



Fast, Complete 12-Bit A/D Converters

AD ADC84/AD ADC85/AD5240

FEATURES

Performance

Complete 12-Bit A/D Converter with Reference and Clock
Fast Successive Approximation Conversion: $10\mu\text{s}$ or $5\mu\text{s}$
Buried Zener Reference for Long Term Stability and Low
Gain T.C.: $10\text{ppm}/^\circ\text{C}$

Max Nonlinearity: $<\pm 0.012\%$

Low Power: 880mW Typical

Low Chip Count — High Reliability

Industry Standard Pin Out

"Z" Models for $\pm 12\text{V}$ Operation Available

MIL-STD-883B Processing Available

Versatility

Negative-True Parallel or Serial Logic Outputs

Short Cycle Capability

Precision $+6.3\text{V}$ Reference for External Applications

PRODUCT DESCRIPTION

The AD ADC84/AD ADC85/AD5240 series devices are high-speed, low-cost 10- and 12-bit successive approximation analog-to-digital converters that include internal clock, reference and comparator. Its hybrid IC design utilizes MSI digital and linear monolithic chips in conjunction with a 12-bit monolithic DAC to provide modular performance and versatility with IC size, price and reliability.

Important performance characteristics of the AD ADC84/AD ADC85/AD5240 series include a maximum linearity error at $+25^\circ\text{C}$ of $\pm 0.012\%$, gain T.C. below $15\text{ppm}/^\circ\text{C}$, typical power dissipation of 880mW , and conversion time of less than $10\mu\text{s}$ for the 12-bit versions. Of considerable significance in severe and aerospace applications is the guaranteed performance from -55°C to $+125^\circ\text{C}$ of the AD ADC85S which is also available with environmental screening. Monotonic operation of the feedback D/A converter guarantees no missing codes over temperature ranges of 0 to $+70^\circ\text{C}$, -25°C to $+85^\circ\text{C}$, and -55°C to $+125^\circ\text{C}$.


The design of the AD ADC84/AD ADC85/AD5240 includes scaling resistors that provide analog input signal ranges of ± 2.5 , ± 5 , ± 10 , 0 to $+5$, or 0 to $+10$ volts. Adding flexibility and value are the $+6.3\text{V}$ precision reference, which also can be used for external applications, and the input buffer amplifier. All digital signals are fully DTL and TTL compatible, and the data output is negative-true and available in either serial or parallel form.

The AD ADC84/AD ADC85/AD5240 series devices are available in two different performance grades. The devices are specified for either 10-bit accuracy ($\pm 0.048\%$ FSR max) or

REV. A

Information furnished by Analog Devices is believed to be accurate and reliable. However, no responsibility is assumed by Analog Devices for its use, nor for any infringements of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of Analog Devices.

FUNCTIONAL BLOCK DIAGRAM

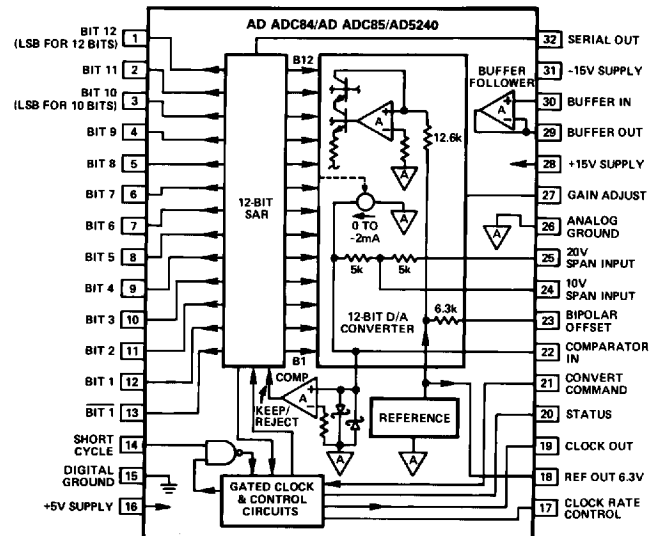

12-bit accuracy ($\pm 0.012\%$ FSR max) with $8.4\mu\text{s}$, $10\mu\text{s}$ (AD ADC84/AD ADC85) and $4.1\mu\text{s}$, $5\mu\text{s}$ (AD5240) max conversion times respectively.

The AD ADC84 and AD ADC85C specified for operation over the 0 to $+70^\circ\text{C}$ temperature range. The AD ADC85 and AD ADC85S are specified for the -25°C to $+85^\circ\text{C}$, -55°C to $+125^\circ\text{C}$ ranges respectively.

PRODUCT HIGHLIGHTS

1. The AD ADC84/AD ADC85/AD5240 series devices are complete 12-bit A/D converters. No external components are required to perform a conversion.
2. The AD ADC84/AD ADC85/AD5240 directly replaces other devices of this type with significant increases in performance.
3. The fast conversion rates of the AD ADC84/AD ADC85 ($10\mu\text{s}$) and AD5240 ($5\mu\text{s}$) make them an excellent choice for applications requiring high system throughput rates.
4. The internal buried zener reference is laser trimmed to $6.3\text{V} \pm 0.1\%$ and $\pm 10\text{ppm}/^\circ\text{C}$ typical T.C. The reference is available externally and can provide up to 1mA .
5. The integrated package construction provides high quality and reliability with small size and weight.
6. The monolithic 12-bit feedback DAC is used for reduced chip count and higher reliability.
7. The AD ADC85S/883B and AD5240SD/883B come processed to MIL-STD-883, Class B requirements (see ADI Military Products Databook).

One Technology Way, P.O. Box 9106, Norwood, MA 02062-9106, U.S.A.
Tel: 617/329-4700 Fax: 617/326-8703 Twx: 710/394-6577
Telex: 924491 Cable: ANALOG NORWOODMASS

AD ADC 84/AD ADC85/AD5240—SPECIFICATIONS (typical@ +25°C, ±15V and +5V unless otherwise noted)

| MODEL | AD ADC84 | AD ADC85C | AD ADC85 | AD ADC85S | AD5240KD/ AD5240SD | UNITS |
|---|---|-----------|-------------|-------------|-----------------------|-----------------------|
| RESOLUTION | 10/12 | 10/12 | 10/12 | 10/12 | 12 | Bits |
| ANALOG INPUTS | | | | | | |
| Voltage Ranges | | | | | | |
| Bipolar | ±2.5, ±5, ±10 | * | * | * | * | Volts |
| Unipolar | 0 to +5, 0 to +10 | * | * | * | * | Volts |
| Impedance (Direct Input) | | | | | | |
| 0V to +5V, ±2.5V | 2.5(±20%) | * | * | * | * | kΩ |
| 0V to +10V, ±5V | 5(±20%) | * | * | * | * | kΩ |
| ±10V | 10(±20%) | * | * | * | * | kΩ |
| Buffer Amplifier ¹ | | | | | | |
| Impedance (min) | 100 | * | * | * | * | MΩ |
| Bias Current | 50 | * | * | * | * | nA |
| Settling Time | | | | | | |
| To 0.01% for 20V Step | 2 | * | * | * | * | μs |
| DIGITAL INPUTS ² | | | | | | |
| Convert Command | Positive Pulse 100ns min Trailing Edge Initiates Conversion | * | * | * | * | |
| Logic Loading | 1 | * | * | * | * | TTL Load |
| TRANSFER CHARACTERISTICS ERROR | | | | | | |
| Gain Error ³ | ±0.1(±0.25% max) | * | * | * | ±0.2 | % |
| Offset Error ³ | Adjustable to Zero | * | * | * | * | |
| Unipolar | ±0.05(±0.2% max) | * | * | * | ±0.1 | % of FSR ⁴ |
| Bipolar ⁵ | ±0.1(±0.25% max) | * | * | * | ±0.2 | % of FSR |
| Linearity Error (max) ⁶ | ±0.048/±0.012 | * | * | * | ±0.012 | % of FSR |
| Inherent Quantization Error | ±0.5 | * | * | * | * | LSB |
| Differential Linearity Error | ±0.5 | * | * | * | * | LSB |
| No Missing Codes Temperature Range | 0 to +70 | 0 to +70 | -25 to +85 | -55 to +125 | 0 to +70/-55 to +125 | °C |
| Power Supply Sensitivity | | | | | | |
| ±15V | ±0.004 | * | * | * | * | % of FSR/%V |
| +5V | ±0.001 | * | * | * | * | % of FSR/%V |
| DRIFT | | | | | | |
| Specification Temperature Range | 0 to +70 | * | -25 to +85 | -55 to +125 | 0 to +70/-55 to +125 | °C |
| Gain (max) | ±30 | ±40/±25 | ±20/±15 | ±25 | ±30/±25 | ppm/°C |
| Offset | | | | | | |
| Unipolar | ±3 | * | * | ±5 max | * | ppm/°C |
| Bipolar (max) ⁵ | ±15 | ±20/±12 | ±10/±7 | ±10 | ±15/±7 | ppm/°C |
| Linearity (max) | ±3 | * | ±3/±2 | * | ±2 | ppm/°C |
| Monotonicity | GUARANTEED | * | * | * | GUARANTEED | |
| CONVERSION SPEED (MAX) | 8.4/10 | * | * | * | 5 | μs |
| DIGITAL OUTPUT | | | | | | |
| (all codes complementary) | | | | | | |
| Parallel | | | | | | |
| Output Codes ⁷ | | | | | | |
| Unipolar | CSB | * | * | * | * | |
| Bipolar | COB, CTC | * | * | * | * | |
| Output Drive | 2 | * | * | * | * | TTL Loads |
| Serial Data Codes (NRZ) | CSB, COB | * | * | * | * | |
| Output Drive | 2 | * | * | * | * | TTL Loads |
| Status | Logic "1" during Conversion | * | * | * | * | |
| Status Output Drive | 2 | * | * | * | * | TTL Loads |
| Internal Clock | | | | | | |
| Clock Output Drive | 2 | * | * | * | * | TTL Loads |
| Frequency | 1.9/1.22 | * | * | * | 2.6 | MHz |
| INTERNAL REFERENCE VOLTAGE | 6.3/±15mV max | * | * | * | * | Volts |
| Max. External Current (with no degradation of specifications) | 1.0 | * | * | * | * | mA |
| Tempco of Drift, (max) | ±20/max | ±10 typ | ±5 typ | ±5 typ | ±10 | ppm/°C |
| POWER REQUIREMENTS | | | | | | |
| Rated Voltages | +5, ±15 | * | * | * | * | Volts |
| Range for Rated Accuracy | 4.75 to 5.25 and ±13.5 to ±16.5 | * | * | * | * | Volts |
| Z Models ⁸ | 4.75 to 5.25 and ±11.4 to ±16.5 | * | * | * | * | Volts |
| Supply Drain | | | | | | |
| +15V | 25 max | * | * | * | 15 max | mA |
| -15V | 35 max | * | * | * | 35 max | mA |
| +5V | 140 max | * | * | * | 100 max | mA |
| Total Power Dissipation | 1500 max | * | * | * | 1100 max | mW |
| TEMPERATURE RANGE | | | | | | |
| Specification | 0 to +70 | * | -25 to +85 | -55 to +125 | 0 to +70/-55 to +125 | °C |
| Operating (Derated Specs) | -25 to +85 | * | -55 to +125 | -55 to +125 | -55 to +125 | °C |
| Storage | -55 to +125 | * | * | * | -65 to +150 | °C |
| PACKAGE OPTION ⁹ | | | | | | |
| DII-32F | Ceramic | Ceramic | Ceramic | Ceramic | Ceramic | |

NOTES

¹ Buffer Settling time adds to conversion speed when buffer is connected to input.

² DTL/TTL compatible Logic "0" = 0.8V max, Logic "1" = 2.0V min for digital output, Logic "0" = 0.4V max, Logic "1" = 2.4V min.

³ Adjustable to zero.

⁴ FSR means Full Scale Range.

⁵ Guaranteed at $V_{IN} = 0$ volts.

⁶ Error shown is the same as ±1/2LSB max error in % of FSR.

⁷ See Table 1.

⁸ For ±12V operation add "Z" to model number. Input range limited to a maximum of ±5V.

⁹ For package outline information see Package Information section.

*Specifications same as AD ADC84.

Specifications subject to change without notice.

Typical Performance Curves – AD ADC84/AD ADC85/AD5240

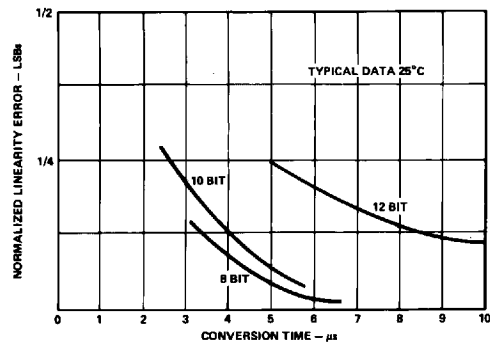


Figure 1a. Linearity Error vs. Conversion Speed (AD ADC84/AD ADC85)

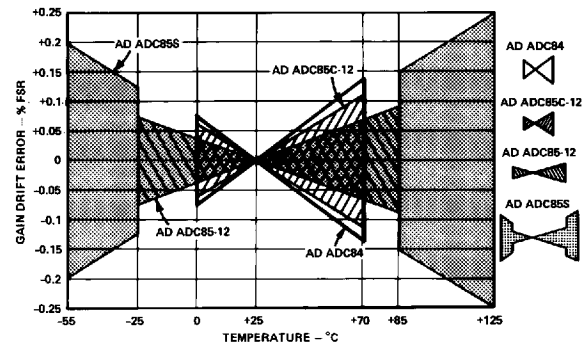


Figure 3a. Gain Drift Error (% FSR) vs. Temperature (AD ADC84/AD ADC85)

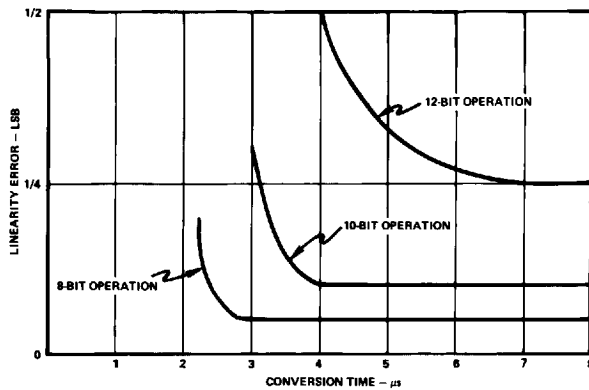


Figure 1b. Linearity Error vs. Conversion Speed (AD5240)

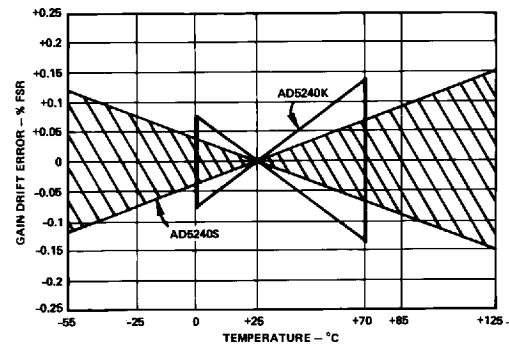


Figure 3b. Gain Drift Error (% FSR) vs. Temperature (AD5240)

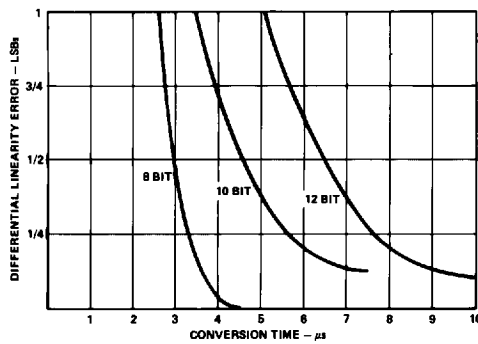


Figure 2a. Change in Differential Linearity vs. Conversion Speed (AD ADC84/AD ADC85)

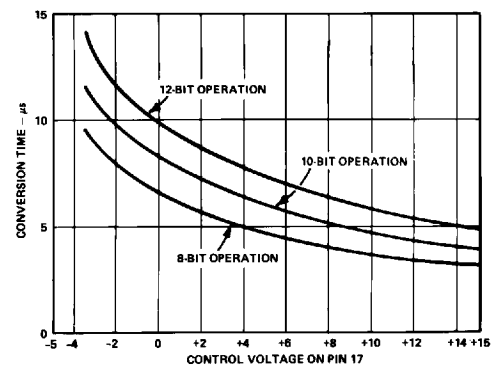


Figure 4a. Conversion Speed vs. Control Voltage (AD ADC84/AD ADC85)

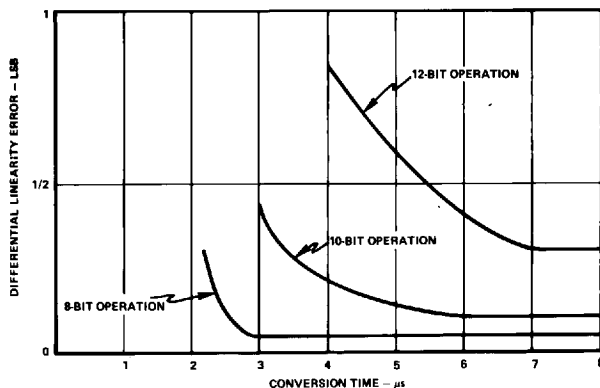


Figure 2b. Change in Differential Linearity vs. Conversion Speed (AD5240)

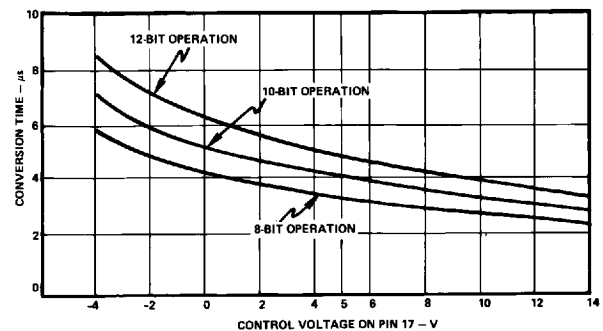


Figure 4b. Conversion Speed vs. Control Voltage (AD5240)

AD ADC84/AD ADC85/AD5240

ORDERING GUIDE

| Model ¹ | Linearity | Temperature Range | Gain T. C. — ppm/°C | Conversion Time |
|--------------------|-----------|-------------------|---------------------|-----------------|
| AD ADC84-10 | ±0.048% | 0 to +70°C | ±30 | 10μs |
| AD ADC84-12 | ±0.012% | 0 to +70°C | ±30 | 10μs |
| AD ADC85C-10 | ±0.048% | 0 to +70°C | ±40 | 10μs |
| AD ADC85C-12 | ±0.012% | 0 to +70°C | ±25 | 10μs |
| AD ADC85-10 | ±0.048% | -25°C to +85°C | ±20 | 10μs |
| AD ADC85-12 | ±0.012% | -25°C to +85°C | ±15 | 10μs |
| AD ADC85S-10 | ±0.048% | -55°C to +125°C | ±25 | 10μs |
| AD ADC85S-12 | ±0.012% | -55°C to +125°C | ±25 | 10μs |
| AD5240KD | ±0.012% | 0 to +70°C | ±30 | 5μs |
| AD ADC85S-12/883B | ±0.012% | -55°C to +125°C | ±25 | 10μs |
| AD5240SD/883B | ±0.012% | -55°C to +125°C | ±25 | 5μs |

¹ For complete model number suffixes must be added for "Z" option (±12V operation), linearity. The following guide shows the proper suffix order.
AD ADC (*) (**) (***)

*Model Number
***"Z" Version Designator
***Linearity

Typical Part Numbers
AD ADC84-12
AD ADC85SZ-12
AD5240ZKD

OFFSET ADJUSTMENT

The zero adjust circuit consists of a potentiometer connected across $\pm V_S$ with its slider connected through a $1.8M\Omega$ resistor to Comparator Input pin 22 for all ranges. As shown in Figure 5 the tolerance of this fixed resistor is not critical, and a carbon composition type is generally adequate. Using a carbon composition resistor having a $-1200\text{ppm}/^\circ\text{C}$ tempco contributes a worst-case offset tempco of $8 \times 244 \times 10^{-6} \times 1200\text{ppm}/^\circ\text{C} = 2.3\text{ppm}/^\circ\text{C}$ of FSR, if the OFFSET ADJ potentiometer is set at either end of its adjustment range. Since the maximum offset adjustment required is typically no more than $\pm 4\text{LSB}$, use of a carbon composition offset summing resistor typically contributes no more than $1\text{ppm}/^\circ\text{C}$ of FSR offset tempco.

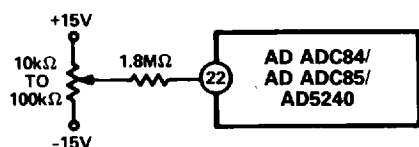


Figure 5. Offset Adjustment Circuit

An alternate offset adjust circuit, which contributes negligible offset tempco if metal film resistors (tempco $<100\text{ppm}/^\circ\text{C}$) are used, is shown in Figure 6.

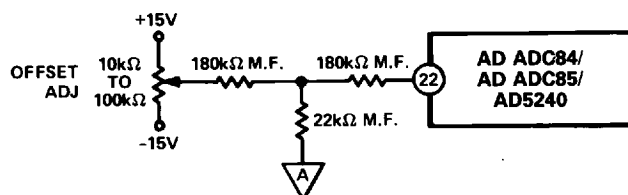


Figure 6. Low Tempco Zero Adjustment Circuit

In either zero adjust circuit, the fixed resistor connected to pin 22 should be located close to this pin to keep the pin connection runs short (Comparator Input pin 22 is quite sensitive to external noise pick-up).

GAIN ADJUSTMENT

The gain adjust circuit consists of a potentiometer connected across $\pm V_S$ with its slider connected through a $10M\Omega$ resistor to the gain adjust pin 27 as shown in Figure 7.

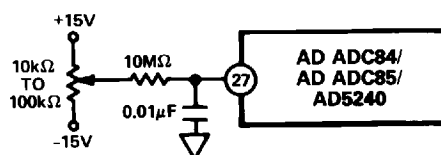


Figure 7. Gain Adjustment Circuit

An alternate gain adjust circuit which contributes negligible gain tempco if metal film resistors (Tempco $<100\text{ppm}/^\circ\text{C}$) are used is shown in Figure 8.

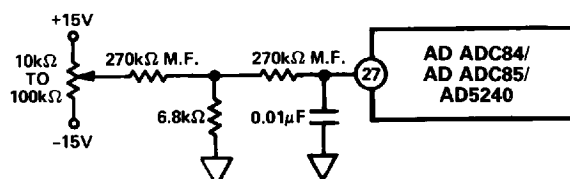


Figure 8. Low Tempco Gain Adjustment Circuit

Applying the AD ADC84/AD ADC85/AD5240

THEORY OF OPERATION

On receipt of a CONVERT START command, the AD ADC84/AD ADC85/AD5240 converts the voltage as its analog input into an equivalent 12-bit binary number. This conversion is accomplished as follows: the 12-bit successive-approximation register (SAR) has its 12-bit outputs connected both to the device bit output pins and to the corresponding bit inputs of the feedback DAC. The analog input is successively compared to the feedback DAC output, one bit at a time (MSB first, LSB last). The decision to keep or reject each bit is then made at the completion of each bit comparison period, depending on the state of the comparator at that time.


TIMING

The timing diagram is shown in Figure 9. Receipt of a CONVERT START signal sets the STATUS flag, indicating conversion in progress. This, in turn, removes the inhibit applied to the gated clock, permitting it to run through 13 cycles. All the SAR parallel bits, STATUS flip-flops, and the gated clock inhibit signal are initialized on the trailing edge of the CONVERT START signal. At time t_0 , B_1 is reset and $B_2 -$

B_{12} are set unconditionally. At t_1 the Bit 1 decision is made (keep) and Bit 2 is unconditionally reset. At t_2 , the Bit 2 decision is made (keep) and Bit 3 is reset unconditionally. This sequence continues until the Bit 12 (LSB) decision (keep) is made at t_{12} . After a 40ns delay period, the STATUS flag is reset, indicating that the conversion is complete and that the parallel output data is valid. Resetting the STATUS flag restores the gated clock inhibit signal, forcing the clock output to the Logic "0" state.

Corresponding serial and parallel data bits become valid on the same positive-going clock edge. Serial data does not change and is guaranteed valid on negative-going clock edges, however; serial data can be transferred quite simply by clocking into a receiving shift register on these edges (see Figure 9).

Incorporation of this 40ns delay guarantees that the parallel (and serial) data are valid at the Logic "1" to "0" transition of the STATUS flag, permitting parallel data transfer to be initiated by the trailing edge of the STATUS signal.

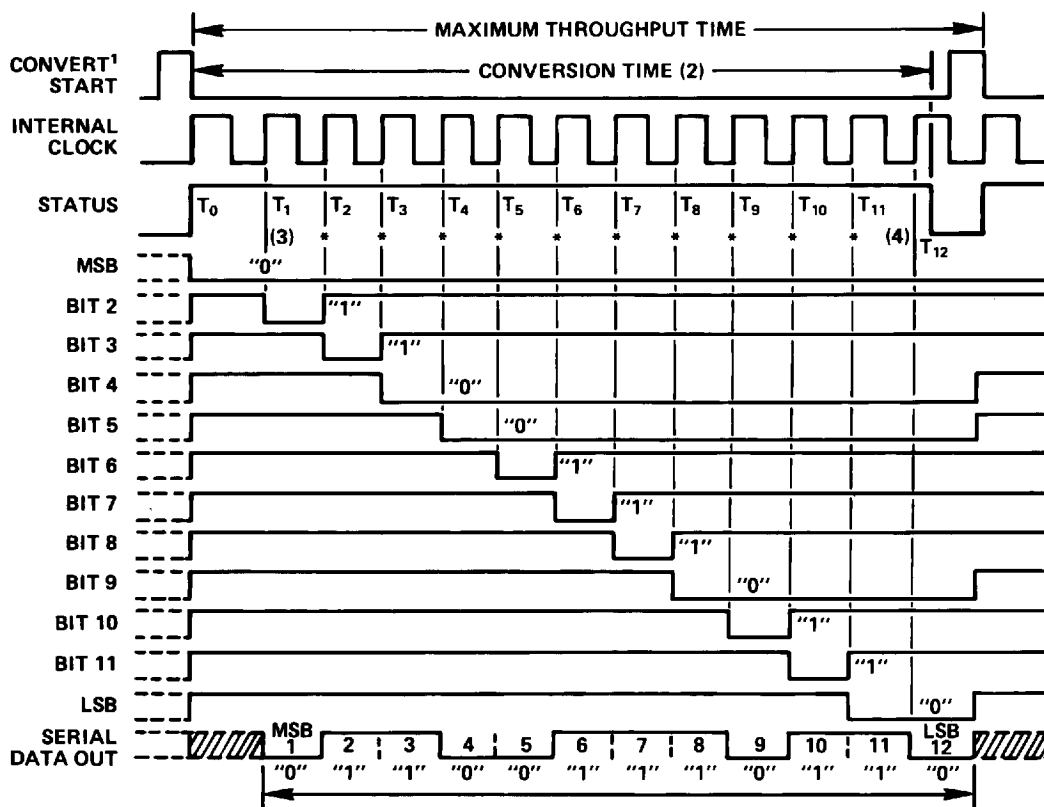

NOTES

1. THE CONVERT START PULSE WIDTH IS 100ns MIN AND MUST REMAIN LOW DURING A CONVERSION. THE CONVERSION IS INITIATED BY THE "TRAILING EDGE" OF THE CONVERT COMMAND.
2. 10 μ s FOR 12 BITS AND 8.4 μ s FOR 10 BITS (AD ADC84/AD ADC85) OR 5 μ s FOR 12 BITS AND 4.1 μ s FOR 10 BITS (AD5240).
3. MSB DECISION.
4. LSB DECISION 20ns PRIOR TO THE STATUS GOING LOW.

*BIT DECISIONS.

Figure 9. Timing Diagram (Binary Code 011001110110)

AD ADC84/AD ADC85/AD5240

DIGITAL OUTPUT DATA

Both parallel and serial data from TTL storage registers are in negative true form. Parallel data output coding is complementary binary for unipolar ranges and either complementary offset binary or complementary two's complement binary, depending on whether BIT 1 (pin 12) or its logical inverse BIT 1 (pin 13) is used as the MSB. Parallel data becomes valid approximately 40ns before the STATUS flag returns to Logic "0", permitting parallel data transfer to be clocked on the "1" to "0" transition of the STATUS flag.

Serial data coding is complementary binary for unipolar input ranges and complementary offset binary for bipolar input ranges. Serial output is by bit (MSB first, LSB last) in NRZ (non-return-to-zero) format. Serial and parallel data outputs change state on positive-going clock edges. Serial data is guaranteed valid 200ns after the rising clock edges, permitting serial data to be clocked directly into a receiving register on the negative-going clock edges as shown in Figure 9. There are 13 negative-going clock edges in the complete 12-bit conversion cycle, as shown in Figure 9. The first edge shifts an invalid bit into the register, which is shifted out on the 13th negative-going clock edge. All serial data bits will have been correctly transferred and be in the receiving shift register locations shown at the completion of the conversion period.

Short Cycle Input: A Short Cycle Input, pin 14, permits the timing cycle shown in Figure 9 to be terminated after any number of desired bits has been converted, permitting somewhat shorter conversion times in applications not requiring full 12-bit resolution. When 12-bit resolution is required, pin 14 is connected to +5V (pin 16). When 10-bit resolution is desired, pin 14 is connected to Bit 11 output pin 2. The conversion cycle then terminates, and the STATUS flag resets after the Bit 10 decision ($t_{10} + 40\text{ns}$ in timing diagram of Figure 9). Short Cycle pin connections and associated maximum 12-, 10- and 8-bit conversion times are summarized in Table I.

| Connect Short Cycle Pin 14 To Pin: | Connect Clock Rate Control Pin 17 To | Bits | Resolution (% FSR) | AD ADC84/ AD ADC85 (AD5240) Conversion Time (μs) | Status Flag Reset |
|--|--|------|-----------------------|---|------------------------|
| 16 | 15 | 12 | 0.024 | 10 (5) | $t_{12} + 40\text{ns}$ |
| 2 | 16 | 10 | 0.100 | 8.5 (4.1) | $t_{10} + 40\text{ns}$ |
| 4 | 28 | 8 | 0.390 | 6.8 (3.3) | $t_8 + 40\text{ns}$ |

Table I. Short Cycle Connections

INPUT SCALING

The AD ADC84/AD ADC85/AD5240 inputs should be scaled as close to the maximum input signal range as possible in order to utilize the maximum signal resolution of the A/D converter. Connect the input signal as shown in Table II. See Figure 10 for circuit detail.

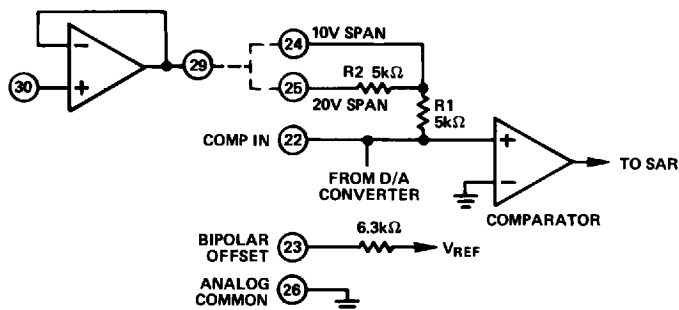


Figure 10. Input Scaling Circuit

| Input Signal Range | Output Code | Connect Pin 23 To Pin | Connect Pin 25 To | For Direct Input Connect Input Signal To | For Buffered Input Pin 30 Connect Pin 29 To Pin |
|--------------------------|----------------|-----------------------------|-------------------------|--|---|
| $\pm 10\text{V}$ | COB or CTC | 22 | Input Signal | 25 | 25 |
| $\pm 5\text{V}$ | COB or CTC | 22 | Open | 24 | 24 |
| $\pm 2.5\text{V}$ | COB or CTC | 22 | Pin 22 | 24 | 24 |
| 0V to +5V | CSB | 26 | Pin 22 | 24 | 24 |
| 0V to +10V | CSB | 26 | Open | 24 | 24 |

Table II. Input Scaling Connections

INPUT VOLTAGE RANGE AND LSB VALUES

| Analog Input Voltage Range | | $\pm 10\text{V}$ | $\pm 5\text{V}$ | $\pm 2.5\text{V}$ | 0V to +10V | 0V to +5V |
|---------------------------------------|--------------------------|--------------------------|--------------------------|-------------------------|--------------------------|-------------------------|
| Code Designation | | COB* or CTC** | COB* or CTC** | COB* or CTC** | CSB*** | CSB*** |
| One Least Significant Bit (LSB) | $\frac{\text{FSR}}{2^n}$ | $\frac{20\text{V}}{2^n}$ | $\frac{10\text{V}}{2^n}$ | $\frac{5\text{V}}{2^n}$ | $\frac{10\text{V}}{2^n}$ | $\frac{5\text{V}}{2^n}$ |
| n = 8 | | 78.13mV | 39.06mV | 19.53mV | 39.06mV | 19.53mV |
| n = 10 | | 19.53mV | 9.77mV | 4.88mV | 9.77mV | 4.88mV |
| n = 12 | | 4.88mV | 2.44mV | 1.22mV | 2.44mV | 1.22mV |
| Transition Values | | | | | | |
| MSB | LSB | | | | | |
| 000 ... 000**** | +Full Scale | +10V -3/2LSB | +5V -3/2LSB | +2.5V -3/2LSB | +10V -3/2LSB | +5V -3/2LSB |
| 011 ... 111 | Mid Scale | 0 | 0 | 0 | +5V | +2.5V |
| 111 ... 110 | -Full Scale | -10V +1/2LSB | -5V +1/2LSB | -2.5V +1/2LSB | 0 + 1/2LSB | 0 + 1/2LSB |

NOTES:

*COB = Complementary Offset Binary

**CTC = Complementary Two's complement—obtained by using the complement of the most significant bit (MSB). MSB is available to pin 13.

***CSB = Complementary Straight Binary.

****Voltages given are the nominal value for transition to the code specified.

Table III. Input Voltages and Code Definition

-7-

AD ADC84/AD ADC85/AD5240

MICROPROCESSOR INTERFACING

The fast conversion times of the AD ADC84/AD ADC85 and AD5240 suggest several different methods of interface to microprocessors. In systems where the ADC is used for high sampling rates on a single signal which is to be digitally processed, CPU-controlled conversion may be inefficient due to the slow cycle times of most microprocessors. It is generally preferable to perform conversions independently, inserting the resultant digital data directly into memory. This can be done using direct memory access (DMA) which is totally transparent to the CPU. Interface to user-designed DMA hardware is facilitated by the guaranteed data validity on the falling edge of the EOC signal.

Clearly, 12 bits of data must be broken up for interface to an 8-bit wide data bus. There are two possible formats: right-justified and left-justified. In a right-justified system, the least-significant 8 bits occupy one byte and the four MSB's reside in the low nybble of another byte. This format is useful when the data from the ADC is being treated as a binary number between 0 and 4095. The left-justified format supplies the eight most-significant bits in one byte and the 4LSB's in the high nybble of another byte. The data now represents the fractional binary number relating the analog signal to the full-scale voltage. An advantage to this organization is that the most-significant eight bits can be read by the processor as a coarse indication of the true signal value. The full 12-bit word can then be read only when all 12 bits are needed. This allows faster and more efficient control of a process.

Figure 15 shows a typical connection of an 8085-type bus, using a left-justified data format for unipolar inputs. Status polling is optional, and can be read simultaneously with the 4LSBs. If it is desired to right-justify the data, pins 1 through 12 of the AD ADC84/AD ADC85/AD5240 should be reversed,

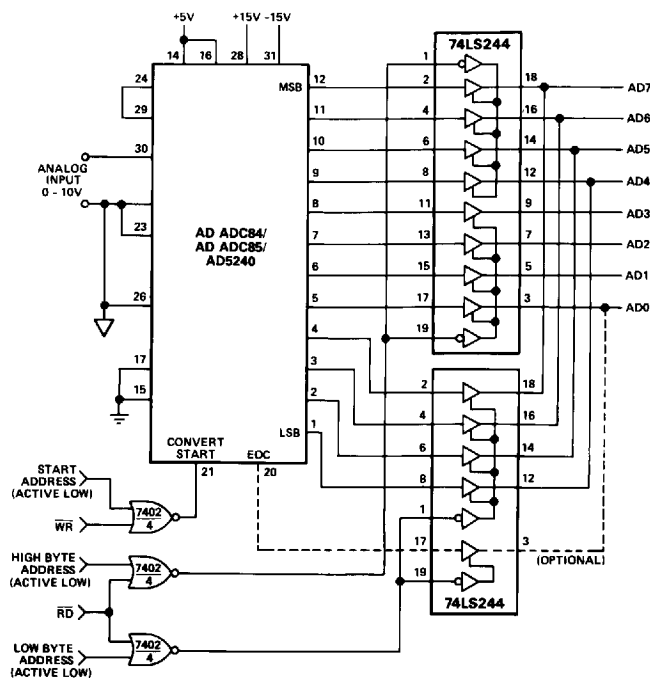


Figure 15. AD ADC84/AD ADC85/AD5240 - 8085A Interface Connections


as well as the connections to the data bus high and low byte address signals.

When dealing with bipolar inputs ($\pm 5V$, $\pm 10V$ ranges), using the MSB directly yields a complementary offset binary-coded output. If complementary two's complement coding is desired, it can be produced by substituting $\overline{\text{MSB}}$ (pin 13) for the MSB. This facilitates arithmetic operations which are subsequently performed on the ADC output data.

OUTLINE DIMENSIONS

Dimensions shown in inches (mm)

DH-32E Package

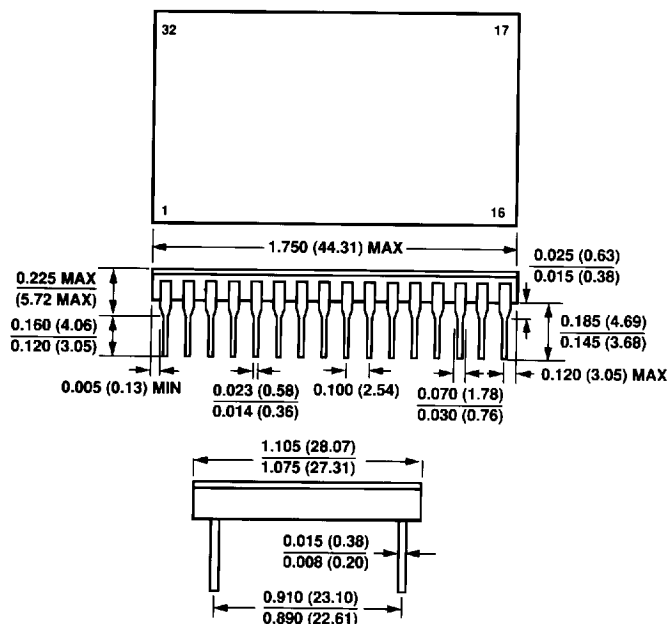



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.