

Features

Regulated Converters

- 2:1 Wide Input Voltage Range
- 1.6kVDC Isolation
- UL Certified
- Efficiency up to 91%
- Six-Sided Continuous Shield
- Available as Power Module (RPM60-G)

RECOM
DC/DC Converter

RP60-G

60 Watt
2" x 2"
Single Output



UL
E196683

UL60950-1 Certified

Description

The RP60-G series DC/DC converters deliver 60W of power in an industry standard 2" x 2" package, which also meets military standards for thermal shock and vibration tolerance. Sense pins allow the output voltage at the point of load to be tightly regulated and automatically compensate for any voltage drops that may occur across any connections.

Selection Guide

Part Number	Input Voltage Range [VDC]	Output Voltage [VDC]	Output Current [mA]	Input ⁽¹⁾ Current [mA]	Efficiency ⁽¹⁾ typ. [%]	Max. Capacitive Load ⁽²⁾ [μF]
RP60-243.3SG ^(3,4)	18-36	3.3	14000	2163	89	36000
RP60-2405SG ^(3,4)	18-36	5	12000	2778	90	20400
RP60-2412SG ^(3,4)	18-36	12	5000	2778	90	3550
RP60-2415SG ^(3,4)	18-36	15	4000	2778	90	2300
RP60-483.3SG ^(3,4)	36-75	3.3	14000	1081	89	36000
RP60-4805SG ^(3,4)	36-75	5	12000	1374	91	20400
RP60-4812SG ^(3,4)	36-75	12	5000	1389	90	3550
RP60-4815SG ^(3,4)	36-75	15	4000	1389	90	2300

Notes:

Note1: Typical value at nominal input voltage and full load.

Note2: Test by minimum Vin and constant resistive load.

Model Numbering



Ordering Examples

RP60-2405SG = 24V Input, 5V Output, Positive Logic CTRL pin.

RP60-4812SG/N-HC = 48V Input, 12V Output, Negative Logic CTRL pin, Heat-sink fitted

Notes:

Note3: no suffix for CTRL function with Positive Logic (1=ON, 0=OFF) and trim pin
add suffix "N" for CTRL function with Negative Logic (0=ON, 1=OFF) and trim pin

Note4: add suffix -HC for premounted Heat-sink and clips

Specifications measured at $T_a = 25^\circ\text{C}$, nominal input voltage, full load otherwise noted

BASIC CHARACTERISTICS

Parameter	Condition	Min.	Typ.	Max.
Input Voltage Range	nom. $V_{in} = 24\text{V}$ nom. $V_{in} = 48\text{V}$	18VDC 36VDC	24VDC 48VDC	36VDC 75VDC
Under Voltage Lockout (UVLO)	$V_{in} = 24\text{V}$ DC-DC ON DC-DC OFF		15VDC	17VDC
	$V_{in} = 48\text{V}$ DC-DC ON DC-DC OFF		32VDC	34VDC
Input Filter	Pi-Type			
Input Reflected Ripple Current ⁽⁵⁾	nominal V_{in} and full load		20mA _{p-p}	
Input Surge Voltage	$V_{in} = 24\text{V}$, 100ms max. $V_{in} = 48\text{V}$, 100ms max.			50VDC 100VDC
Start-up time	constant resistive load Power up Remote ON/OFF			20ms 20ms
Operating Frequency Range		270kHz	300kHz	330kHz
Ripple and Noise	measured by 20MHz bandwidth, with 1 μF MLCC on output 3.3V _{out} , 5V _{out} 12V _{out} , 15V _{out}		75mV _{p-p} 100mV _{p-p}	
Remote ON/OFF ⁽⁶⁾	Positive Logic DC-DC ON DC-DC OFF	Open or $3.0\text{V} < V_r < 12\text{V}$ Short or $0\text{V} < V_r < 1.2\text{V}$		
	Negative Logic DC-DC ON DC-DC OFF	Short or $0\text{V} < V_r < 1.2\text{V}$ Open or $3.0\text{V} < V_r < 12\text{V}$		
Input current of Remote pin (CTRL)	DC-DC OFF		4mA	
	DC-DC ON	-0.5mA		1.0mA


Notes:

Note5: No minimum loading on the output is required to maintain specified regulation. Operation under no-load condition will not damage these devices.


Note6: The ON/OFF control pin voltage is referenced to the - V_{in} pin.

RP60-2405SGW

Efficiency vs. Output Current

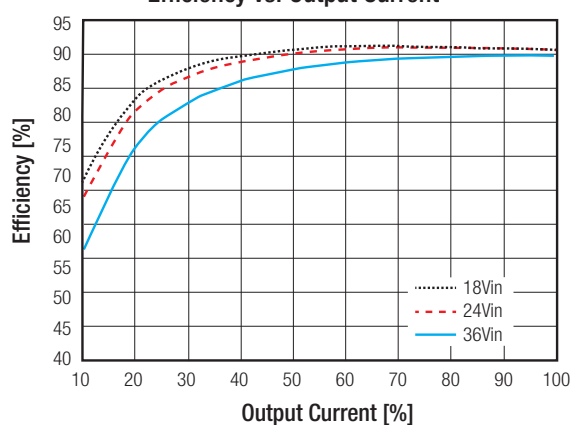

Efficiency vs. Input Voltage

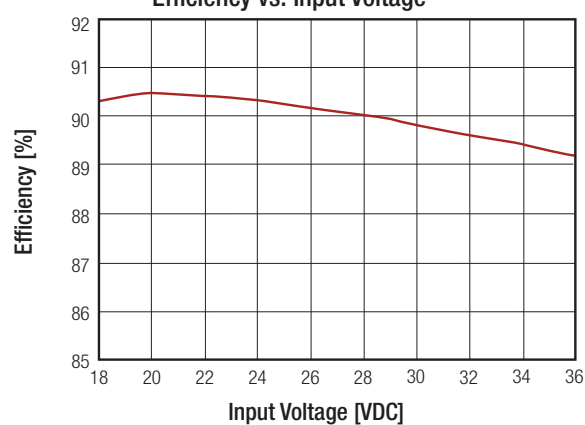


continued on next page


Specifications measured at $T_a = 25^\circ\text{C}$, nominal input voltage, full load otherwise noted

RP60-4805SGW

Efficiency vs. Output Current

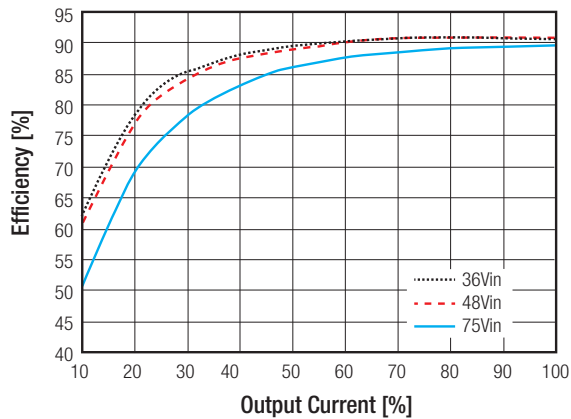

Efficiency vs. Input Voltage

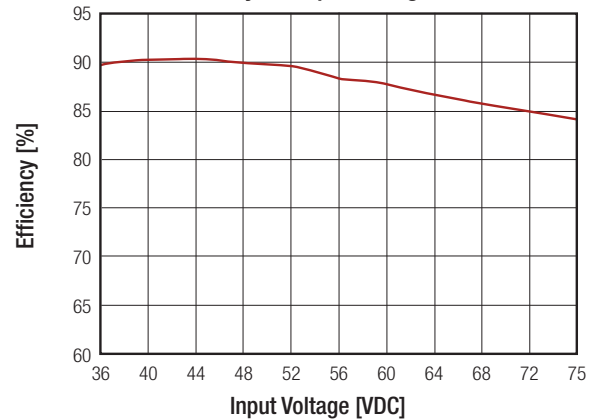

REGULATIONS

Parameter	Condition	Value
Output Voltage Accuracy	full load and nominal input	$\pm 1.0\%$
Voltage Adjustability ⁽⁷⁾		$\pm 10\%$
Line Voltage Regulation	low line, high line at full load	$\pm 0.2\%$
Load Voltage Regulation ⁽⁸⁾		$\pm 0.5\%$
Transient Response recovery time	25% load step change	250 μs typ.

Notes:


Note7: Maximum output deviation is 10% inclusive of remote sense and trim. If remote sense is not being used, the +sense should be connected to its corresponding +OUTPUT and likewise the -sense should be connected to its corresponding -OUTPUT.

Note8: No minimum loading on the output is required to maintain specified regulation. Operation under no-load condition will not damage these devices.

External Output Trimming

Output Voltage Trimming

Single output Powerline converters offer the feature of trimming the output voltage over a certain range around the nominal value by using external trim resistors. No general equation can be given for calculating the trim resistors, but the following trimtables give typical values for choosing these trimming resistors. If voltages between the given trim points are required, extrapolate between the two nearest given values to work out the resistor required or use a variable resistor to set the output voltage. Output can be externally trimmed by using the method shown below.

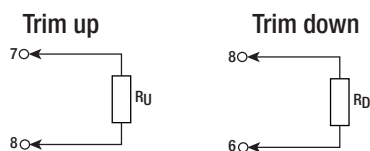

RP60-xx3.3SG

Trim up	1	2	3	4	5	6	7	8	9	10	%
V _{out} =	3.333	3.366	3.399	3.432	3.465	3.498	3.531	3.564	3.597	3.63	Volts
R _U =	57.93	26.16	15.58	10.28	7.11	4.99	3.48	2.34	1.46	0.75	kOhms
Trim down	1	2	3	4	5	6	7	8	9	10	%
V _{out} =	3.267	3.234	3.201	3.168	3.135	3.102	3.069	3.036	3.003	2.97	Volts
R _D =	69.47	31.23	18.49	12.12	8.29	5.74	3.92	2.56	1.50	0.65	kOhms

continued on next page

Specifications measured at $T_a = 25^\circ\text{C}$, nominal input voltage, full load otherwise noted

RP60-xx05SG											
Trim up	1	2	3	4	5	6	7	8	9	10	%
Vout =	5.05	5.10	5.15	5.20	5.25	5.30	5.35	5.4	5.45	5.50	Volts
$R_{\text{L}} =$	36.57	16.58	9.92	6.58	4.59	3.25	2.30	1.59	1.03	0.59	kOhms
Trim down	1	2	3	4	5	6	7	8	9	10	%
Vout =	4.95	4.90	4.85	4.80	4.75	4.70	4.65	4.60	4.55	4.50	Volts
$R_{\text{L}} =$	45.53	20.61	12.31	8.15	5.66	4.00	2.81	1.92	1.23	0.68	kOhms
RP60-xx12SG											
Trim up	1	2	3	4	5	6	7	8	9	10	%
Vout =	12.12	12.24	12.36	12.48	12.60	12.72	12.84	12.96	13.08	13.20	Volts
$R_{\text{L}} =$	367.91	165.95	98.64	64.98	44.78	31.32	21.70	14.49	8.88	4.39	kOhms
Trim down	1	2	3	4	5	6	7	8	9	10	%
Vout =	11.88	11.76	11.64	11.52	11.40	11.28	11.16	11.04	10.92	10.8	Volts
$R_{\text{L}} =$	460.99	207.95	123.60	81.42	56.12	39.25	27.20	18.16	11.13	5.51	kOhms
RP60-xx15SG											
Trim up	1	2	3	4	5	6	7	8	9	10	%
Vout =	15.15	15.3	15.45	15.60	15.75	15.90	16.05	16.20	16.35	16.50	Volts
$R_{\text{L}} =$	404.18	180.59	106.06	68.80	46.44	31.53	20.88	12.90	6.69	1.72	kOhms
Trim down	1	2	3	4	5	6	7	8	9	10	%
Vout =	14.85	14.70	14.55	14.40	14.25	14.10	13.95	13.80	13.65	13.50	Volts
$R_{\text{L}} =$	499.82	223.41	131.27	85.20	57.56	39.14	25.97	16.10	8.42	2.282	kOhms

PROTECTIONS



PROTECTIONS

Parameter	Condition		Value
Short Circuit Protection (SCP)			continuous, automatic recovery
Over Voltage Protection (OVP)	Zener Diode Clamp	3.3Vout 5Vout 12Vout 15Vout	3.7VDC - 5.4VDC 5.6VDC - 7.0VDC 13.8VDC - 17.5VDC 16.8VDC - 20.5VDC
Over Temperature Protection (OTP)			120°C typ.
Over Load Protection (OLP)	% of Iout rated		150% max.
Isolation Voltage	I/P to O/P I/P to O/P to case		1.6kVDC/1 minute 1.6kVDC/1 minute
Isolation Resistance	500VDC		1GΩ min.
Isolation Capacitance			1500pF max.
Notes:			
Note9: This power module is not internally fused. An input line fuse must always be used.			

Specifications measured at Ta = 25°C, nominal input voltage, full load otherwise noted

ENVIRONMENTAL		
Parameter	Condition	Value
Operating Temperature Range	without derating with derating	-40°C to +50°C -40°C to +110°C
Maximum Case Temperature		+110°C max.
Temperature Coefficient		±0.02%/°C max.
Thermal Impedance	natural convection (20LFM) without Heat-sink natural convection (20LFM) with Heat-sink	10.5°C/Watt 8.4°C/Watt
Operating Humidity		5% - 95% RH
Thermal Shock		MIL-STD-810F
Vibration		MIL-STD-810F
MTBF	MIL-HDBK-217F Bellcore TR-NWT-000332 ⁽¹⁰⁾	408.9 x 10 ³ hours 1093 x 10 ³ hours

Derating Graph⁽¹¹⁾

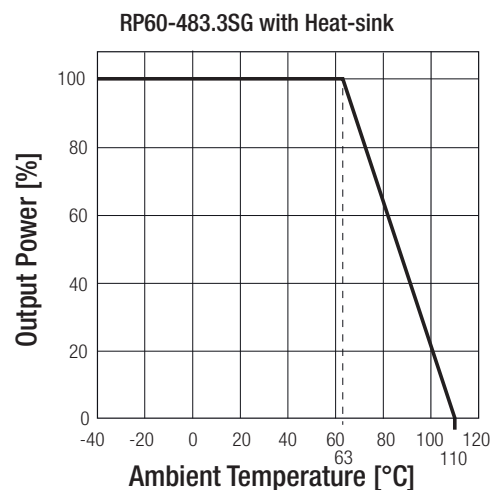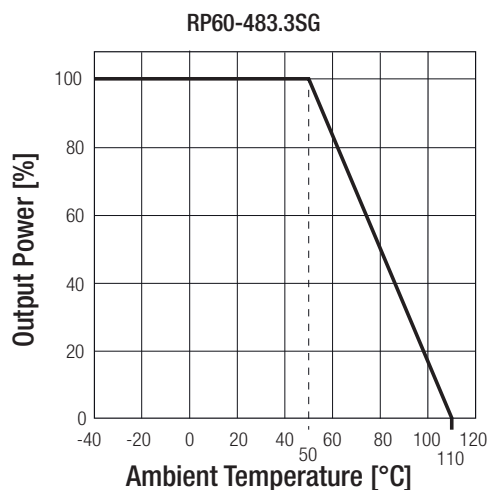

Notes:

Note10: BELLCORE TR-NWT-000332. Case I: 50% Stress, Temperature at 40°C (Ground fixed and controlled environment).

Note11: Derating graphs are valid only for the shown part numbers. If you need detailed derating-information about a part-number not shown here please contact our technical support service at techsupportAT@recom-power.com.

SAFETY AND CERTIFICATIONS

Certificate Type (Safety)	Report / File Number	Standard
UL General Safety	E196683	UL60950-1 1st. Ed.: 2003 C22.2 No. 60950 1st. Ed.: 2003
EMC Compliance	Condition	Standard / Criterion
EMI Standard ⁽¹²⁾	with external filter	EN55022, Class A, Class B
ESD	Air ±8kV and Contact ±6kV	EN61000-4-2, Criteria A
Radiated Immunity	10 V/m	EN61000-4-3, Criteria A
Fast Transient ⁽¹³⁾	±2kV	EN61000-4-4, Criteria A
Surge ⁽¹³⁾	±1kV	EN61000-4-5, Criteria A
Conducted Immunity	10 Vr.m.s	EN61000-4-6, Criteria A

continued on next page

Specifications measured at $T_a = 25^\circ\text{C}$, nominal input voltage, full load otherwise noted


Notes:

Note12: The standard modules meet EMI Class A or Class B with external components, see filter suggestions below.

Note13: An external input filter capacitor is required if the module has to meet EN61000-4-4, EN61000-4-5.


The filter capacitor Recom suggest: Nippon chemi-con KY series, 220 μF /100V

EMI Filtering Class A

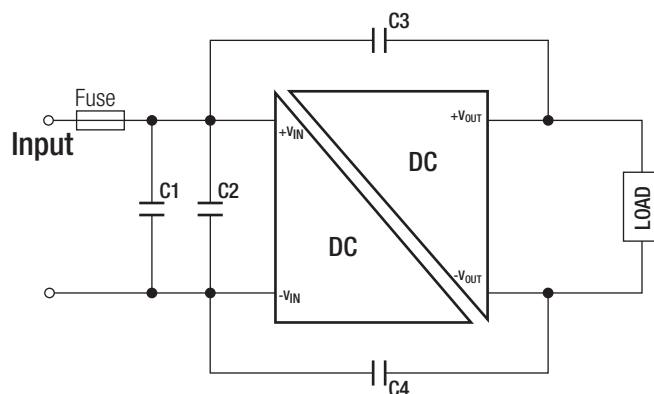

MODEL	C1	C2	C3/C4
RP60-24xxSG	N/A	6.8 μF /50V 1812 MLCC	1000pF/2kV 1808 MLCC
RP60-48xxSG	2.2 μF /100V 1812 MLCC	2.2 μF /100V 1812 MLCC	1000pF/2kV 1808 MLCC

EMI Filtering Class B

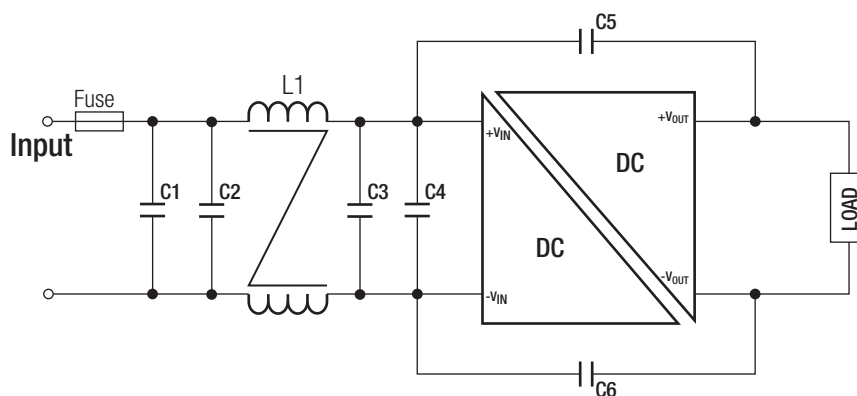






MODEL	C1	C2	C3	C4	C5/C6	L2
RP60-24xxSG	4.7 μF /50V 1812 MLCC	N/A	4.7 μF /50V 1812 MLCC	N/A	1000pF/2kV 1808 MLCC	CMC: 450 μH ref.: WE 7448227005 ref.: CMC-05
RP60-48xxSG	2.2 μF /100V 1812 MLCC	2.2 μF /100V 1812 MLCC	2.2 μF /100V 1812 MLCC	N/A	1000pF/2kV 1808 MLCC	CMC: 830 μH ref.: WE 744822301 ref.: CMC-08

Specifications measured at Ta = 25°C, nominal input voltage, full load otherwise noted

DIMENSIONS and PHYSICAL CHARACTERISTICS

Parameter	Type	Value
Material	Case	Nickel coated copper
	Base	FR4 PCB
	Potting	Epoxy (UL94-V0)
Package Dimensions (LxWxH)	without Heat-sink	50.8 x 50.8 x 10.2mm
	with Heat-sink	56.8 x 50.8 x 17.0mm
Package Weight	without Heat-sink	60g
	with Heat-sink	81.06g

Dimensions Drawing (mm)

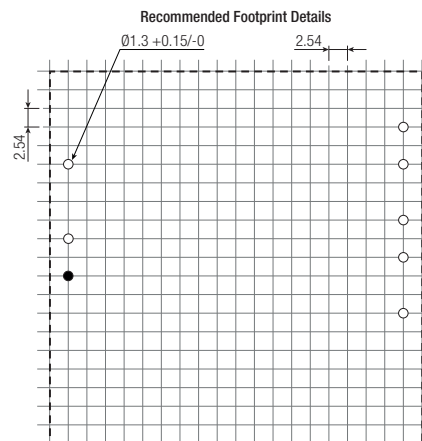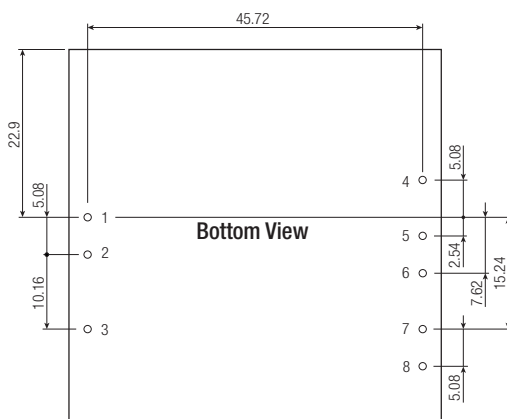
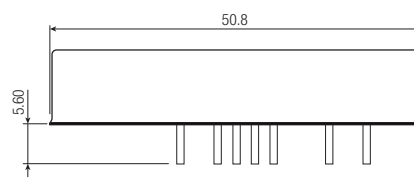
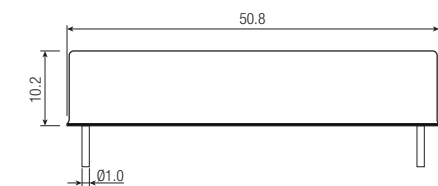


Pin Connections

Pin #	Single
1	+Vin
2	-Vin
3	CTRL
4	-Sense ⁽⁷⁾
5	+Sense ⁽⁷⁾
6	+Vout
7	-Vout
8	Trim

Pin Pitch Tolerance ± 0.25 mm
Pin Dimension Tolerance ± 0.1 mm
Tolerance: X.X ± 0.5 mm
X.XX ± 0.25 mm

Dimension Drawing (mm) with Heat-sink

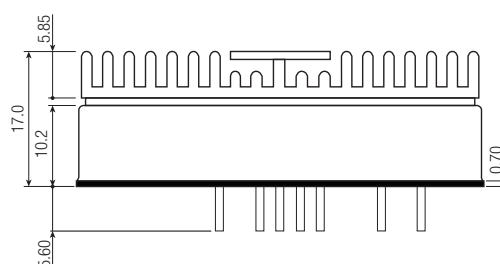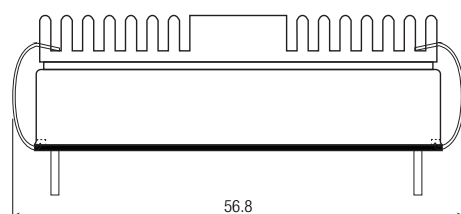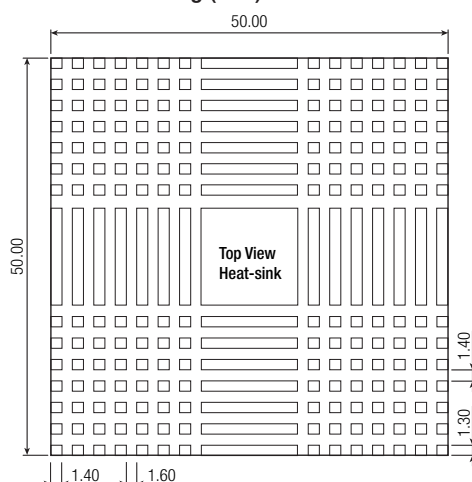

Specifications measured at Ta = 25°C, nominal input voltage, full load otherwise noted

PACKAGING INFORMATION		
Parameter	Type	Value
Packaging Quantity	without Heat-sink	4pcs.
	with Heat-sink	12pcs.
Storage Temperature Range		-55°C to +125°C
Storage Humidity		5% - 95% RH



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.