



Features

- 2" x 4" x 1.3" Package
- Suitable for 1U Applications
- 110W w/air, 80W convection cooled
- Universal Input 90-264Vac
- Efficiency 87% typical
- Approved to CSA/EN/IEC/UL60950-1, 2nd Edition
- Power Fail Signal
- Remote Sense
- 3 Year Warranty
- RoHS Compliant



Description

The CINT3110 Series are industrial grade, high efficiency, triple output power supplies in a small 2" x 4" size. The CINT3110 family is ideal for Industrial and ITE applications requiring multiple outputs and small footprint. Compliant to IEC60950-1 2nd edition, the CINT3110 models feature outputs of 5/±12V, 5/±15V, 5/±24V, includes a Power Fail/DC OK signal, and meet Class B Conducted EMI.

Model Selection

| Model Number | Volts* | | Output Current** | | Ripple & Noise*** | Total Regulation | OVP Threshold |
|------------------|--------|------|------------------|------------|-------------------|------------------|---------------|
| | | | w/200LFM air | Convection | | | |
| CINT3110A0508K01 | V1 | 5V | 14.0A | 10.0A | 1.0% pk-pk | ±2% | 7.5V max. |
| | V2 | 12V | 6.0A | 4.5A | 1.0% pk-pk | ±3% | 115%-135% |
| | V3 | -12V | 1.0A | 1.0A | 2.0% pk-pk | ±10% | 115%-135% |
| CINT3110A1708K01 | V1 | 5V | 14.0A | 10.0A | 1.0% pk-pk | ±2% | 7.5V max. |
| | V2 | 15V | 4.5A | 3.5A | 1.0% pk-pk | ±3% | 115%-135% |
| | V3 | -15V | 1.0A | 1.0A | 2.0% pk-pk | ±10% | 115%-135% |
| CINT3110A1908K01 | V1 | 5V | 12.0A | 8.0A | 1.0% pk-pk | ±2% | 7.5V max. |
| | V2 | 24V | 4.0A | 3.0A | 1.0% pk-pk | ±3% | 115%-135% |
| | V3 | -24V | 1.0A | 1.0A | 2.0% pk-pk | ±10% | 115%-135% |

Notes: * 5V output is adjustable with +/-10% range

** Total convection power is 80 Watts.

*** Measured with noise probe directly across output terminals, and load terminated with 0.1µF ceramic and 10µF low ESR capacitors. Ripple & Noise of V2 at no load is 2% maximum.

General Specifications

| | | | |
|----------------------|---|---------------------|---|
| AC Input | 100-240Vac, ±10%, 47-63Hz, 1Ø 120-370Vdc | Turn On Time | Less than 2 sec. @115Vac (inversely proportional to input voltage and thermistor temperature) |
| Input Current | 115Vac: 1.5A, 230Vac: 0.75A | Hold-up Time | 16mS typical at 110W, 120Vac input |

General Specifications (continued)

| | | | |
|------------------------------|--|---------------------------------|--|
| Inrush Current | 264Vac, cold start: will not exceed 45A | Signals | AC Power Fail, DC OK |
| Input Fuses | F1, F2: 2.5A, 250Vac fuses provided on all models | Overload Protection | 150%-300% above rating for V2 & V3, 110%-200% for V1. Hiccup Mode |
| Earth Leakage Current | <290 μ A@264Vac, 60Hz, NC | Short Circuit Protection | Provided - no damage will occur if the output is shorted. |
| Efficiency | 87% typical at 230Vac | Overvoltage Protection | See models chart for trip range. |
| Output Power | 110W continuous with 200 lfm airflow, 80W convection cooled – See chart for specific voltage model ratings. | Switching Frequency | PFC: 75kHz typical |
| Transient Response | 500 μ S typ. for return to within 0.5% of nominal, 50% load step. $\Delta i/\Delta t < 0.2A/\mu S$. Max Volt Deviation = 3% | Isolation | Input-Output: 4000Vac Input-Ground: 1800Vac Output-Ground: 500Vac |
| Ripple and Noise | See models chart | Operating Temperature | -10°C to +70°C |
| Output Voltage | See models chart | Temperature Derating | Derate output power linearly above 50°C to 50% at 70°C |
| Voltage Adjustability | +/-10% from nominal on 5V output | Storage Temperature | -40°C to +85°C |
| Minimum Load | Not required | Altitude | Operating: -500 to 10,000 ft. Non-operating: -500 to 40,000 ft. |
| Total Regulation | See models chart | Relative Humidity | 5% to 95%, non-condensing |
| Vibration | Operating: 0.003g ² /Hz, 1.5grms overall, 3 axes, 10 min/axis Non-Operating: 0.026g ² /Hz, 5.0grms overall, 3 axes, 1 hr/axis | Shock | Operating: Half-sine, 20gpk, 10ms, 3 axes, 6 shocks total Non-Operating: Half-sine, 40 gpk, 10 ms, 3 axes, 6 shocks total |
| Dimensions | W: 2.0" x L: 4.0" x H: 1.3" | Safety Standards | EN/CSA/UL/IEC 60950-1, 2 nd Edition |
| Weight | 200g | MTBF | 245,000 hours, 25°C Ambient, 110Vac input |

Auxiliary Signals

| | | | |
|-----------------------|---|---------------|--|
| AC Power Fail: | During normal operation, stays HIGH. Signal goes LOW with at least 6mS warning before loss of DC output from AC failure. | DC OK: | Open collector logic signal goes and stays HIGH 100mS to 500mS after main output reaches regulation. |
| Remote Sense: | (5V output, optional) Will compensate for 0.5V drop min. Will operate without remote sense connected. Reverse connection protected. | | |


Notes:

- Specifications are for convection rating at factory settings at 115 Vac input, 25°C ambient unless otherwise stated.
- For DC input an external DC safety rated fuse must be used.

EMI/EMC Compliance

| | |
|---|---|
| Conducted Emissions | EN55011/22 Class B, FCC Part 15, Subpart B, Class B |
| Radiated Emissions | EN55011/22 Class A; FCC Part 15, Subpart A, Class A |
| Static Discharge Immunity | EN61000-4-2, Criteria A, 6kV Contact Discharge, 8kV air discharge |
| Radiated RF Immunity | EN61000-4-3, 3V/m. Criteria A |
| EFT/Burst Immunity | EN61000-4-4, 2kV/5kHz, Criteria A |
| Line Surge Immunity | EN61000-4-5, 1kV differential, 2kV common-mode, Criteria A |
| Conducted RF Immunity | EN61000-4-6, 3Vrms, Criteria A |
| Power Frequency Magnetic Field Immunity | EN61000-4-8, 3A/m, Criteria A |
| Voltage Dip Immunity | EN61000-4-11, 0% Vin, 0.5cycle; 40% Vin, 5 cycles; 70% Vin, 25 cycles; Criteria A |
| Line Harmonic Emissions | EN61000-3-2, Class A, B, C, & D |
| Flicker Test | EN61000-3-3, Complies (dmax<6%) |

Mechanical Drawing

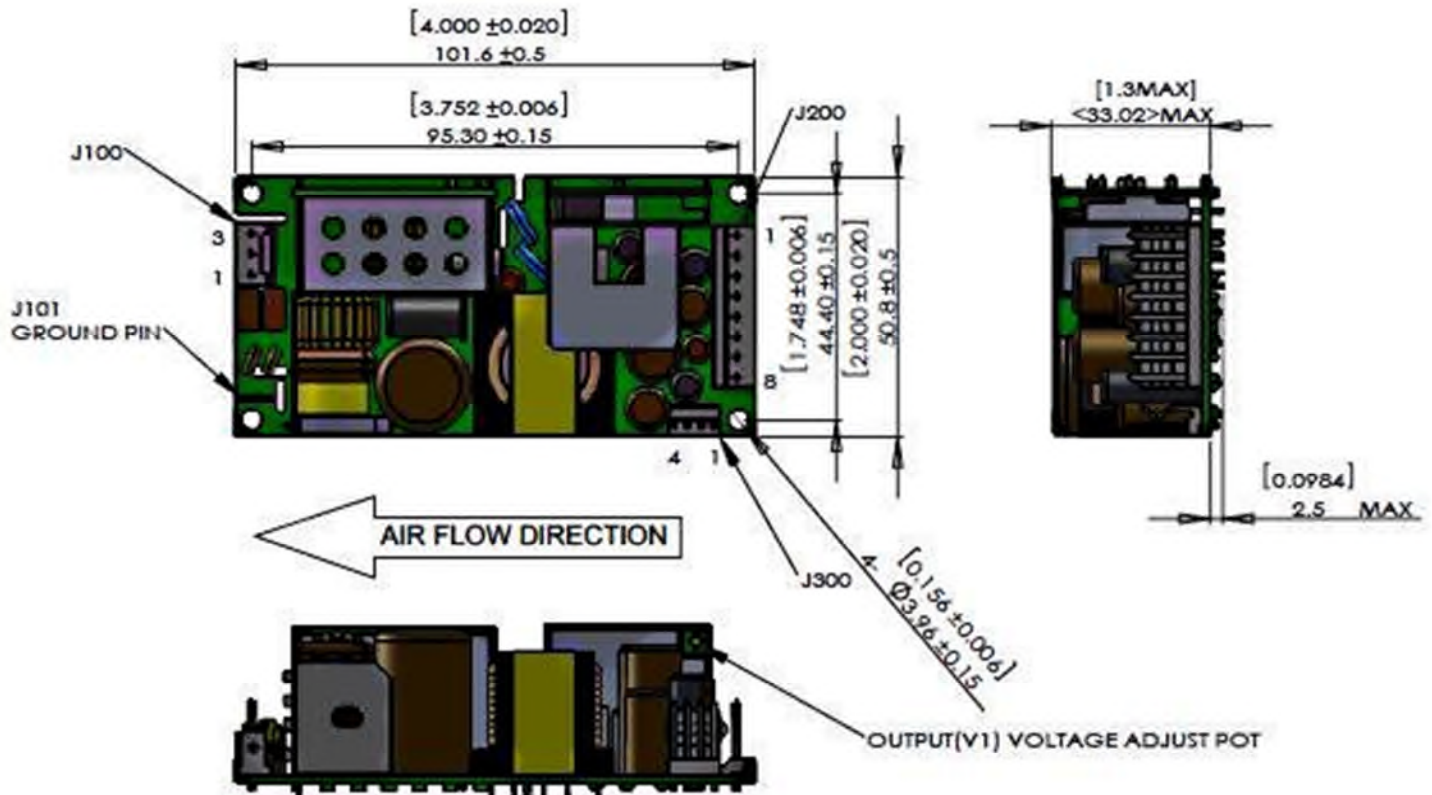

Notes:

1. All dimensions in inches (mm), tolerance is $\pm .02$ ".
2. Mounting holes should be grounded for EMI purpose
3. Mounting J101 is safety ground connection
4. This power supply requires mounting on metal standoffs 0.20" (5 mm) in height.

Connector Information

| Input Connector J100 | Ground J101 | DC Output Connector J200 | | | Signal Connector J300 |
|---|--|--|--|------------------------|---|
| PIN 1) AC NEUTRAL PIN 2) EMPTY PIN 3) AC LINE | 0.187" FASTON TAB | PIN 1) +V1 PIN 2) +V1 PIN 3) GND | PIN 4) GND PIN 5) GND PIN 6) GND | PIN 7) V2 PIN 8) V3 | PIN 1) Power Fail/DC OK PIN 2) GND PIN 3) +Remote Sense PIN 4) -Remote Sense |
| Mating Connector: Molex 09-50-3031 Pins= 08-52-0072 | Mating Connector: Molex 01-90020001 | Mating Connector: JST VHR-8N Pins = SVH-21T-P1.1 | | | Mating Connector: Molex 51065-0400 Pins = 50212-8100 |

Isolation Specifications

| Parameter | Conditions/Description | Min | Nom | Max | Units |
|--------------------------------|---|---------------------|------------------------------------|-----|-------------------|
| Insulation Safety Rating | Input/Ground Input/Output Output/Ground | | Basic Reinforced Operational | | |
| Electric Strength Test Voltage | Input/Ground Input/Output Output/Ground | 1800 4000 500 | - | - | Vac Vac Vac |

Leakage Current

| Parameter | Conditions/Description | Max |
|-----------------------|---|----------------|
| Earth Leakage Current | Normal Condition (NC) Single Fault Condition (SFC) | 290µA 420µA |
| Touch Current | Normal Condition (NC) Single Fault Condition (SFC) | 90µA 170µA |

Input Specifications

All specifications apply over specified input voltage, output load, and temperature range, unless otherwise noted.

| Parameter | Conditions/Description | Min | Nom | Max | Units |
|-----------------|--|-----|---------|------|-------|
| Input Voltage | | 90 | 115/230 | 264 | Vac |
| Input Frequency | | 47 | 50/60 | 63 | Hz |
| Input Current | 115Vac/max load | | | 1.5 | A |
| Input Current | 230Vac/max load | | | 0.75 | A |
| Inrush Current | 264Vac, cold start, 25°C | - | - | 45 | A |
| Efficiency | V_i nom, I_o nom CINT3110A0508K01 CINT3110A1708K01 CINT3110A1908K01 | - | 87% | - | % |

Output Specifications

| Parameter | Conditions/Description | Min | Nom | Max | Units |
|---|------------------------|-------------|------------------|------------------|-------|
| Output Current V1 Output Current V2 Output Current V3 | CINT3110A0508K01 | 0 0 0 | 10.0 4.5 1 | 14.0 6.0 1 | ADC |
| Output Current V1 Output Current V2 Output Current V3 | CINT3110A1708K01 | 0 0 0 | 10.0 3.5 1 | 14.0 4.5 1 | ADC |
| Output Current V1 Output Current V2 Output Current V3 | CINT3110A1908K01 | 0 0 0 | 8.0 3.0 1 | 12.0 4.0 1 | ADC |

Output Specifications (continued)

| Parameter | Conditions/Description | Min | Nom | Max | Units |
|--|---|-----|-----|-----|---------------------|
| Static Line Regulation V1 | $V_i \text{ min-} V_i \text{ max, } V_i \text{ nom, 0-100\% } I_{o1} \text{ max}$ | -2 | - | 2 | % $V_o \text{ nom}$ |
| Static Line Regulation V2 | $V_i \text{ min-} V_i \text{ max, } V_i \text{ nom, 0-100\% } I_{o2} \text{ max}$ | -3 | - | 3 | % $V_o \text{ nom}$ |
| Static Line Regulation V3 | $V_i \text{ min-} V_i \text{ max, } V_i \text{ nom, 0-100\% } I_{o3} \text{ max}$ | -10 | - | 10 | % $V_o \text{ nom}$ |
| Static Load Regulation V1 (Droop Characteristic) | $V_i \text{ min-} V_i \text{ max, } V_i \text{ nom, 0-100\% } I_{o1} \text{ max}$ | -2 | - | 2 | % $V_o \text{ nom}$ |
| Static Load Regulation V2 (Droop Characteristic) | $V_i \text{ min-} V_i \text{ max, } V_i \text{ nom, 0-100\% } I_{o2} \text{ max}$ | -3 | - | 3 | % $V_o \text{ nom}$ |
| Static Load Regulation V3 (Droop Characteristic) | $V_i \text{ min-} V_i \text{ max, } V_i \text{ nom, 0-100\% } I_{o3} \text{ max}$ | -10 | - | 10 | % $V_o \text{ nom}$ |
| Hold-Up Time | $V_{in} = 120\text{Vac, } P_o = 110\text{W}$ | 16 | - | - | mS |
| Dynamic Load Regulation V1, V2, V3 | Load change =50%, $di/dt = 0.2\text{A}/\mu\text{S}$ | 0 | - | 3 | % $V_o \text{ nom}$ |
| Start-Up Time | $V_{in} = 115\text{Vac, } I_o \text{ nom}$ | 0 | - | 2 | S |
| Ripple & Noise V1 | 20MHz bandwidth | 0 | - | 1% | % $V_o \text{ nom}$ |
| Ripple & Noise V2 | 20MHz bandwidth | 0 | - | 1% | % $V_o \text{ nom}$ |
| Ripple & Noise V3 | 20MHz bandwidth | 0 | - | 2% | % $V_o \text{ nom}$ |

Protection


All specifications apply over specified input voltage, output load, and temperature range, unless otherwise noted.

| Parameter | Conditions/Description | Min | Nom | Max | Units |
|----------------------------|---|----------------------------------|-----|-----|---------|
| Input Fuse | T2.5A/250V internal fuse in both line & neutral | Not user accessible | | | |
| Input Transient Protection | 2KV(CM) and 1KV(DM) surge | | | 2 | KV (CM) |
| Short Circuit Protection | | Hiccup Mode | | | |
| Overload Protection | | Hiccup Mode | | | |
| Overvoltage Protection | Latching Type, recycle AC input to reset | See models chart for trip ranges | | | |

Characteristic Curves (Note: All waveforms below are based on CINT3110A0508K01 model)



Output vs. Temperature

80W convection cooled and 110W continuous with 200 LFM airflow. Derate output power to 50% at 70°C.

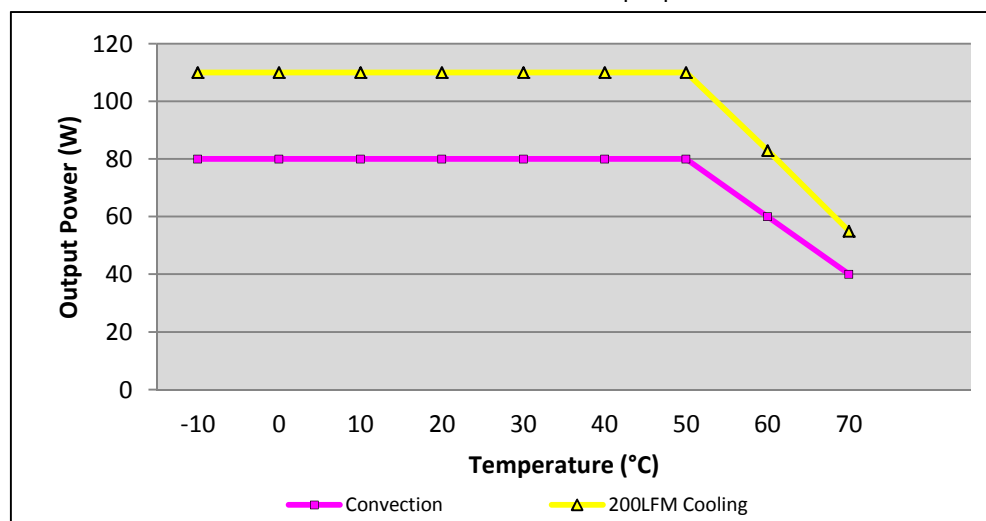



Ripple & Noise

To verify that the output ripple and noise does not exceed the level specified in the product specification. Measured using a scope probe socket with 0.1 μ F ceramic and a 10 μ F electrolytic capacitor connected in parallel across it, BW limit with 20MHz.

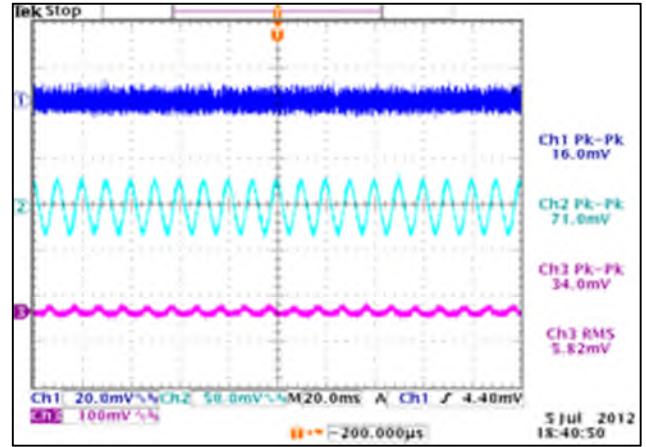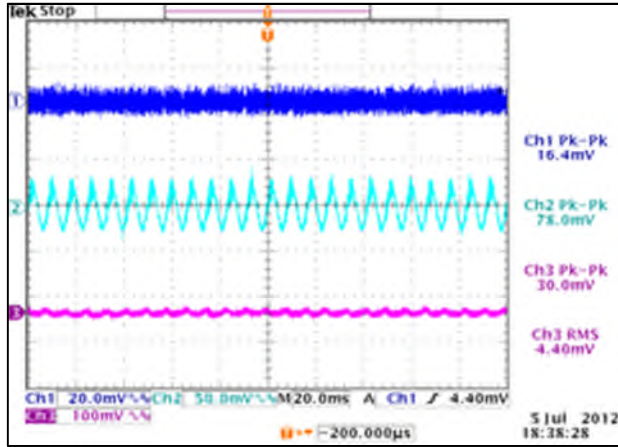



Output Transient Response V1

50% load step within the regulation limits of minimum and maximum load, $di/dt < 0.2A/\mu$ Sec. Recovery time not specified as there is no laps in regulation with a 50% Load Step. Maximum voltage deviation is 3%.

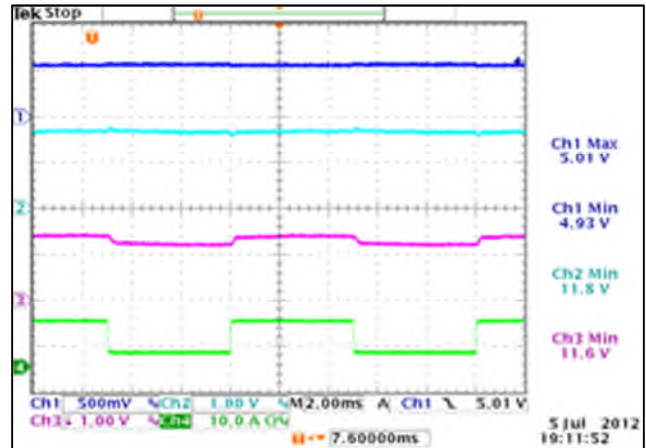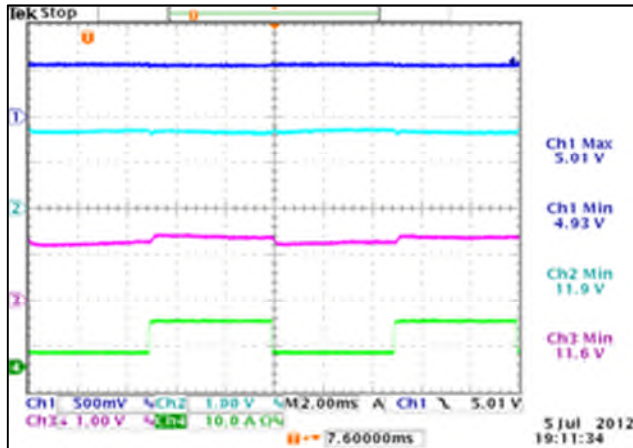



Output Transient Response V2

50% load step within the regulation limits of minimum and maximum load, $di/dt < 0.2A/\mu$ Sec. Recovery time not specified as there is no laps in regulation with a 50% Load Step. Maximum voltage deviation is 3%.

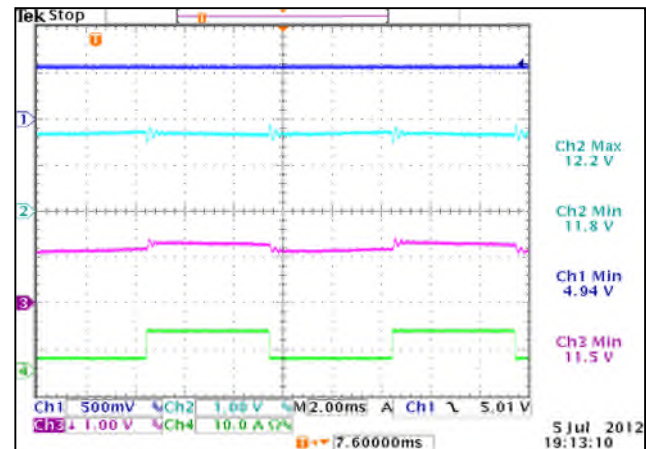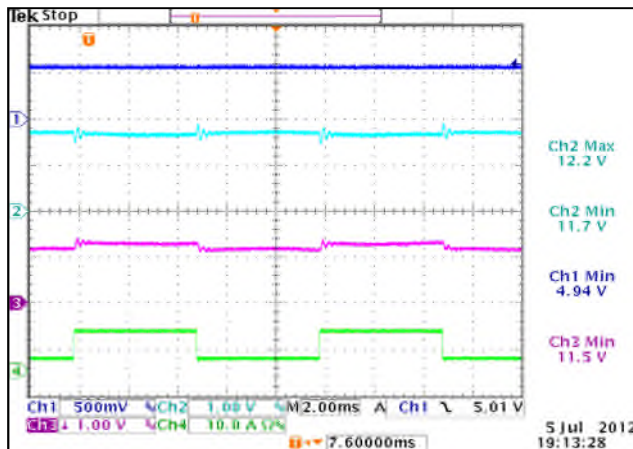



Output Transient Response V3

50% load step within the regulation limits of minimum and maximum load, $di/dt < 0.2A/\mu\text{Sec}$. Recovery time not specified as there is no laps in regulation with a 50% Load Step. Maximum voltage deviation is 3%.

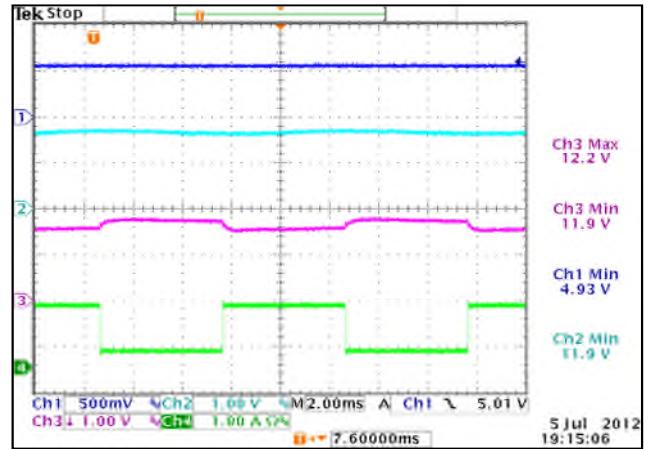
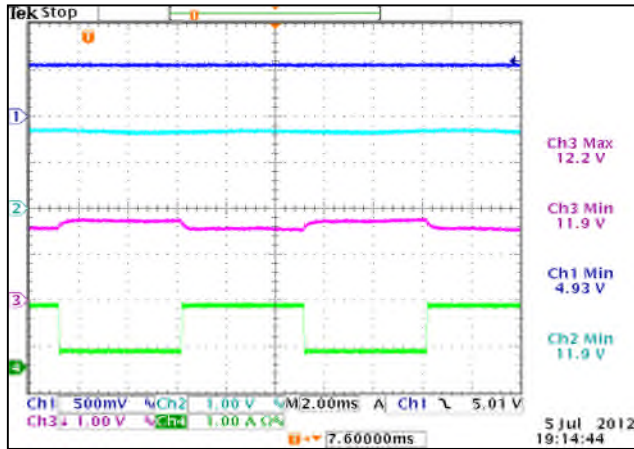


Output Overload Characteristic V1



Supply shall protect itself against Overload conditions. The Power Supply shall recover from Overload Conditions without operator intervention.

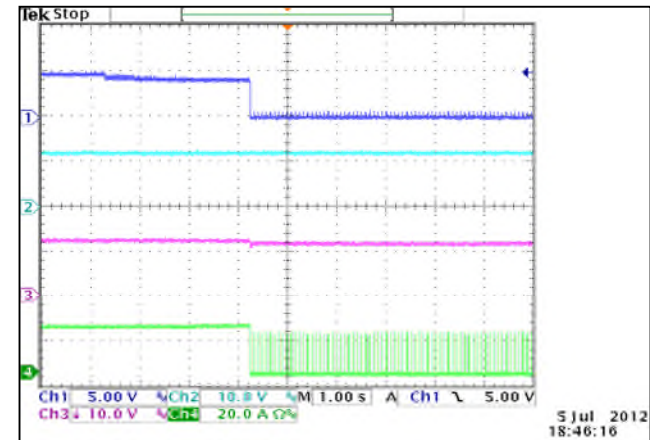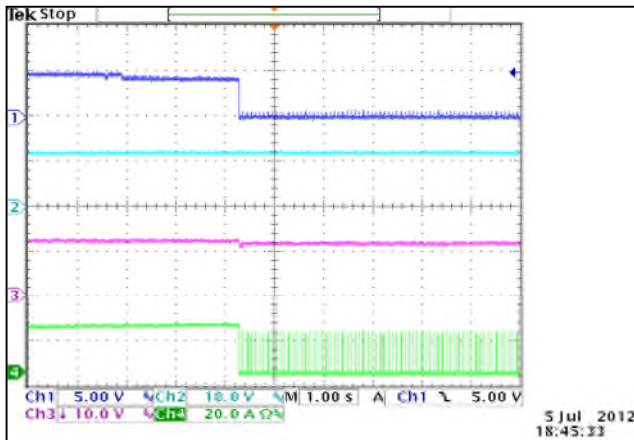

Output Overload Characteristic V2

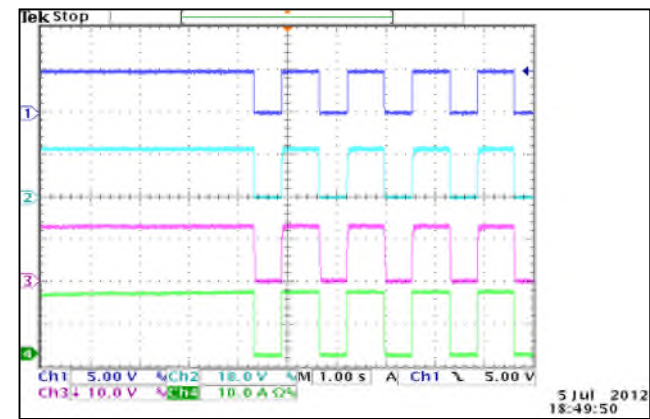
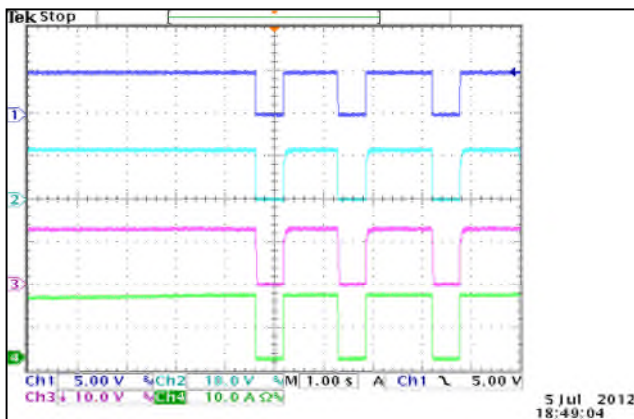


Output Overload Characteristic V3

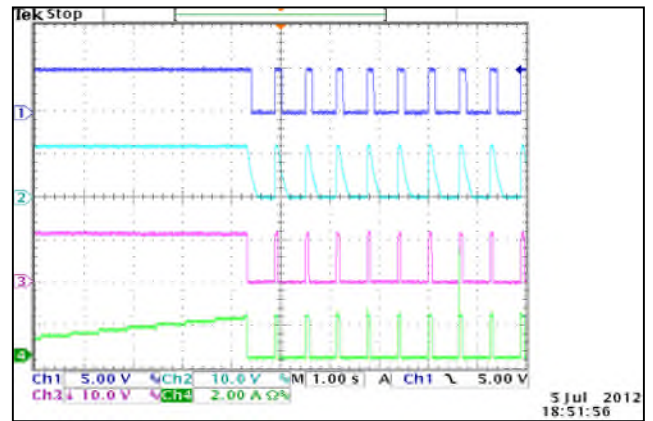
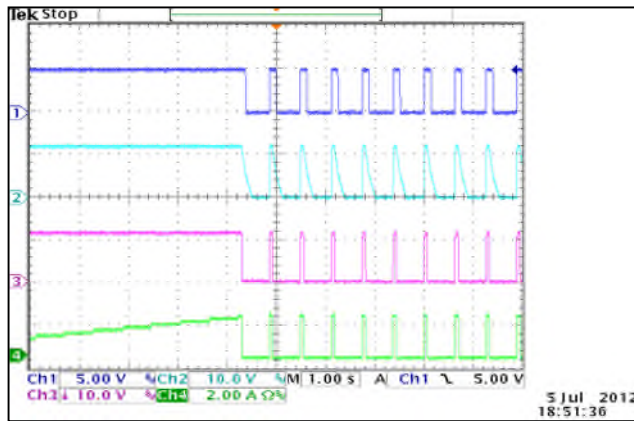


Output Short Circuit Characteristic V1



Supply shall protect itself against Short Circuit conditions. The Power Supply shall recover from short circuit conditions without operator intervention.

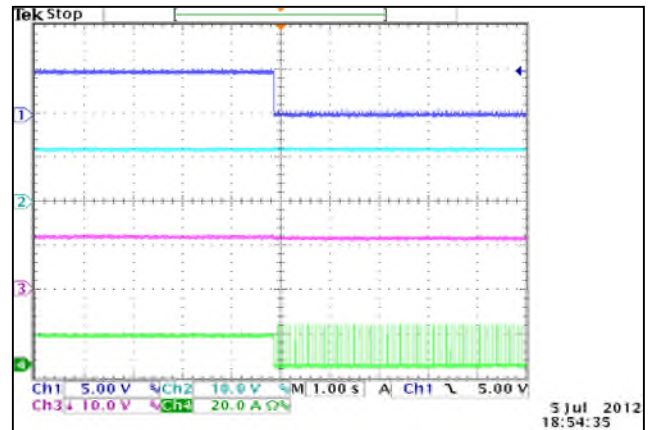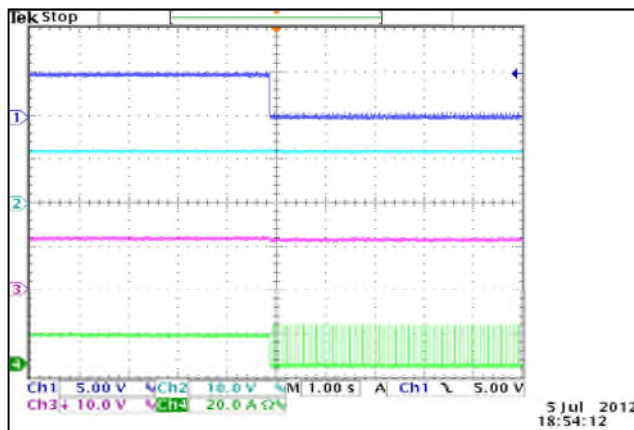

Output Short Circuit Characteristic V2

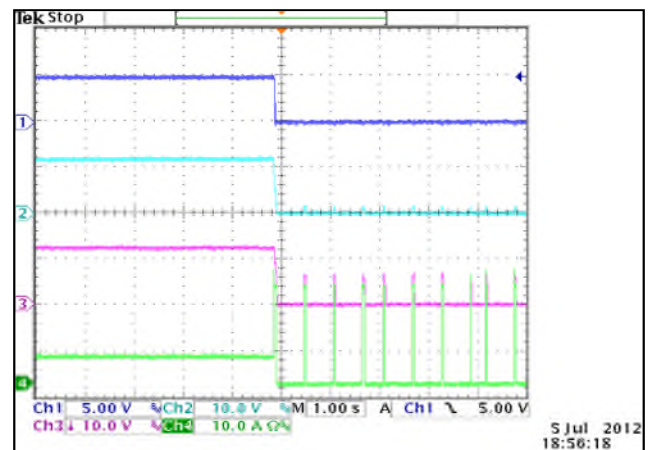
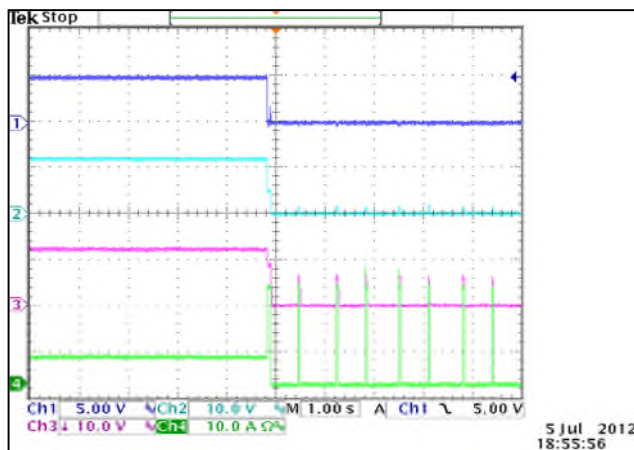


Output Short Circuit Characteristic V3

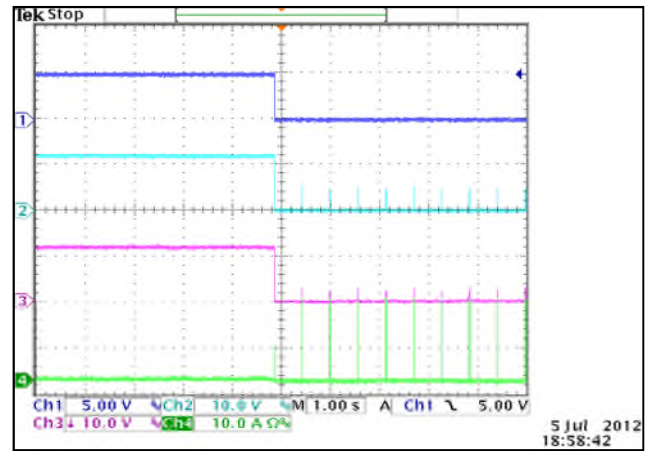
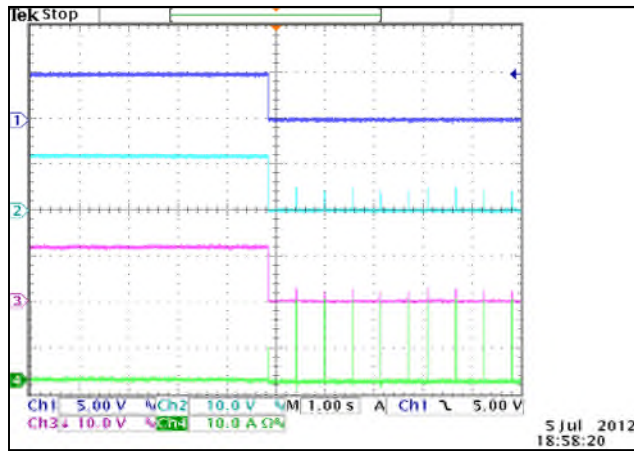


Output Overvoltage Characteristic V1



Supply shall protect itself against over voltage conditions. The Power Supply shall latch and require AC input recycle to reset.

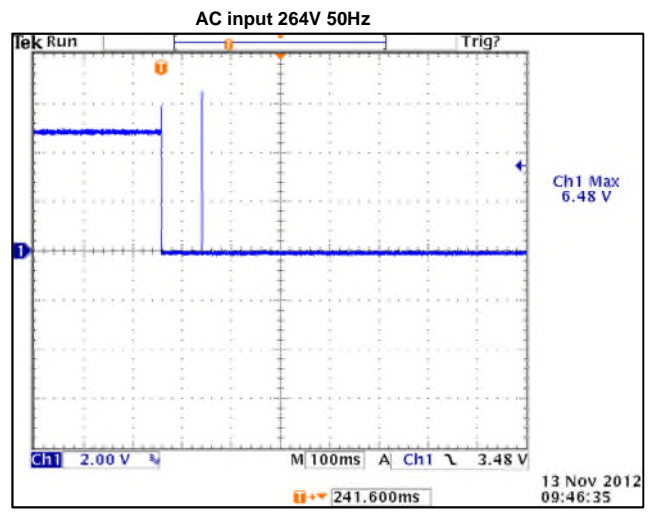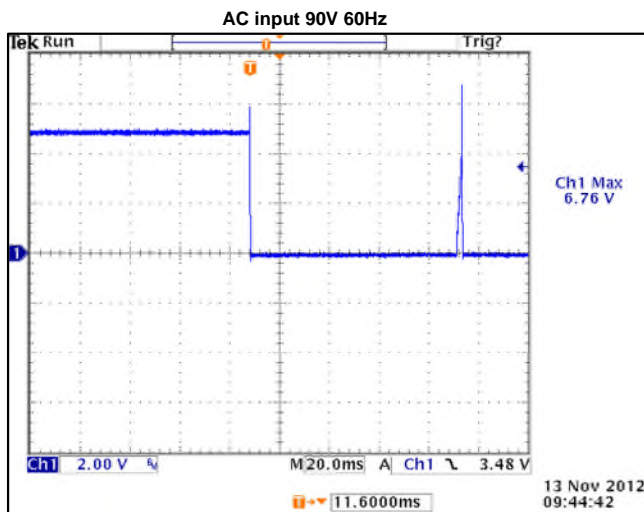

Output Overvoltage Characteristic V2

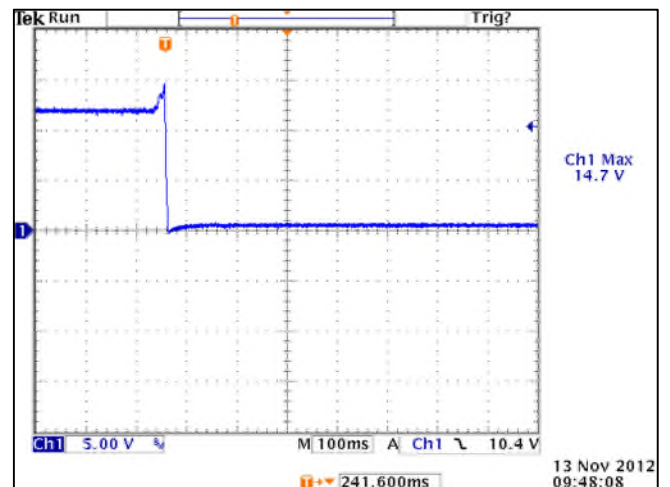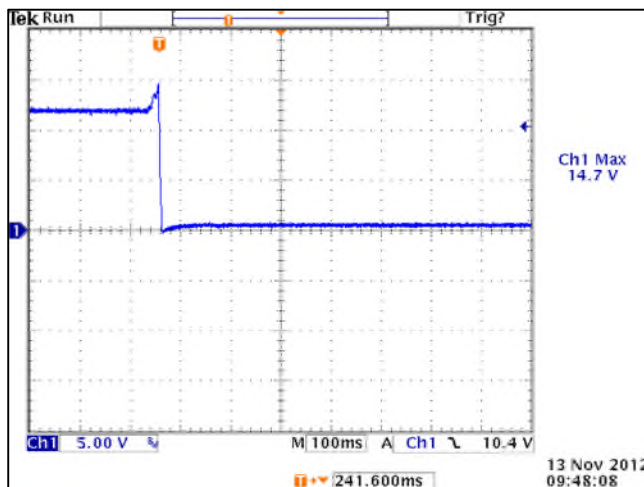


Output Overvoltage Characteristic V3

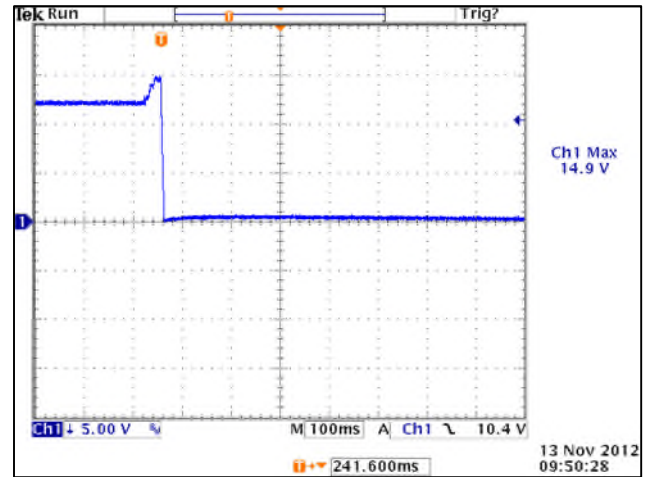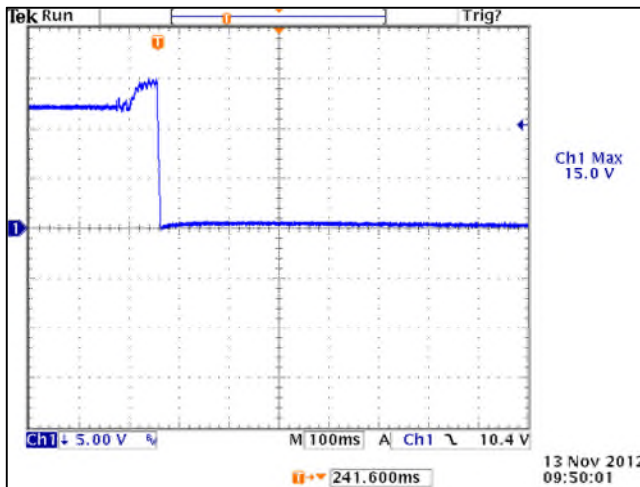


Startup Time

Start up time is <2seconds

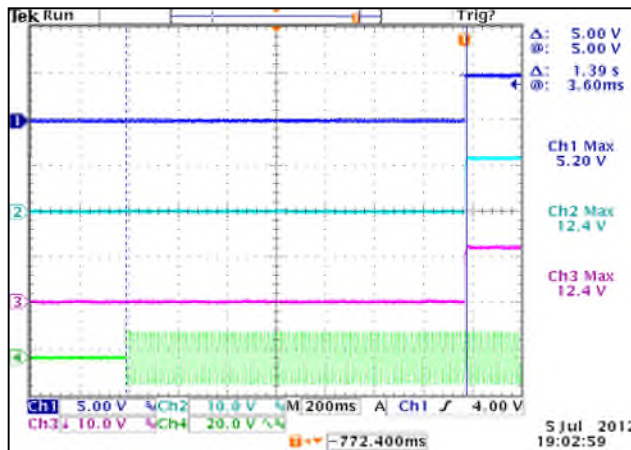



Hold-up Time

Hold up time is 16mS minimum

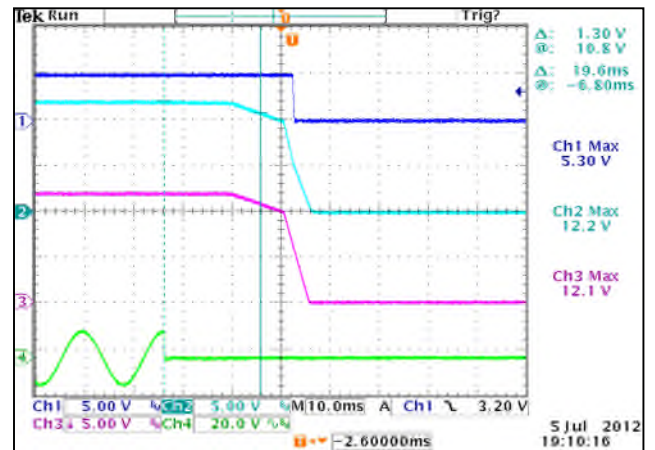

Power Fail Signal Timing

Active Low TTL logic signal goes high 100 - 500 ms after main output; it goes low at least 6 mS before loss of regulation.

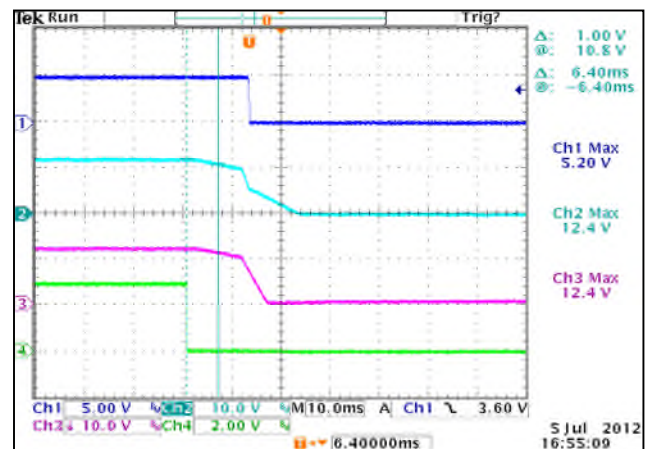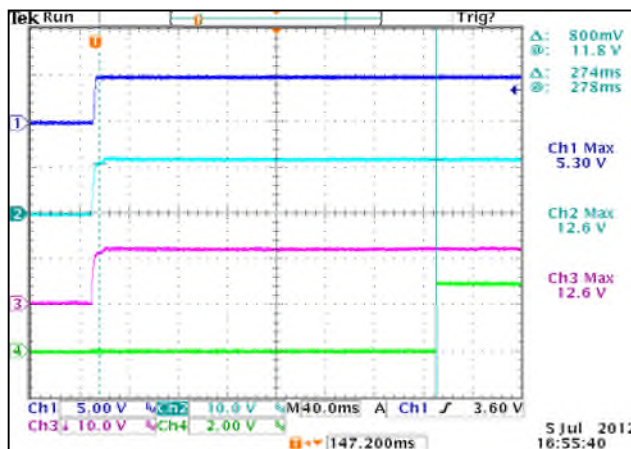



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.