



## FEATURES

- RoHS compliant
- Low profile
- Surface mount
- Inductance range from 1.0μH to 1.0mH
- Tape & reel
- UL 94V-0 materials
- J-STD-020D.1 reflow

## PRODUCT OVERVIEW

The 2900 series is a range of bobbin-wound, shielded inductors. They are suitable for power-line filtering found in consumer electronics such as desktop computers, handheld devices and GPS systems, as well as in a vast range of industrial and telecom applications including network hubs, bridges & routers, and high frequency wireless communication devices.

These surface mount inductors are extremely compact and have an integral shield, making them useful in EMI sensitive applications.

For lower current ratings see also our lower profile 2900L series.



For full details go to  
[www.murata-ps.com/rohs](http://www.murata-ps.com/rohs)

# 2900 Series

## Shielded Surface Mount Inductors

## SELECTION GUIDE

| Order Code | Inductance (10kHz, 0.1VAc) |                   | Idc <sup>2</sup> | Rdc        |
|------------|----------------------------|-------------------|------------------|------------|
|            | Nom.<br>μH                 | Min. – Max.<br>μH | Max.<br>A        | Max.<br>mΩ |
| 29102C     | 1.0                        | 0.70 – 1.30       | 6.0              | 16         |
| 29152C     | 1.5                        | 1.05 – 1.95       | 5.5              | 18         |
| 29222C     | 2.2                        | 1.54 – 2.86       | 5.0              | 20         |
| 29332C     | 3.3                        | 2.31 – 4.29       | 4.0              | 28         |
| 29472C     | 4.7                        | 3.29 – 6.11       | 2.3              | 30         |
| 29682C     | 6.8                        | 4.76 – 8.84       | 2.1              | 40         |
| 29103C     | 10                         | 8.0 – 12.0        | 1.8              | 45         |
| 29153C     | 15                         | 12.0 – 18.0       | 1.5              | 65         |
| 29223C     | 22                         | 17.6 – 26.4       | 1.2              | 85         |
| 29333C     | 33                         | 26.4 – 39.6       | 1.0              | 120        |
| 29473C     | 47                         | 37.6 – 56.4       | 850mA            | 170        |
| 29683C     | 68                         | 54.4 – 81.6       | 650mA            | 250        |
| 29104C     | 100                        | 80.0 – 120        | 530mA            | 360        |
| 29154C     | 150                        | 120 – 180         | 470mA            | 500        |
| 29224C     | 220                        | 176 – 264         | 380mA            | 760        |
| 29334C     | 330                        | 264 – 396         | 320mA            | 1000       |
| 29474C     | 470                        | 376 – 564         | 260mA            | 1600       |
| 29684C     | 680                        | 544 – 816         | 210mA            | 2400       |
| 29105C     | 1000                       | 800 – 1200        | 180mA            | 4100       |

## ABSOLUTE MAXIMUM RATINGS


|                                      |                |
|--------------------------------------|----------------|
| Operating free air temperature range | -40°C to 85°C  |
| Storage temperature range            | -40°C to 125°C |

## SOLDERING INFORMATION<sup>1</sup>

|                                         |       |
|-----------------------------------------|-------|
| Peak reflow solder temperature          | 250°C |
| Pin finish                              | Tin   |
| Moisture sensitivity level <sup>3</sup> | 1     |

## PACKAGE SPECIFICATIONS

### Mechanical Dimensions

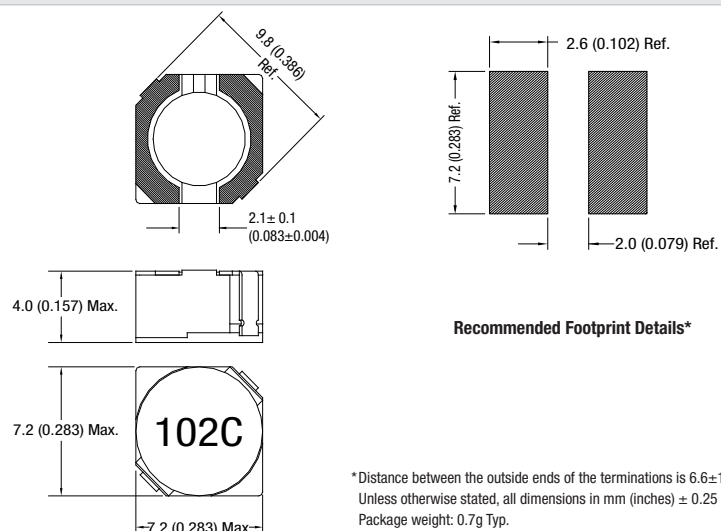


### Recommended Footprint Details\*

\* Distance between the outside ends of the terminations is 6.6 ± 1.5 (0.26 ± 0.06)  
Unless otherwise stated, all dimensions in mm (inches) ± 0.25 (0.010).  
Package weight: 0.7g Typ.


1 For further information, please visit [www.murata-ps.com/rohs](http://www.murata-ps.com/rohs)  
2 The maximum DC current is the value at which the inductance falls to 75% of its nominal value or when its temperature rise reaches 40°C, whichever is sooner.

3 When tested to moisture sensitivity level 1, as described per IPC/JEDEC J-STD-020D, products passed electrical testing, package coplanarity and visual inspection.  
All specifications typical at T<sub>A</sub> = 25°C


**INDUCTANCE Vs CURRENT**

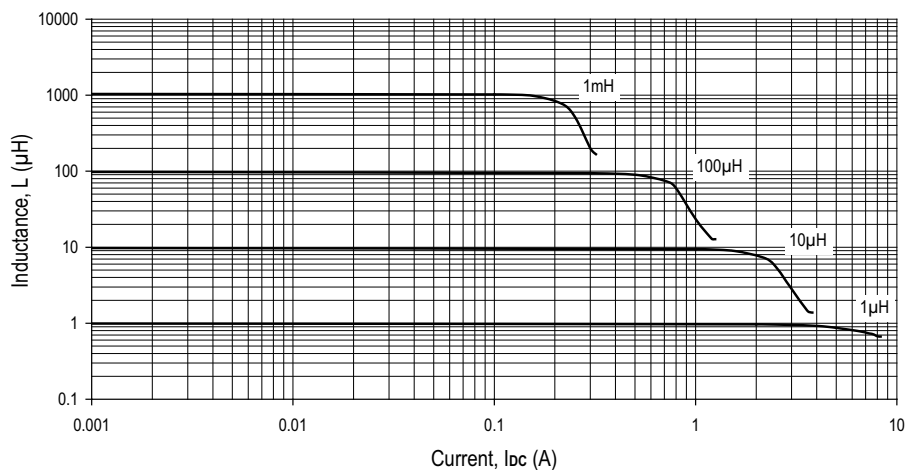

**TEMPERATURE Vs CURRENT**

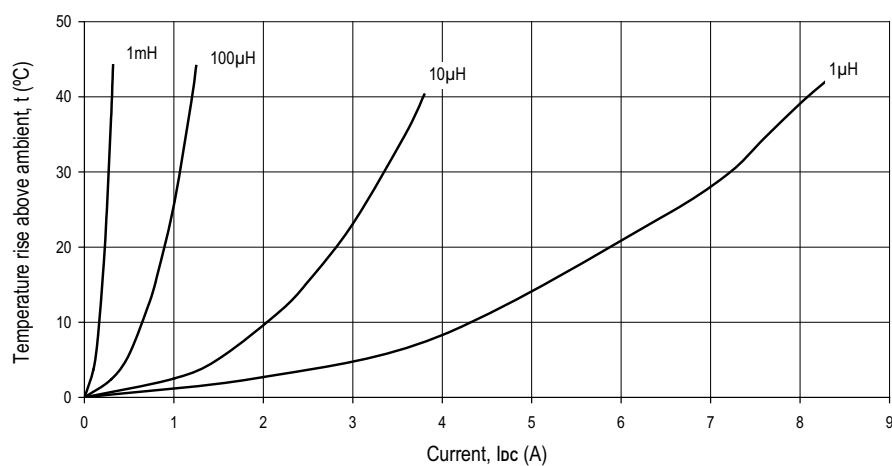


**INDUCTANCE Vs FREQUENCY**

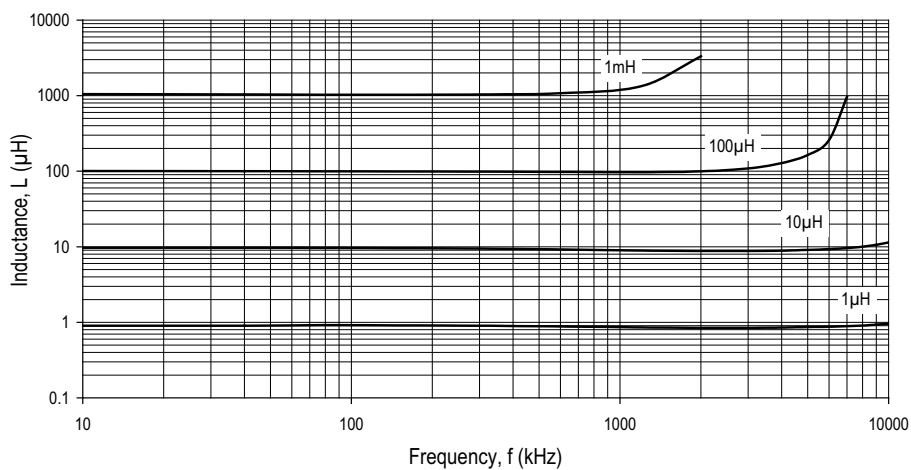


## PACKAGE SPECIFICATIONS

### Reel Dimensions

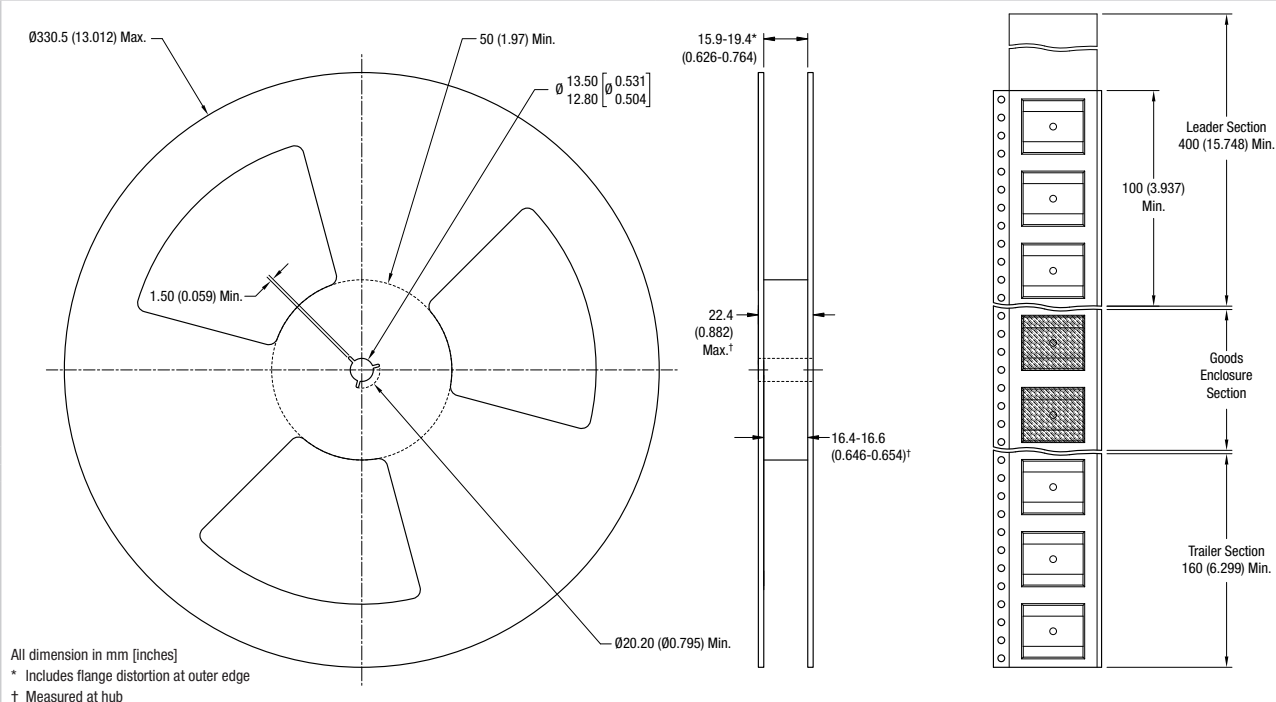

### Tape Outline Dimensions

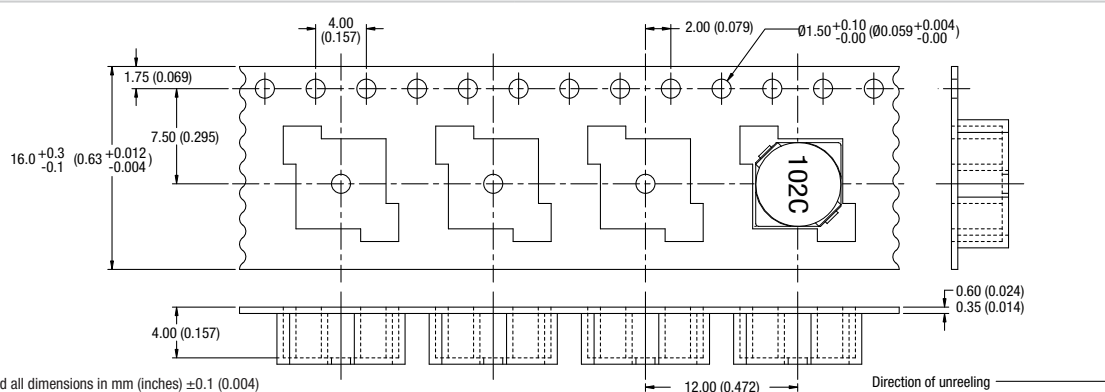

**Murata Power Solutions, Inc.**  
11 Cabot Boulevard, Mansfield, MA 02048-1151 U.S.A.  
ISO 9001 and 14001 REGISTERED

Murata Power Solutions, Inc. makes no representation that the use of its products in the circuits described herein, or the use of other technical information contained herein, will not infringe upon existing or future patent rights. The descriptions contained herein do not imply the granting of licenses to make, use, or sell equipment constructed in accordance therewith. Specifications are subject to change without notice.



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.