
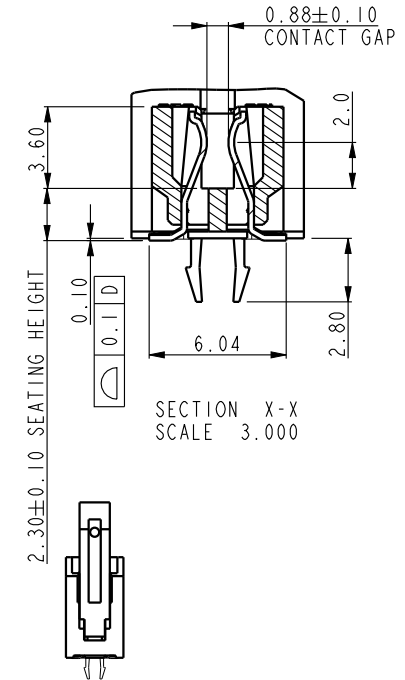


A

B

C

D

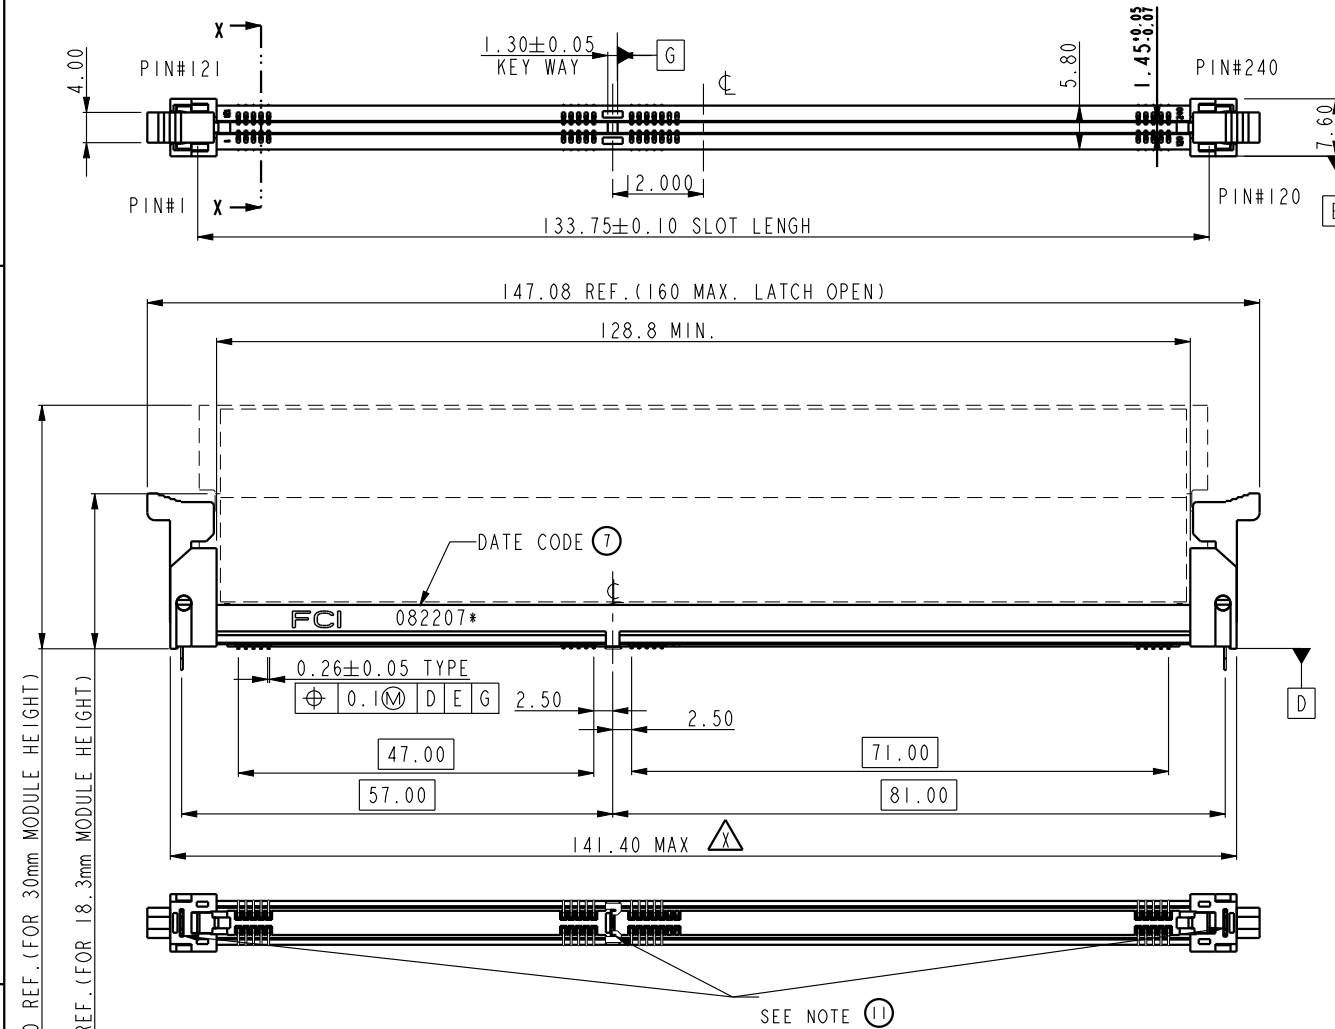

spec ref		*		dr	Rick Bian	2010/07/04	projection 	mm 	size	A4	scale	0.500
tolerance std ASME Y14.5	TOLERANCES UNLESS OTHERWISE SPECIFIED			eng	Jeny Ren	2018/02/08			ecn no	ELX-DG-28885-1		
				chr	-	-						
				appr	Nickor Zuo	2018/02/09	product family			rel level	Released	
surface 	linear	0.X	±0.30	Amphenol FCI	title	SMT DDRIII SOCKET ASS'Y DDRIII,240P SOCKET(FOR RDIMM MODULE)			dwg no	10079248		rev Y
		0.XX	±0.15									
		0.XXX	±0.05									
ASME Y14.5	angular	0°	±2°	www.fci.com	cat. no.	Product - Customer Drw			sheet 1 of 5			

Crea File - REV E - 2016-02-12


2


3



PDS: Rev :Y

STATUS:Released

Printed: Feb 09, 2018

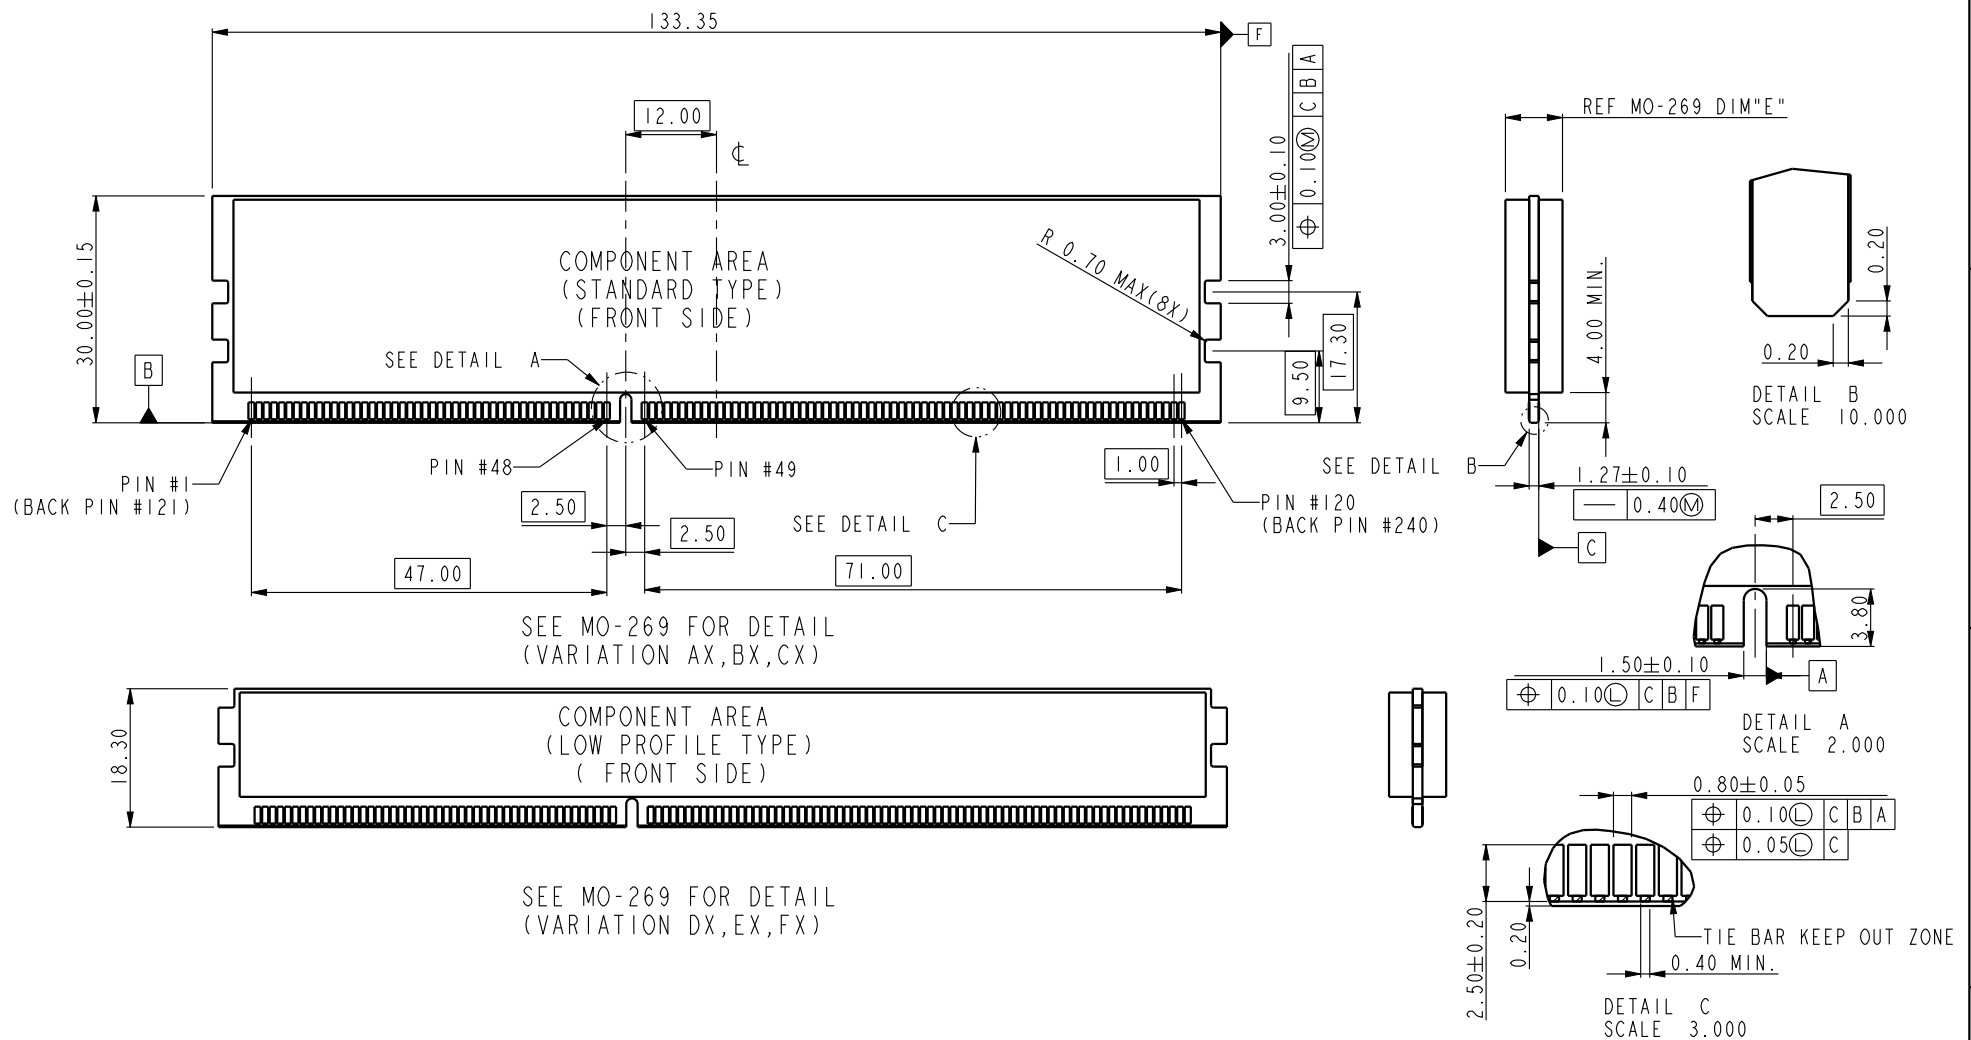


spec ref		*		dr	Rick Bian	2010/07/04	projection 	mm 	size	A4	scale	0.500	
tolerance std ASME Y14.5	TOLERANCES UNLESS OTHERWISE SPECIFIED			eng	Jeny Ren	2018/02/08			ecn no	ELX-DG-28885-1			
				chr	-	-							
				appr	Nickor Zuo	2018/02/09						product family	
surface 	linear	0.X	±0.30	Amphenol FCI	title	SMT DDRIII SOCKET ASS'Y DDRIII,240P SOCKET(FOR RDIMM MODULE)			dwg no	10079248		rev	Y
		0.XX	±0.15										
		0.XXX	±0.05										
ASME Y14.5	angular	0°	±2°	www.fci.com	cat. no.	Product - Customer Drw		sheet 2 of 5					

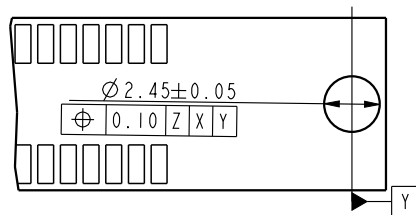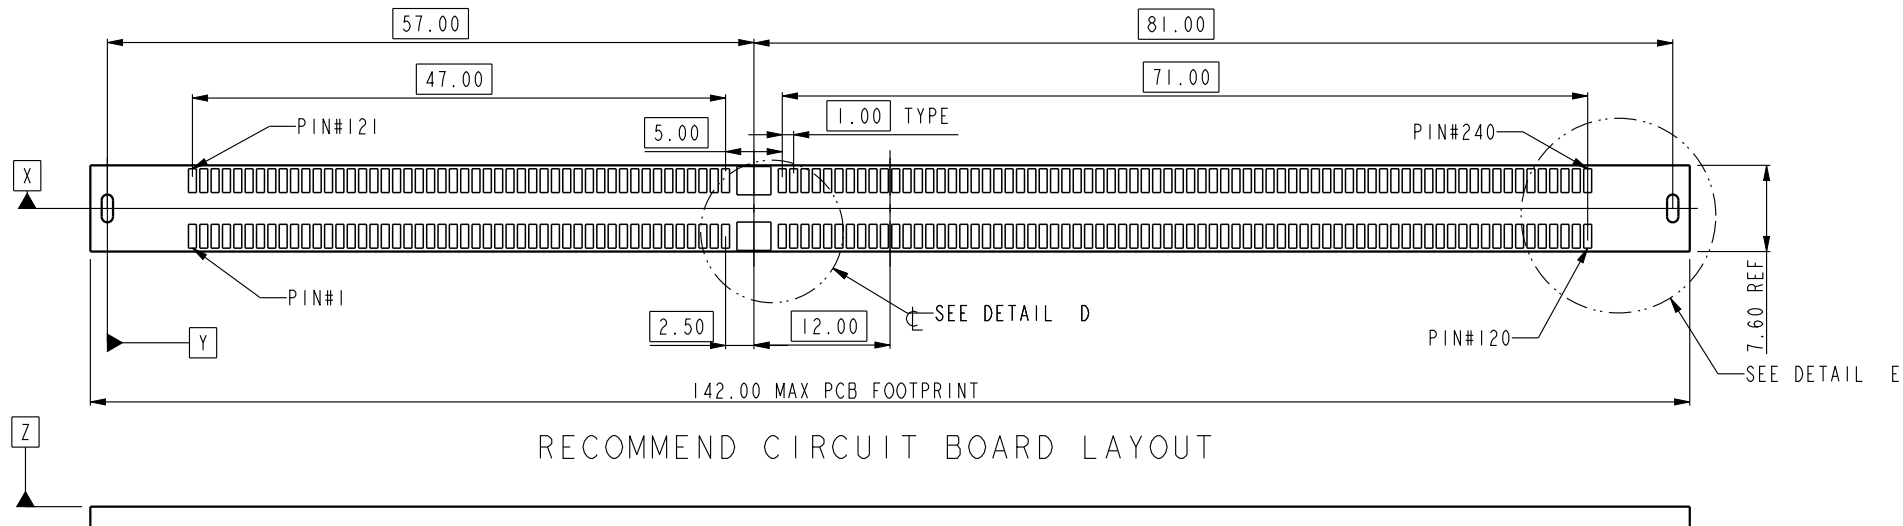


DETAIL E
SCALE 3.000

Standard hole for
hold-down clips

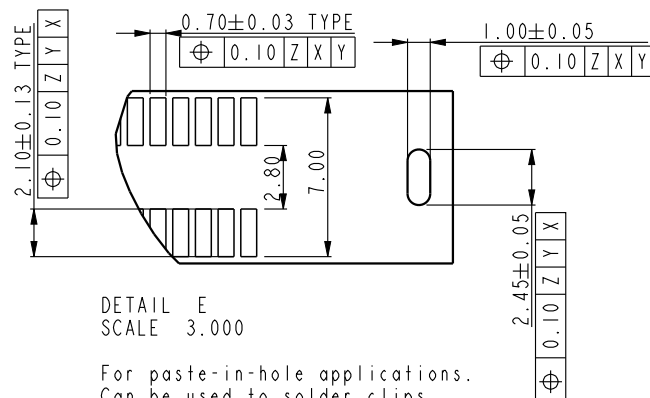

DETAIL E
SCALE 3.000

For paste-in-hole applications.
Can be used to solder clips
during reflow operation.

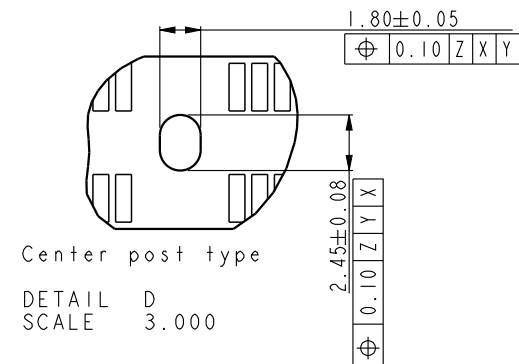

Center post type

DETAIL D
SCALE 3.000

spec ref	*	dr	Rick Bian	2010/07/04	projection	mm	size	A4	scale	0.500
tolerance std	TOLERANCES UNLESS OTHERWISE SPECIFIED	eng	Jeny Ren	2018/02/08			ecn no	ELX-DG-28885-1	rel level	Released
ASME Y14.5		chr	-	-			rel level	Released		
surface	linear	appr	Nickor Zuo	2018/02/09	product family		rel level	Released		
ASME Y14.5	angular									
	0.X									
	±0.30									
	0.XX									
	±0.15									
	0.XXX									
	±0.05									
	0°									
	±2°									

Amphenol FCI	title	SMT DDRIII SOCKET ASS'Y	dwg no	10079248	rev	Y
www.fci.com	cat. no.		Product - Customer Drw	sheet 3 of 5		




SCALE 0.500

10079248-10***
CENTER SMT HOLDOWN TYPE


SCALE 0.500

10079248-11***
3 FORK LOCK TYPE


SCALE 0.500

10079248-12***
3 SMT HOLDOWN TYPE

SCALE 0.500

10079248-13***
3 SMT HOLDOWN AND 2 PLASTIC POST TYPE

SCALE 0.500

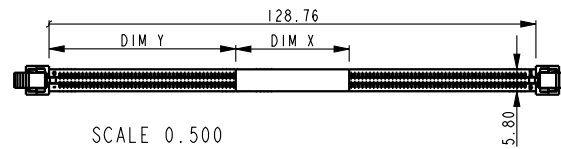10079248-15***
3 PLASTIC POST TYPESCALE 0.500
WITH MYLAR TAPE (OPTIONAL)

STYLE : MECHANICAL KEYING

1 : 1.5 VOLT. W/ CENTER KEY

HOLD DOWN TYPE

0 : CENTER HOLD DOWN, FORKLOCK AT BOTH END
1 : 3 FORKLOCK TYPE
2 : 3 SMT HOLDOWN TYPE
3 : 3 SMT HOLDOWN AND 2 PLASTIC POST
5 : 3 PLASTIC POST TYPE

PACKAGE AND MYLAR OPTION

0: SOFT TRAY WITHOUT MYLAR (OBSOLETE)
1: HARD TRAY WITH MYLAR 1
2: HARD TRAY WITHOUT MYLAR
3: SOFT TRAY WITH MYLAR 1 (OBSOLETE)
4: SPECIAL HARD TRAY WITH MYLAR 1
5: SPECIAL HARD TRAY WITHOUT MYLAR
6: HARD TRAY WITH MYLAR 2
7: HARD TRAY WITH MYLAR 3
8: HARD TRAY WITH MYLAR 4
9: SMALLER HARD TRAY WITHOUT MYLAR

SEE DETAIL N

SEE DETAIL J

SEE DETAIL M

DETAIL N
SCALE 5.000

10079248 - □ □ □ □

PLATING

CODE	CONTACT	SOLDERTAIL	UNDERPLATE	NOTE
1	10u" (0.25um) MIN. GOLD	100u" (2.54um) MIN. TIN-LEAD	50u" (1.27um) MIN. NICKEL OVERALL	CONTACT NON-LUBRICANT
2	15u" (0.38um) MIN. GOLD			
3	30u" (0.76um) MIN. GOLD			
4	GOLD FLASH			
5	10u" (0.25um) MIN. GOLD	100u" (2.54um) MIN. 100% MATT TIN	50u" (1.27um) MIN. NICKEL OVERALL	CONTACT LUBRICATED
6	15u" (0.38um) MIN. GOLD			
7	30u" (0.76um) MIN. GOLD			
8	GOLD FLASH			
3S	5u" (0.125um) MIN. GOLD	100u" (2.54um) MIN. 100% MATT TIN	50u" (1.27um) MIN. NICKEL OVERALL	CONTACT LUBRICATED WITH HIGH PERFORMANCE POLY A-OLEFIN LUBRICANT
1LF	10u" (0.25um) MIN. GOLD			
2LF	15u" (0.38um) MIN. GOLD			
3LF	30u" (0.76um) MIN. GOLD			
4LF	GOLD FLASH	100u" (2.54um) MIN. 100% MATT TIN	50u" (1.27um) MIN. NICKEL OVERALL	CONTACT NON-LUBRICANT
5LF	10u" (0.25um) MIN. GOLD			
6LF	15u" (0.38um) MIN. GOLD			
7LF	30u" (0.76um) MIN. GOLD			
8LF	GOLD FLASH	100u" (2.54um) MIN. 100% MATT TIN	50u" (1.27um) MIN. NICKEL OVERALL	CONTACT LUBRICATED
3SLF	5u" (0.125um) MIN. GOLD			
7SLF	30u" (0.76um) MIN. GOLD			

COLOR OF HOUSING AND EJECTOR

0 : BLACK HOUSING + IVORY EJECTOR
1 : BLACK HOUSING + BLACK EJECTOR
2 : BLACK HOUSING + BLUE(661C) EJECTOR
3 : BLACK HOUSING + YELLOW(123C) EJECTOR

spec ref		*		dr	Rick Bian	2010/07/04	projection 	mm 	size	A4	scale	0.500
tolerance std ASME Y14.5	TOLERANCES UNLESS OTHERWISE SPECIFIED			eng	Jeny Ren	2018/02/08			ecn no	ELX-DG-28885-1		
				chr	-	-						
				appr	Nickor Zuo	2018/02/09	product family			rel level	Released	
surface 	linear	0.X	±0.30	Amphenol FCI	title	SMT DDRIII SOCKET ASS'Y DDRIII,240P SOCKET(FOR RDIMM MODULE)			dwg no	10079248		rev Y
		0.XX	±0.15									
		0.XXX	±0.05									
ASME Y14.5	angular	0°	±2°	www.fci.com	cat. no.	Product - Customer Drw			sheet 4 of 5			



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.