


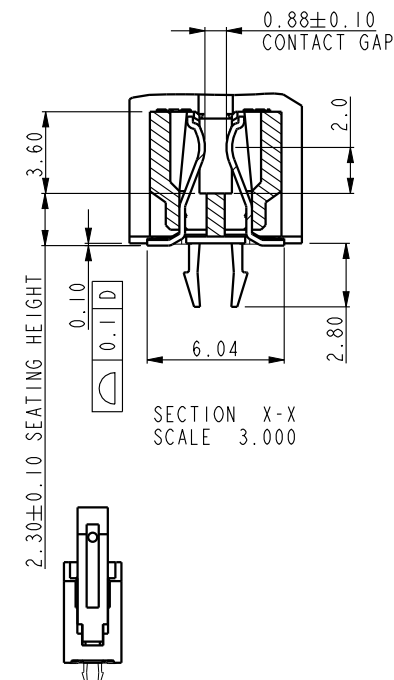
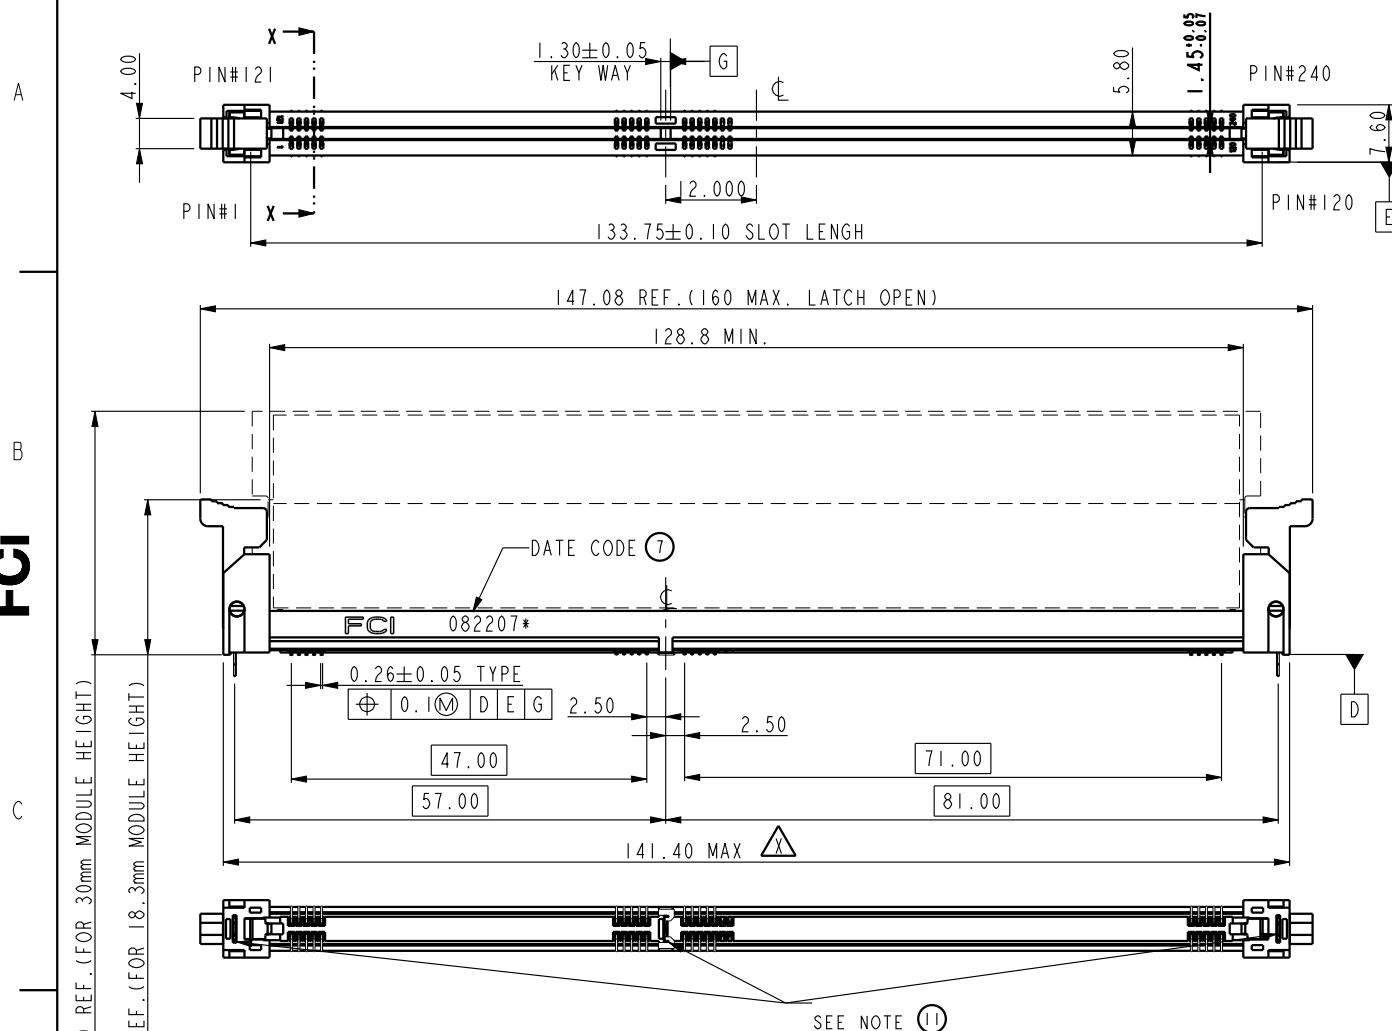


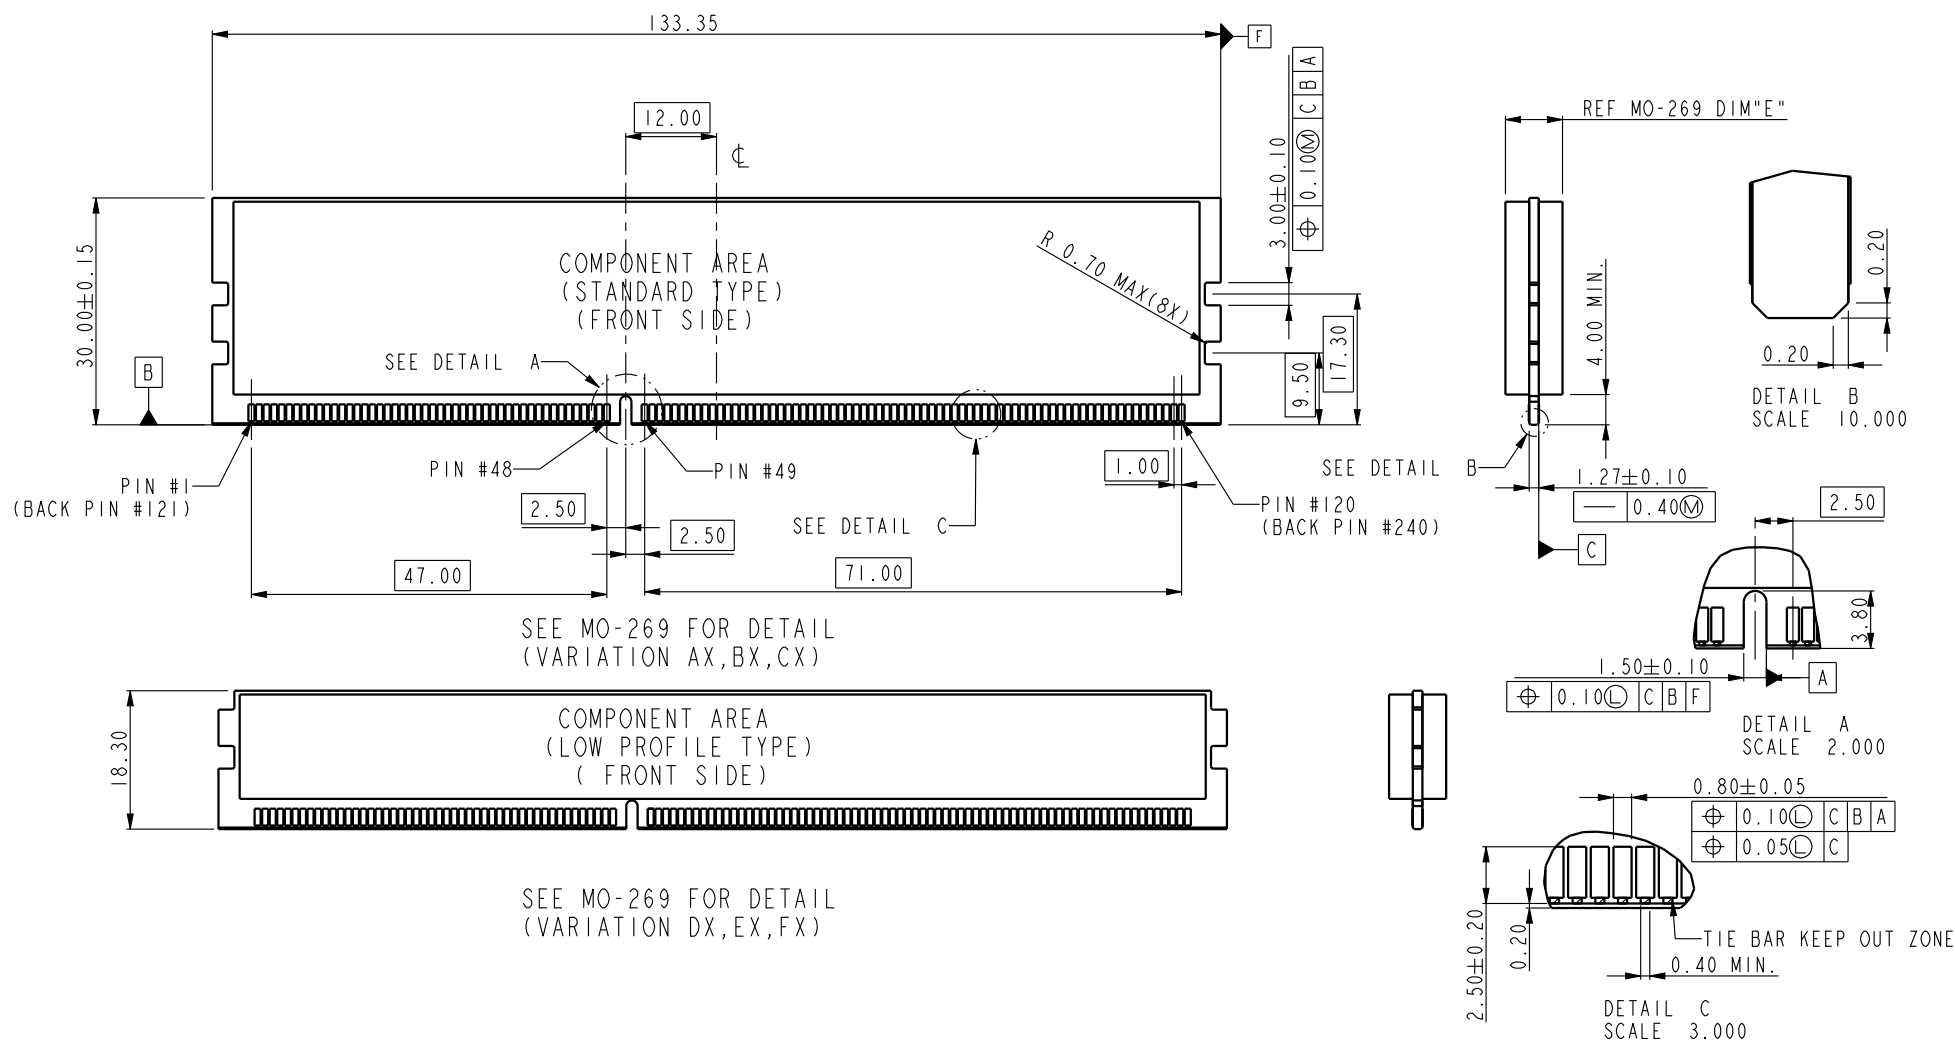




spec ref *				dr Rick Bian2010/07/04		projection 		mm 		sizeA4		scale0.500			
tolerance std ASME Y14.5				eng Jeny Ren2018/02/08						ecn noELX-DG-28885-1					
TOLERANCES UNLESS OTHERWISE SPECIFIED				chr -											
				appr Nickor Zuo2018/02/09		product family				rel levelReleased					
surface  ASME Y14.5		linear		0.X±0.30		Amphenol FCI SMT DDRIII SOCKET ASS'Y DDRIII, 240P SOCKET (FOR RDIMM MODULE)				dwg no10079248				revY	
				0.XX±0.15											
				0.XXX±0.05											
ASME Y14.5		angular		0°±2°		www.fci.com		cat. no.		Product - Customer Drw				sheet 1 of 5	

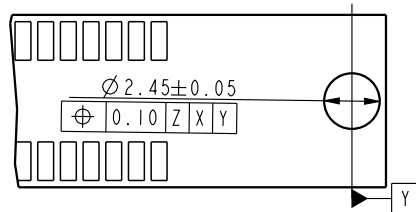


spec ref		*		dr	Rick Bian	2010/07/04	projection 	mm 	size	A4	scale	0.500
tolerance std ASME Y14.5	TOLERANCES UNLESS OTHERWISE SPECIFIED			eng	Jeny Ren	2018/02/08			ecn no	ELX-DG-28885-1		
				chr	-	-			rel level	Released		
				appr	Nickor Zuo	2018/02/09	product family					
surface 	linear	0.X	±0.30	Amphenol FCi	SMT DDRIII SOCKET ASS'Y DDRIII, 240P SOCKET (FOR RDIMM MODULE)			dwg no	10079248			rev Y
		0.XX	±0.15									
		0.XXX	±0.05									
ASME Y14.5	angular	0°	±2°	www.fci.com	cat. no.		*	Product - Customer Drw			sheet 2 of 5	

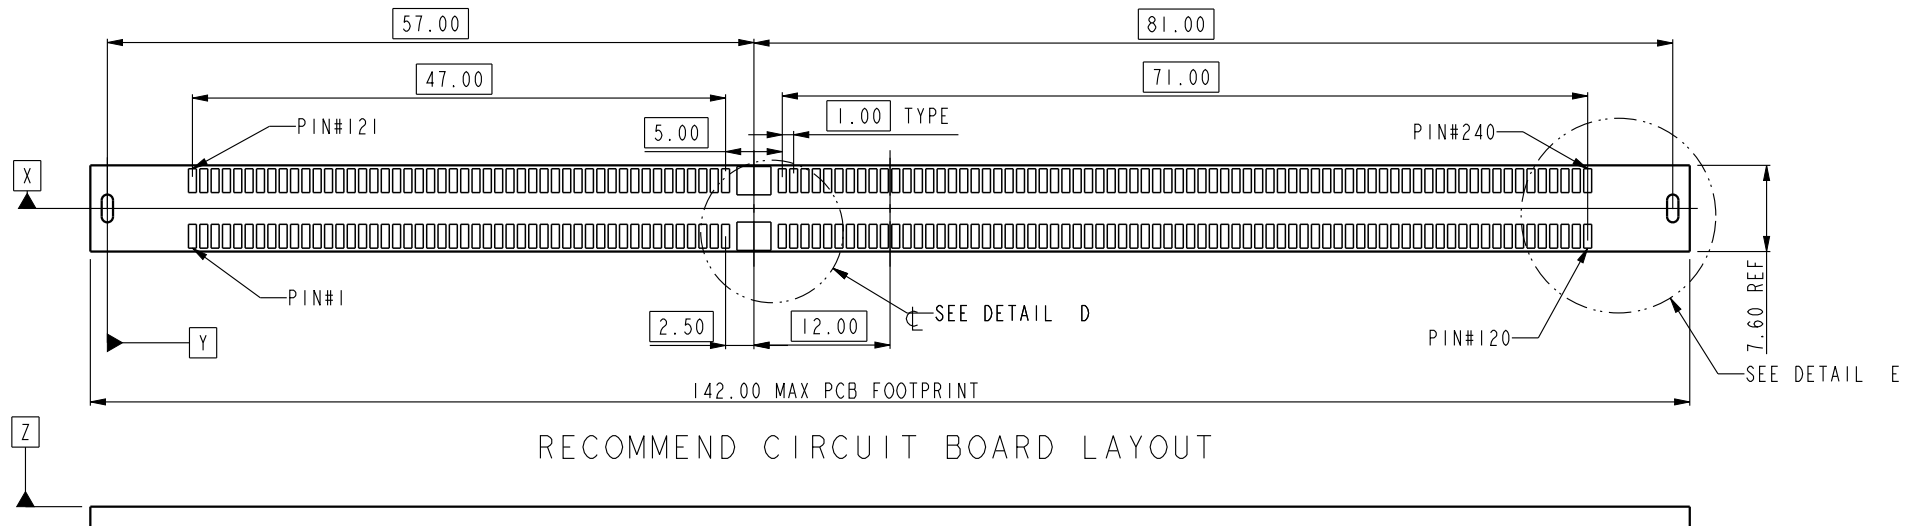


DETAIL E
SCALE 3.000

Standard hole for
hold-down clips

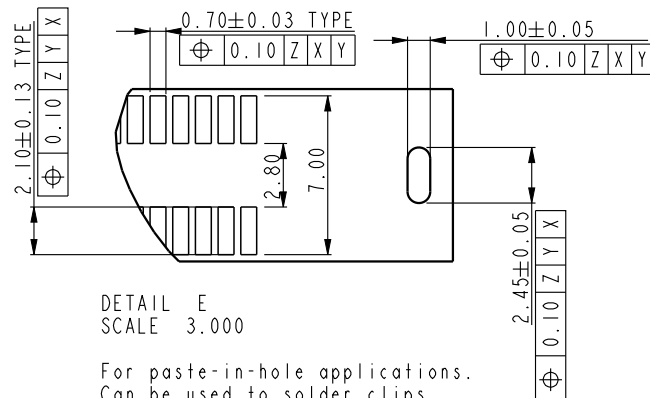

DETAIL E
SCALE 3.000

For paste-in-hole applications.
Can be used to solder clips
during reflow operation.

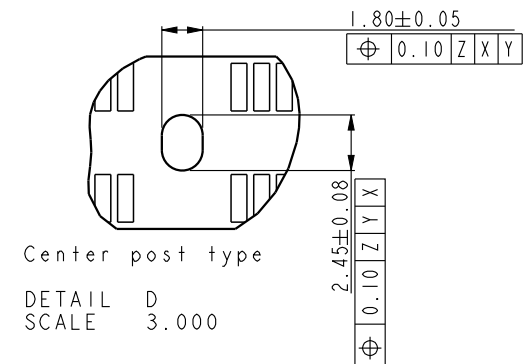

Center post type

DETAIL D
SCALE 3.000

spec ref	*	dr	Rick Bian	2010/07/04	projection	mm	size	A4	scale	0.500
tolerance std	TOLERANCES UNLESS OTHERWISE SPECIFIED	eng	Jeny Ren	2018/02/08			ecn no	ELX-DG-28885-1	rel level	Released
ASME Y14.5		chr	-	-			rel level	Released		
surface	linear	appr	Nickor Zuo	2018/02/09	product family		rel level	Released		
ASME Y14.5	angular									
	0.X									
	±0.30									
	0.XX									
	±0.15									
	0.XXX									
	±0.05									
	0°									
	±2°									

Amphenol FCI	title	SMT DDRIII SOCKET ASS'Y	dwg no	10079248	rev	Y
www.fci.com	cat. no.		Product - Customer Drw	sheet 3 of 5		

DETAIL E
SCALE 3.000

For smt holdown type

DETAIL E
SCALE 3.000

For 3smt holdown + 2plastic post type

Center smt holdown type


DETAIL D
SCALE 3.000

Center forklock type


DETAIL D
SCALE 3.000

NOTES:


1. MATERIAL:
HOUSING: HIGH PERFORMANCE RESINS, GLASS FILLED UL94V-0 RATED.
EJECTOR: HIGH PERFORMANCE RESINS, GLASS FILLED UL94V-0 RATED.
TERMINAL: HIGH PERFORMANCE COPPER ALLOY
METAL CLIP: COPPER ALLOY.
2. FCI LOGO TO BE APPROXIMATELY LOCATED AS SHOWN ON PRINT.
3. PRODUCT SPECIFICATION: GS-12-486.
4. PACKAGING SPECIFICATION: GS-14-899.
5. RECOMMENDED STENCIL THICKNESS NO LESS THAN 0.15 mm.
6. FOR OPTIMUM PERFORMANCE, THE TIE BAR IS TO BE ON AN INTERNAL LAYER SO THAT THE REMNANT CANNOT CAUSE CONTACT DAMAGE.
7. THE DATE CODE IS SHOWN "MMDDYY*.". "*" MEANS PRODUCTION LINE.
8. THIS PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008.
9. THE HOUSING WILL WITH STAND EXPOSURE TO 260°C PEAK TEMPERATURE FOR 10 SECONDS IN AN IR REFLOW SOLDERING APPLICATION.
10. PRODUCT APPLICATION SPEC GS-20-089.
11. THE HOLDOWN TYPES ARE OPTION FOR HOLDOWN OR FORKLOCK.



SECTION K-K
SCALE 5.000

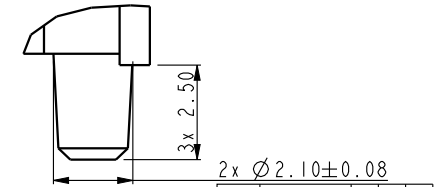

DETAIL M
SCALE 5.000

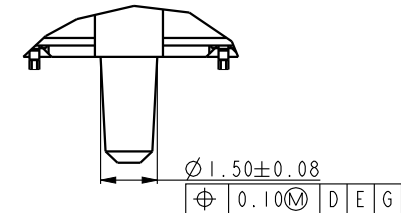

DETAIL J
SCALE 5.000

spec ref	*	dr	Rick Bian	2010/07/04	projection	mm	size	A4	scale	0.500
tolerance std	TOLERANCES UNLESS OTHERWISE SPECIFIED	eng	Jeny Ren	2018/02/08			ecn no	ELX-DG-28885-1		
ASME Y14.5		chr	-	-			rel level	Released		
		appr	Nickor Zuo	2018/02/09	product family					
surface	linear	0.X	±0.30	Amphenol FCI	title	SMT DDRIII SOCKET ASS'Y	dwg no	10079248	rev	Y
		0.XX	±0.15			DDRIII, 240P SOCKET (FOR RDIMM MODULE)				
		0.XXX	±0.05							
ASME Y14.5	angular	0°	±2°	www.fci.com	cat. no.	Product - Customer Drw			sheet 5 of 5	



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.