



## IQS680EV02 Overview

Combination sensor with dual channel capacitive proximity/touch, Passive Infrared Radial sensor and metal detection capabilities

The IQS680 ProxFusion® IC is a multifunctional Capacitance, Passive Infrared Radial (PIR) & Inductance sensor designed for applications such as domestic energy efficient lighting applications with movement detection. The IQS680 is an ultra-low power solution designed for short or long-term activations through any of the sensing channels. The IQS680 operates standalone or via the I<sup>2</sup>C protocol and custom configurations are stored in an on-chip EEPROM.

### EV-Kit Overview

- PIR sensing (Movement sensing)
- Capacitive sensing
- Inductive sensing (Requires writing to the EEPROM)
- Sample coil/touch pad supplied



Figure 1: IQS680EV02 Orthogonal view

### Evaluation Modes

- Standalone Mode (Default)
  - Events shown by LED's
- Connect IQS680EV02 via a CT210A USB Dongle<sup>1</sup> to PC GUI
  - Raw information displayed in GUI
- Assemble the module into a mock-up application and test
  - Sample inductive coil/touch pad supplied
- Connect custom coil or touch pad to sensor board

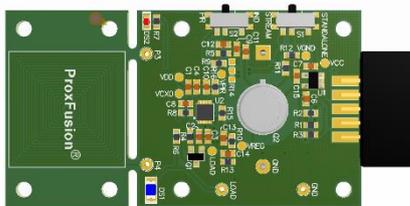


Figure 2: IQS680EV02 Top view

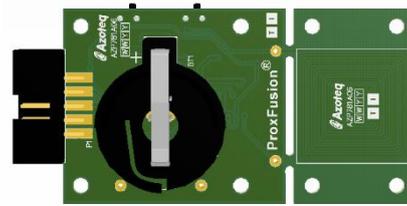


Figure 3: IQS680EV02 Bottom view

### Applications


- Under Cabinet Lighting
- Standard PIR sensor cost reduction
- Battery powered PIR sensors solutions
- Smart Lights
- Night Lights
- Movement detection
- White goods and appliances
- Human Interface Devices
- Movement activated backlighting

<sup>1</sup>Sold Separately



## Quick Start (Default Settings)


- Ensure that two 3V coin-cell batteries are inserted in the battery holder (6V).
- Place a lens over the PIR sensor and switch S1 to standalone and S2 to PIR mode.
- Wait for both LED's to go off (PIR is stabilizing).
- A movement will trigger the PIR sensor.
- A PIR event is indicated by the red LED and the blue LED has a predefined timeout.
- A capacitive touch on the coil will switch the light on/off and a long press will change the brightness of the blue LED.

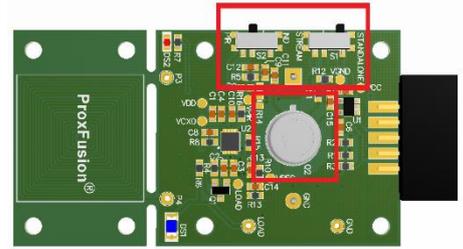

Get the latest software at <http://www.azoteq.com/design/software.html>


## Hardware

- If standalone mode is required, ensure that two 3V coin-cell batteries are inserted in the battery holder (6V) and place a lens over the PIR sensor. Switch S1 to standalone mode and evaluate using battery power supply.
- If streaming mode is required, switch S1 to streaming mode and place board in a stationary position and connect IQS680EV02 via a CT210A USB Dongle to PC GUI.
- After programming the EEPROM with the GUI, select the desired UI (PIR/Inductive) using S2.

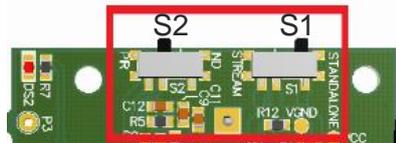

## Software

- Click START STREAMING and choose the desired UI from the options below:

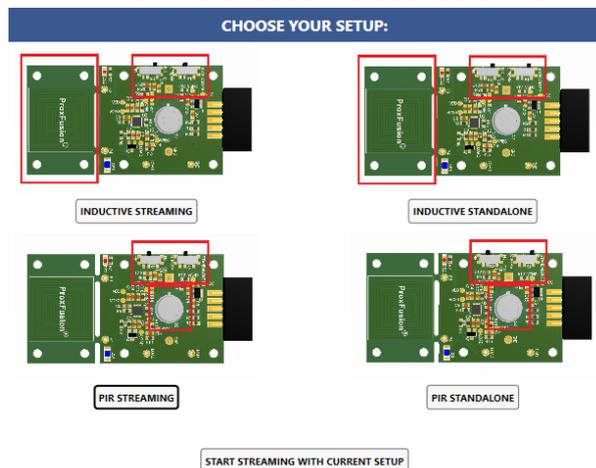

- The GUI will update the EEPROM and start streaming.
- Unplug the CT tool for Standalone mode and switch S1 to Standalone side.



## Evaluation


- Settings can be changed and written to the RAM of the IQS680.



- The raw information of the PIR or inductive sensor is displayed on the GUI.




- Current settings in the RAM can be written to the EEPROM.



- The voltage can be changed to 1.8 V to evaluate the IC, but it should be noted that the blue LED will not go on at 1.8 V.

- Standalone mode can be entered with the current settings. Only after writing to the EEPROM, unplug cable from IQS680EV02 and switch S1 to Standalone mode. Evaluate using battery power supply.



- PIR Standalone
  - A movement will trigger the PIR sensor.
  - A PIR event is indicated by the red LED and the blue LED has a predefined timeout.
  - A capacitive touch on the coil will switch the light on/off and a long press will change the brightness of the blue LED.
- Inductive Standalone
  - Program the EEPROM using the GUI as described in this document.
  - Place a piece of metal on the inductive coil to trigger the inductive sensor.
  - The blue LED will switch off if metal is detected.



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.