An Intel® Vision Accelerator Design Product

# Mustang-v100-mx8

Intel® Vision Accelerator Design with Intel® Movidius™ VPU



### Accelerate To The Future

Powered by Open Visual Inference & Neural Network Optimization (OpenVINO™) toolkit

- Ubuntu 16.04.3 LTS 64bit, CentOS 7.4 64bit, Windows® 10 64bit (more OS are coming soon)
- Supports popular frameworks...such as TensorFlow, MxNet, and CAFFE.
- Easily deploy open source deep learning frameworks via Intel® Deep Learning Deployment Toolkit.
- Provides optimized computer vision libraries to quick handle the computer vision tasks.

#### A Perfect Choice for Al Deep Learning Inference workloads












OpenVINO™ toolkit



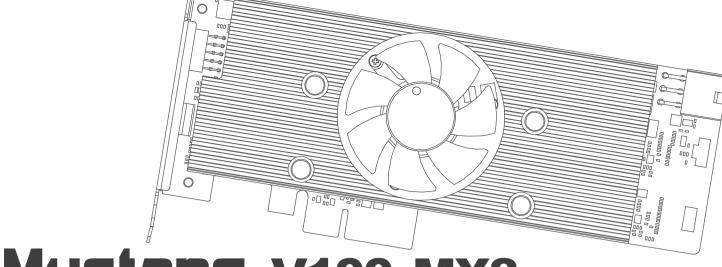


# Mustang-v100-mx8




### Deep learning and inference

Deep learning is part of the machine learning method. It allows computational models that are composed of multiple processing layers to learn representations of data with multiple levels of abstraction. Deep neural network and recurrent neural network architectures have been used in applications such as object recognition, object detection, feature segmentation, text-to-speech, speech-to-text, translation, etc. In some cases the performance of deep learning algorithms can be even more accurate than human judgement.

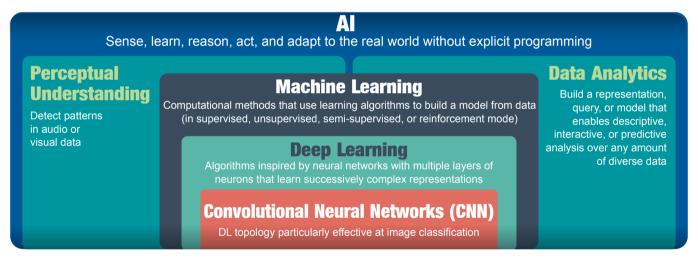

In the past, machine learning required researchers and domain experts knowledge to design filters that extracted the raw data into feature vectors. However, with the contributions of deep learning accelerators and algorithms, trained models can be applied to the raw data, which could be utilized to recognize new input data in inference.

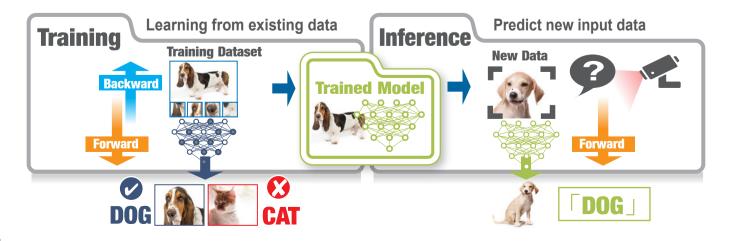




#### ● OpenVINO™ toolkit

Open Visual Inference & Neural Network Optimization (OpenVINO™) toolkit is based on convolutional neural networks (CNN), the toolkit extends workloads across Intel® hardware and maximizes performance.

It can optimize pre-trained deep learning model such as Caffe, MXNET, Tensorflow into IR binary file then execute the inference engine across  $Intel^{@}$ -hardware heterogeneously such as CPU, GPU,  $Intel^{@}$  Movidius Meural Compute Stick, and FPGA.

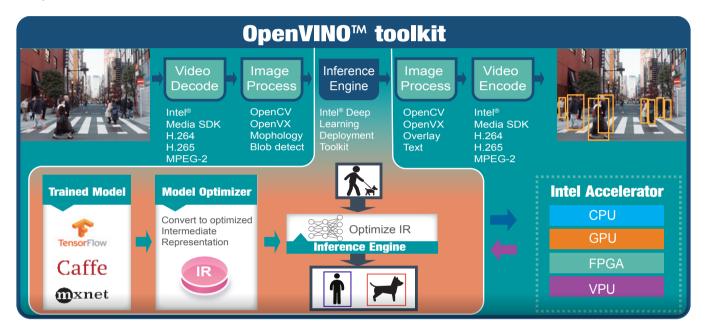



### ► IEI Mustang-V100-MX8

In AI applications, training models are just half of the whole story. Designing a real-time edge device is a crucial task for today's deep learning applications.

VPU is short for vision processing unit. It can run AI faster, and is well suited for low power consumption applications such as surveillance, retail, transportation. With the advantage of power efficiency and high performance to dedicate DNN topologies, it is perfect to be implemented in AI edge computing device to reduce total power usage, providing longer duty time for the rechargeable edge computing equipment. AI applications at the edge must be able to make judgements without relying on processing in the cloud due to bandwidth constraints, and data privacy concerns. Therefore, how to resolve AI task locally is getting more important.

In the era of AI explosion, various computations rely on server or device which needs larger space and power budget to install accelerators to ensure enough computing performance.

In the past, solution providers have been upgrading hardware architecture to support modern applications, but this has not addressed the question on minimizing physical space. However, space may still be limited if the task cannot be processed on the edge device.

We are pleased to announce the launch of the Mustang-V100-MX8, a small form factor, low power consumption, and high performance VPU base AI edge computing solution compatible with IEI TANK-870AI compact IPC for those with limited space and power budget.



### Mustang-V100-MX8 AI Application Ready Edge Computing

#### Compact:

Only half-height ,half-length ,single slot. The conventional accelerator have large form factor which is the drawback for compact edge systems.

#### • Low power consumption:

Compared to CPU or GPU or FPGA, VPU power consumption is extremely efficient (approximate 2.5W for each Intel® Movidius™ Myriad™ X VPU), and this feature is a great advantage in edge computing.

#### • Multi-Tasks:


Eight Intel<sup>®</sup> Movidius<sup>™</sup> Myriad <sup>™</sup> X VPU can execute multiple topologies simultaneously.





### Edge Computing

Wikipedia defines Edge Computing as "pushing the frontier of computing applications, data, and services away from centralized nodes to the logical extremes of a network." Today, most of AI technology still rely on the data center to execute the inference, which will increase the risk of real-time application for applications such as traffic monitoring, security CCTV, etc. Therefore, it's crucial to implement a low-latency real-time edge computing platform.

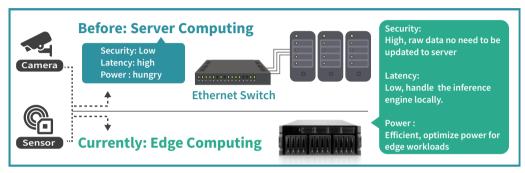

#### The advantages of edge computing:

- Reduce data center loading, transmit less data, reduce network traffic bottlenecks.
- Real-time applications, the data is analyzed locally, no need long distant data center.
- Lower costs, no need to implement sever grade machine to achieve non complex applications.

#### **Human Sorting**

Sorting by human bare-eyes, the standard can not fix due to different person. Low accuracy, low productivity

#### **Machine Vision**


Training and sorting by conventional machine vision method, need welltrained engineer to teach and modify the inspection criteria. Low latency, but low accuracy if product has too much variations.

#### Deep Learning Server


Implement deep learning method for training and sorting, reduce human bias and machine vision training process. High CTO, high latency, power hungry, high power consumption

#### **Deep learning Edge**

Implement deep learning method for training and sorting, reduce human power efficiency, low power

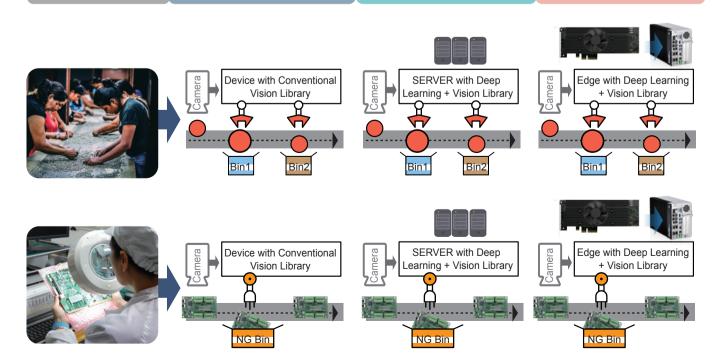

### **Software**

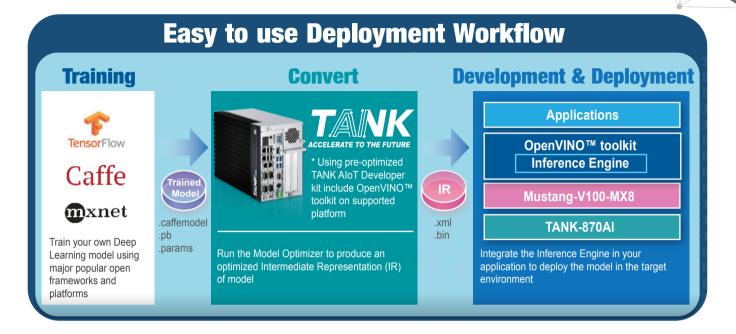




### Mustang-V100-MX8 Software


- Operating Systems
   Ubuntu 16.04.3 LTS 64bit, CentOS 7.4 64bit ,Windows® 10 64bit (more OS are coming soon)
- OpenVINO™ Toolkit
  - Intel® Deep Learning Deployment Toolkit
    - Model Optimizer
    - Inference Engine
  - Optimized computer vision libraries
  - Intel® Media SDK
  - AlexNet, GoogleNetV1/V2, Mobile\_SSD, MobileNetV1/V2, MTCNN, Squeezenet1.0/1.1, Tiny Yolo V1 & V2, Yolo V2, ResNet-18/50/101(more variants are coming soon)
- High flexibility, Mustang-V100-MX8 develop on OpenVINO™ toolkit structure which allows trained data such as Caffe, TensorFlow, and MXNet to execute on it after convert to optimized IR.

#### Key Features of Intel<sup>®</sup> Movidius™ Myriad™ X VPU:

- Native FP16 support
- Rapidly port and deploy neural networks in Caffe and Tensorflow formats
- End-to-End acceleration for many common deep neural networks
- Industry-leading Inferences/S/Watt performance

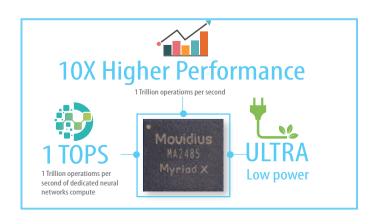

### **Hardware**

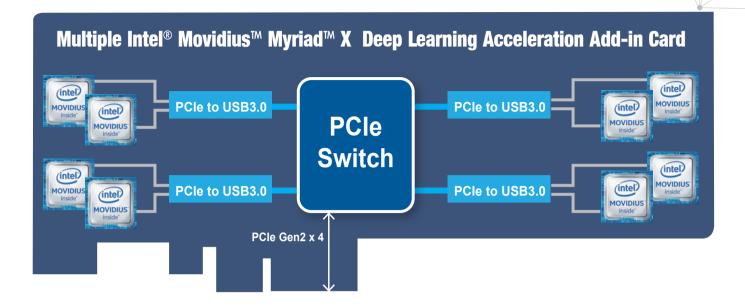




### Mustang-V100-MX8 Block Diagram


- Intel<sup>®</sup> Movidius<sup>™</sup> Myriad<sup>™</sup> X VPU delivering up to 1 TOPs of dedicated networks compute
- Interface: PCIe Gen2 x 4
- Form Factor: Standard Half-Height, Half-Length, Single-slot
- Cooling: Active fan.
- Operation Temperature : 5°C~55°C(ambient temperature)
- Operation Humidity: 5% to 90% relative humidity
- Power Consumption: < 30W
- Power Connector: \*Preserved PCIe 6-pin 12V external power
- DIP Switch/LED Indicator: Identify card number.
  - \*Standard PCIe slot provides 75W power, this feature is preserved for user in case of different system configuration




#### Dimensions (Unit: mm)

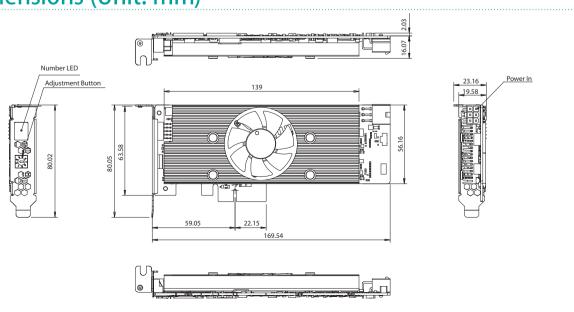

# **Applications**

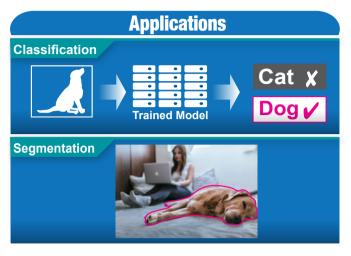



		TS-X77 with GPU	GRANG-C422 with GPU	TANK-870AI with Mustang-F100-A10	TANK-870Al with Mustang-V100-MX8
Applications	Inference Training	0	0		
	Inference Engine	0	0	0	0
	Image Classification	0	0	0	0
	Image Segementation	0	0	0	
Features	Energy Efficent			0	0
	Low-latency			0	0
	Compact Size			0	0

#### Surveillance

#### Traffic

The Mustang-V100-MX8 edge computing device can be utilized to capture data and send traffic to a control center to optimize a traffic light system. It can also perform license plate recognition (LPR) to help law enforcement if vehicles break traffic laws or help parking services identify available parking spaces to assist drivers in congested urban areas.

### Security

With the algorithms developed using the Mustang-V100-MX8 edge device, trained deep neural networks now have inference capabilities to identify suspicious persons to alert law enforcement or for security departments to early warning scenarios.






Face F

### **Industrial Manufacturing**

#### Industrial automation

Mustang-V100-MX8 solutions help enable intelligent factories to be more efficient on work order schedule arrangements. In today's production line, sticking to manufacturing schedules is becoming more and more important for business efficiency. From raw material storage to fabrication and complete products, all information from factory such as manufacturing equipment process time and warehouse storage status are essential to achieve production goals. Solutions based on AI technology can produce more detailed, accurate, and meaningful digital models of equipment and processes for product management.

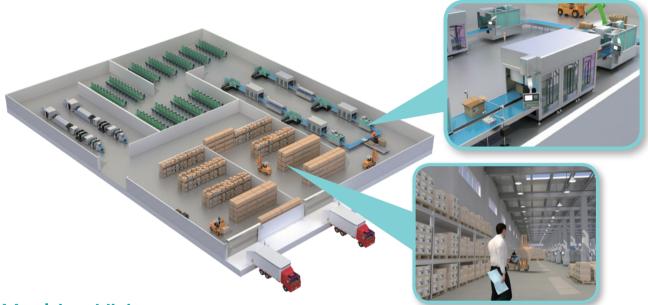

#### Machine Vision

Implementing AI into machine vision makes smart-automation applications easier. Previously, factory AOI needed sophisticated engineers to fine tune inspection parameters such as length, width, diameters and many other specifications that required many adjustments.

The Mustang-V100-MX8 powered using AI technologies supports workloads such as defect detection and quality control to improve production yield.



#### Retail

#### Smart Retail


Using the Mustang-V100-MX8 for computer vision solutions at the edge of retail sites can quickly recognize the gender and age of the customers and provide relevant product information through digital signage display to improve product sales and inventory control. Self-checkout can reduce human resource cost so that retail owners can spend more resources on promoting products and understanding business patterns.


In addition, it can help to analyze customer's in-store behavior, and provide customer information based on gender and age to facilitate product positioning. Quickly converting the business intelligence gained and help build better business practices and increase profitability.



### Medical Diagnostics

With AI based technology, healthcare and medical centers can diagnose, locate and identify suspicious areas such as tumors and other abnormalities more quickly and accurately. Using trained models on the Mustang-V100-MX8 can be used to locate and identify abnormalities with a high degree of accuracy helping doctors and researchers quickly serve the patient.



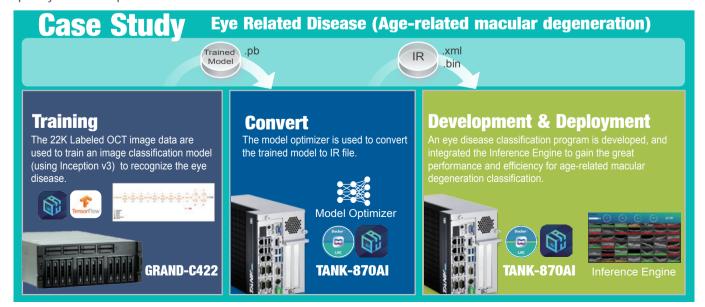

# Mustang-V100-MX8



#### **Feature**





- Half-Height, Half-Length, Single-slot compact size
- Low power consumption ,approximate 2.5W for each Intel® Movidius™ Myriad™ X VPU.
- Supported OpenVINO™ toolkit, Al edge computing ready device
- Eight Intel® Movidius™ Myriad™ X VPU can execute multiple topologies simultaneously.

### **Specifications**

Model Name	Mustang-V100-MX8		
Main Chip	Eight Intel® Movidius™ Myriad™ X MA2485 VPU		
Operating Systems	Ubuntu 16.04.3 LTS 64bit, CentOS 7.4 64bit ,Windows® 10 64bit (more OS are coming soon)		
Dataplane Interface	PCI Express x4		
рагаріане інтенасе	Compliant with PCI Express Specification V2.0		
Power Consumption	<30W		
Operating Temperature	5°C~55°C (ambient temperature)		
Cooling	Active fan		
Dimensions Standard	Half-Height, Half-Length, Single-slot PCIe		
Operating Humidity	5% ~ 90%		
Power Connector	*Preserved PCIe 6-pin 12V external power		
Dip Switch/LED indicator	Identify card number		
Support Topology	AlexNet, GoogleNetV1/V2, Mobile_, SSD, MobileNetV1/V2, MTCNN, Squeezenet1.0/1.1, Tiny Yolo V1 & V2, Yolo V2, ResNet-18/50/101		

<sup>\*</sup>Standard PCIe slot provides 75W power, this feature is preserved for user in case of different system configuration

### **Packing List**

1 X Full height bracket
1 x External power cable
1 x QIG

### **Ordering Information**

Part No.	Description
Mustang-V100-MX8-R10	Computing Accelerator Card with 8 x Movidius Myriad X MA2485 VPU, PCIe Gen2 x4 interface, RoHS

# **IEI Tank AloT Development Kit**



#### **Feature**

- 6th/7th Gen Intel® Core™ processor platform with Intel® Q170/C236 chipset and DDR4 memory
- Dual independent display with high resolution support
- Rich high-speed I/O interfaces on one side for easy installation
- On-board internal power connector for providing power to add-on cards
- Great flexibility for hardware expansion
- Support Open Visual Inference & Neural Network Optimization (OpenVINO™) toolkit
- Support Ubuntu 16.04 LTS







Model Name		TANK AloT Dev. Kit	
	Color	Black C + Silver	
D	imensions (WxHxD) (mm)	121.5 x 255.2 x 205 mm (4.7" x 10" x 8")	
Chassis	System Fan	Fan	
	Chassis Construction	Extruded aluminum alloys	
	Weight (Net/Gross)	4.2 kg (9.26 lbs)/ 6.3 kg (13.89 lbs)	
Mathadaaad	CPU	Intel® Xeon® E3-1268LV5 2.4GHz (up to 3.4 GHz, Quad Core, TDP 35W) Intel® Core™ i7-7700T 2.9GHz (up to 3.8 GHz, Quad Core, TDP 35W) Intel® Core™ i5-7500T 2.7GHz (up to 3.3 GHz, Quad Core, TDP 35W) Intel® Core™ i7-6700TE 2.4 GHz (up to 3.4GHz, quad-core, TDP=35W) Intel® Core™ i5-6500TE 2.3 GHz (up to 3.3GHz, quad-core, TDP=35W)	
Motherboard	Chipset	Intel® Q170/C236 with Xeon® E3 only	
	System Memory	2 x 260-pin DDR4 SO-DIMM, 8 GB pre-installed (for i5/i5KBL/i7 sku) 16 GB pre-installed (for i7KBL sku) 32 GB pre-installed (for E3 sku)	
Storage	Hard Drive	$2 \times 2.5$ " SATA 6Gb/s HDD/SSD bay, RAID 0/1 support (1x $2.5$ " 1TB HDD pre-installed)	
	USB 3.0	4	
	USB 2.0	4	
	Ethernet	2 x RJ-45 LAN1: Intel® I219LM PCIe controller with Intel® vPro™ support LAN2 (iRIS): Intel® I210 PCIe controller	
	COM Port	$4 \times RS-232$ (2 x RJ-45, 2 x DB-9 w/2.5KV isolation protection) 2 x RS-232/422/485 (DB-9)	
I/O Interfaces	Digital I/O	8-bit digital I/O, 4-bit input / 4-bit output	
	Display	1 x VGA 1 x HDMI/DP 1 x iDP (optional)	
	Resolution	VGA: Up to 1920 x 1200@60Hz HDMI/DP: Up to 4096×2304@24Hz / 4096×2304@60Hz	
	Audio	1 x Line-out, 1 x Mic-in	
	TPM	1x Infineon TPM 2.0 Module	
	Backplane	2 x PCIe x8	
Expansions	PCIe Mini	1 x Half-size PCle Mini slot 1 x Full-size PCle Mini slot (supports mSATA, colay with SATA)	
	Power Input	DC Jack: 9 V~36 V DC Terminal Block: 9 V~36 V DC	
Power	Power Consumption	19 V@3.68 A (Intel® Core™ i7-6700TE with 8 GB memory)	
	Internal Power output	5V@3A or 12V@3A	
	Mounting	Wall mount	
Reliability	Operating Temperature	Xeon® E3 -20°C $\sim$ 60°C with air flow (SSD), 10% $\sim$ 95%, non-condensing i7-7700T -20°C $\sim$ 35°C with air flow (SSD), 10% $\sim$ 95%, non-condensing i5-7500T -20°C $\sim$ 45°C with air flow (SSD), 10% $\sim$ 95%, non-condensing i7-6700TE -20°C $\sim$ 45°C with air flow (SSD), 10% $\sim$ 95%, non-condensing i5-6500TE -20°C $\sim$ 60°C with air flow (SSD), 10% $\sim$ 95%, non-condensing	
	Operating Vibration	MIL-STD-810G 514.6 C-1 (with SSD)	
	Safety/EMC	CE/FCC/RoHS	
OS	Supported OS	Linux Ubuntu 16.04 LTS	

Warning: DO NOT install the Mustang-V100-MX8 into the TANK AloT Dev. Kit before shipment. It is recommended to ship them with their original boxes to prevent the Mustang-V100-MX8 from being damaged.

## Fully Integrated I/O

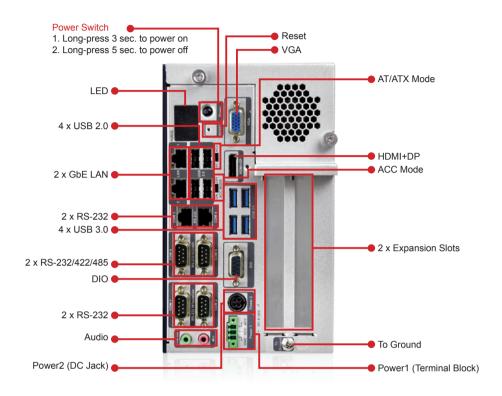

## Dimensions (Unit: mm)

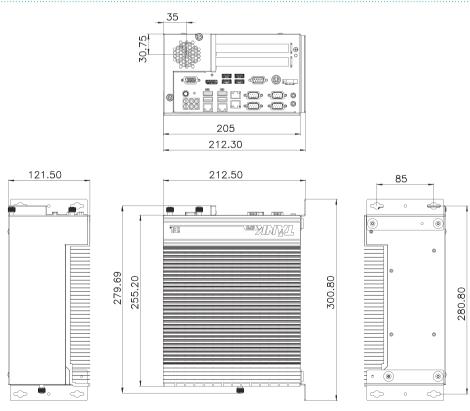




#### QNAP QuAI


QNAP Systems, Inc. is a wholly owned subsidiary under IEI Group. which specializes in providing networked solutions for file sharing, virtualization, storage management and surveillance applications. QNAP implements deep learning method into its main product Network-Attached Storage (NAS) to enable more Al applications.

QNAP QuAI enables data scientists and developers to quickly build, train, optimize, and deploy machinelearning models with high-performance machine-learning algorithms that come with a wide range of supported Al frameworks.

QuAl is an integrated platform to empower your Al-related computing needs. QNAP NAS now supports graphics cards, Intel FPGA acceleration card, and Intel VPU acceleration card; from training to edge computing, it provides additional computational power and end-to-end solution to help run your tasks more efficiently. On top of that, software enhancements are also provided to help you deploy your solutions faster than ever.

Major frameworks and libraries are supported through Container Station (1.8 and later), such as Caffe, MXNet, TensorFlow, CNTK and NVIDIA CUDA. You can easily migrate existing containerized solutions to the QuAl platform, or start a new one with QuAI, to fully realize benefits of cognitive technologies.

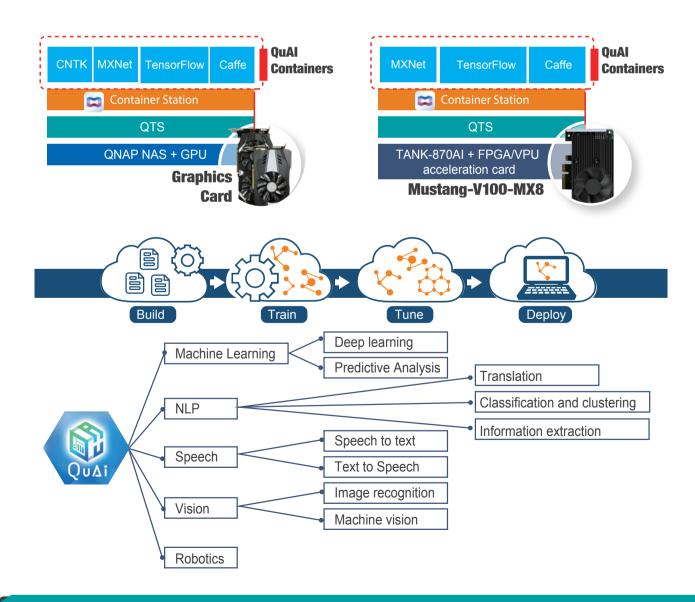

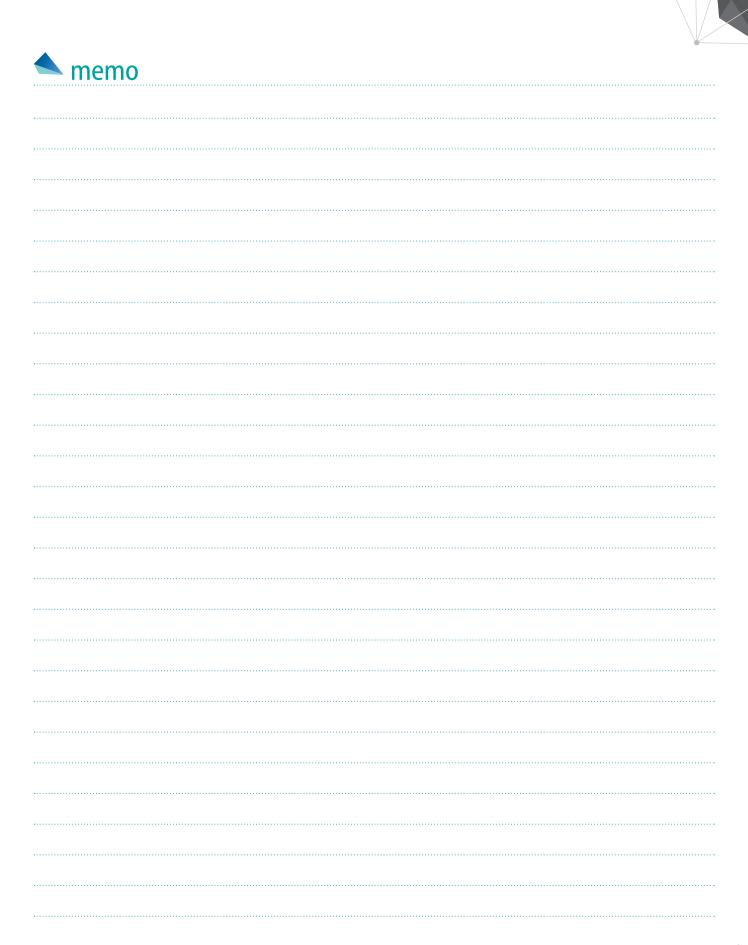



\*Specifications are subject to change without prior notice.

#### Headquarters 威強電工業電腦 IEI Integration Corp.

No. 29, Zhongxing Rd., Xizhi Dist., New Taipei City 221, Taiwan
TEL: +886-2-86916798 / +886-2-26902098 FAX: +886-2-66160028 TEL: +1-909-595-2819 FAX: +1-909-595-2816 sales@ieiworld.com www.ieiworld.com sales@usa.ieiworld.com usa.ieiworld.com

#### America IEI Technology USA Corp.

#### China

展現电工业电脑 IEI Integration (Shanghai) Corp. 上海市闵行莘庄工业区申富路515号 515, Shen Fu Rd., Xin Zhuang Industrial Develop Zone, Shanghai, 201108, China TEL:+86-21-3116-7799 FAX:+86-21-3462-7797 sales@ieiworld.com.cn www.ieiworld.com.cn



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

#### Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001:
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: <u>org@eplast1.ru</u>

Адрес: 198099, г. Санкт-Петербург, ул. Калинина,

дом 2, корпус 4, литера А.