

# MPI40-V2

High current, low profile, miniature power inductors



## Product features

- High current carrying capacity
- Magnetically shielded, Low EMI
- Rugged flexible construction
- Self resonant frequency (SRF) greater than 9.5 MHz
- Inductance range from 0.1  $\mu$ H to 22  $\mu$ H
- Current range from 1.2 A to 22 A
- 4.75 mm x 4.45 mm footprint surface mount package in 1.2 mm, 1.5 mm, and 2.0 mm heights
- Moisture Sensitivity Level (MSL): 1

## Applications

- Handheld/mobile devices
- Portable media players
- Notebook/netbook/laptop regulators
- Tablets/smartbooks
- Battery operated devices
- LED drivers
- LCD displays
- Point-of-load (POL) converters

## Environmental data

- Storage temperature range (Component): -55 °C to +125 °C
- Operating temperature range: -55 °C to +125 °C (ambient plus self-temperature rise)
- Solder reflow temperature: J-STD-020 (latest revision) compliant
- Halogen free, lead free, RoHS compliant




## Product specifications

| Part Number <sup>5</sup> | OCL <sup>1</sup><br>( $\mu$ H) $\pm 20\%$ | Part marking<br>designator | $I_{rms}^2$<br>(A) | $I_{sat}^3$<br>(A) | DCR (m $\Omega$ )<br>typical @ +20 °C | DCR (m $\Omega$ )<br>maximum @<br>+20 °C | SRF<br>(MHz)<br>typical | K-factor <sup>4</sup> |
|--------------------------|-------------------------------------------|----------------------------|--------------------|--------------------|---------------------------------------|------------------------------------------|-------------------------|-----------------------|
| <b>1.2 mm height</b>     |                                           |                            |                    |                    |                                       |                                          |                         |                       |
| MPI4012V2-R33-R          | 0.33                                      | A                          | 7.5                | 11                 | 11                                    | 13.5                                     | 128                     | 2480                  |
| MPI4012V2-R47-R          | 0.47                                      | B                          | 5.6                | 6.8                | 19                                    | 23                                       | 106                     | 2470                  |
| MPI4012V2-R68-R          | 0.68                                      | C                          | 4.5                | 6.7                | 28                                    | 33.5                                     | 98                      | 2223                  |
| MPI4012V2-1R0-R          | 1.0                                       | D                          | 4.3                | 6.5                | 38.5                                  | 46.5                                     | 64                      | 1477                  |
| MPI4012V2-1R5-R          | 1.5                                       | E                          | 3.3                | 4.3                | 55                                    | 66                                       | 63                      | 1264                  |
| MPI4012V2-2R2-R          | 2.2                                       | F                          | 2.9                | 4.2                | 75                                    | 90                                       | 35                      | 1143                  |
| MPI4012V2-4R7-R          | 4.7                                       | G                          | 1.8                | 2.8                | 175                                   | 210                                      | 29                      | 890                   |
| <b>1.5 mm height</b>     |                                           |                            |                    |                    |                                       |                                          |                         |                       |
| MPI4015V2-R22-R          | 0.22                                      | A                          | 10.5               | 14                 | 6.0                                   | 7.5                                      | 153                     | 2649                  |
| MPI4015V2-R33-R          | 0.33                                      | B                          | 9.5                | 11                 | 7.0                                   | 8.5                                      | 120                     | 2158                  |
| MPI4015V2-R47-R          | 0.47                                      | C                          | 7.8                | 9.0                | 11                                    | 14                                       | 98                      | 1991                  |
| MPI4015V2-R56-R          | 0.56                                      | D                          | 7.5                | 8.3                | 12                                    | 14                                       | 84                      | 1942                  |
| MPI4015V2-R68-R          | 0.68                                      | E                          | 6.8                | 8.0                | 16                                    | 19                                       | 81                      | 1437                  |
| MPI4015V2-1R0-R          | 1.0                                       | F                          | 5.5                | 6.0                | 23                                    | 27                                       | 56                      | 1382                  |
| MPI4015V2-1R5-R          | 1.5                                       | G                          | 4.2                | 4.6                | 48                                    | 58                                       | 48                      | 1468                  |
| MPI4015V2-2R2-R          | 2.2                                       | H                          | 2.9                | 4.5                | 65                                    | 78                                       | 42                      | 920                   |
| MPI4015V2-3R3-R          | 3.3                                       | I                          | 3.0                | 3.2                | 77                                    | 92                                       | 31                      | 854                   |
| MPI4015V2-4R7-R          | 4.7                                       | J                          | 2.2                | 3.0                | 108                                   | 130                                      | 22                      | 791                   |
| MPI4015V2-6R8-R          | 6.8                                       | K                          | 2.0                | 2.3                | 172                                   | 207                                      | 21                      | 609                   |
| MPI4015V2-100-R          | 10                                        | L                          | 1.8                | 2.1                | 245                                   | 294                                      | 14                      | 766                   |
| <b>2.0 mm height</b>     |                                           |                            |                    |                    |                                       |                                          |                         |                       |
| MPI4020V2-R10-R          | 0.10                                      | A                          | 16                 | 22                 | 3.5                                   | 4.5                                      | 343                     | 2692                  |
| MPI4020V2-R22-R          | 0.22                                      | B                          | 13                 | 17                 | 5.5                                   | 6.6                                      | 165                     | 2036                  |
| MPI4020V2-R33-R          | 0.33                                      | C                          | 9.5                | 12                 | 7.5                                   | 9.0                                      | 113                     | 1268                  |
| MPI4020V2-R47-R          | 0.47                                      | D                          | 8.5                | 11                 | 10.5                                  | 13                                       | 95                      | 1219                  |
| MPI4020V2-R56-R          | 0.56                                      | E                          | 8.0                | 10                 | 12                                    | 15                                       | 87                      | 1205                  |
| MPI4020V2-R68-R          | 0.68                                      | F                          | 7.5                | 9.0                | 12.5                                  | 16                                       | 80                      | 1201                  |
| MPI4020V2-1R0-R          | 1.0                                       | G                          | 6.5                | 7.0                | 20                                    | 24                                       | 65                      | 1168                  |
| MPI4020V2-1R2-R          | 1.2                                       | H                          | 6.5                | 6.8                | 23                                    | 28                                       | 52                      | 1110                  |
| MPI4020V2-1R5-R          | 1.5                                       | I                          | 5.0                | 6.0                | 25                                    | 30                                       | 45                      | 1038                  |
| MPI4020V2-2R2-R          | 2.2                                       | J                          | 3.8                | 5.5                | 40                                    | 48                                       | 33                      | 711                   |
| MPI4020V2-3R3-R          | 3.3                                       | K                          | 3.3                | 4.0                | 71                                    | 85                                       | 25                      | 643                   |
| MPI4020V2-4R7-R          | 4.7                                       | L                          | 2.7                | 3.2                | 98                                    | 118                                      | 24                      | 453                   |
| MPI4020V2-6R8-R          | 6.8                                       | M                          | 2.0                | 2.6                | 167                                   | 192                                      | 23                      | 482                   |
| MPI4020V2-100-R          | 10                                        | N                          | 1.7                | 2.2                | 245                                   | 281                                      | 17                      | 307                   |
| MPI4020V2-150-R          | 15                                        | O                          | 1.5                | 1.8                | 320                                   | 384                                      | 13                      | 257                   |
| MPI4020V2-220-R          | 22                                        | P                          | 1.2                | 1.65               | 350                                   | 402                                      | 9.5                     | 215                   |

1. Open Circuit Inductance (OCL) Test Parameters: 100 kHz, 1.0 Vrms, 0.0 Adc, +25 °C.
2.  $I_{rms}$ : DC current for an approximate temperature rise of 40 °C without core loss. Derating is necessary for AC currents. PCB layout, trace thickness and width, air-flow, and proximity of other heat generating components will affect the temperature rise. It is recommended that the temperature of the part not exceed +125 °C under worst case operating conditions verified in the end application.
3.  $I_{sat}$ : Peak current for approximately 30% rolloff @ +25 °C.

4. K-factor: Used to determine Bp-p for core loss (see graph). Bp-p = K \* L \*  $\Delta I$ . Bp-p (Gauss), K: (K-factor from table), L: (Inductance in  $\mu$ H),  $\Delta I$  (Peak to peak ripple current in Amps).
5. Part Number Definition: MPI40xxV2-xxx-R  
MPI40 = Product code  
xx= Height indicator  
V2=Version indicator  
xxx= inductance value in  $\mu$ H, R= decimal point,  
If no R is present then last character equals number of zeros  
-R suffix = RoHS compliant

## Dimensions (mm)

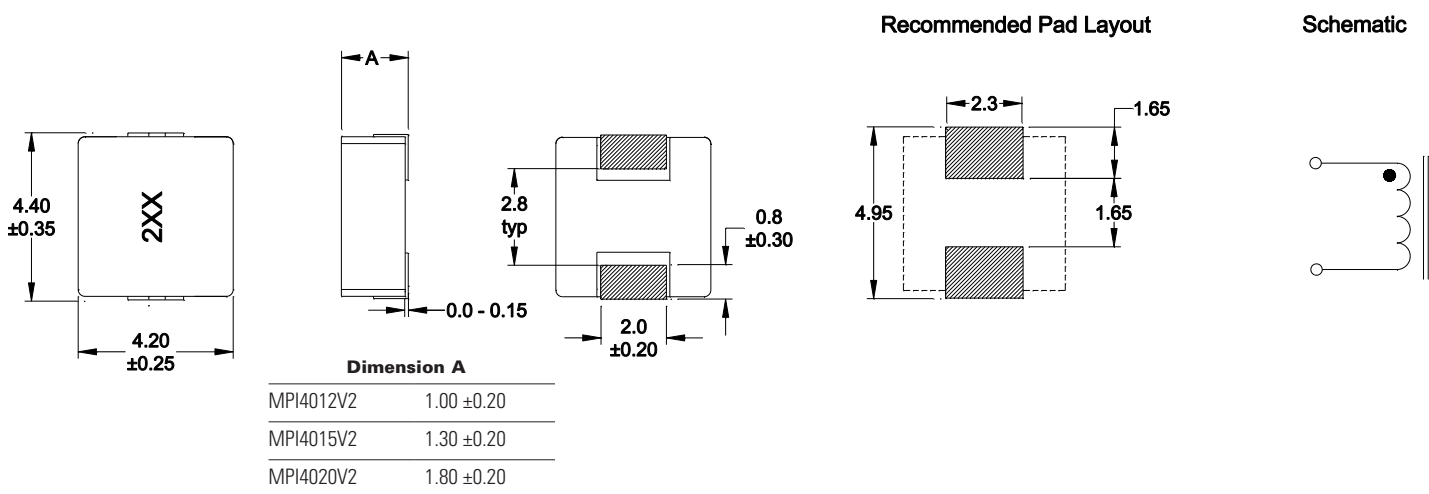

Part marking: 2xx (2 = version, x = inductance value per "Part marking designator" listed in Product specification table, x = bi-weekly date code)

All soldering surfaces to be coplanar within 0.10 millimeters

Tolerances are  $\pm 0.3$  millimeters unless stated otherwise


Pad layout tolerances are  $\pm 0.1$  millimeters unless stated otherwise

Do not route traces or vias underneath the inductor







## Packaging information (mm)

Drawing not to scale







Supplied in tape and reel packaging, 3000 parts per 13" diameter reel

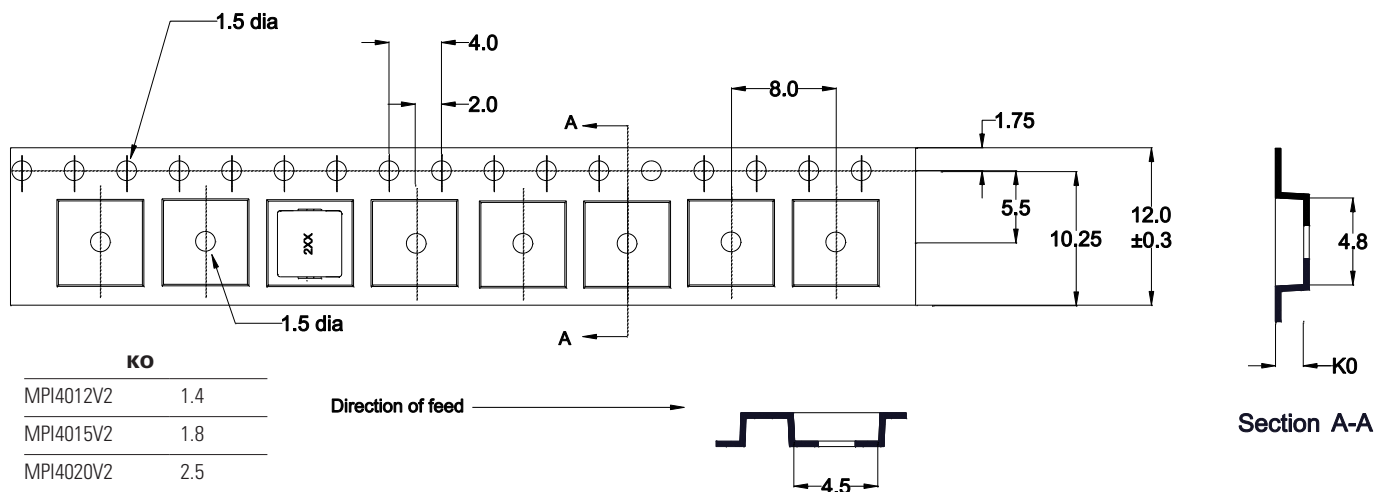







Core loss vs Bp-p

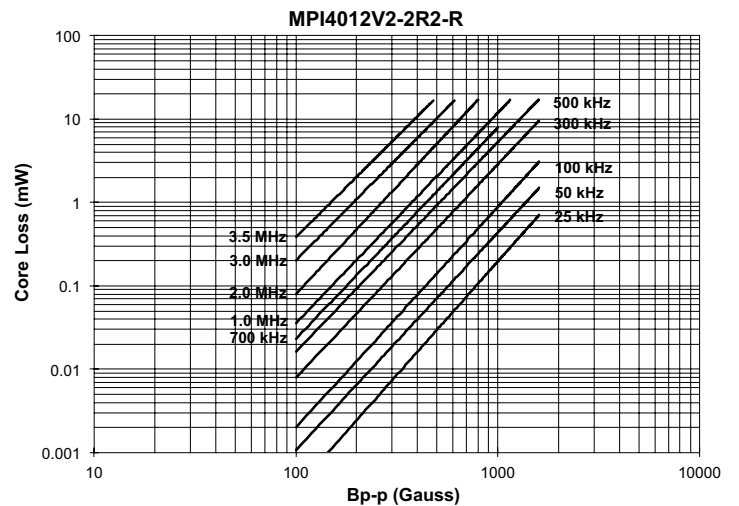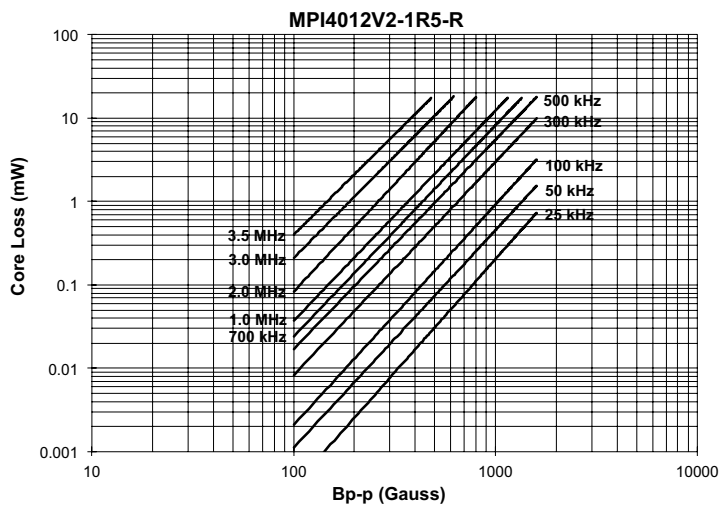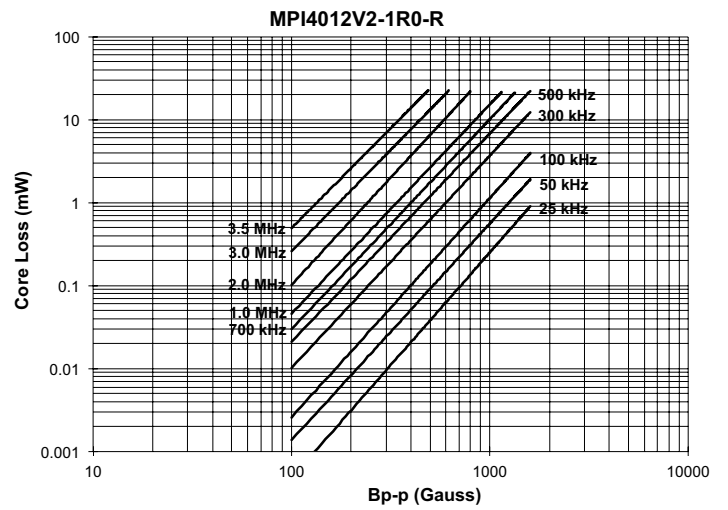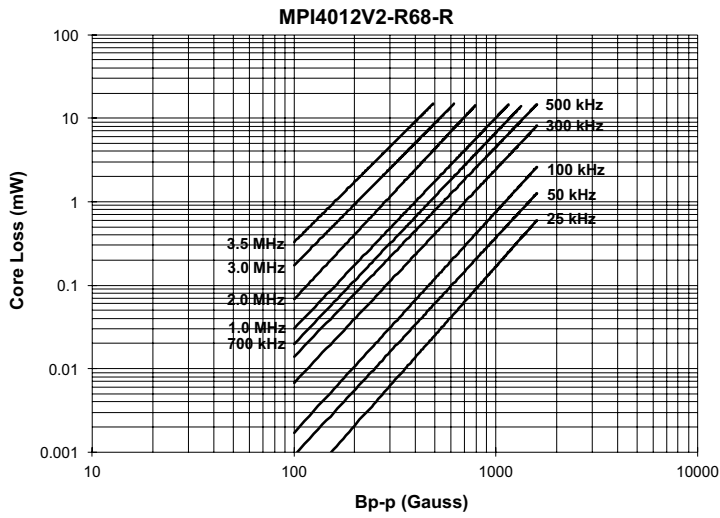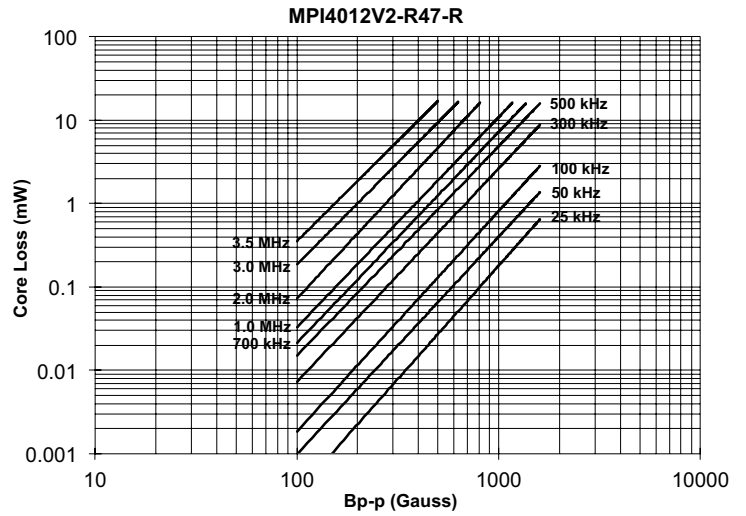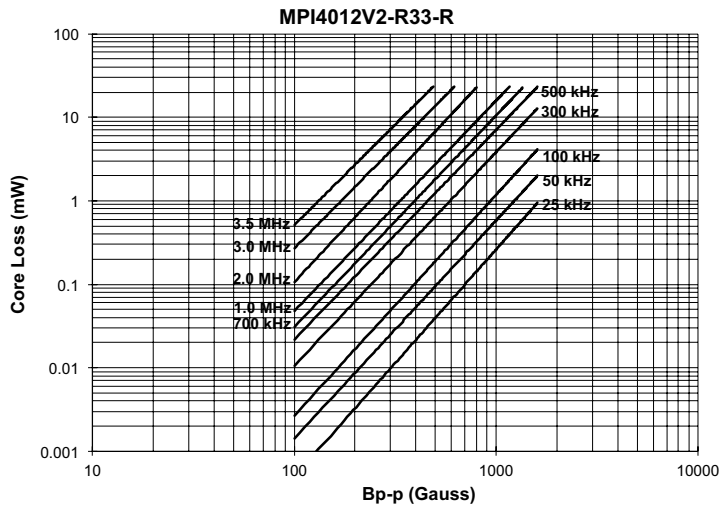







Core loss vs Bp-p

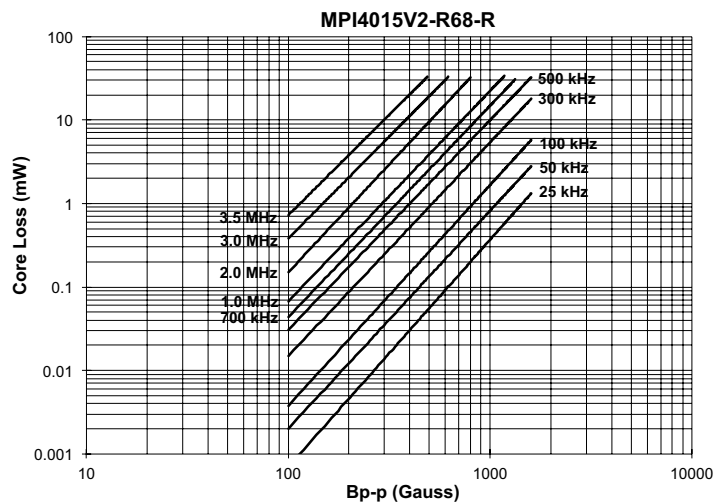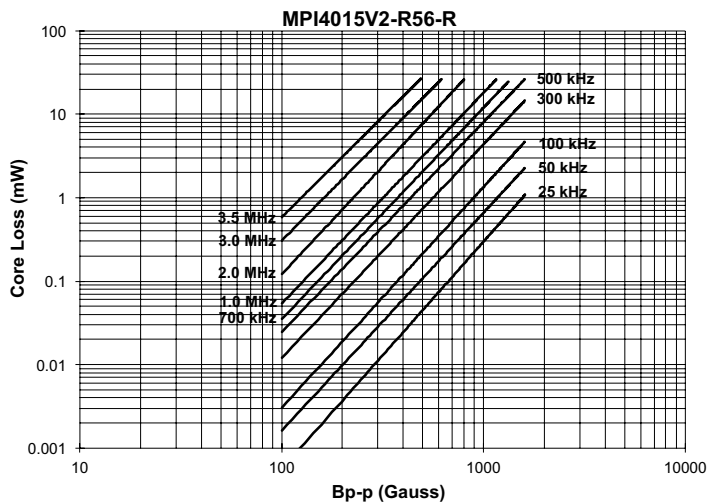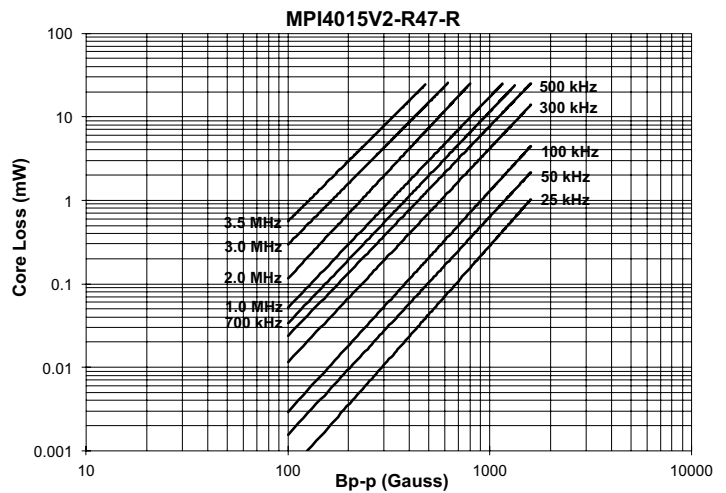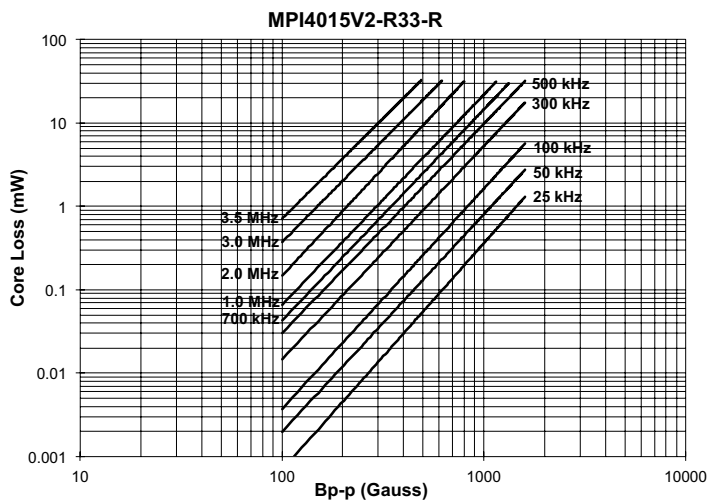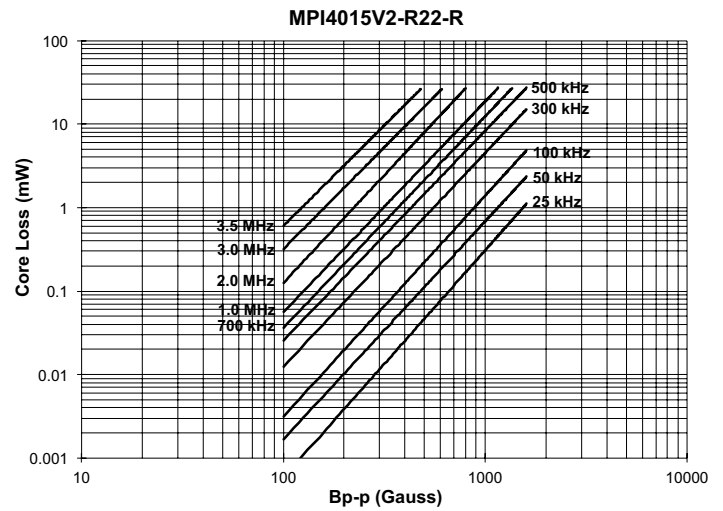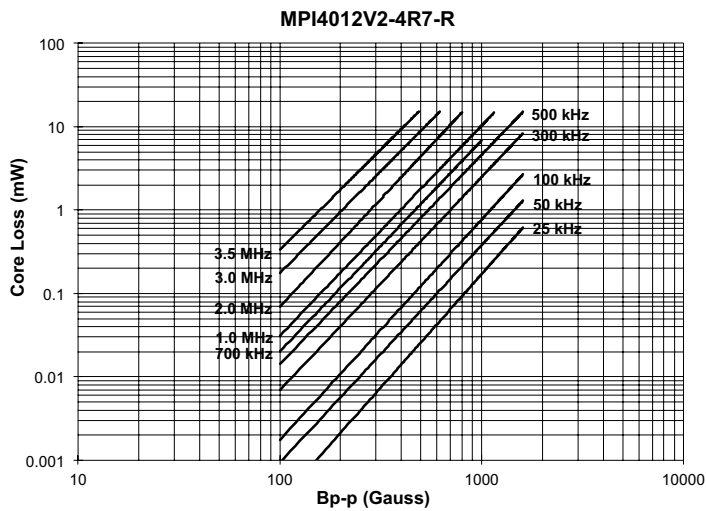







Core loss vs Bp-p

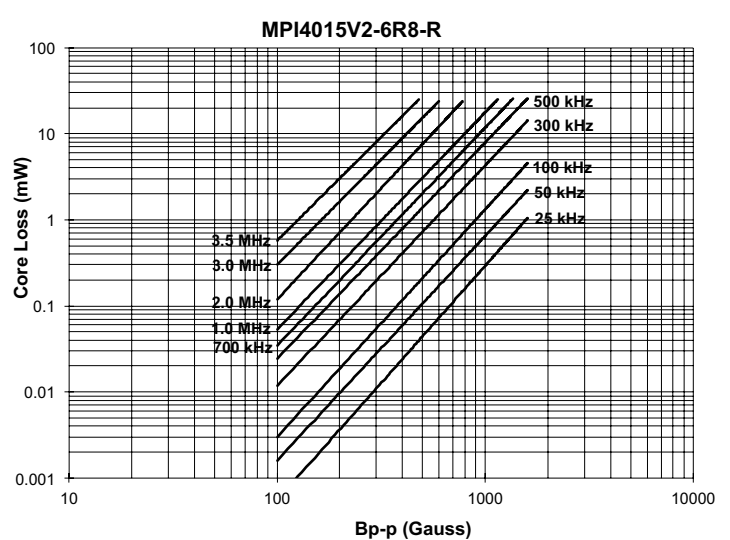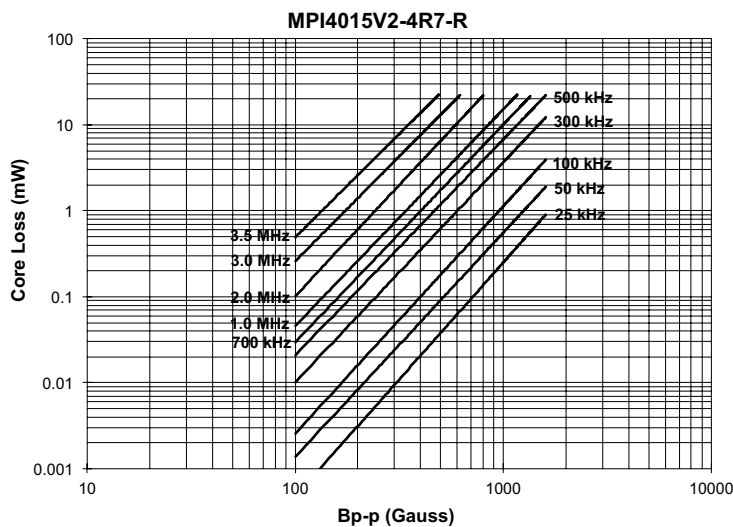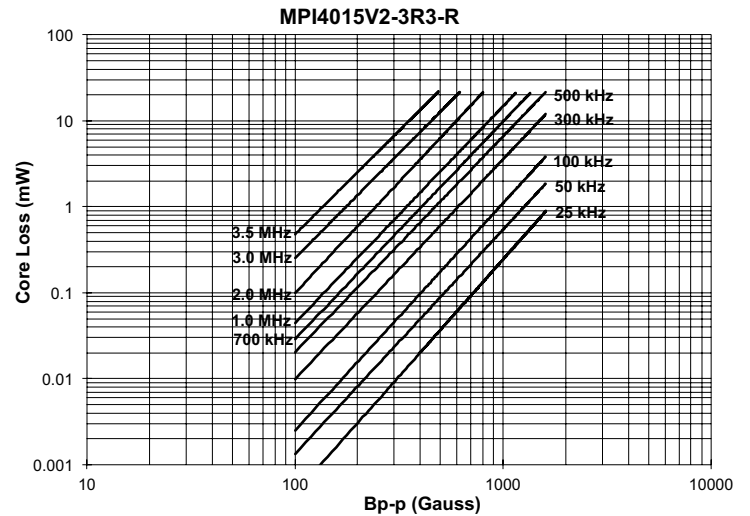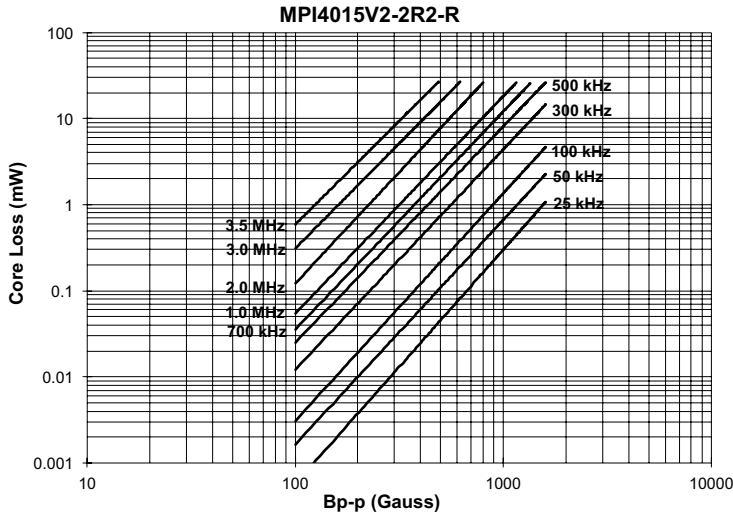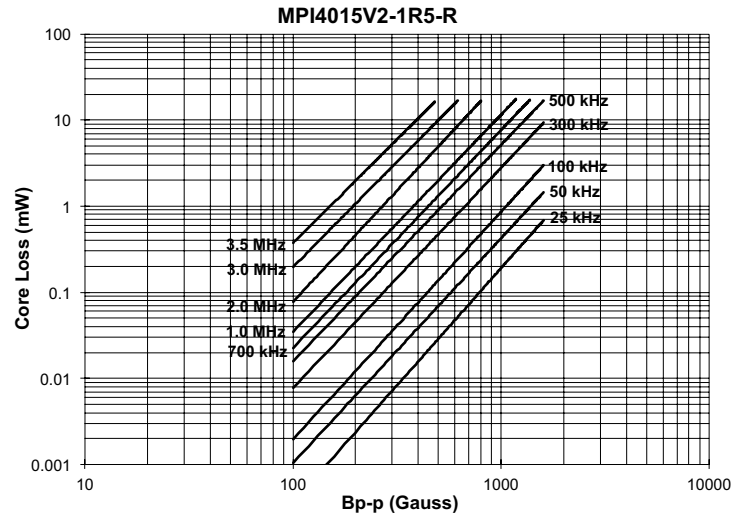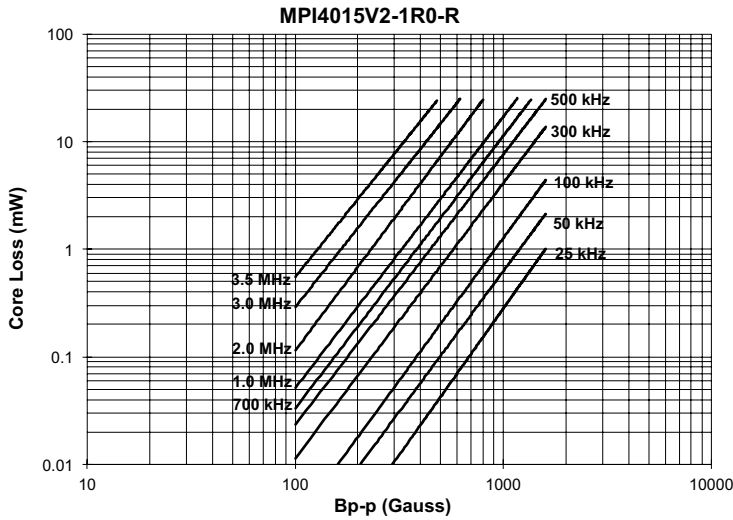

Core loss vs Bp-p

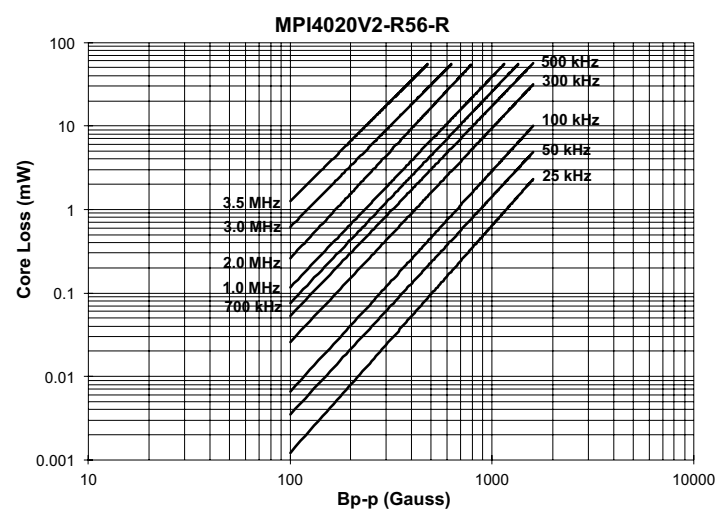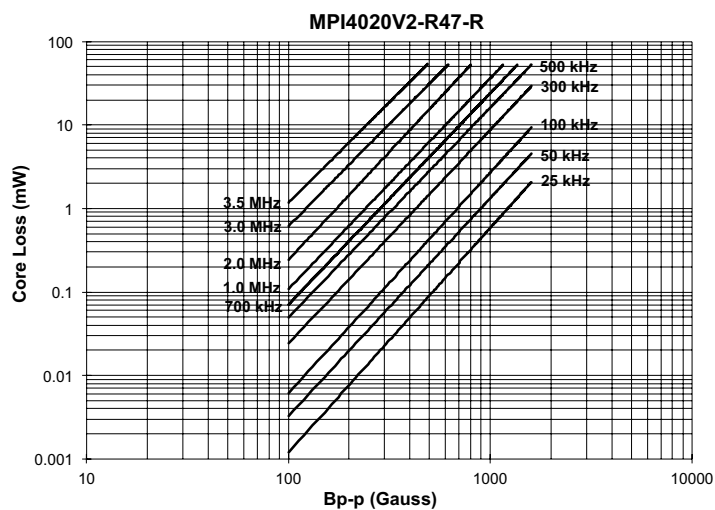
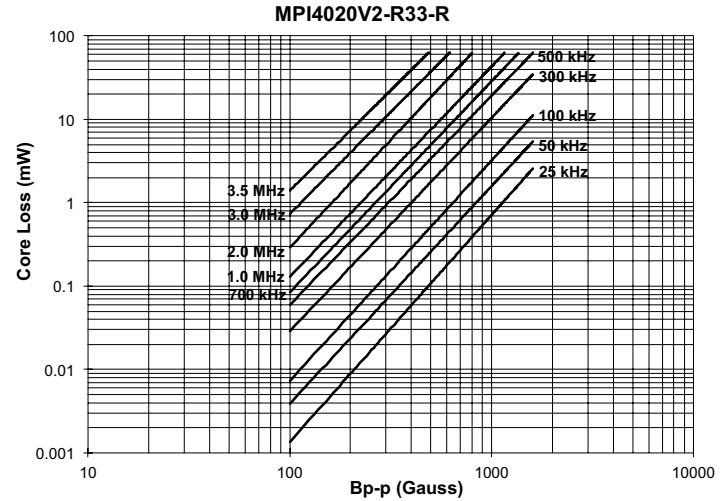
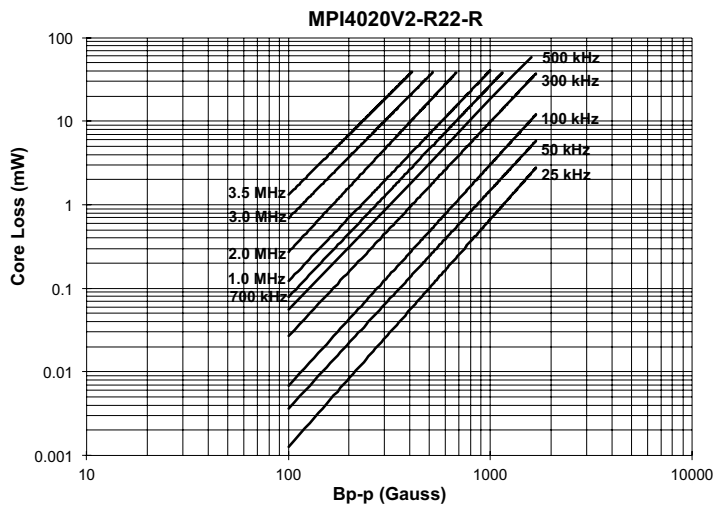
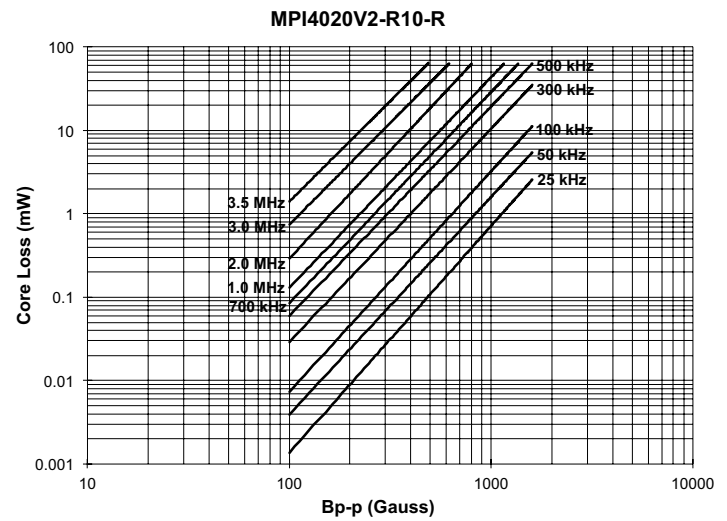
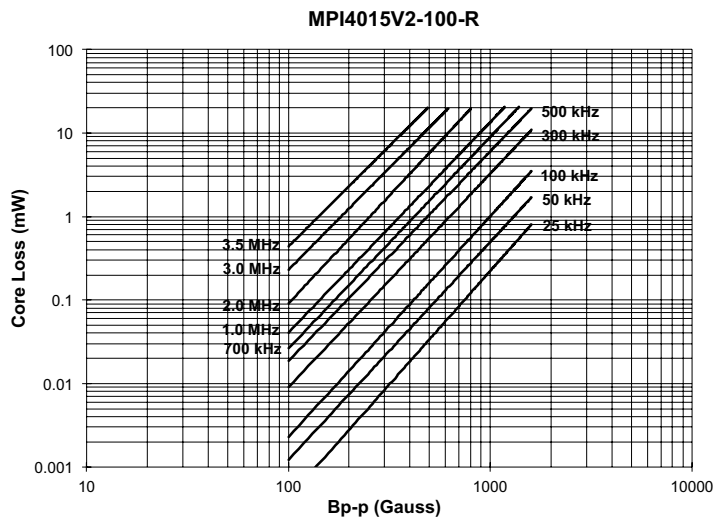


## Core loss vs Bp-p

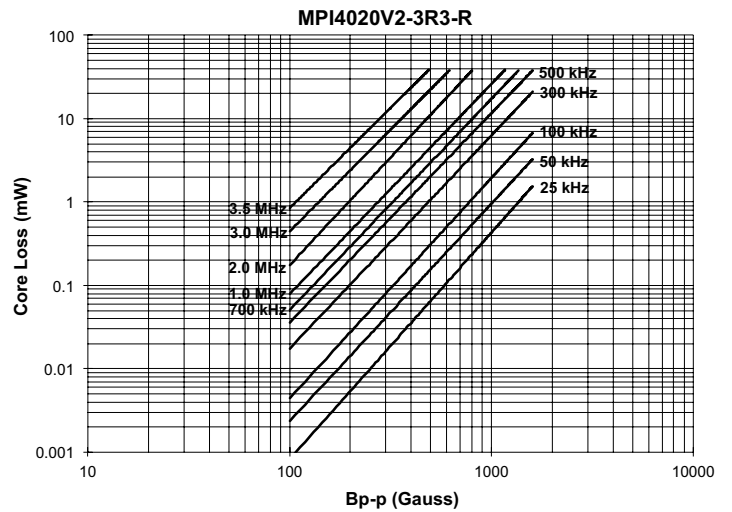
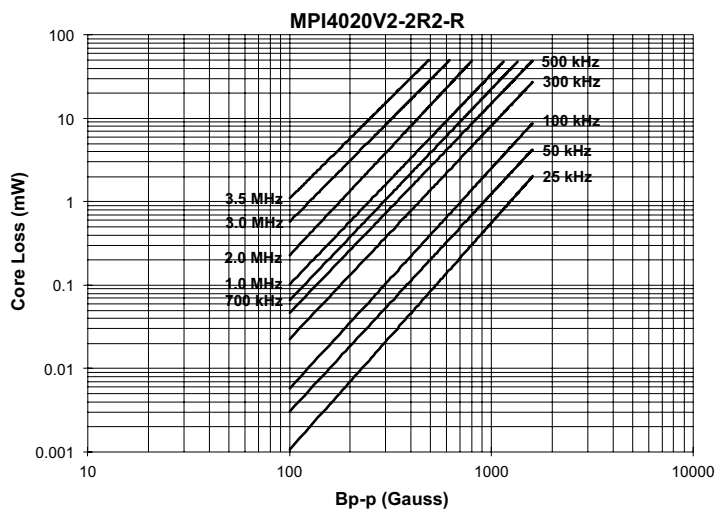
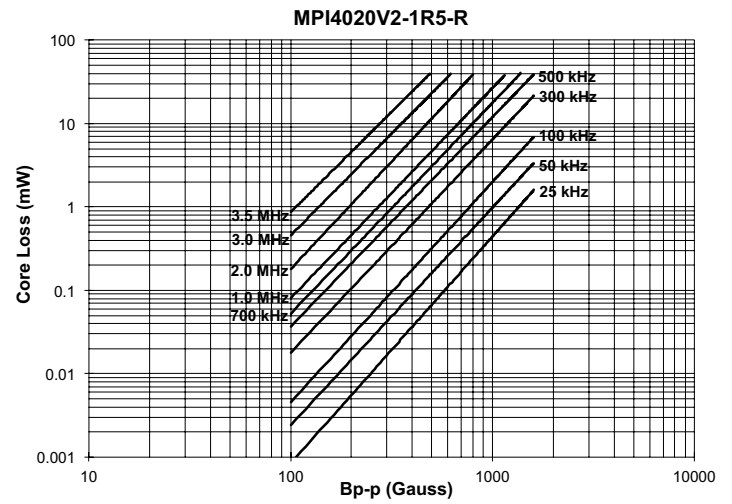
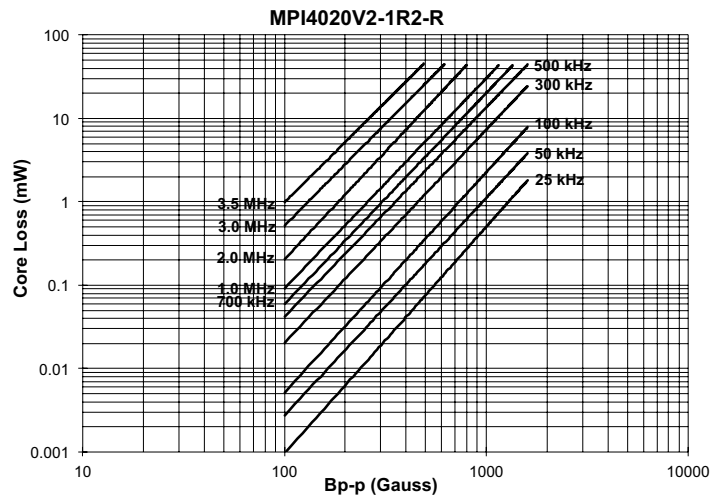
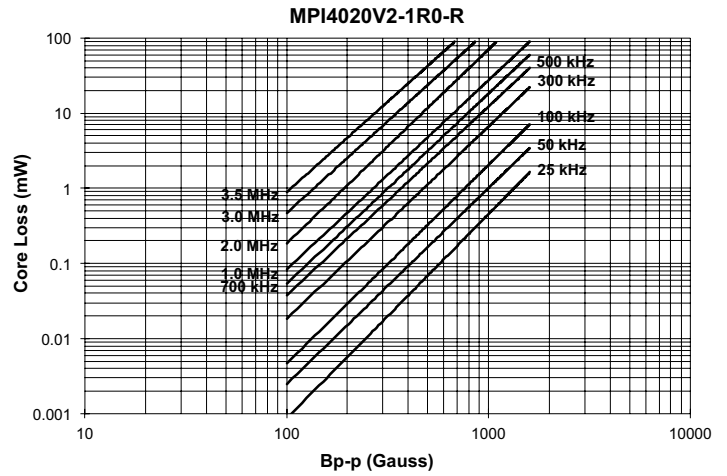
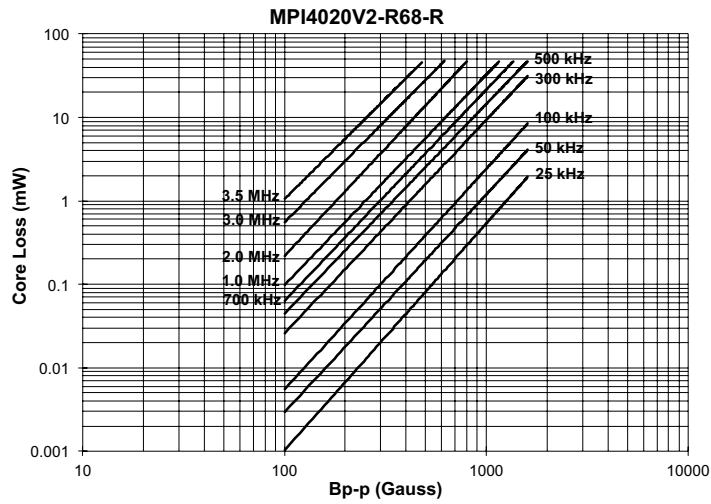










Core loss vs Bp-p

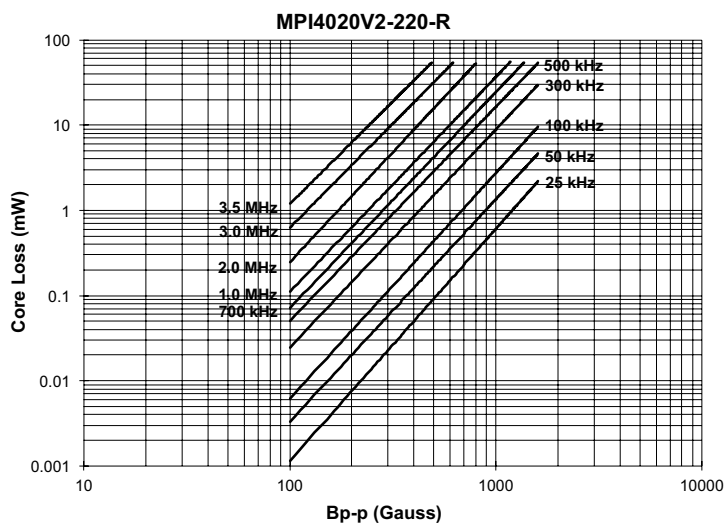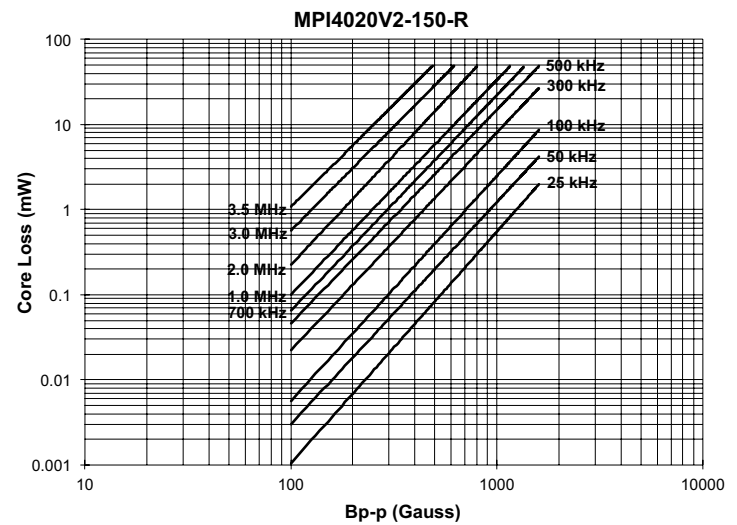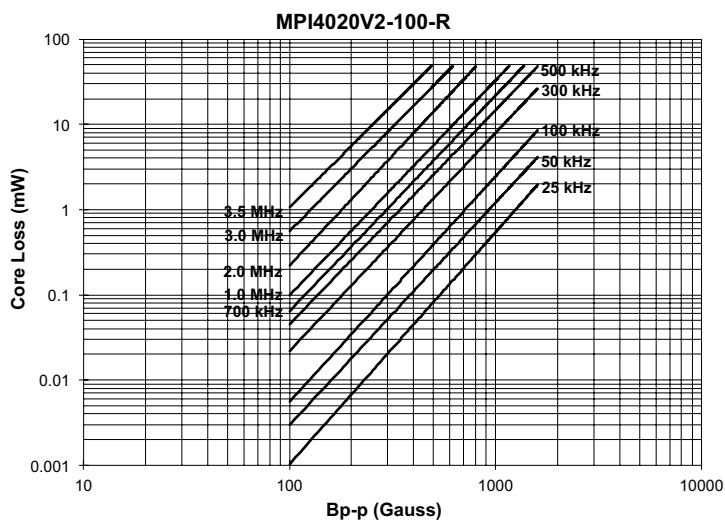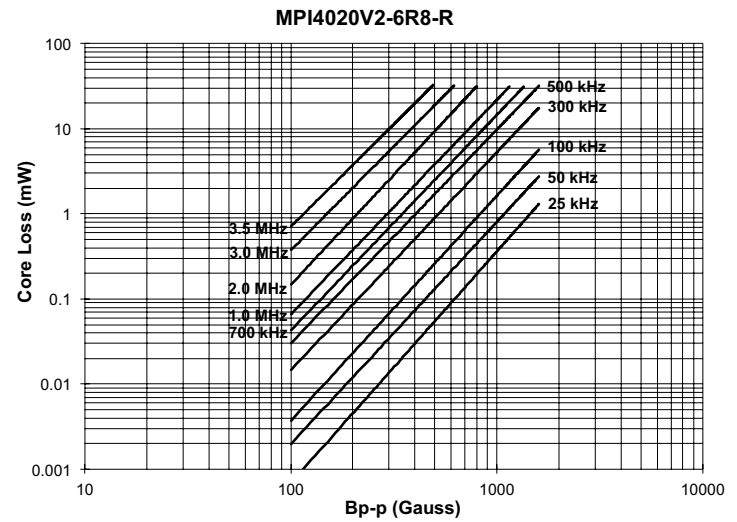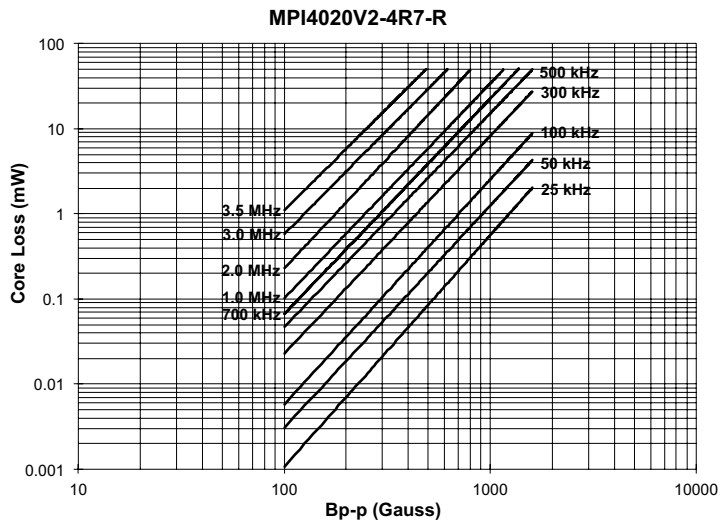







## Inductance vs. Frequency

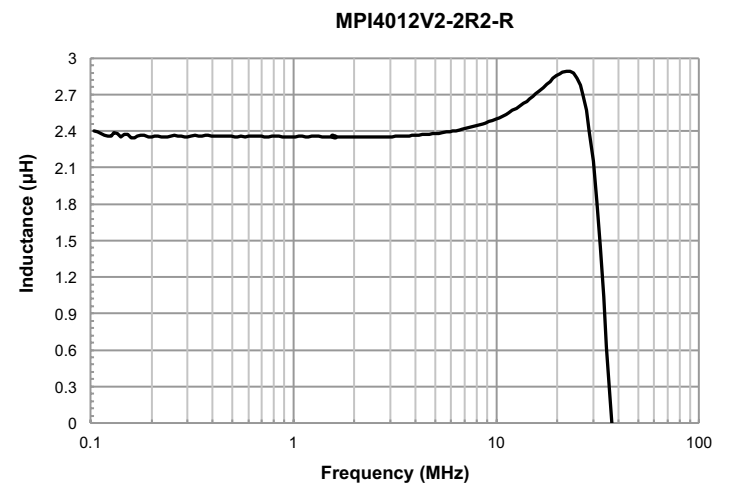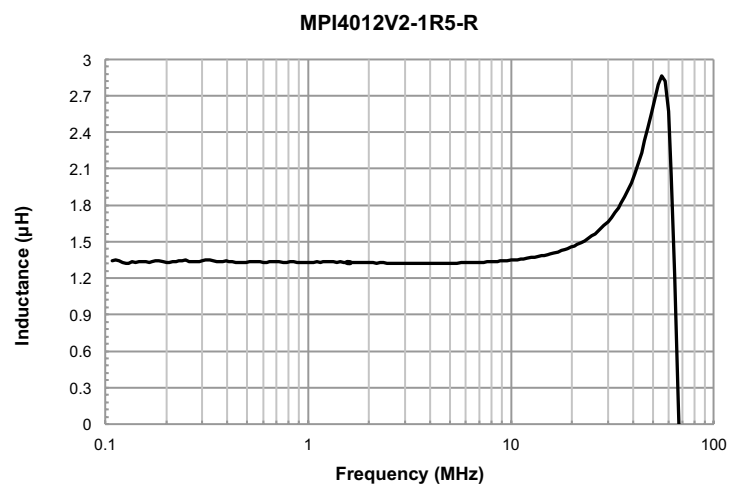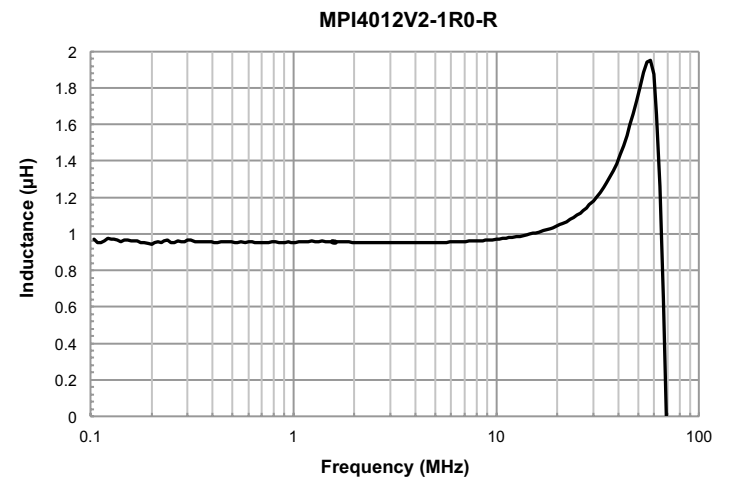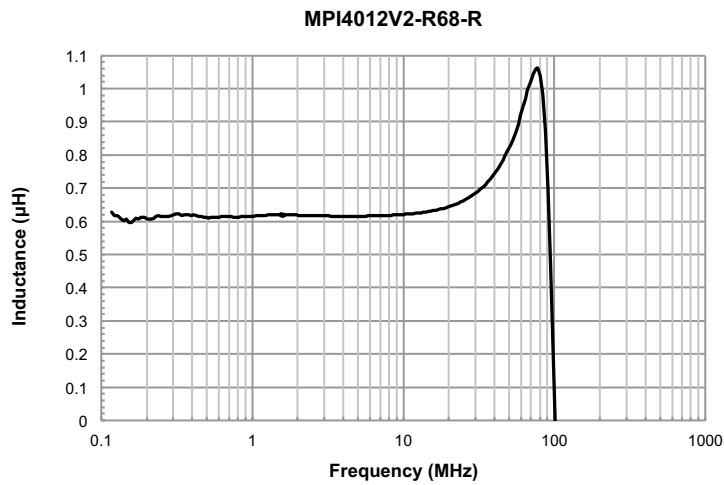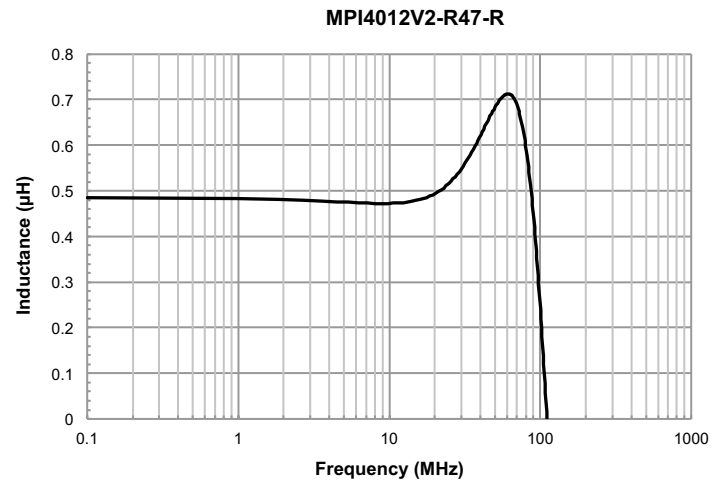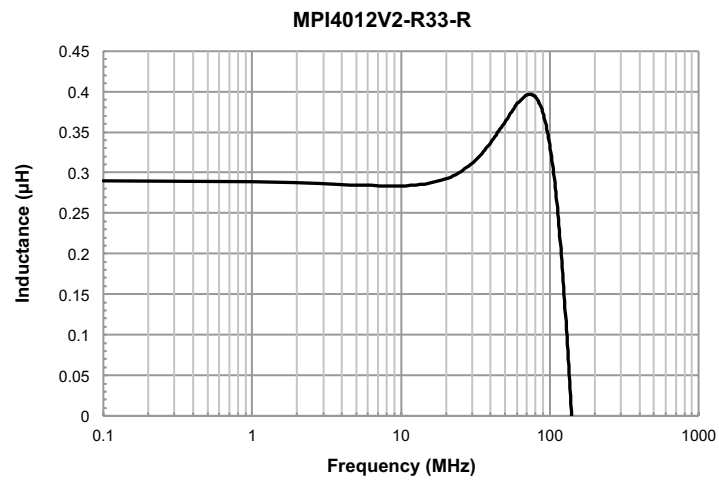







# Inductance vs. Frequency

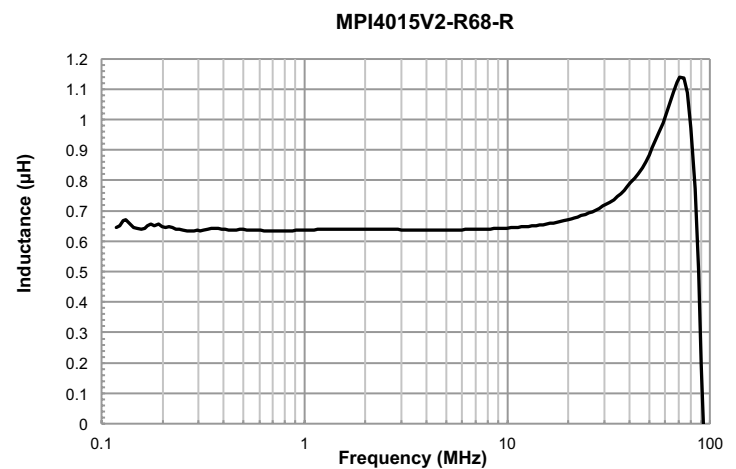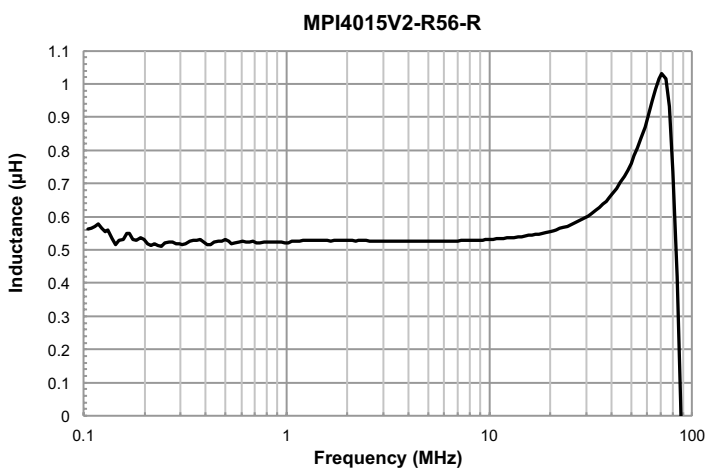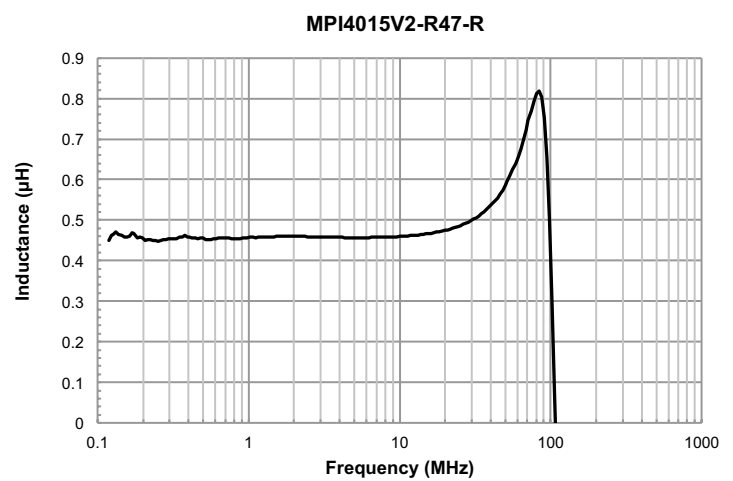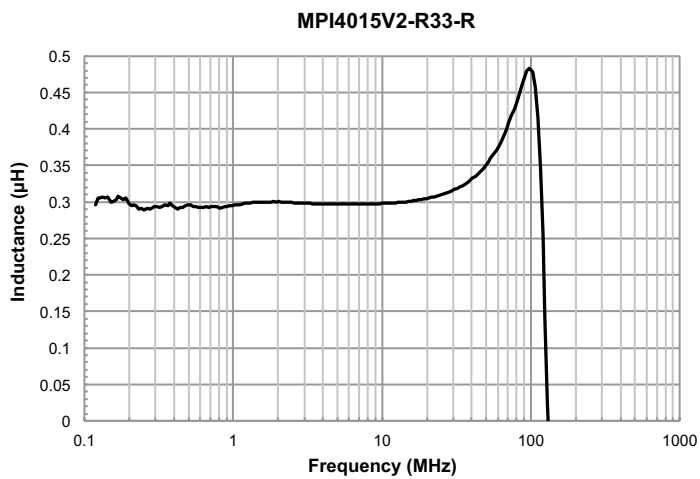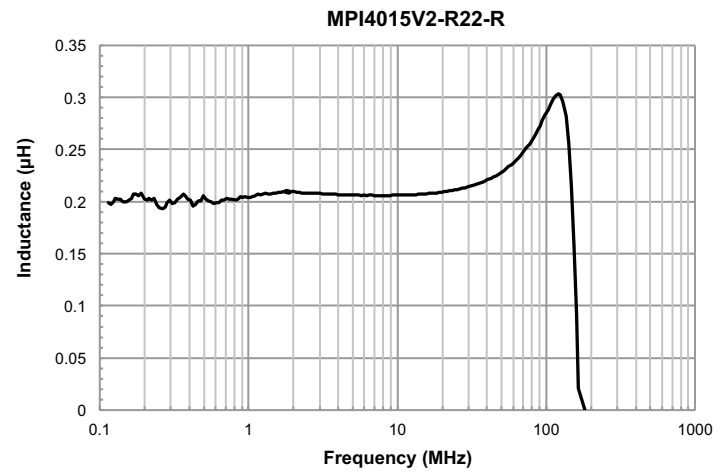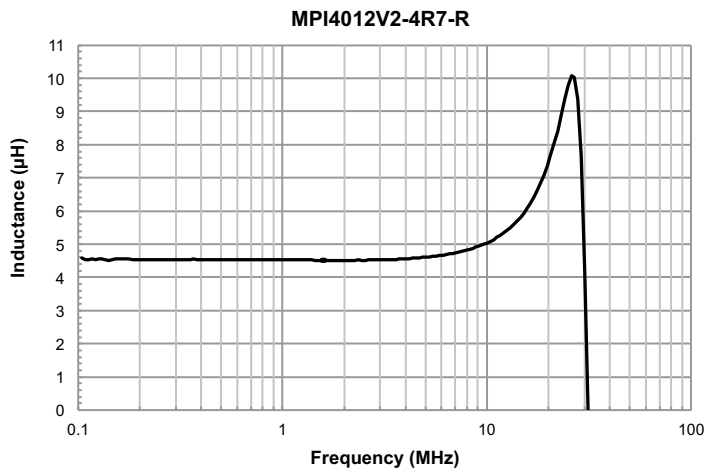







### Inductance vs. Frequency

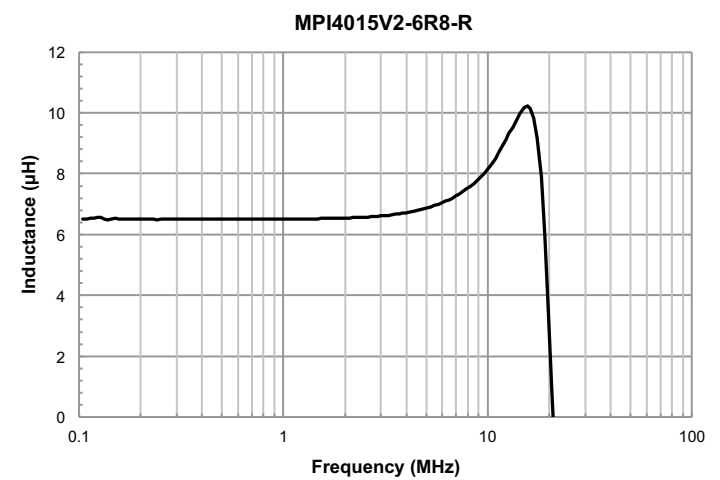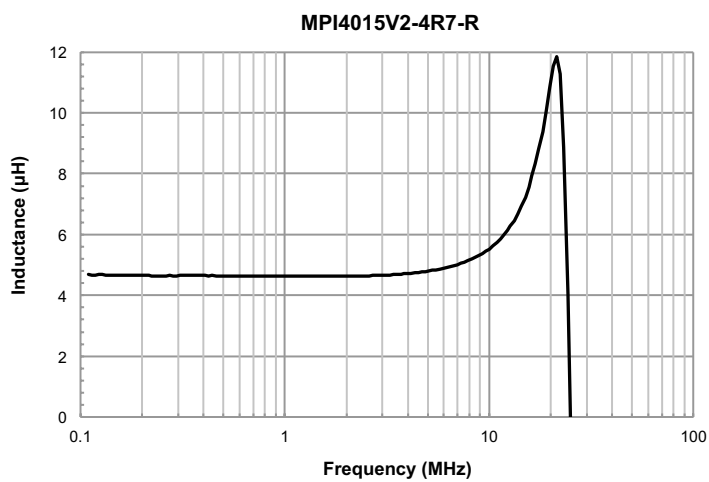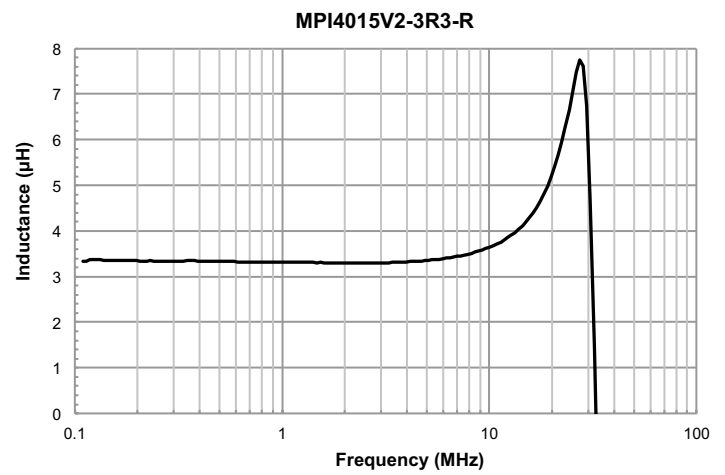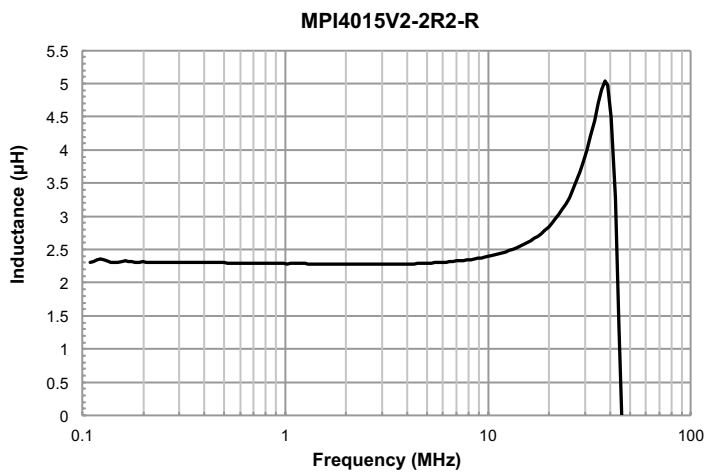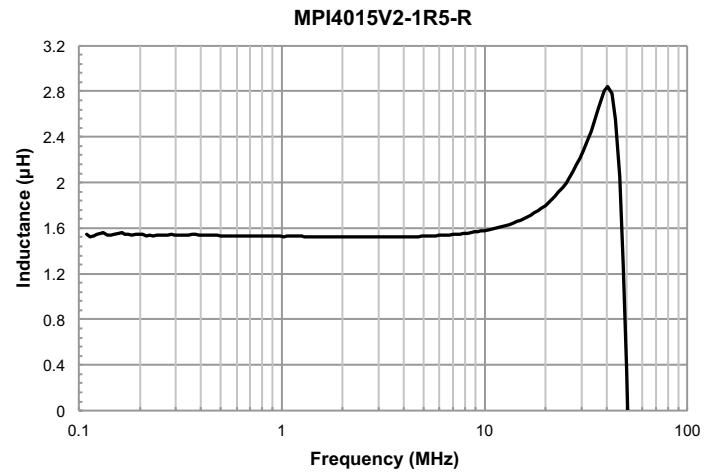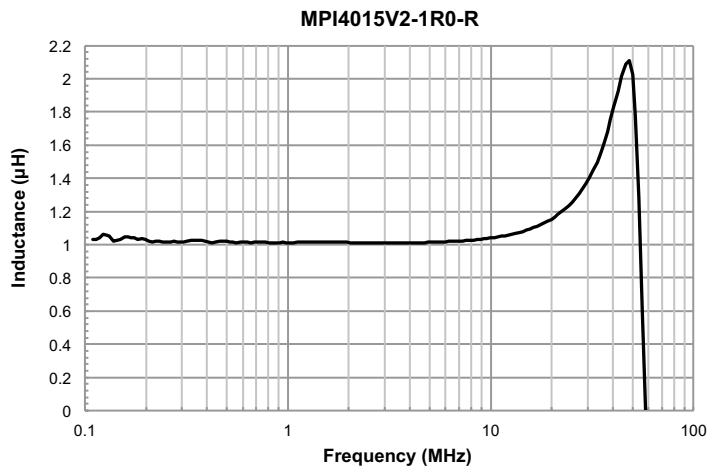






# Inductance vs. Frequency

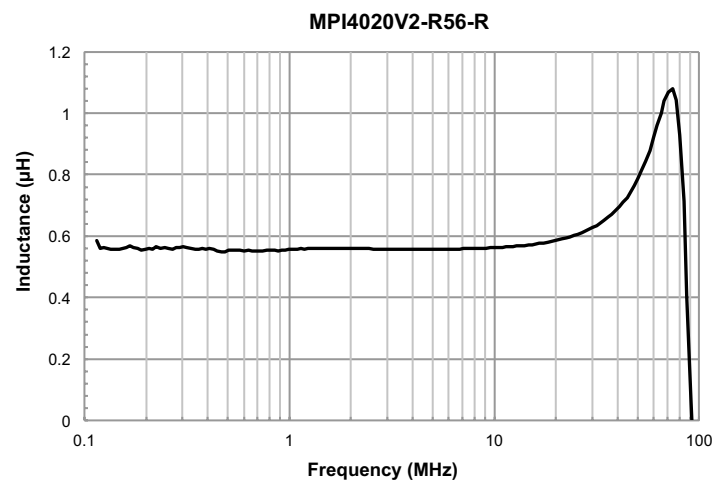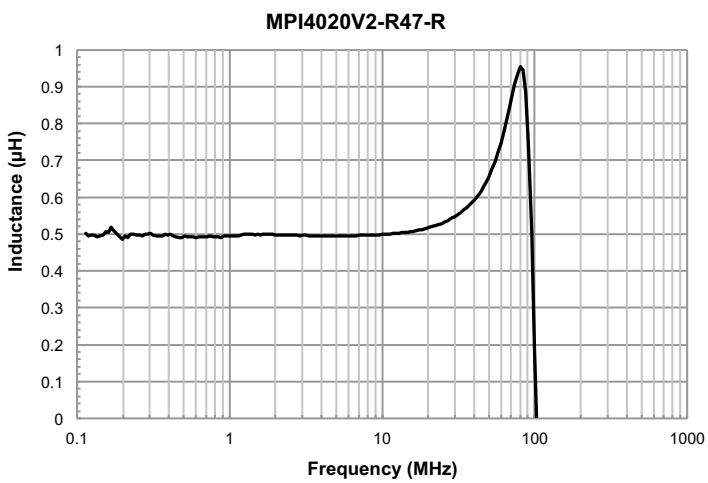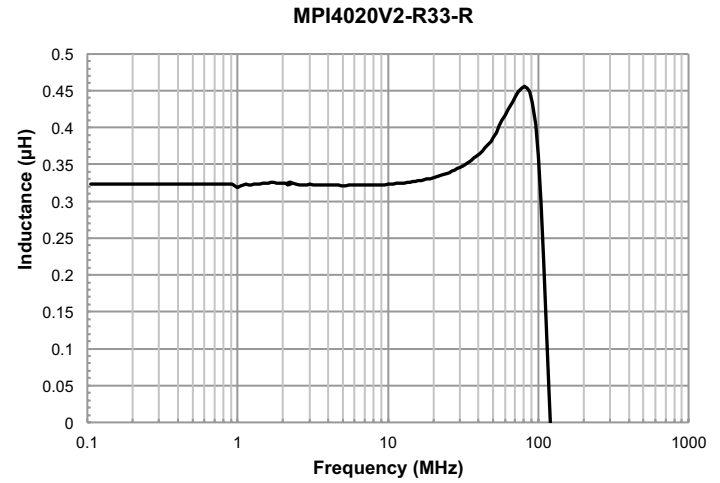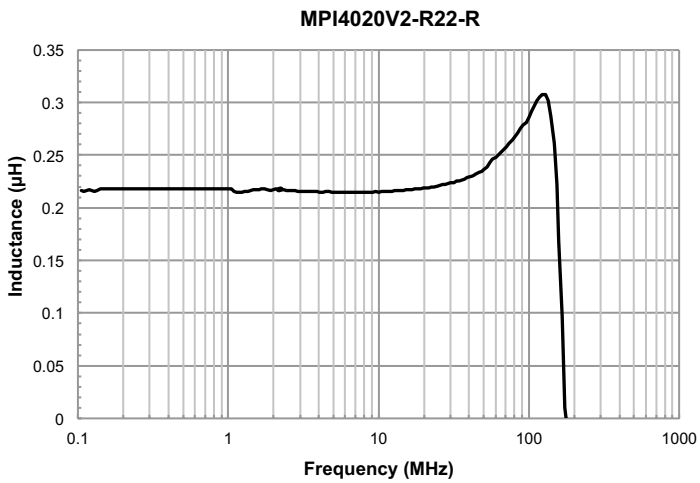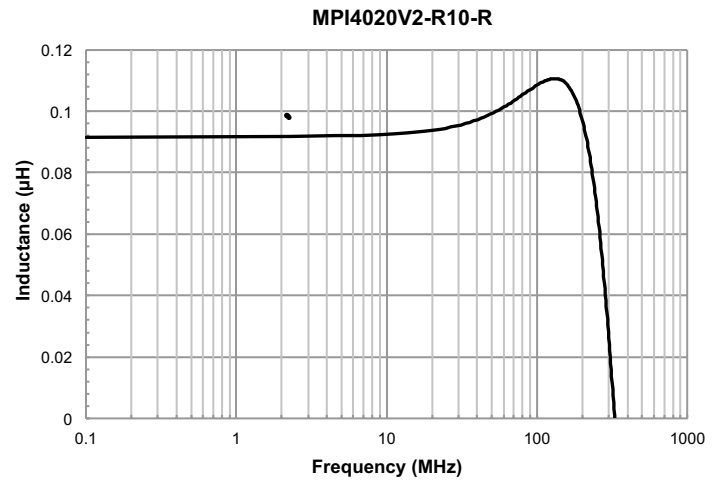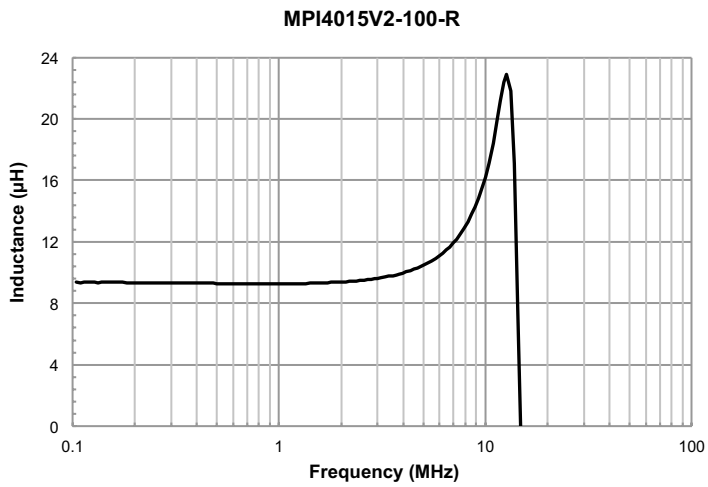







### Inductance vs. Frequency

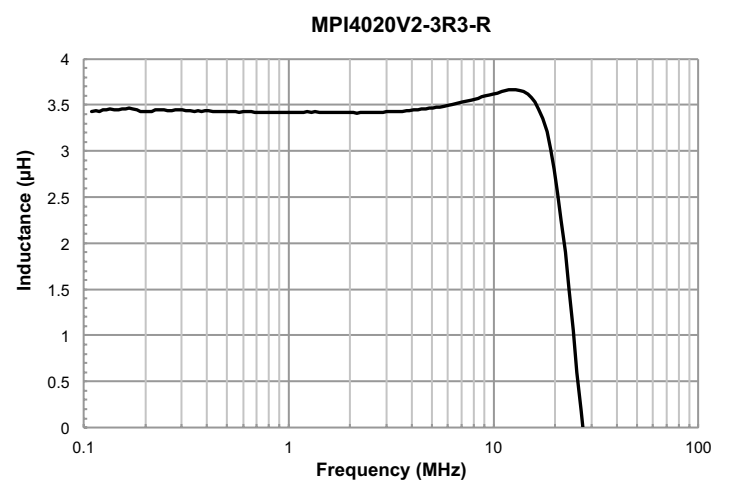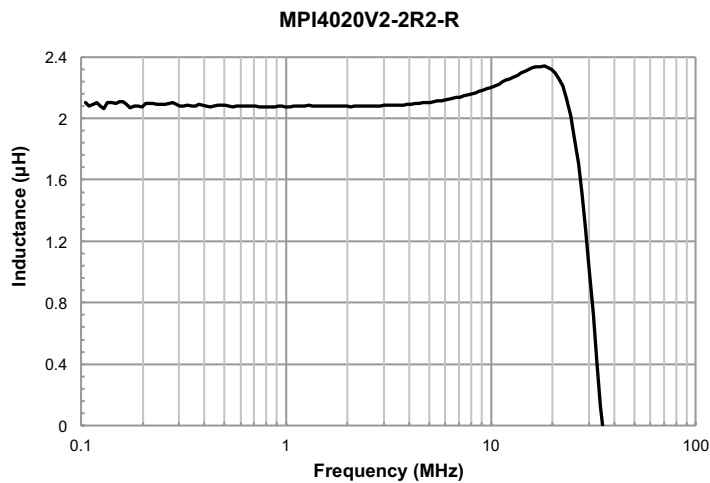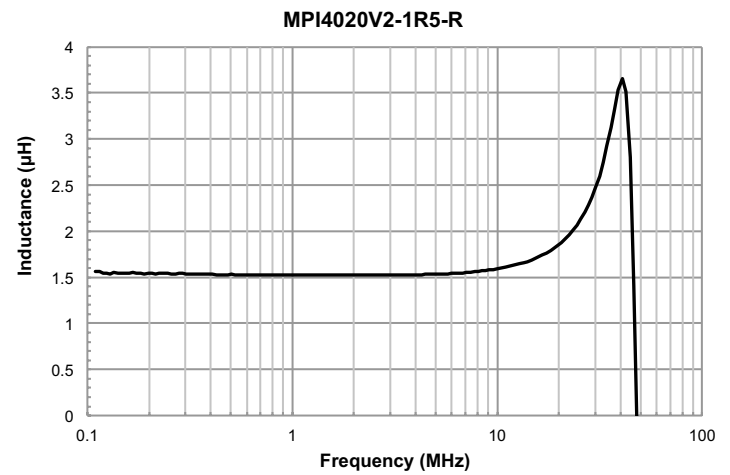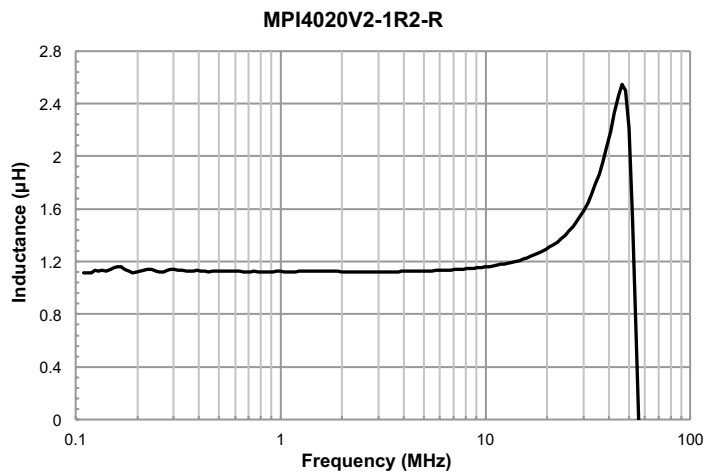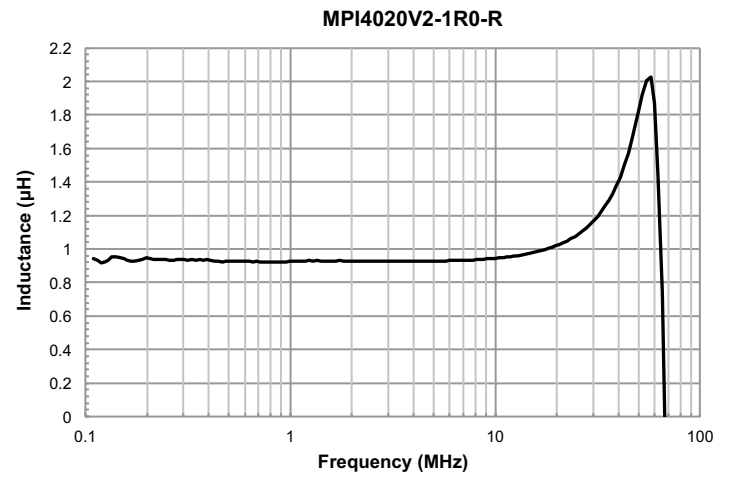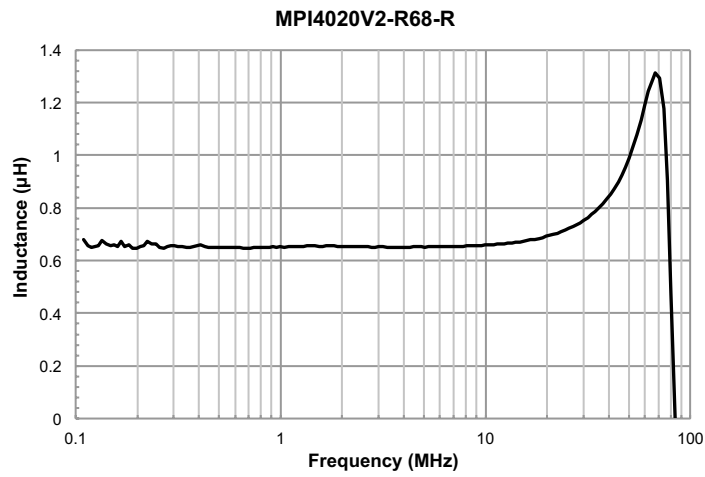

Inductance vs. Frequency


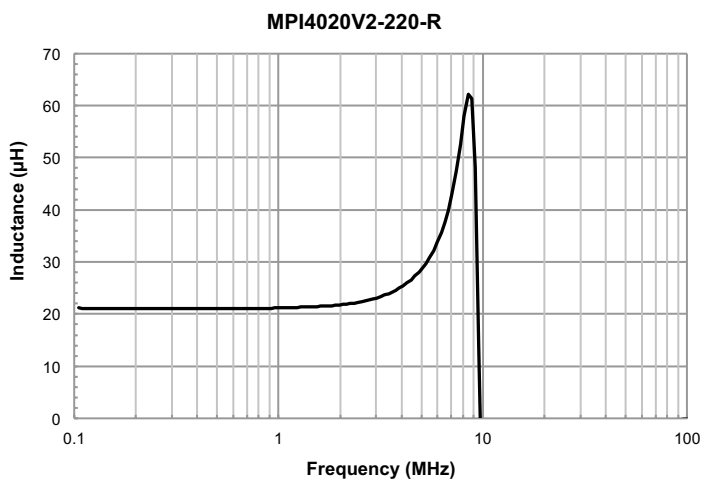
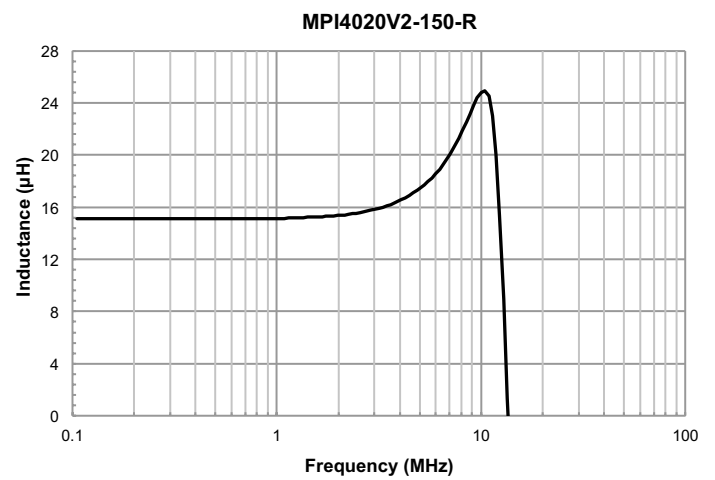
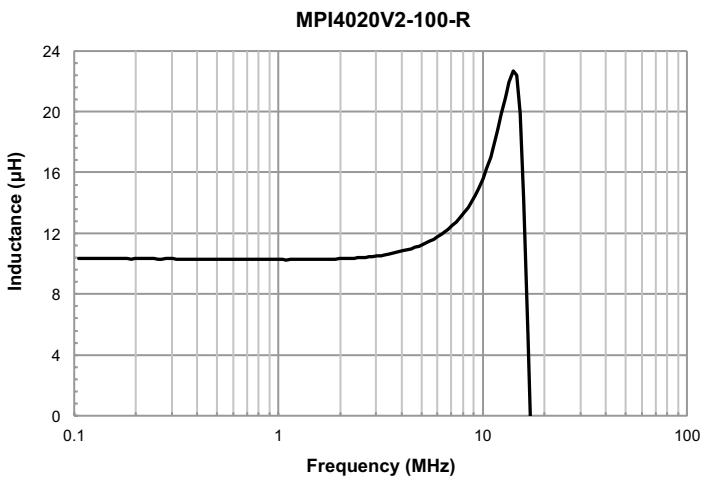
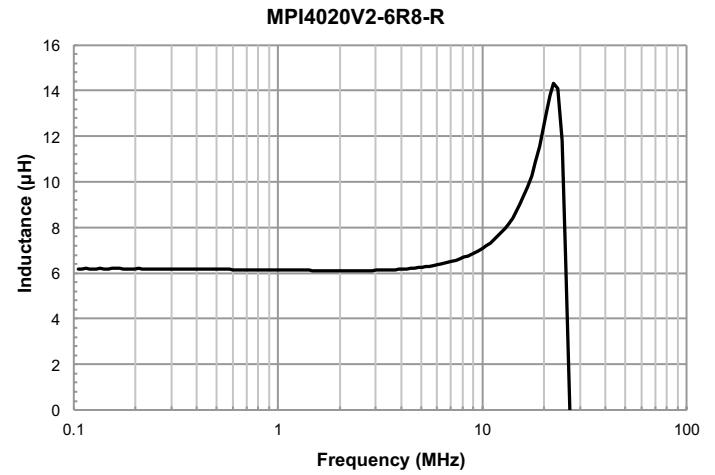
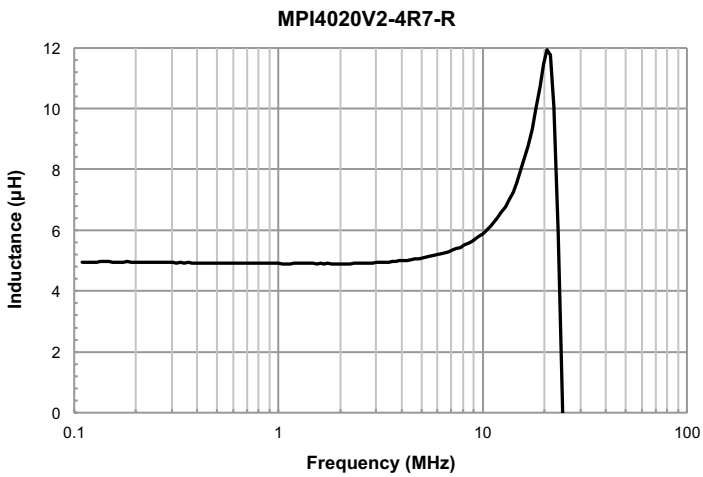


Inductance and temperature rise vs. Current

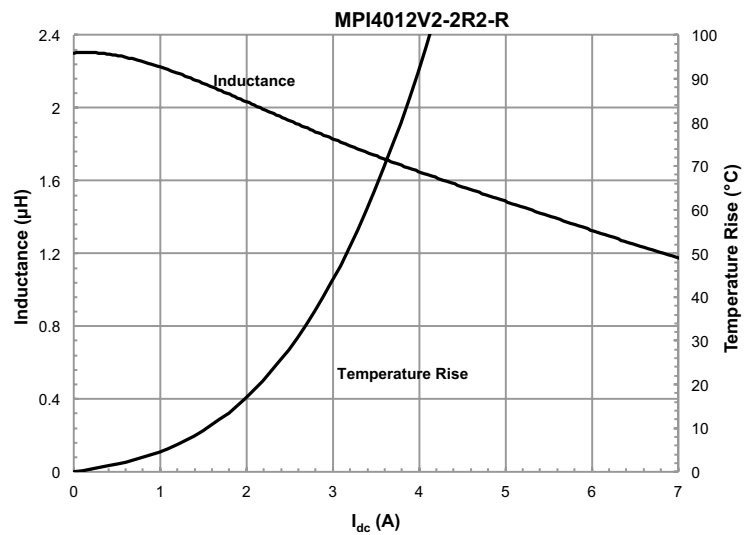
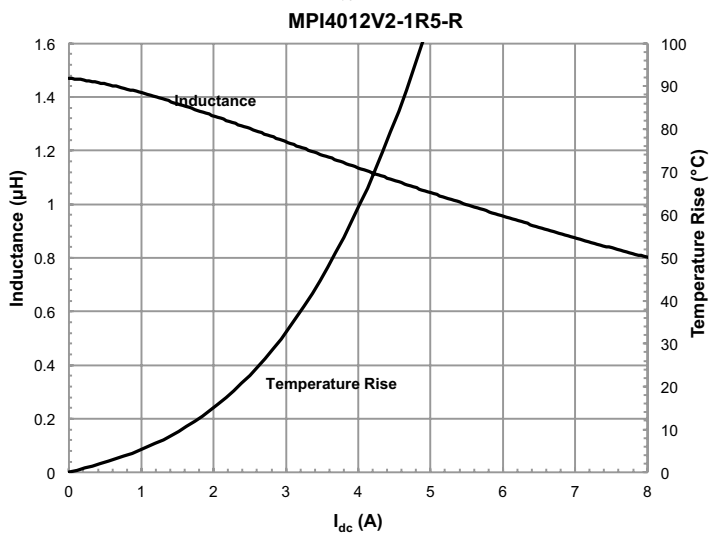
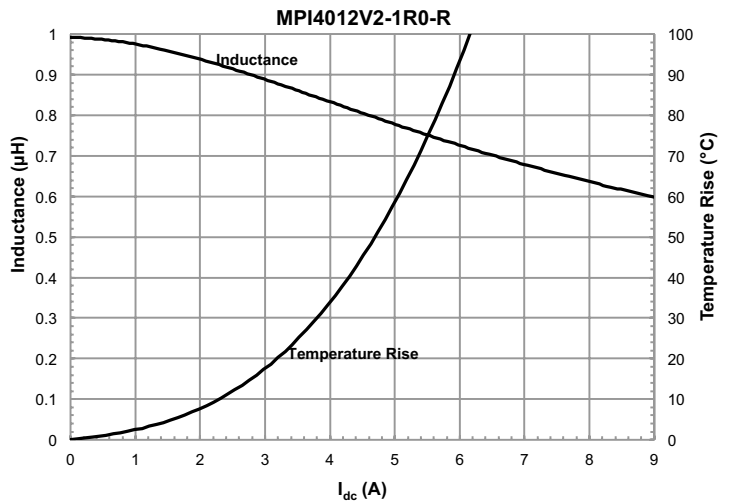
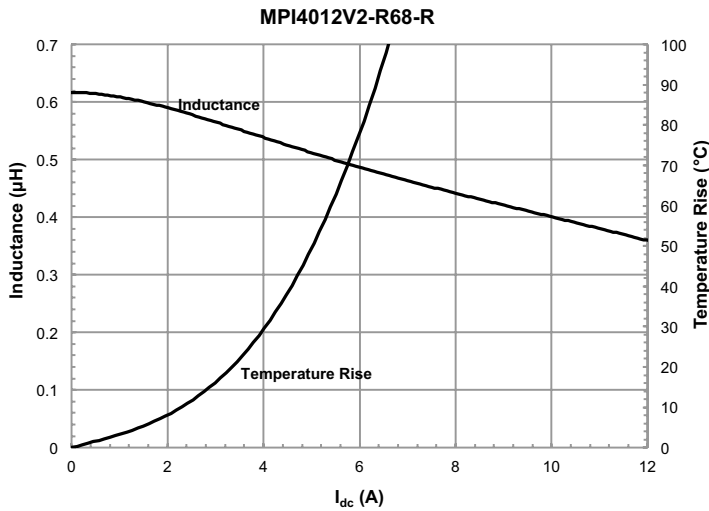
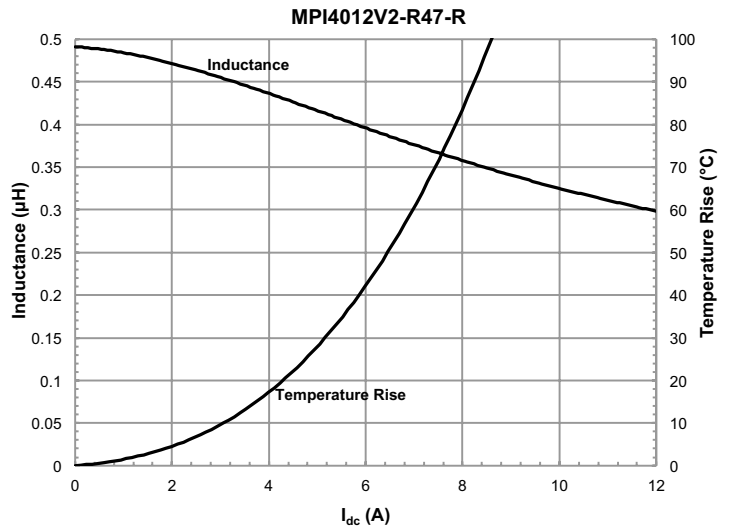
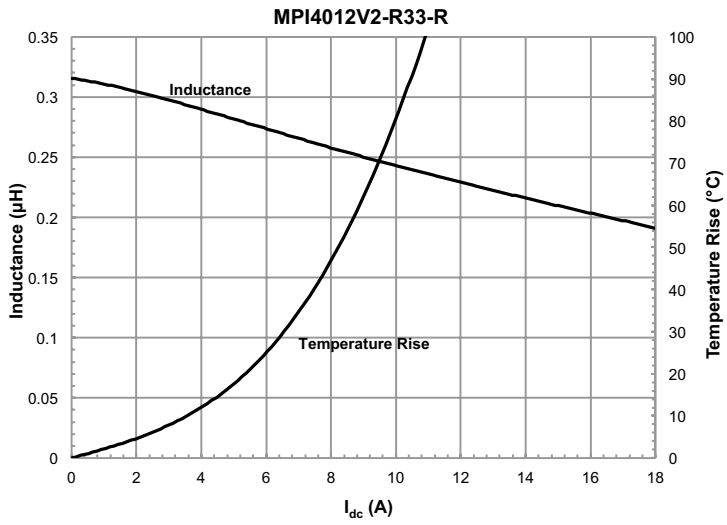










Inductance and temperature rise vs. Current

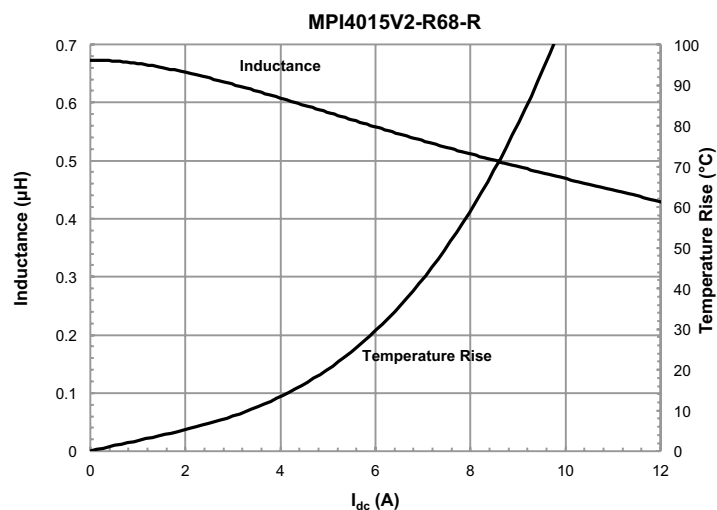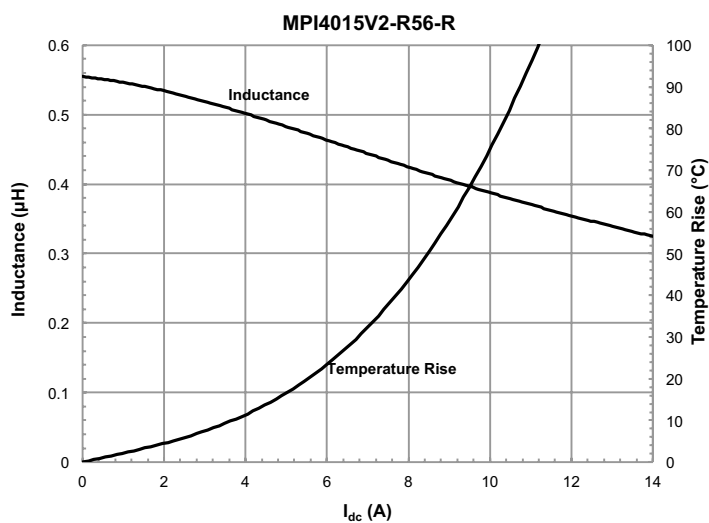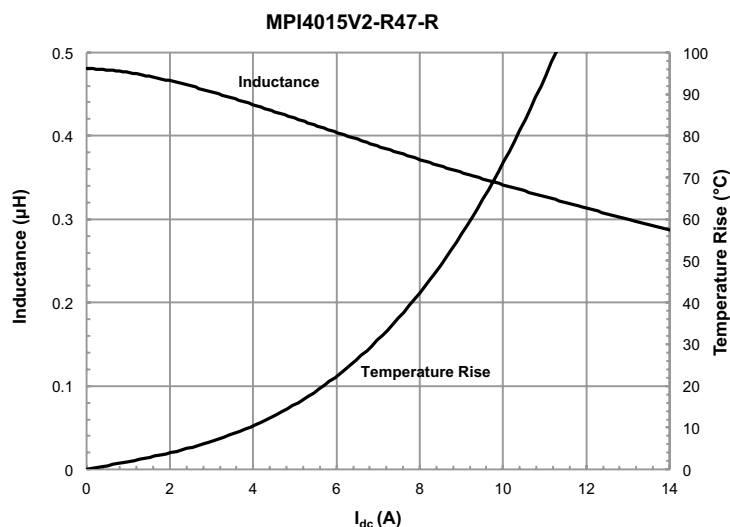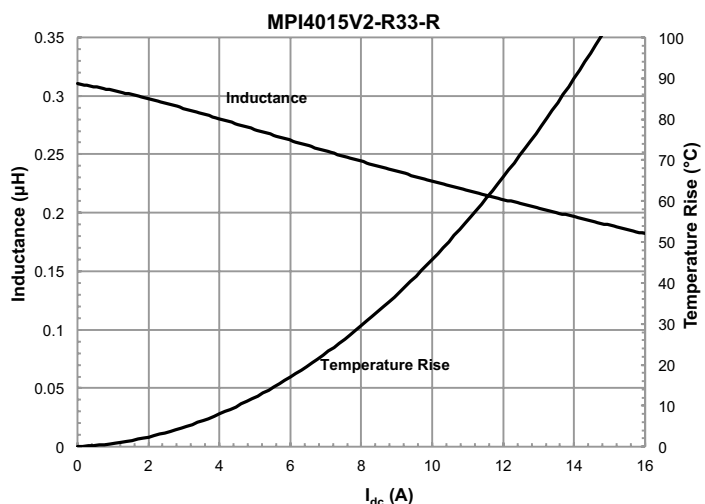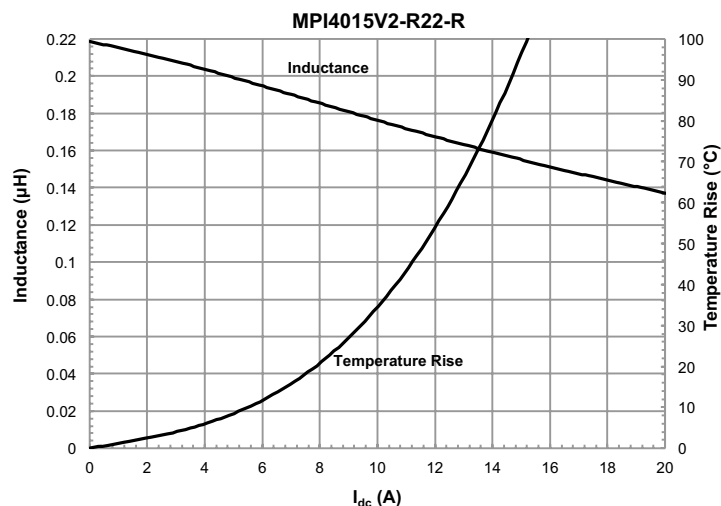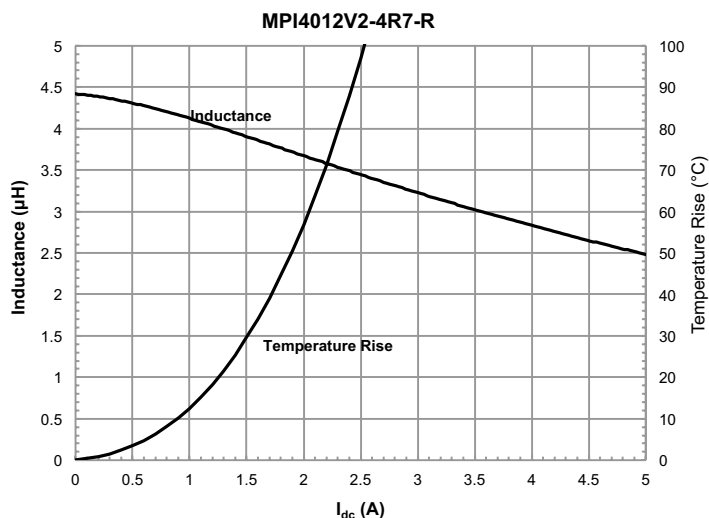







Inductance and temperature rise vs. Current

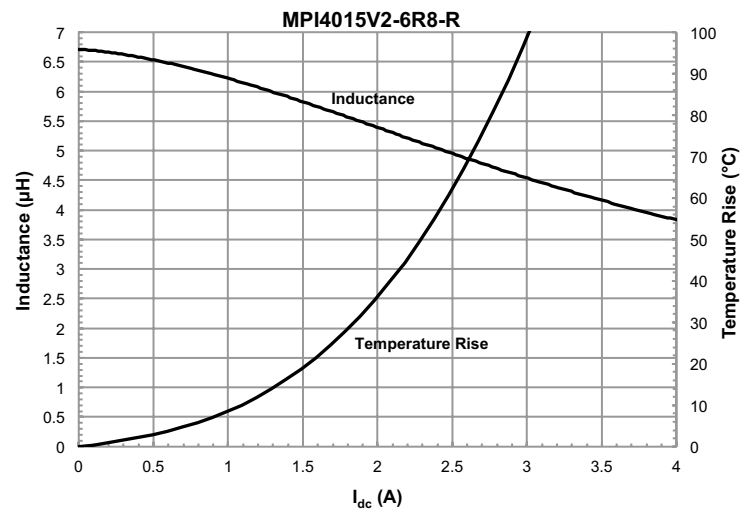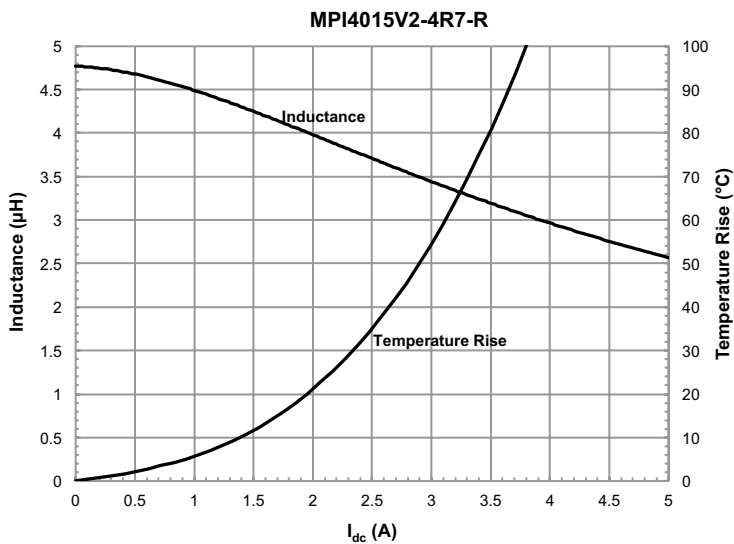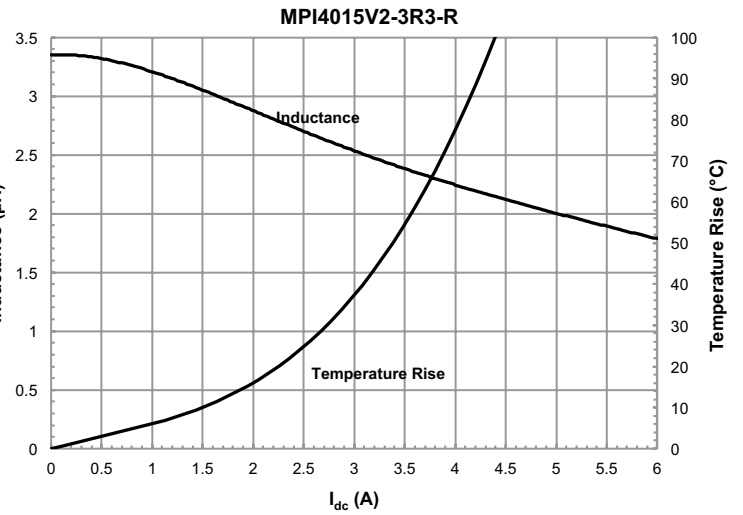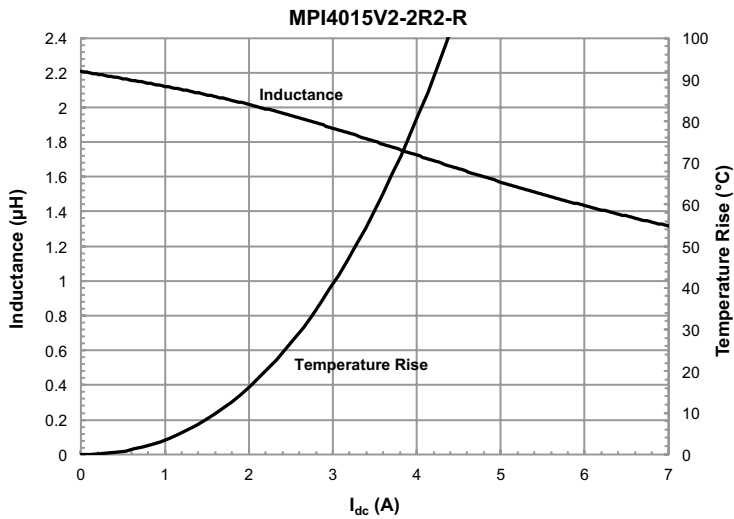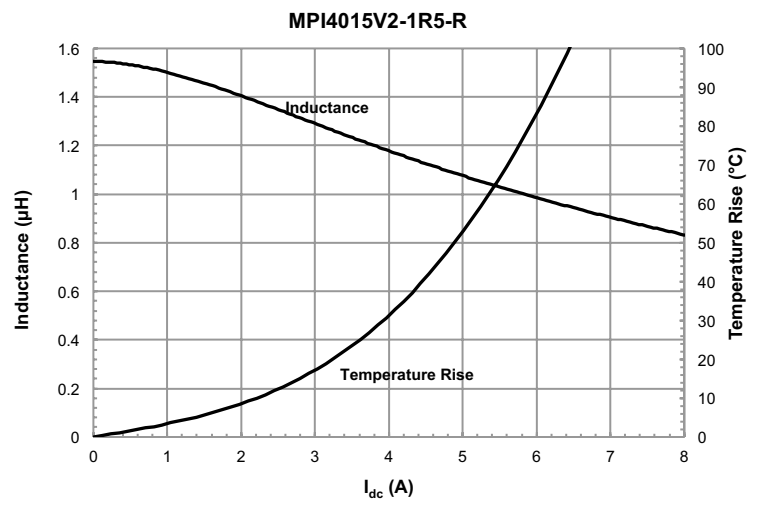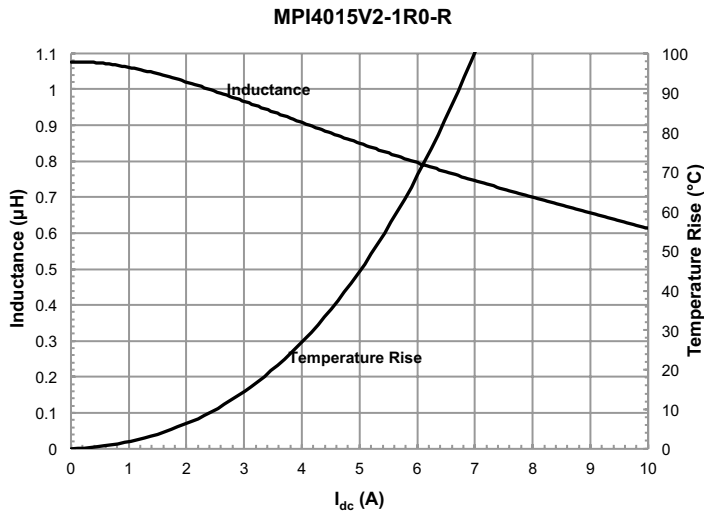






Inductance and temperature rise vs. Current

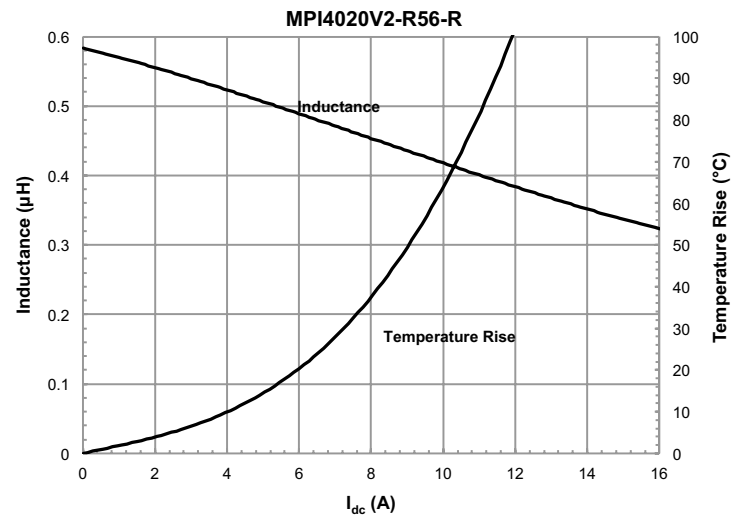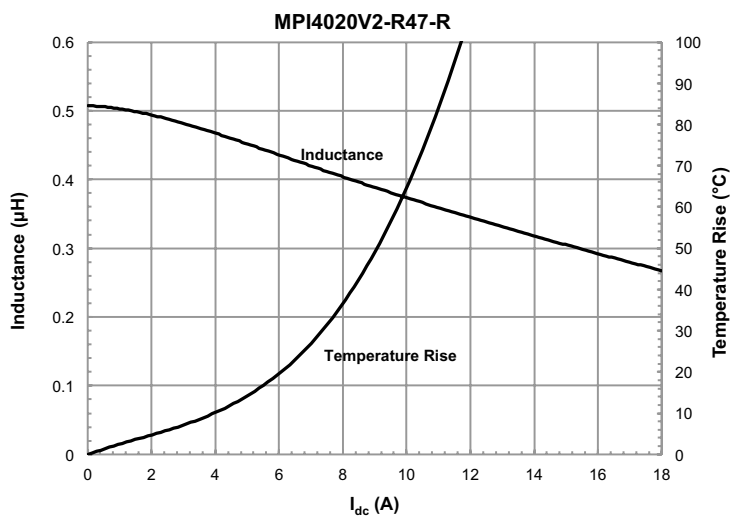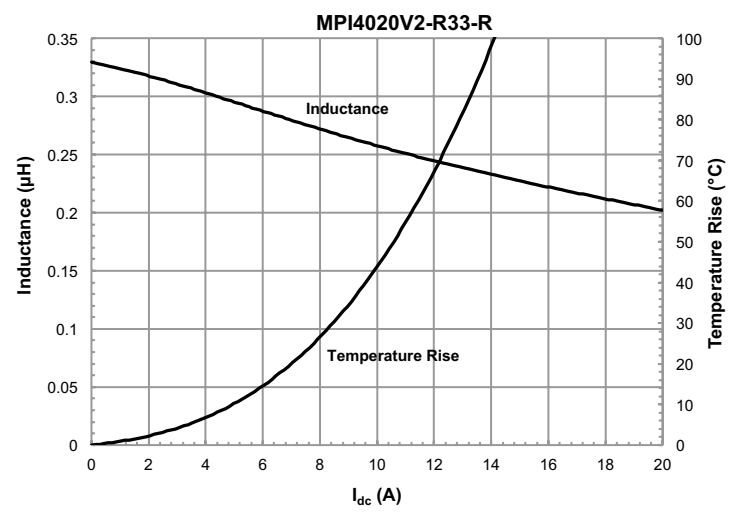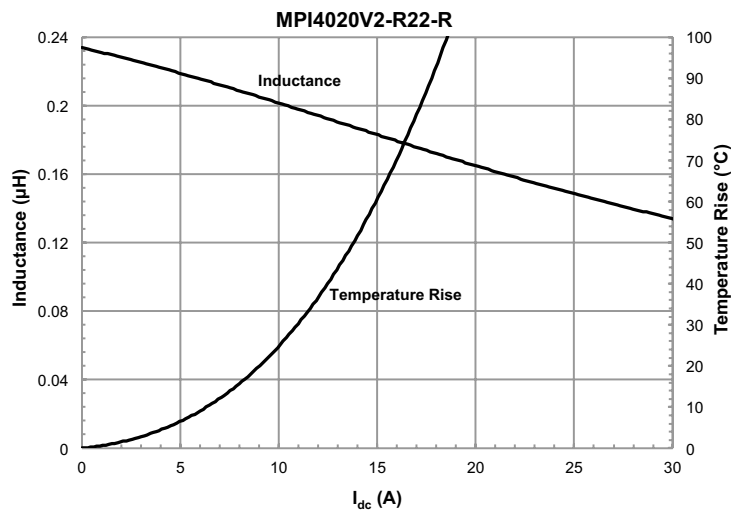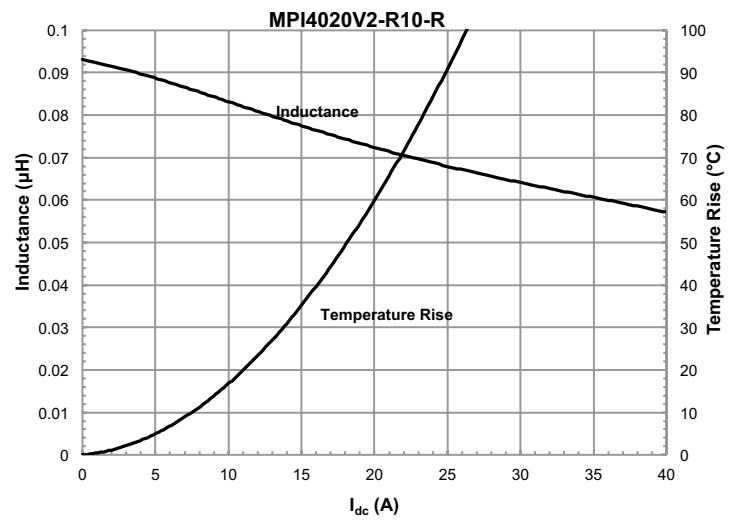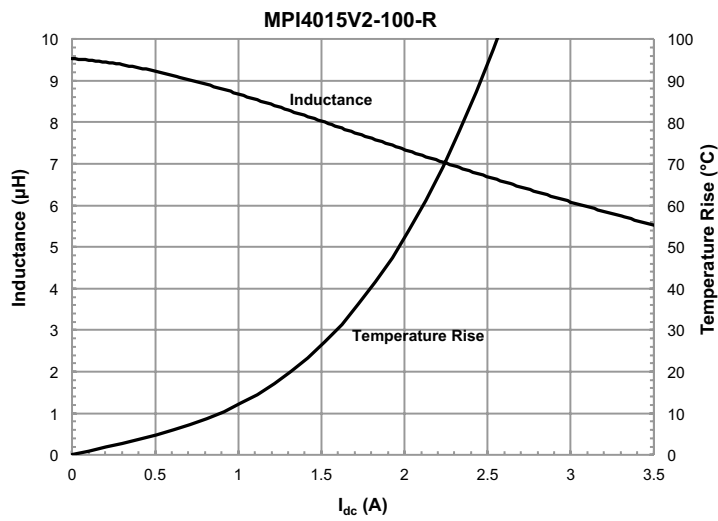

Inductance and temperature rise vs. Current

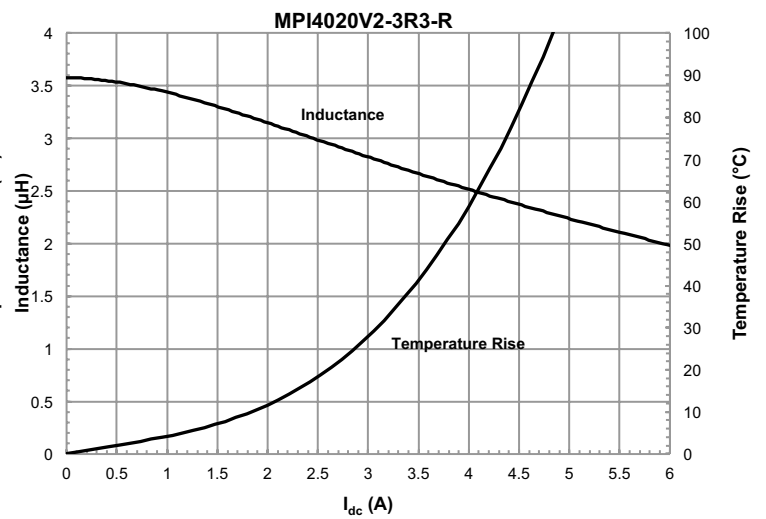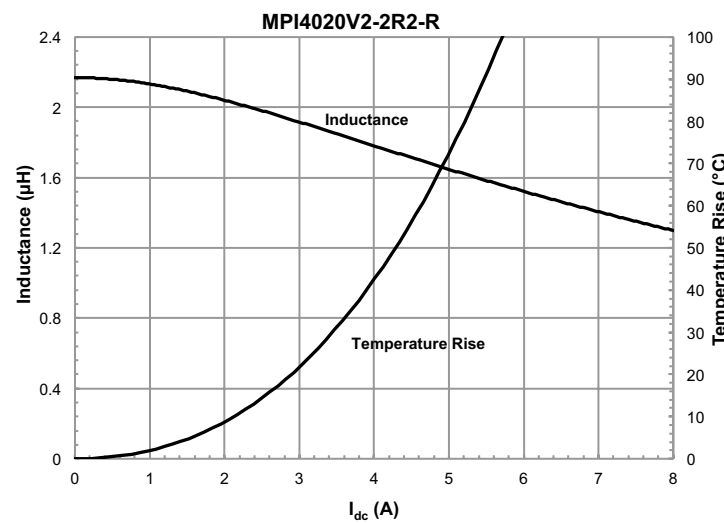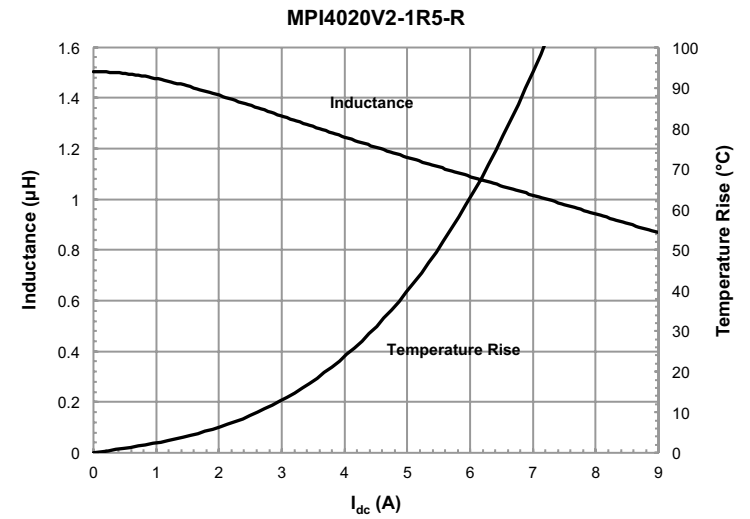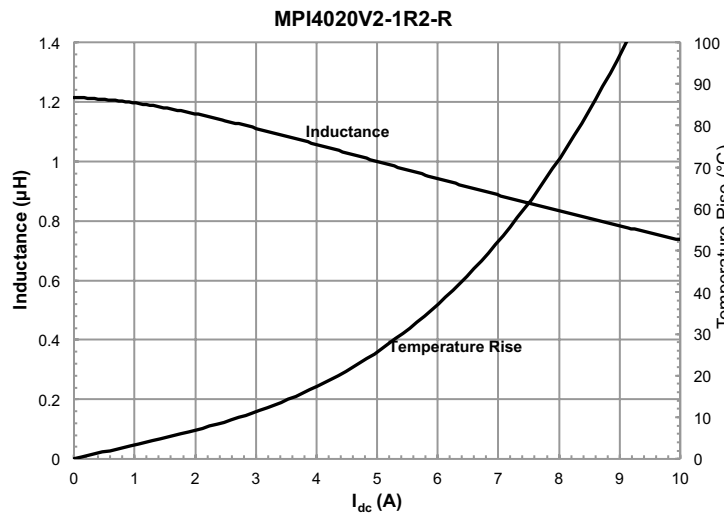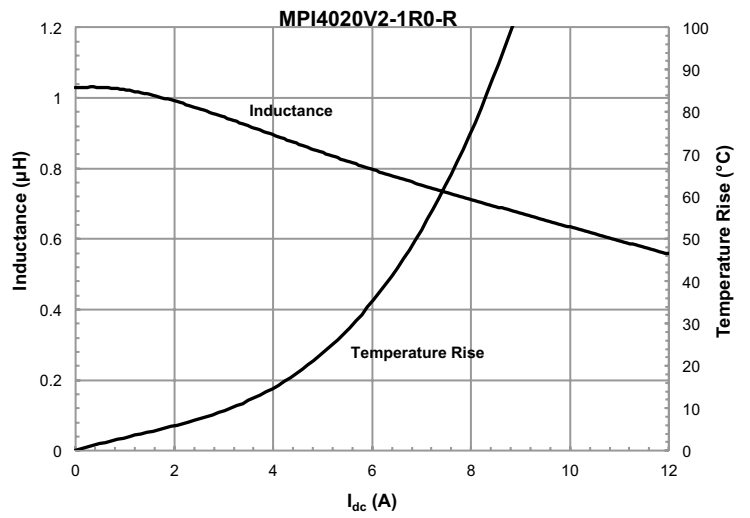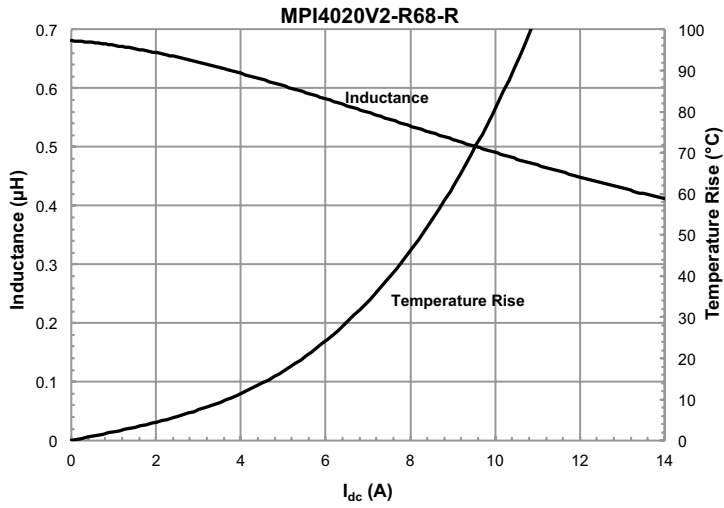

Inductance and temperature rise vs. Current

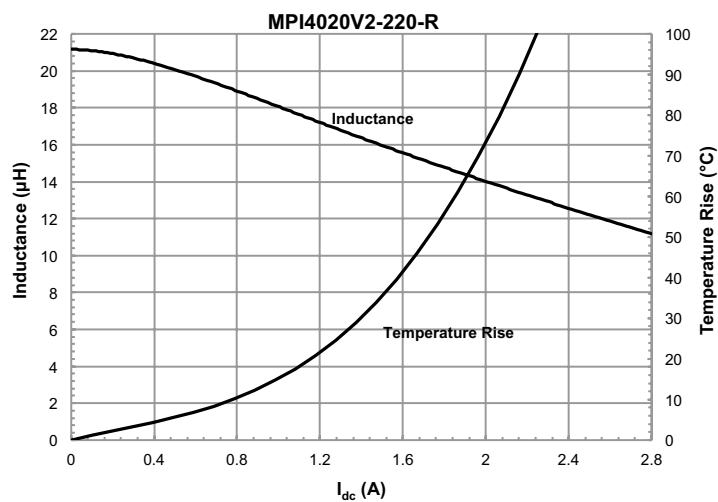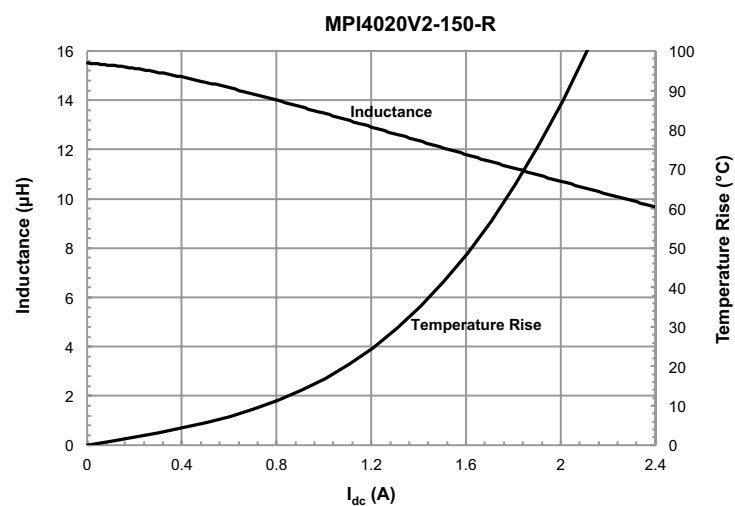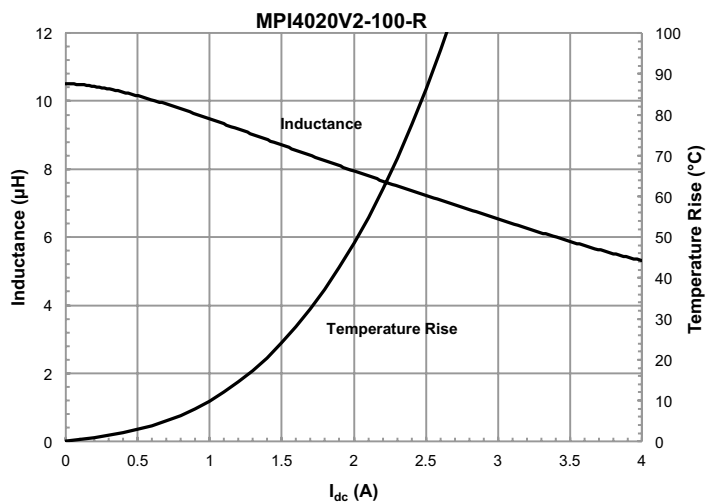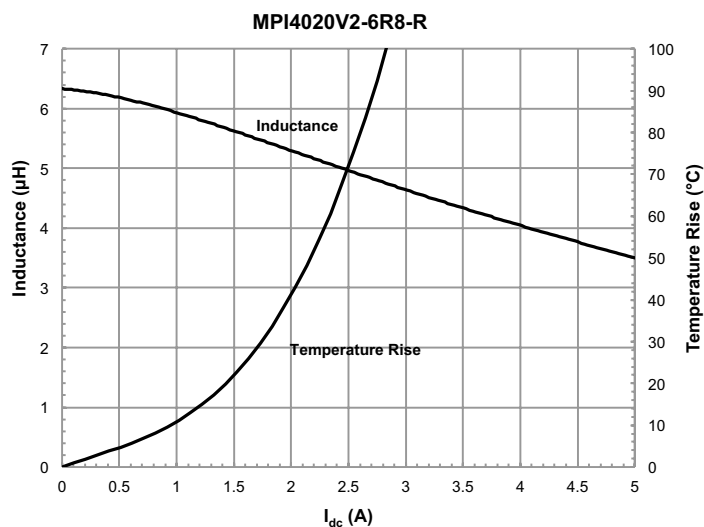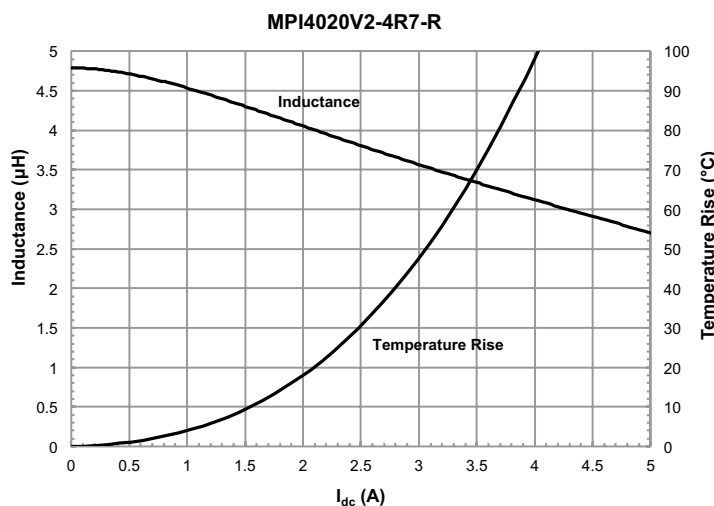

## Solder reflow profile

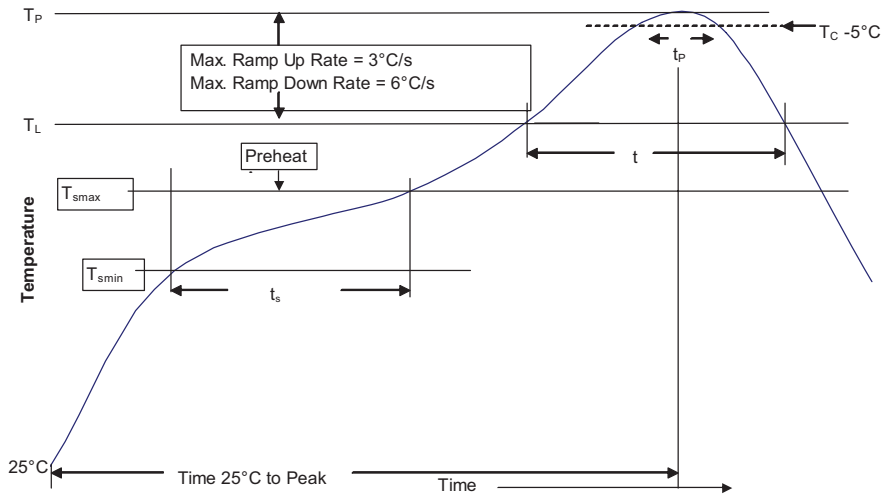


Table 1 - Standard SnPb Solder ( $T_C$ )

| Package Thickness | Volume mm <sup>3</sup> <350 | Volume mm <sup>3</sup> ≥350 |
|-------------------|-----------------------------|-----------------------------|
| <2.5mm)           | 235 °C                      | 220 °C                      |
| ≥2.5mm            | 220 °C                      | 220 °C                      |

Table 2 - Lead (Pb) Free Solder ( $T_C$ )

| Package Thickness | Volume mm <sup>3</sup> <350 | Volume mm <sup>3</sup> 350 - 2000 | Volume mm <sup>3</sup> >2000 |
|-------------------|-----------------------------|-----------------------------------|------------------------------|
| <1.6mm            | 260 °C                      | 260 °C                            | 260 °C                       |
| 1.6 – 2.5mm       | 260 °C                      | 250 °C                            | 245 °C                       |
| >2.5mm            | 250 °C                      | 245 °C                            | 245 °C                       |

## Reference JDEC J-STD-020

| Profile Feature                                                                    | Standard SnPb Solder | Lead (Pb) Free Solder |
|------------------------------------------------------------------------------------|----------------------|-----------------------|
| Preheat and Soak                                                                   |                      |                       |
| • Temperature min. ( $T_{smin}$ )                                                  | 100 °C               | 150 °C                |
| • Temperature max. ( $T_{smax}$ )                                                  | 150 °C               | 200 °C                |
| • Time ( $T_{smin}$ to $T_{smax}$ ) ( $t_s$ )                                      | 60-120 Seconds       | 60-120 Seconds        |
| Average ramp up rate $T_{smax}$ to $T_p$                                           | 3 °C/ Second Max.    | 3 °C/ Second Max.     |
| Liquidous temperature ( $T_L$ )                                                    | 183 °C               | 217 °C                |
| Time at liquidous ( $t_L$ )                                                        | 60-150 Seconds       | 60-150 Seconds        |
| Peak package body temperature ( $T_p$ )*                                           | Table 1              | Table 2               |
| Time ( $t_p$ )** within 5 °C of the specified classification temperature ( $T_C$ ) | 20 Seconds**         | 30 Seconds**          |
| Average ramp-down rate ( $T_p$ to $T_{smax}$ )                                     | 6 °C/ Second Max.    | 6 °C/ Second Max.     |
| Time 25 °C to Peak Temperature                                                     | 6 Minutes Max.       | 8 Minutes Max.        |

\* Tolerance for peak profile temperature ( $T_p$ ) is defined as a supplier minimum and a user maximum.

\*\* Tolerance for time at peak profile temperature ( $t_p$ ) is defined as a supplier minimum and a user maximum.

Life Support Policy: Eaton does not authorize the use of any of its products for use in life support devices or systems without the express written approval of an officer of the Company. Life support systems are devices which support or sustain life, and whose failure to perform, when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in significant injury to the user.

Eaton reserves the right, without notice, to change design or construction of any products and to discontinue or limit distribution of any products. Eaton also reserves the right to change or update, without notice, any technical information contained in this bulletin.

**Eaton**  
**Electronics Division**  
1000 Eaton Boulevard  
Cleveland, OH 44122  
United States  
www.eaton.com/electronics

© 2017 Eaton  
All Rights Reserved  
Publication 10651 BU-MC17023  
April 2017

**EATON**  
Powering Business Worldwide

Eaton is a registered trademark.

All other trademarks are property of their respective owners.



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.