

4600 and 4400 series

Toggle switches

Distinctive features and specifications

UG1410A



- High current/voltage rating in a small case
- Butt action contacts
- Insulated or metal lever
- UL, CSA and VDE (EN 61058-1) approved

ELECTRICAL SPECIFICATIONS

- Max. current/voltage rating with resistive load (silver contacts A) : 4A 250VAC - 6A 125VAC
- Approved electrical ratings : see table below
- Initial contact resistance : 10 mΩ max.
- Insulation resistance : 1.000 MΩ min. at 500VDC
- Dielectric strength :
 - 2.000 Vrms 50 Hz min. between terminals
 - 2.500 Vrms 50 Hz min. between poles and between terminals and frame
- Electrical life : 10.000 cycles at full load

| APPROVALS | MODELS | POLES | FUNCTIONS | APPROVED RATINGS |
|---------------------|--------|-------|-----------|-----------------------|
| UL/CSA | 4600A | 1-2 | 1-6-9 | 3A 250VAC - 6A 125VAC |
| VDE (EN 61058-1) | 4400A | 1-2 | 1-6 | 4(2)A 250VAC |
| | 4600A | 1-2-3 | 1-6 | 4(2)A 250VAC |

MATERIALS

- Case : melamine phenolic
- Actuator :
 - insulated : polyamide ,6-6
 - non-insulated : brass, nickel plated
- Bushing :
 - insulated : polyamide 6-6
 - non-insulated : brass, nickel plated
- Contacts : silver

GENERAL SPECIFICATIONS

- Torque : 0,95 Nm (.70 Ft.lb) max. applied to nut
- Panel thickness : 5 mm (.196) between 2 nuts
- Operating temperature : -20°C to +55°C
- Hand soldering : 270°C max. for 10 seconds max. - iron Ø3 (.118)

AGENCY APPROVALS





Availability : see above chart.
Marking : VDE approved models are standard marked.
 To order switches marked UL-CSA, complete appropriate box of ordering format.

The company reserves the right to change specifications without notice.

4600 and 4400 series

Toggle switches

Overview

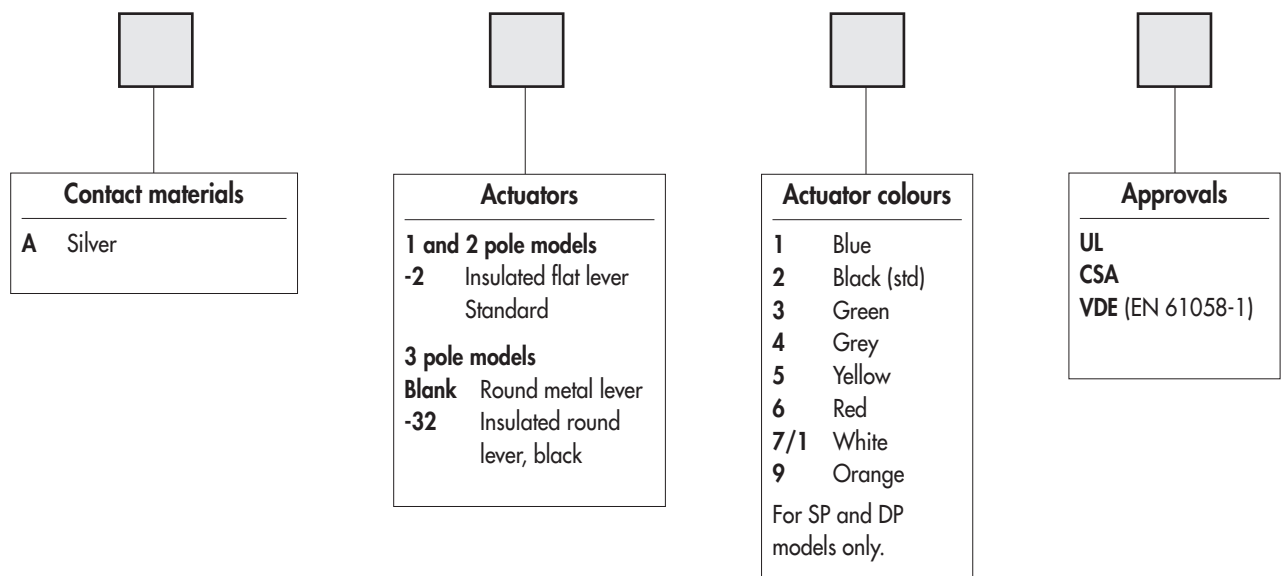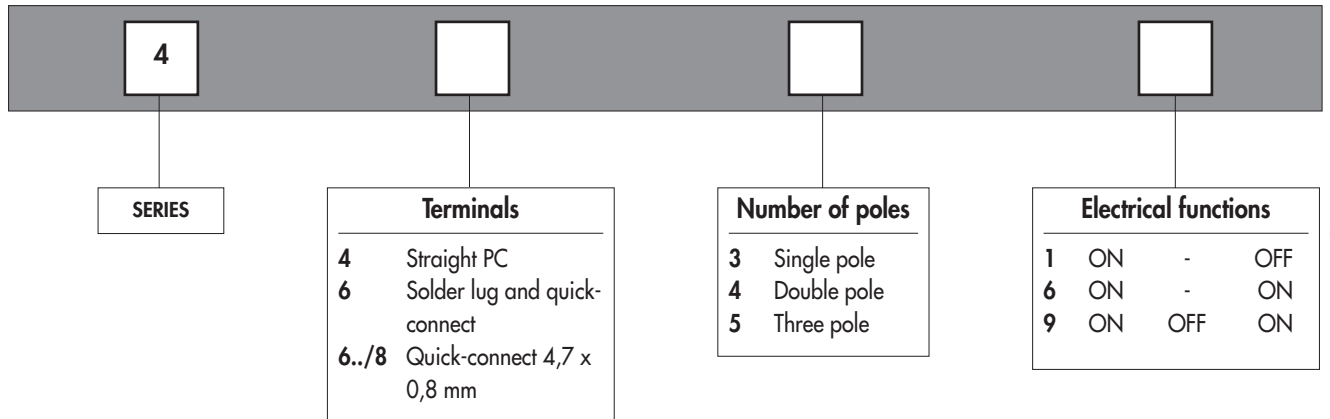

ABOUT THIS SERIES

Dimensions : first dimensions are in mm while inches are shown as bracketed numbers.



NOTICE : please note that not all combinations of above numbers are available. Refer to the following pages for further information.



Sealing boots are available on 3 pole models to protect the switches against dust and water. They are presented in section H.



Mounting accessories : standard hardware supplied with all models : 1 hex nut U166 and 1 knurled nut U520 in the same colour as the lever (insulated models) or U411 nickel plated (metal lever models). Standard and special hardware available are presented in section I.



Packaging unit : 20 pieces.

4600 and 4400 series


Toggle switches

Insulated flat lever


MODEL
STRUCTURE



→ Keyway



- Solder lug/quick-connect terminals 2,8 x 0,5 (.110 x .019)
- Straight PC terminals or quick-connect terminals 4,7 x 0,8 (.185 x .031)
- 2 and 3 maintained positions
- 1 and 2 pole configurations

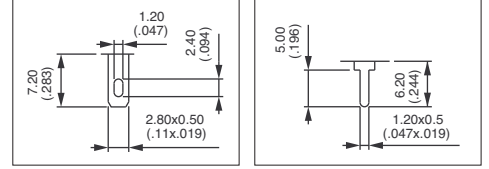

A

MODEL
STRUCTURE




Solder lug/quick-connect terminals - single pole

→ Keyway



4631 -2
4636 -2
4639 -2

| | III | II | I |
|---------|-----|-----|-----|
| 4631 -2 | ON | - | OFF |
| 4636 -2 | ON | - | ON |
| 4639 -2 | ON | OFF | ON |

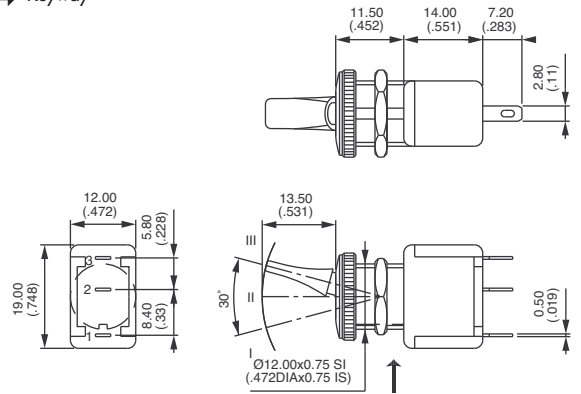


Solder lug/quick-connect terminals - double pole

→ Keyway



4641 -2
4646 -2
4649 -2

| | III | II | I |
|---------|-----|-----|-----|
| 4641 -2 | ON | - | OFF |
| 4646 -2 | ON | - | ON |
| 4649 -2 | ON | OFF | ON |

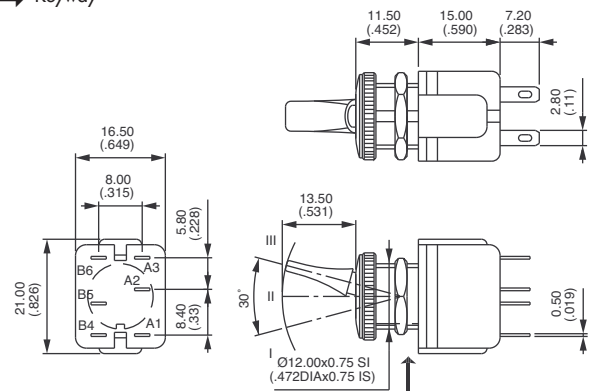


Straight PC terminals - single pole

→ Keyway



4431 -2
4436 -2
4439 -2

| | III | II | I |
|---------|-----|-----|-----|
| 4431 -2 | ON | - | OFF |
| 4436 -2 | ON | - | ON |
| 4439 -2 | ON | OFF | ON |

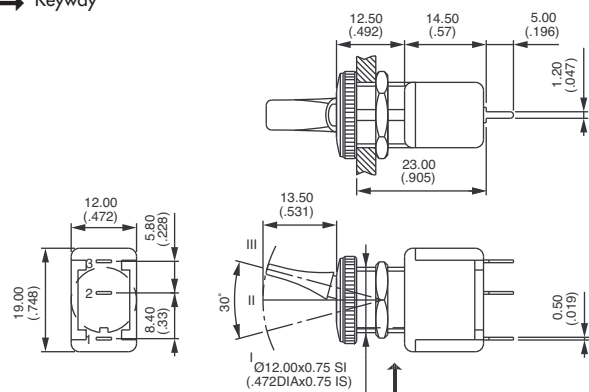



4600 and 4400 series

Toggle switches

Insulated flat lever



Straight PC terminals - double pole



4441 -2
4446 -2
4449 -2

| III | II | I |
|-----|-----|-----|
| ON | - | OFF |
| ON | - | ON |
| ON | OFF | ON |

→ Keyway

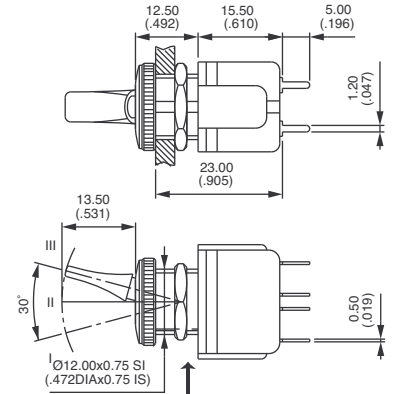



Quick-connect terminals 4,7 x 0,8 (.185 x .031) - single pole




4631/8 -2
4636/8 -2

| I | II | |
|----|----|-----|
| ON | - | OFF |
| ON | - | ON |

→ Keyway

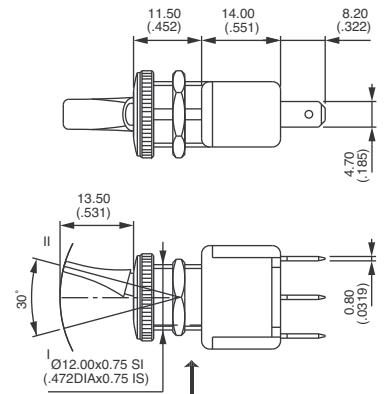

PANEL CUT-OUT

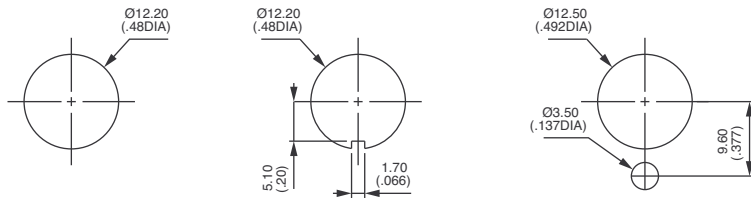

A


4600 and 4400 series

Toggle switches


Round lever - three pole



A

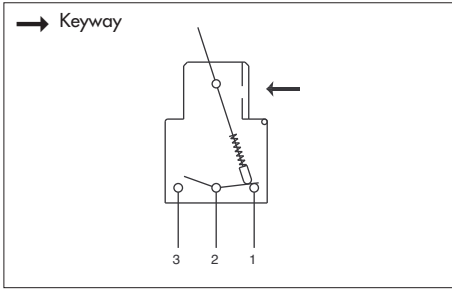

- Solder lug or straight PC terminals
- 2 and 3 maintained positions

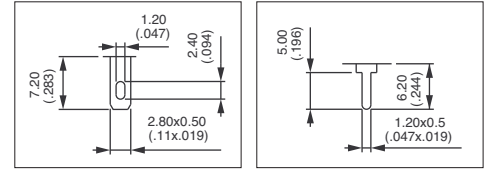

MODEL STRUCTURE




Solder lug terminals - metal lever



4651
4656
4659

| III | II | I |
|-----|-----|-----|
| ON | - | OFF |
| ON | - | ON |
| ON | OFF | ON |

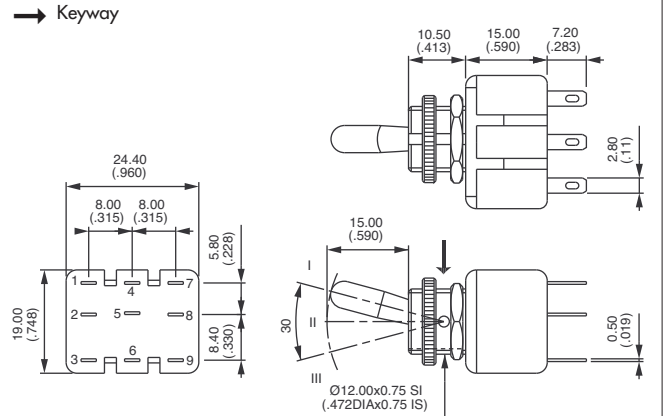


Straight PC terminals - metal lever



4451
4456
4459

| III | II | I |
|-----|-----|-----|
| ON | - | OFF |
| ON | - | ON |
| ON | OFF | ON |

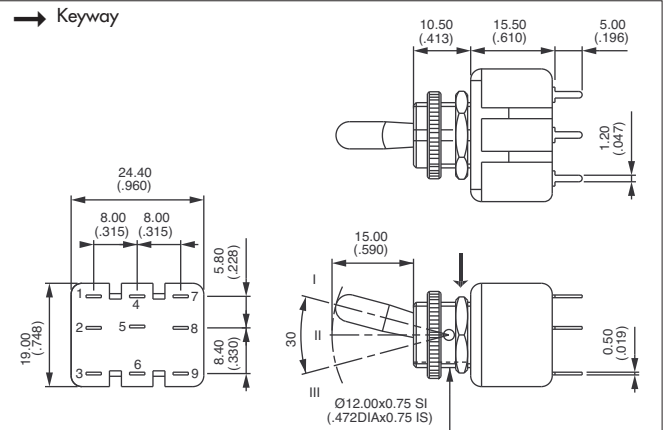


Solder lug terminals - insulated lever - silver contacts



4651A-32
4656A-32

| I | II | |
|----|----|-----|
| ON | - | OFF |
| ON | - | ON |

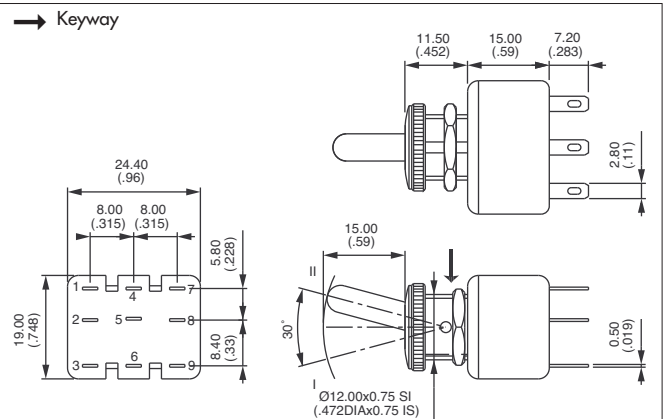




4600 and 4400 series

Toggle switches

CONTACT MATERIAL




ACTUATORS



- Blank** Round, metal lever for 3 pole only
- 2** Insulated flat lever (for single and double pole only)
- 32** Black insulated round lever (for 3 pole only)

ACTUATOR COLOURS




- 1** Blue
- 2** Black (standard)
- 3** Green
- 4** Grey
- 5** Yellow
- 6** Red
- 7/1** White
- 9** Orange



For insulated flat lever
 Black : standard colour - reduced delivery time
 Minimum order of 500 pieces for non-standard colours.

APPROVALS



UU (UL-CSA) Single and double pole only

Availability : see specifications for details of approved models.

Marking : to order switches marked UL-CSA, complete above box with 'UU'.
 Other approvals available as standard, see specifications.



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.