

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [0736441001](#)
Status: **Active**
Overview: [hdm](#)
Description: 2.00mm (.079") Pitch HDM® Board-to-Board Backplane Header, Vertical, SMC, Press-Fit, Guide Post Location A, Polarizing Key Position A, 144 Circuits

Documents:
[3D Model](#) [Drawing \(PDF\)](#)
[Test Summary \(PDF\)](#) [RoHS Certificate of Compliance \(PDF\)](#)

Agency Certification

CSA LR19980
UL E29179

General

Product Family Backplane Connectors
Series [73644](#)
Application Backplane
Comments Standard Press-Fit
Component Type PCB Header
Overview [hdm](#)
Product Name HDM®
Style N/A

Physical

Circuits (Loaded) 144
Circuits (maximum) 144
Color - Resin Black, Natural
Durability (mating cycles max) 250
First Mate / Last Break No
Flammability 94V-0
Guide to Mating Part Yes
Keying to Mating Part Yes
Material - Metal Phosphor Bronze, Stainless Steel
Material - Plating Mating Gold
Material - Plating Termination Gold
Material - Resin High Temperature Thermoplastic
Number of Columns 24
Number of Pairs Open Pin Field
Number of Rows 6
Orientation Vertical
PC Tail Length (in) 0.138 In
PC Tail Length (mm) 3.50 mm
PCB Locator No
PCB Retention Yes
PCB Thickness Recommended (in) 0.098 In
PCB Thickness Recommended (mm) 2.50 mm
Packaging Type Tube
Pitch - Mating Interface (in) 0.079 In
Pitch - Mating Interface (mm) 2.00 mm
Pitch - Term. Interface (in) 0.079 In
Pitch - Term. Interface (mm) 2.00 mm
Plating min: Mating (µin) 30
Plating min: Mating (µm) 0.75
Plating min: Termination (µin) 2
Plating min: Termination (µm) 0.05



Series

image - Reference only

EU RoHS
ELV and RoHS
Compliant
REACH SVHC
Contains SVHC: No
Halogen-Free
Status
Not Reviewed

China RoHS



Need more information on product environmental compliance?

Email productcompliance@molex.com
For a multiple part number RoHS Certificate of Compliance, [click here](#)

Please visit the [Contact Us](#) section for any non-product compliance questions.

Search Parts in this Series
[73644Series](#)

Mates With
[73632](#) HDM PLUS® Board-to-Board Daughtercard Receptacle. [73780](#) HDM® Board-to-Board Daughtercard Receptacle

Application Tooling | FAQ
Tooling specifications and manuals are found by selecting the products below. Crimp Height Specifications are then contained in the Application Tooling Specification document.
Global

Description	Product #
Flat Rock Tooling for	0622013700
Pneumatic Press	
HDM® Backplane	0621001400
Insertion Signal	
Contact Tool	
HDM® Backplane	0622005703
Insertion Head for	
144 Positions	

Polarized to PCB	No	Extraction Tool	0621001000
Stackable	No		
Surface Mount Compatible (SMC)	Yes		
Temperature Range - Operating	-55°C to +105°C		
Termination Interface: Style	Through Hole - Compliant Pin		
Electrical			
Current - Maximum per Contact	1A		
Data Rate	1.0 Gbps		
Real Signals (per 25mm)	75		
Shielded	No		
Voltage - Maximum	250V AC		
Material Info			
Reference - Drawing Numbers			
Packaging Specification	PK-70873-0818		
Sales Drawing	SDA-73644-****		

HDM and High Density Metric are trademarks of Amphenol Corporation

This document was generated on 05/14/2010
PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

73644	4	3	2	73644
1. MATERIALS: HOUSING - LIQUID CRYSTAL POLYMER (LCP), GLASS-FILLED, UL94V-0, COLOR: BLACK, TERMINAL - PHOSPHOR BRONZE. 2. FINISHES: SELECTIVE GOLD (Au) IN CONTACT AREA, 0.00076mm MINIMUM THICKNESS; NICKEL (Ni) AND GOLD FLASH OVERALL SELECTIVE GOLD (Au) IN CONTACT AREA, 0.00076mm MIN. THICKNESS; SELECTIVE TIN/LEAD (Sb/Pb) IN TAIL AREA; NICKEL (Ni) OVERALL.				

NOTES:

F

E

D

C

B

10 9 8 7 6

The drawing illustrates the 73644 connector assembly. The isometric view shows the connector with its pins and housing. The side view shows the overall dimensions: length (B), pin pitch (2.00), pin diameter (0.92), and mounting hole dimensions (Z, 10.00, 5X2.00). The detail view shows the pin dimensions (0.42, 0.39), mounting hole dimensions (14.35±0.15, 7.05±0.20, 6.50), and pin diameter (0.15). The feature callouts are: $\oplus \varnothing 0.20 X Y Z$, $\oplus \varnothing 0.30 M Y Z$, $\oplus \varnothing 0.15 M X Y Z$, and $\oplus \varnothing 0.20 X Y Z$. The connector is labeled 73644-**** WW/YY. The dimensions are in millimeters.

Y

(B)

2.00

0.92

Z

(10.00)

5X2.00

A±0.10

$\oplus \varnothing 0.20 X Y Z$

0.42

0.39

2.00

M±0.25

14.35±0.15

7.05±0.20

6.50

X

(0.43)

(15.7)

$\oplus \varnothing 0.15 M X Y Z$

$\oplus \varnothing 0.30 M Y Z$

73644-****
WW/YY

(0.40)

SEE NOTE 8

A					I	REVISED ECR UDT2000-0348 BINGHAM 99/10/12	DIMENSIONS SHOWN (IMPERIAL) INCH UNLESS OTHERWISE SPECIFIED TOLERANCES: ANGULAR ± 1/2°		▽ = 0 ▼ = 0 REVISE ONLY ON CAD SYSTEM													
					H	REVISED ECR UDT1999-0662 BINGHAM 99/05/18	<table border="1"> <thead> <tr> <th></th> <th>INCH</th> <th>METRIC</th> </tr> </thead> <tbody> <tr> <td>3 PLACE</td> <td>± N/A</td> <td>---</td> </tr> <tr> <td>2 PLACE</td> <td>± N/A</td> <td>± 0.05</td> </tr> <tr> <td>1 PLACE</td> <td>---</td> <td>± 0.10</td> </tr> </tbody> </table>			INCH	METRIC	3 PLACE	± N/A	---	2 PLACE	± N/A	± 0.05	1 PLACE	---	± 0.10	TITLE SALES ASSY, HDM BACKPLANE MODULE, POLAR/GUIDE OPTION	
		INCH	METRIC																			
	3 PLACE	± N/A	---																			
	2 PLACE	± N/A	± 0.05																			
1 PLACE	---	± 0.10																				
J	REVISED ECR UCP2003-2260 THOMAS 03/04/25		G	REVISED ECR UDT1999-0476 BINGHAM 98/12/21		 MOLEX INCORPORATED LITTLE, ILL. 60532 U.S.A.		SHEET NO. 1 OF 2	DATE 96/12/18													
LTR.	REVISIONS		LTR.	REVISIONS		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS DRWG. BY JRR CHK'D. SMR APP'D. CAB SCALE 2 : 1		PART NO. SEE CHART DRWG. NO. SDA-73644-***** FILE NAME S73644X1 DGN THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INC. AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION.		DIV. DA	SIZE B											
10		9	8	7	6	5	4	3	2	1												

	2	D
	1	J
MFG.	SH.	REV.

10		9	8	7	6		7364
F	MATERIAL NUMBER	NUMBER OF SIGNAL CONTACTS	PLATING		DIM "A"	DIM "B"	DIM "M"
	73644-00**	72	SELECTIVE GOLD/GOLD FLASH		31.60	22.00	5.00
	73644-01**	72	SELECTIVE GOLD/GOLD FLASH		31.60	22.00	5.50
	73644-02**	72	SELECTIVE GOLD/GOLD FLASH		31.60	22.00	6.00
	73644-10**	144	SELECTIVE GOLD/GOLD FLASH		55.60	46.00	5.00
	73644-11**	144	SELECTIVE GOLD/GOLD FLASH		55.60	46.00	5.50
	73644-12**	144	SELECTIVE GOLD/GOLD FLASH		55.60	46.00	6.00
E	73644-20**	72	SELECTIVE GOLD/SELECTIVE TIN-LEAD		31.60	22.00	5.00
	73644-21**	72	SELECTIVE GOLD/SELECTIVE TIN-LEAD		31.60	22.00	5.50
	73644-22**	72	SELECTIVE GOLD/SELECTIVE TIN-LEAD		31.60	22.00	6.00
	73644-30**	144	SELECTIVE GOLD/SELECTIVE TIN-LEAD		55.60	46.00	5.00
	73644-31**	144	SELECTIVE GOLD/SELECTIVE TIN-LEAD		55.60	46.00	5.50
	73644-32**	144	SELECTIVE GOLD/SELECTIVE TIN-LEAD		55.60	46.00	6.00

MATERIAL NUMBER ASSIGNMENT


73644- * * * *

0 = 72-CIRCUIT, GOLD/GOLD FLASH
1 = 144-CIRCUIT, GOLD/GOLD FLASH
2 = 72-CIRCUIT, GOLD/TIN-LEAD
3 = 144-CIRCUIT, GOLD/TIN-LEAD

```
0 = 5.00 MATING LENGTH
1 = 5.50 MATING LENGTH
2 = 6.00 MATING LENGTH
```



REF. MATERIAL NUMBER 73644-0009
GUIDE PIN IS IN LOCATION A
POLARIZING KEY IS IN LOCATION B. POSITION F

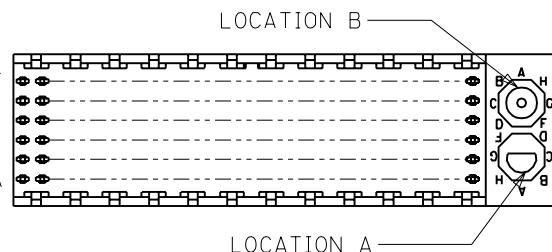

REF. MATERIAL NUMBER 73644-0008
GUIDE PIN IS IN LOCATION B
POLARIZING KEY IS IN LOCATION A, POSITION E

NUMBER	GUIDE POST LOCATION	POLAR KEY POSITION
00	B	A
01	A	
02	B	B
03	A	
04	B	C
05	A	
06	B	D
07	A	
08	B	E
09	A	
10	B	F
11	A	
12	B	G
13	A	
14	B	H
15	A	
16	B	N/A
17	A	
18	N/A	

[illegible]



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.