
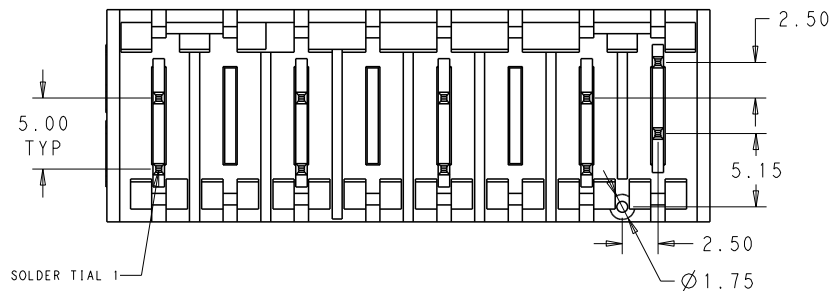
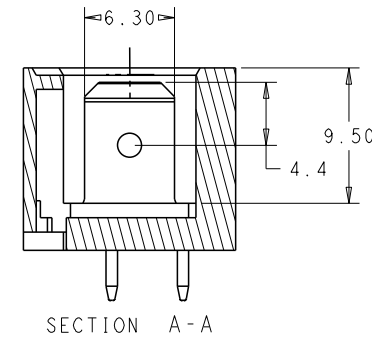
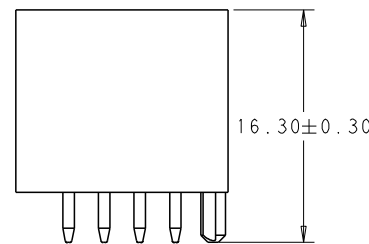
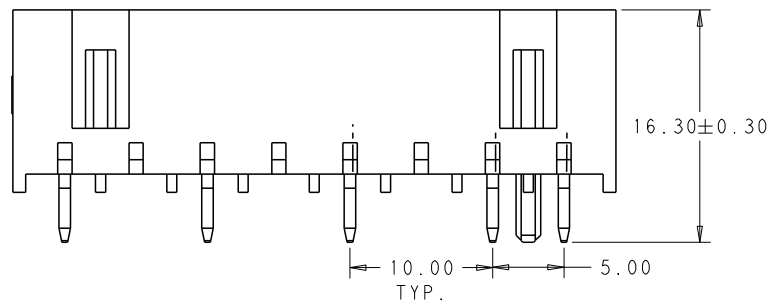



LOC		DIST		REVISIONS			
P	LYR	DESCRIPTION	DATE	DWN	APVD		
A13		ECR-17-008597	15JUN2017	WKD	RR		
A14		ECR-17-017719	12DEC2017	LZ	RR		

- HOUSING HAS RAST 5 COMPLIANT KEYING LATCHING, AND POLARIZATION, TAB IS 6.30 x 0.8mm ACCORDING TO DIN 46224;
 - MATERIAL: HOUSING NYLON, UL94 V0, 750 °C GWT NO FLAME;
 - FINISH: CONTACTS, TIN PLATING OVERALL , NICKEL UNDER-PLATING;
 - PACKING: LOOSE PIECE OR TUBE. THE PART NUMBER IN THIS DRAWING ARE WITH LOOSE PIECE PACKING. PLEASE CONTACT TE SALES REPRESENTATIVES FOR TUBE PACKING REQUIREMENT.
- 5 PRELIMINARY, NOT FOR PRODUCTION.
- 6 MATERIAL: HOUSING PA66,UL94 V0
PRODUCT COMPLY WITH GLOW WIRE REQUIREMENTS FOR PARTS OF NON-METALLIC MATERIAL SUPPORTING A CURRENT-CARRYING CONNECTION DETAILED IN IEC 60335-1, SECTION 30 (GWT).
- 7 FINISH:CONTACT, SILVER PLATING OVERALL, NICKEL UNDER-PLATING.
- 8 SPECIAL VERSION: SHORT PEG DESIGN, DETAIL IN SHEET 3

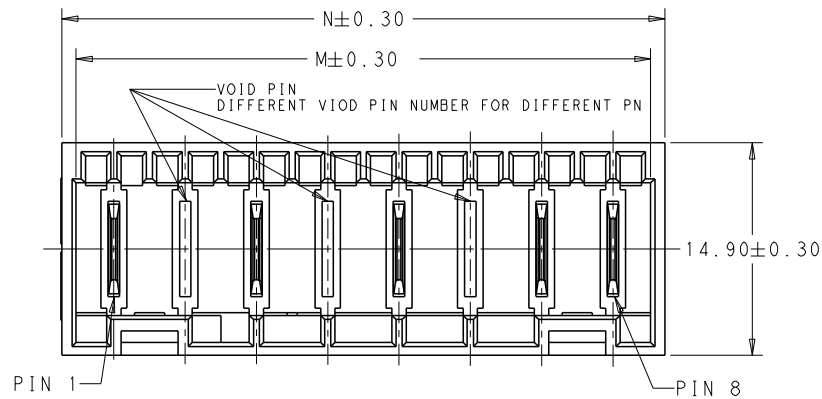

42.30	40.30	8
37.30	35.30	7
32.30	30.30	6
27.30	25.30	5
22.30	20.30	4
17.30	15.30	3
12.30	10.30	2
N	M	NO.OF POS.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	APRT62013	TE TE Connectivity	
		CHK	APRT62013		
		F M	APRT62013		
		APVD	APRT62013		
DIMENSIONS:		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME	
mm		0 PLC ±0.5		PRODUCT SPEC	
		1 PLC ±0.25		108-106080	
		2 PLC ±0.13		APPLICATION SPEC	
		3 PLC ±0.0001		-	
		4 PLC ±0.0001		WEIGHT	
		ANGLES FINISH		-	
MATERIAL		-		CUSTOMER DRAWING	
				SCALE 4:1 SHEET 1 OF 3 REV A14	

4

3


2

1


THIS DRAWING IS UNPUBLISHED.
 RELEASED FOR PUBLICATION
 20

© COPYRIGHT 20 BY - ALL RIGHT REVERSED
 ALL RIGHTS RESERVED.



LOC	DIST	REVISIONS			
P	LYR	DESCRIPTION	DATE	DWN	APVD
-	-	SEE SHEET 1	-	-	-




3-2232511-3 $\triangle \triangle$




2232511-5
 1-2232511-5 $\triangle$
 2328608-5 $\triangle \triangle$




2232511-3
 1-2232511-3 $\triangle$
 2328608-3 $\triangle \triangle$



2232511-4




1-2232511-4



2-2232511-5 $\triangle$



2232511-6



2232511-8

2-2232511-3 $\triangle$

3 POS.

4 POS.


4 POS.

5 POS.




VOID PIN
 2232511-5
 1-2232511-5

6 POS.




8 POS.




VOID PIN




PCB LAYOUT SKETCH
 SOLDER SIDE




2232511-7
 1-2232511-7 $\triangle$
 2328608-7 $\triangle \triangle$



2-2232511-7 $\triangle$




3-2232511-7



PCB LAYOUT SKETCH
 SOLDER SIDE

7 POS.

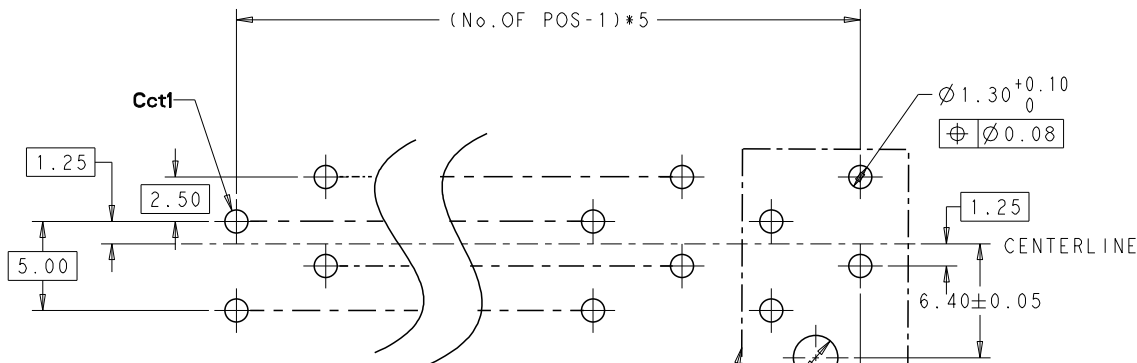

THE POSITION OF THE 4 PIN TAIL HOLE AND POST ARE FIXED

Ø 2.50 ± 0.05
 HOLE FOR POLARIZING PEG

RECOMMEND PCB LAYOUT - SOLDER SIDE
 PCB 1.5 ± 0.2 THICK

NATURE

COLOR NO. OF POS.

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN B.P. APR162013

CHK - 24SEP2013

APVD - 24SEP2013

PRODUCT SPEC


APPLICATION SPEC

WEIGHT

CUSTOMER DRAWING

SCALE 4:1 SHEET 2 OF 3 REV A14

8	2232511-8
7	3-2232511-7
7	2-2232511-7 $\triangle$
7	1-2232511-7 $\triangle$
7	2232511-7 $\triangle$
6	2232511-6
5	2-2232511-5 $\triangle$
5	1-2232511-5 $\triangle$
5	2232511-5 $\triangle$
4	1-2232511-4 $\triangle$
4	2232511-4 $\triangle$
3	3-2232511-3 $\triangle \triangle$
3	2-2232511-3 $\triangle$
3	1-2232511-3 $\triangle$
3	2232511-3 $\triangle$

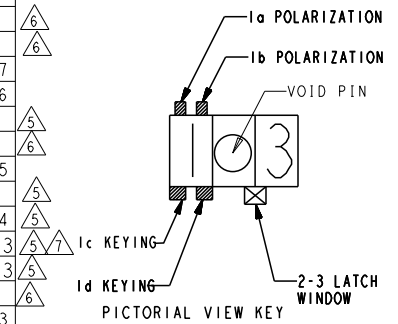

TE TE Connectivity


RAST 5 TAB HEADER ASSY
 DIN STYLE, TH, VERTICAL

SIZE CAGE CODE DRAWING NO
 A200779C=2232511


RESTRICTED TO

LOC		DIST		REVISIONS			
P	LYR	DESCRIPTION	DATE	DWN	APVD		
-	-	SEE SHEET 1	-	-	-		

△ 8 SPECIAL VERSION: SHORT PEG DESIGN

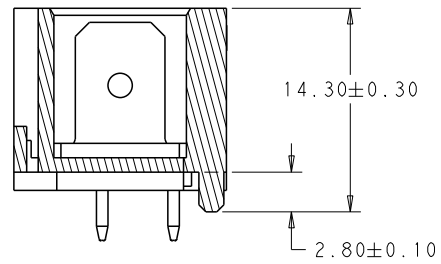

SECTION C-C

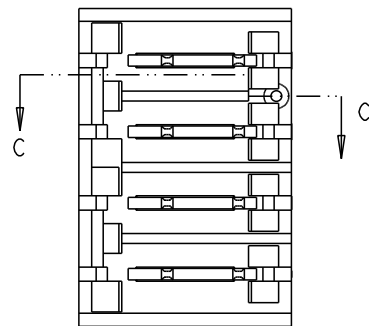

OTHER DIMENSIONS SEE SHEET 1
KEYING SEE SHEET 2

NATURE	7	2328608-7	△ 5
	5	2328608-5	△ 5
	3	2328608-3	△ 5
COLOR	NO. OF POS.	△ 8 PART NUMBER	

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN B.P.	APRT62013	 TE Connectivity	
DIMENSIONS:		CHK F.M.	APRT62013		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD -	APRT62013	NAME	
0 PLC ±.5		PRODUCT SPEC		RAST 5 TAB HEADER ASSY DIN STYLE, TH, VERTICAL	
1 PLC ±0.5		108-106080			
2 PLC ±0.25		APPLICATION SPEC		SIZE	
3 PLC ±0.013		-		CAGE CODE	
4 PLC ±0.0001		WEIGHT		DRAWING NO	
ANGLES		-		A200779C=2232511	
FINISH		CUSTOMER DRAWING		RESTRICTED TO	
-		SCALE 4:1		SHEET 3 OF 3	
-		REV A14			



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.