

## Microprocessor Supervisory Circuit with Manual Reset

NO.EA-170-151222

### OUTLINE

The R5107G is a microprocessor supervisory circuit and has high accuracy and ultra low supply current voltage detector with built-in delay circuit and watchdog timer. When the supply voltage is down across the threshold, or the watchdog timer does not detect the system clock from the microprocessor, the reset output is generated. The voltage detector circuit is used for the system reset, etc. The detector threshold is fixed internally, and the accuracy is  $\pm 1.0\%$ . The released delay time (Power-on Reset Delay) circuit is built-in, and output delay time is adjustable with an external capacitor, and the accuracy is  $\pm 16\%$ <sup>(1)</sup>. When the supply voltage becomes higher than the released voltage, the reset state will be maintained during the delay time. The output type of the reset is selectable, Nch open-drain, or CMOS.

The time out period of the watchdog timer can be also set with an external capacitor, and the accuracy is  $\pm 33\%$ <sup>(1)</sup>.

The function to stop supervising clock by the watchdog timer (INH function) and manual reset function are built in this IC. There are another 4 products by the difference of packages and the function of voltage detector and watchdog timer. The package of R5107G is SSOP-8G.

### FEATURES

- Operating Voltage Range (Maximum Rating) ..... 0.9V to 6.0V (7.0V)
- Supply Current ..... Typ. 11 $\mu$ A

#### < Voltage Detector Part >

- Detector Threshold Range ..... 1.5V to 5.5V (0.1V steps)
- Detector Threshold Accuracy .....  $\pm 1.0\%$
- Power-on Reset Delay Time accuracy .....  $\pm 16\%$ <sup>(1)</sup> ( $-40^{\circ}\text{C} \leq T_a \leq 105^{\circ}\text{C}$ )
- Power-on reset delay time of the voltage detector ..... Typ. 370ms with an external capacitor : 0.1 $\mu$ F
- With Manual Reset pin (MR) ..... Able to reset voltage detector and watchdog timer

#### < Watchdog Timer Part >

- Built-in a watchdog timer's time out period accuracy .....  $\pm 33\%$ <sup>(1)</sup> ( $-40^{\circ}\text{C} \leq T_a \leq 105^{\circ}\text{C}$ )
- Timeout period for watchdog timer ..... Typ. 310ms with an external capacitor : 0.1 $\mu$ F
- Reset timer for watchdog timer ..... Typ. 34ms with an external capacitor : 0.1 $\mu$ F
- With Inhibit pin (INH) ..... Able to stop watchdog timer
- Package ..... SSOP-8G

### APPLICATIONS

- Supervisory circuit for equipment with using microprocessors.

<sup>(1)</sup> Accuracy to center value of (Min.+Max.)/2

---

**R5107G**

---

NO.EA-170-151222

**SELECTION GUIDE**

The detector threshold, the output type and the taping type for the ICs can be selected at the users' request. The selection can be made with designating the part number as shown below;

| Product Name     | Package | Quantity per Reel | Pb Free | Halogen Free |
|------------------|---------|-------------------|---------|--------------|
| R5107Gxx1*-TR-FE | SSOP-8G | 3,000 pcs         | Yes     | Yes          |

xx: The detector threshold ( $-V_{DET}$ ) can be designated in the range from 1.5V(15) to 5.5V(55) in 0.1V steps.

\* : Designation of Output Type  
(A) Nch Open Drain  
(C) CMOS


---

**Series Selection**


|                            | R5105N   | R5106N                                                        | R5107G  | R5108G                               | R5109G                |
|----------------------------|----------|---------------------------------------------------------------|---------|--------------------------------------|-----------------------|
| Package                    | SOT-23-6 |                                                               | SSOP-8G |                                      |                       |
| With INH pin (Inhibit)     | No       | Yes                                                           |         |                                      |                       |
| 2 clock input              | No       |                                                               |         |                                      | Yes                   |
| With MR pin (Manual Reset) | No       |                                                               | Yes     | No                                   |                       |
| With SENSE pin             | No       |                                                               |         | Yes                                  | No                    |
| Remarks                    |          | C <sub>D</sub> pin and C <sub>TW</sub> pin are combined uses. |         | Operating Voltage Range 1.5V to 6.0V | Supply Current 11.5μA |

## BLOCK DIAGRAMS

**R5107Gxx1A**  
(Nch Open Drain Output)

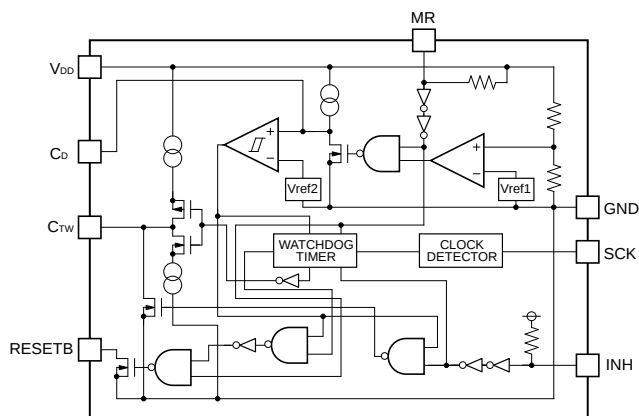


**R5107Gxx1C**  
(CMOS Output)

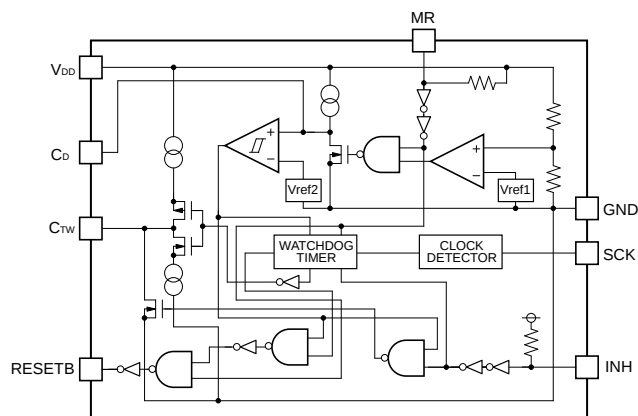

## PIN DESCRIPTIONS

### • SSOP-8G



| Pin No. | Symbol          | Description                                                                                                                                   |
|---------|-----------------|-----------------------------------------------------------------------------------------------------------------------------------------------|
| 1       | RESETB          | Output Pin for Reset signal of Watchdog timer and Voltage Detector.<br>(Output "L" at detecting Detector Threshold and Watchdog Timer Reset.) |
| 2       | MR              | Manual Reset Pin (Active"L")                                                                                                                  |
| 3       | C <sub>D</sub>  | External Capacitor Pin for Setting Delay Time of Voltage Detector                                                                             |
| 4       | GND             | Ground Pin                                                                                                                                    |
| 5       | SCK             | Clock Input Pin from Microprocessor                                                                                                           |
| 6       | INH             | Inhibit Pin ("L": Inhibit the watchdog timer)                                                                                                 |
| 7       | C <sub>Tw</sub> | External Capacitor Pin for Setting Reset and Watchdog Timeout Periods                                                                         |
| 8       | V <sub>DD</sub> | Power supply Pin                                                                                                                              |

**ABSOLUTE MAXIMUM RATINGS**

(Ta=25°C)

| Symbol              | Item                                       |                                | Rating                        | Unit |
|---------------------|--------------------------------------------|--------------------------------|-------------------------------|------|
| V <sub>DD</sub>     | Supply Voltage                             |                                | −0.3 to 7.0                   | V    |
| V <sub>CD</sub>     | Output Voltage                             | Voltage of C <sub>D</sub> Pin  | −0.3 to V <sub>DD</sub> + 0.3 | V    |
| V <sub>CTW</sub>    |                                            | Voltage of C <sub>TW</sub> Pin | −0.3 to V <sub>DD</sub> + 0.3 | V    |
| V <sub>RESETB</sub> |                                            | Voltage of RESETB Pin          | −0.3 to 7.0                   | V    |
| V <sub>SCK</sub>    | Input Voltage                              | Voltage of SCK Pin             | −0.3 to 7.0                   | V    |
| V <sub>INH</sub>    |                                            | Voltage of INH Pin             | −0.3 to 7.0                   | V    |
| V <sub>MR</sub>     |                                            | Voltage of MR Pin              | −0.3 to 7.0                   | V    |
| I <sub>RESETB</sub> | Output Current                             | Current of RESETB Pin          | 20                            | mA   |
| P <sub>D</sub>      | Power Dissipation <sup>(1)</sup> (SSOP-8G) |                                | 380                           | mW   |
| T <sub>j</sub>      | Junction Temperature                       |                                | −40 to 125                    | °C   |
| T <sub>stg</sub>    | Storage Temperature Range                  |                                | −55 to 125                    | °C   |

**ABSOLUTE MAXIMUM RATINGS**

Electronic and mechanical stress momentarily exceeded absolute maximum ratings may cause the permanent damages and may degrade the life time and safety for both device and system using the device in the field. The functional operation at or over these absolute maximum ratings are not assured.

**RECOMMENDED OPERATING CONDITIONS**

| Symbol          | Item                        | Ratings    | Unit |
|-----------------|-----------------------------|------------|------|
| V <sub>IN</sub> | Input Voltage               | 0.9 to 6.0 | V    |
| Ta              | Operating Temperature Range | −40 to 105 | °C   |

**RECOMMENDED OPERATING CONDITIONS**

All of electronic equipment should be designed that the mounted semiconductor devices operate within the recommended operating conditions. The semiconductor devices cannot operate normally over the recommended operating conditions, even if when they are used over such ratings by momentary electronic noise or surge. And the semiconductor devices may receive serious damage when they continue to operate over the recommended operating conditions.

<sup>(1)</sup> Refer to *POWER DISSIPATION* for detailed information.

## ELECTRICAL CHARACTERISTICS

VDD=6.0V, CTW=0.1μF, CD=0.1μF, In case of Nch Open Drain Output type, the output pin is pulled up with a resistance of 100kΩ (R5107Gxx1A), unless otherwise noted.

The specification in    is checked and guaranteed by design engineering at  $-40^{\circ}\text{C} \leq T_a \leq 105^{\circ}\text{C}$ .

### • R5107Gxx1A/C

(Ta=25°C)

| Symbol          | Item           | Conditions                                                     | Min. | Typ. | Max.                                                             | Unit |
|-----------------|----------------|----------------------------------------------------------------|------|------|------------------------------------------------------------------|------|
| I <sub>SS</sub> | Supply Current | V <sub>DD</sub> =-V <sub>DET</sub> +0.5V,<br>Clock pulse input |      | 11   | <span style="border: 1px solid black; padding: 0 2px;">15</span> | μA   |

### • VD Part

| Symbol                     | Item                                          | Conditions                                                      | Min.                                                                                     | Typ.                       | Max.                                                                                     | Unit   |
|----------------------------|-----------------------------------------------|-----------------------------------------------------------------|------------------------------------------------------------------------------------------|----------------------------|------------------------------------------------------------------------------------------|--------|
| -V <sub>DET</sub>          | Detector Threshold                            | Ta=25°C                                                         | ×0.990                                                                                   |                            | ×1.010                                                                                   | V      |
|                            |                                               | -40°C ≤ Ta ≤ 105°C                                              | <span style="border: 1px solid black; padding: 0 2px;">×0.972</span>                     |                            | <span style="border: 1px solid black; padding: 0 2px;">×1.015</span>                     |        |
| ΔV <sub>DET</sub> /<br>ΔTa | Detector Threshold<br>Temperature Coefficient | -40°C ≤ Ta ≤ 105°C                                              |                                                                                          | ±100                       |                                                                                          | ppm/°C |
| V <sub>HYS</sub>           | Detector Threshold Hysteresis                 |                                                                 | <span style="border: 1px solid black; padding: 0 2px;">-V<sub>DET</sub><br/>×0.03</span> | -V <sub>DET</sub><br>×0.05 | <span style="border: 1px solid black; padding: 0 2px;">-V<sub>DET</sub><br/>×0.07</span> | V      |
| t <sub>PLH</sub>           | Output Delay Time                             | C <sub>D</sub> =0.1μF <sup>(1)</sup>                            | <span style="border: 1px solid black; padding: 0 2px;">340</span>                        | 370                        | <span style="border: 1px solid black; padding: 0 2px;">467</span>                        | ms     |
| I <sub>RESETB</sub>        | Output Current<br>(RESETB Output pin)         | Nch V <sub>DD</sub> =1.2V, V <sub>DS</sub> =0.1V                | <span style="border: 1px solid black; padding: 0 2px;">0.38</span>                       | 0.8                        |                                                                                          | mA     |
|                            |                                               | Pch <sup>(2)</sup> V <sub>DD</sub> =6.0V, V <sub>DS</sub> =0.5V | <span style="border: 1px solid black; padding: 0 2px;">0.65</span>                       | 0.9                        |                                                                                          | mA     |
| V <sub>MRH</sub>           | MR Input "H" <sup>(3)</sup>                   |                                                                 | <span style="border: 1px solid black; padding: 0 2px;">1.0</span>                        |                            | <span style="border: 1px solid black; padding: 0 2px;">6.0</span>                        | V      |
| V <sub>MRL</sub>           | MR Input "L"                                  |                                                                 | <span style="border: 1px solid black; padding: 0 2px;">0</span>                          |                            | <span style="border: 1px solid black; padding: 0 2px;">0.35</span>                       | V      |
| t <sub>MRW</sub>           | MR Input Pulse Width <sup>(4)</sup>           |                                                                 | <span style="border: 1px solid black; padding: 0 2px;">3</span>                          |                            |                                                                                          | μs     |
| R <sub>MR</sub>            | MR Pull-up Resistance                         |                                                                 | <span style="border: 1px solid black; padding: 0 2px;">60</span>                         | 110                        | <span style="border: 1px solid black; padding: 0 2px;">164</span>                        | kΩ     |

### • WDT Part

| Symbol            | Item                    | Conditions                                                                       | Min.                                                                             | Typ. | Max.                                                                             | Unit |
|-------------------|-------------------------|----------------------------------------------------------------------------------|----------------------------------------------------------------------------------|------|----------------------------------------------------------------------------------|------|
| t <sub>WD</sub>   | Watchdog Timeout period | C <sub>TW</sub> =0.1μF <sup>(1)</sup>                                            | <span style="border: 1px solid black; padding: 0 2px;">230</span>                | 310  | <span style="border: 1px solid black; padding: 0 2px;">450</span>                | ms   |
| t <sub>WR</sub>   | Reset Hold Time of WDT  | C <sub>TW</sub> =0.1μF <sup>(1)</sup>                                            | <span style="border: 1px solid black; padding: 0 2px;">29</span>                 | 34   | <span style="border: 1px solid black; padding: 0 2px;">48</span>                 | ms   |
| V <sub>SCKH</sub> | SCK Input "H"           |                                                                                  | <span style="border: 1px solid black; padding: 0 2px;">V<sub>DD</sub>×0.8</span> |      | <span style="border: 1px solid black; padding: 0 2px;">6.0</span>                | V    |
| V <sub>SCKL</sub> | SCK Input "L"           |                                                                                  | <span style="border: 1px solid black; padding: 0 2px;">0</span>                  |      | <span style="border: 1px solid black; padding: 0 2px;">V<sub>DD</sub>×0.2</span> | V    |
| V <sub>INH</sub>  | INH Input "H"           |                                                                                  | <span style="border: 1px solid black; padding: 0 2px;">1.0</span>                |      | <span style="border: 1px solid black; padding: 0 2px;">6.0</span>                | V    |
| V <sub>INHL</sub> | INH Input "L"           |                                                                                  | <span style="border: 1px solid black; padding: 0 2px;">0</span>                  |      | <span style="border: 1px solid black; padding: 0 2px;">0.35</span>               | V    |
| R <sub>INH</sub>  | INH pull-up Resistance  |                                                                                  | <span style="border: 1px solid black; padding: 0 2px;">64</span>                 | 110  | <span style="border: 1px solid black; padding: 0 2px;">152</span>                | kΩ   |
| t <sub>SCKW</sub> | SCK Input Pulse Width   | V <sub>SCKL</sub> =V <sub>DD</sub> ×0.2, V <sub>SCKH</sub> =V <sub>DD</sub> ×0.8 | <span style="border: 1px solid black; padding: 0 2px;">500</span>                |      |                                                                                  | ns   |

All test items listed under *Electrical Characteristics* are done under the pulse load condition (T<sub>j</sub> ≈ T<sub>a</sub> = 25°C) except for Detector Threshold Temperature Coefficient and MR Input Pulse Width.

<sup>(1)</sup> The specification does not contain the temperature characteristics of the external capacitor.

<sup>(2)</sup> In case of CMOS type (R5107Gxx1C)

<sup>(3)</sup> In case of CMOS type (R5107Gxx1C)

<sup>(4)</sup> MR input pulse width specification guarantee the minimum input pulse width of MR pin for output "L" from RESETB pin. If the "L" pulse width of MR is short, t<sub>PLH</sub> may be short. Refer to the timing diagram for details.

## R5107G


NO.EA-170-151222

### Product-specific Electrical Characteristics

| Product Name | -V <sub>DET</sub> |       |       |                     |       |        | V <sub>HYS</sub> |       |       |
|--------------|-------------------|-------|-------|---------------------|-------|--------|------------------|-------|-------|
|              | Ta = 25°C         |       |       | -40°C ≤ Ta ≤ 105 °C |       |        |                  |       |       |
|              | Min.              | Typ.  | Max.  | Min.                | Typ.  | Max.   | Max.             | Typ.  | Max.  |
| R5107G151x   | 1.485             | 1.500 | 1.515 | 1.4580              | 1.500 | 1.5225 | 0.045            | 0.075 | 0.105 |
| R5107G161x   | 1.584             | 1.600 | 1.616 | 1.5552              | 1.600 | 1.6240 | 0.048            | 0.080 | 0.112 |
| R5107G171x   | 1.683             | 1.700 | 1.717 | 1.6524              | 1.700 | 1.7255 | 0.051            | 0.085 | 0.119 |
| R5107G181x   | 1.782             | 1.800 | 1.818 | 1.7496              | 1.800 | 1.8270 | 0.054            | 0.090 | 0.126 |
| R5107G191x   | 1.881             | 1.900 | 1.919 | 1.8468              | 1.900 | 1.9285 | 0.057            | 0.095 | 0.133 |
| R5107G201x   | 1.980             | 2.000 | 2.020 | 1.9440              | 2.000 | 2.0300 | 0.060            | 0.100 | 0.140 |
| R5107G211x   | 2.079             | 2.100 | 2.121 | 2.0412              | 2.100 | 2.1315 | 0.063            | 0.105 | 0.147 |
| R5107G221x   | 2.178             | 2.200 | 2.222 | 2.1384              | 2.200 | 2.2330 | 0.066            | 0.110 | 0.154 |
| R5107G231x   | 2.277             | 2.300 | 2.323 | 2.2356              | 2.300 | 2.3345 | 0.069            | 0.115 | 0.161 |
| R5107G241x   | 2.376             | 2.400 | 2.424 | 2.3328              | 2.400 | 2.4360 | 0.072            | 0.120 | 0.168 |
| R5107G251x   | 2.475             | 2.500 | 2.525 | 2.4300              | 2.500 | 2.5375 | 0.075            | 0.125 | 0.175 |
| R5107G261x   | 2.574             | 2.600 | 2.626 | 2.5272              | 2.600 | 2.6390 | 0.078            | 0.130 | 0.182 |
| R5107G271x   | 2.673             | 2.700 | 2.727 | 2.6244              | 2.700 | 2.7405 | 0.081            | 0.135 | 0.189 |
| R5107G281x   | 2.772             | 2.800 | 2.828 | 2.7216              | 2.800 | 2.8420 | 0.084            | 0.140 | 0.196 |
| R5107G291x   | 2.871             | 2.900 | 2.929 | 2.8188              | 2.900 | 2.9435 | 0.087            | 0.145 | 0.203 |
| R5107G301x   | 2.970             | 3.000 | 3.030 | 2.9160              | 3.000 | 3.0450 | 0.090            | 0.150 | 0.210 |
| R5107G311x   | 3.069             | 3.100 | 3.131 | 3.0132              | 3.100 | 3.1465 | 0.093            | 0.155 | 0.217 |
| R5107G321x   | 3.168             | 3.200 | 3.232 | 3.1104              | 3.200 | 3.2480 | 0.096            | 0.160 | 0.224 |
| R5107G331x   | 3.267             | 3.300 | 3.333 | 3.2076              | 3.300 | 3.3495 | 0.099            | 0.165 | 0.231 |
| R5107G341x   | 3.366             | 3.400 | 3.434 | 3.3048              | 3.400 | 3.4510 | 0.102            | 0.170 | 0.238 |
| R5107G351x   | 3.465             | 3.500 | 3.535 | 3.4020              | 3.500 | 3.5525 | 0.105            | 0.175 | 0.245 |
| R5107G361x   | 3.564             | 3.600 | 3.636 | 3.4992              | 3.600 | 3.6540 | 0.108            | 0.180 | 0.252 |
| R5107G371x   | 3.663             | 3.700 | 3.737 | 3.5964              | 3.700 | 3.7555 | 0.111            | 0.185 | 0.259 |
| R5107G381x   | 3.762             | 3.800 | 3.838 | 3.6936              | 3.800 | 3.8570 | 0.114            | 0.190 | 0.266 |
| R5107G391x   | 3.861             | 3.900 | 3.939 | 3.7908              | 3.900 | 3.9585 | 0.117            | 0.195 | 0.273 |
| R5107G401x   | 3.960             | 4.000 | 4.040 | 3.8880              | 4.000 | 4.0600 | 0.120            | 0.200 | 0.280 |
| R5107G411x   | 4.059             | 4.100 | 4.141 | 3.9852              | 4.100 | 4.1615 | 0.123            | 0.205 | 0.287 |
| R5107G421x   | 4.158             | 4.200 | 4.242 | 4.0824              | 4.200 | 4.2630 | 0.126            | 0.210 | 0.294 |
| R5107G431x   | 4.257             | 4.300 | 4.343 | 4.1796              | 4.300 | 4.3645 | 0.129            | 0.215 | 0.301 |
| R5107G441x   | 4.356             | 4.400 | 4.444 | 4.2768              | 4.400 | 4.4660 | 0.132            | 0.220 | 0.308 |
| R5107G451x   | 4.455             | 4.500 | 4.545 | 4.3740              | 4.500 | 4.5675 | 0.135            | 0.225 | 0.315 |
| R5107G461x   | 4.554             | 4.600 | 4.646 | 4.4712              | 4.600 | 4.6690 | 0.138            | 0.230 | 0.322 |
| R5107G471x   | 4.653             | 4.700 | 4.747 | 4.5684              | 4.700 | 4.7705 | 0.141            | 0.235 | 0.329 |
| R5107G481x   | 4.752             | 4.800 | 4.848 | 4.6656              | 4.800 | 4.8720 | 0.144            | 0.240 | 0.336 |
| R5107G491x   | 4.851             | 4.900 | 4.949 | 4.7628              | 4.900 | 4.9735 | 0.147            | 0.245 | 0.343 |
| R5107G501x   | 4.950             | 5.000 | 5.050 | 4.8600              | 5.000 | 5.0750 | 0.150            | 0.250 | 0.350 |
| R5107G511x   | 5.049             | 5.100 | 5.151 | 4.9572              | 5.100 | 5.1765 | 0.153            | 0.255 | 0.357 |
| R5107G521x   | 5.148             | 5.200 | 5.252 | 5.0544              | 5.200 | 5.2780 | 0.156            | 0.260 | 0.364 |
| R5107G531x   | 5.247             | 5.300 | 5.353 | 5.1516              | 5.300 | 5.3795 | 0.159            | 0.265 | 0.371 |
| R5107G541x   | 5.346             | 5.400 | 5.454 | 5.2488              | 5.400 | 5.4810 | 0.162            | 0.270 | 0.378 |
| R5107G551x   | 5.445             | 5.500 | 5.555 | 5.3460              | 5.500 | 5.5825 | 0.165            | 0.275 | 0.385 |

## THEORY OF OPERATION

## TIMING CHART

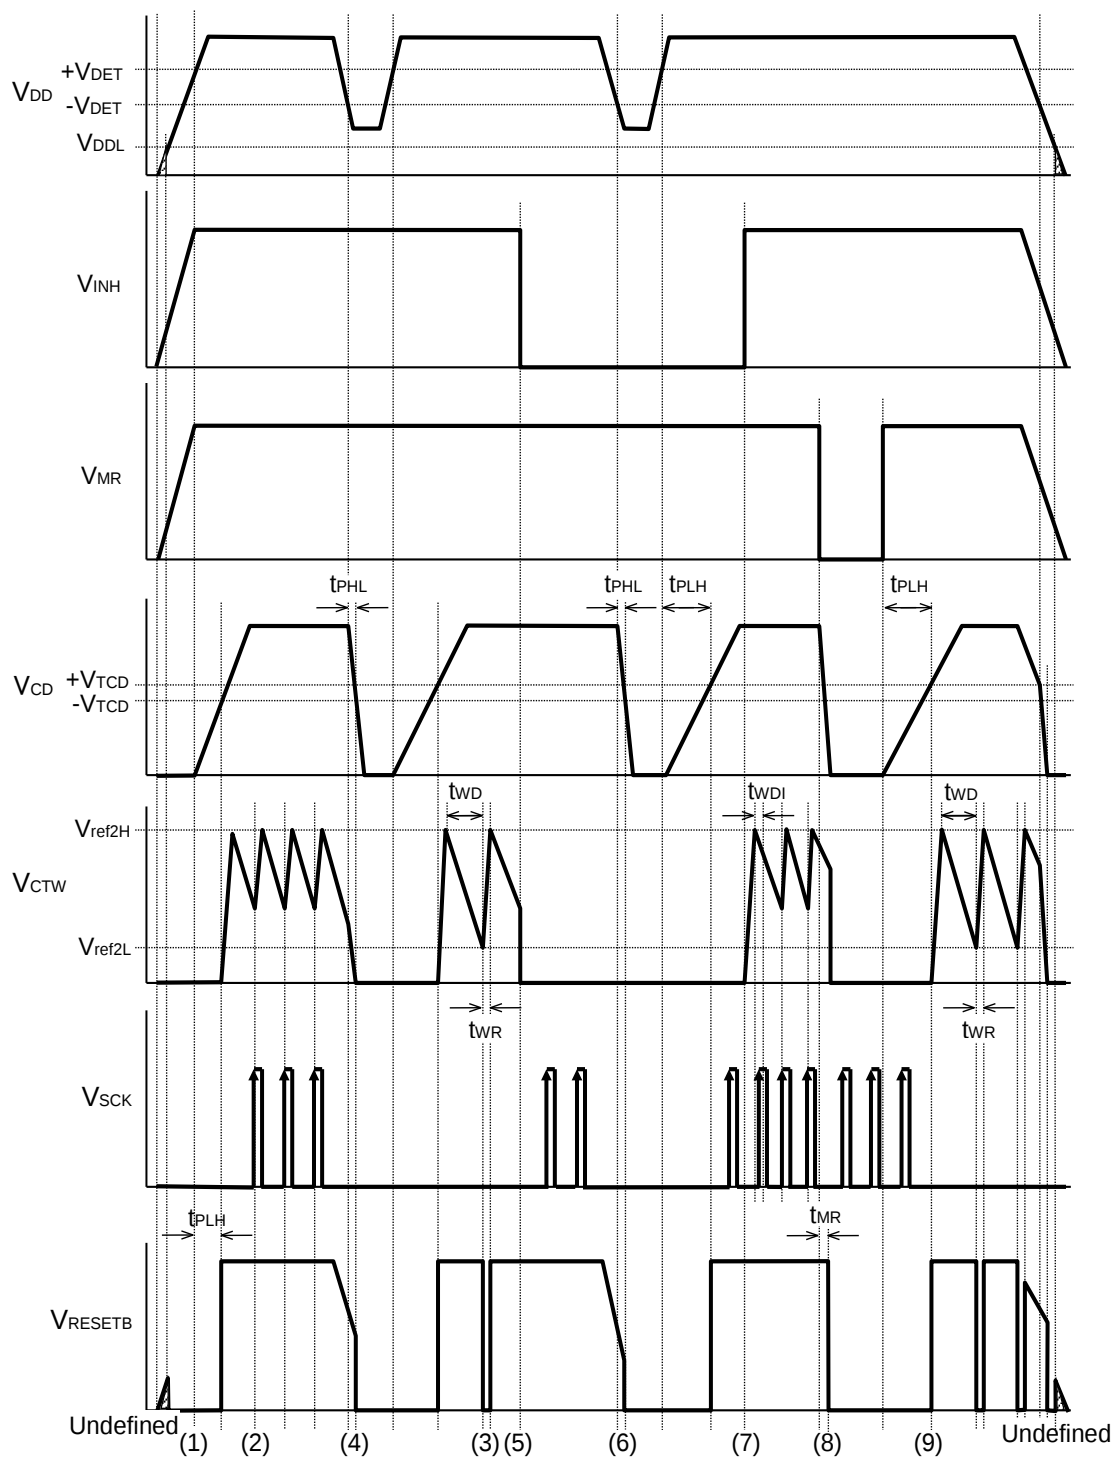

\*)  $V_{TCD}$  : Threshold voltage of  $C_D$  pin when a power-on reset pulse inverting.

\*)  $V_{ref2H}$  :  $C_{TW}$  pin voltage at the end of WDT timeout period.

\*)  $V_{ref2L}$  :  $C_{TW}$  pin voltage at the begin of WDT timeout period.

**Operating Description**

- (1) When the power supply,  $V_{DD}$  pin voltage becomes more than the released voltage ( $+V_{DET}$ ), after the released delay time (or the power on reset time  $t_{PLH}$ ), the output of RESETB becomes "H" level.
- (2) When the SCK pulse is input, the watchdog timer is cleared, and  $C_{TW}$  pin mode changes from the discharge mode to the charge mode. When the  $C_{TW}$  pin voltage becomes higher than  $V_{ref2H}$ , the mode will change into the discharge mode, and next watchdog time count starts.
- (3) Unless the SCK pulse is input, WDT will not be cleared, and during the charging period of  $C_{TW}$  pin, RESETB="L".
- (4) When the  $V_{DD}$  pin becomes lower than the detector threshold voltage ( $-V_{DET}$ ), RESETB outputs "L" after the  $t_{PHL}$ .
- (5) If "L" signal is input to the INH pin, the RESETB outputs "H", regardless the SCK clock state.
- (6) During the "L" period of INH pin, the voltage detector monitors the supply voltage.
- (7) When the signal to the INH pin is set from "L" to "H", the watchdog starts supervising the system clock, or charge cycle to the  $C_{TW}$  pin starts, the capacitor connected to the  $C_{TW}$  pin is charged with the current of setting Reset time of WDT.
- (8) If "L" signal is input to the MR pin, the RESETB outputs "L" after the  $t_{MR}$ , regardless the SCK clock state and  $V_{DD}$  voltage.
- (9) When the signal to the MR pin is set from "L" to "H", the RESETB outputs "H" after the  $t_{PLH}$ , the watchdog starts supervising the system clock.

**• Watchdog Timeout period/Reset hold time**

The watchdog timeout period and reset hold time can be set with an external capacitor to  $C_{TW}$  pin.

The next equations describe the relation between the watchdog timeout period and the external capacitor value, or the reset hold time and the external capacitor value.

$$t_{WD} (s) = 3.1 \times 10^6 \times C (F)$$

$$t_{WR} (s) = t_{WD}/9$$

The watchdog timer (WDT) timeout period is determined with the discharge time of the external capacitor.

During the watchdog timeout period, if the clock pulse from the system is detected, WDT is cleared and the capacitor is charged. When the charge of the capacitor completes, another watchdog timeout period starts again. During the watchdog timeout period, if the clock pulse from the system is not detected, during the next reset hold time RESETB pin outputs "L".

During the reset time, (while charging the external capacitor) and after starting the watchdog timeout period, (just after from the discharge of the external capacitor) even if the clock pulse is input during the time period " $t_{WDI}$ ", the clock pulse is ignored.

$$t_{WDI} (s) = t_{WD}/10$$


### • Released Delay Time (Power-on Reset delay time)

The released delay time can be set with an external capacitor connected to the  $C_D$  pin. The next equation describes the relation between the capacitance value and the released delay time ( $t_{PLH}$ ).

$$t_{PLH} (s) = 3.7 \times 10^6 \times C (F)$$

The capacitor connected to  $C_D$  pin determines  $t_{WD}$ ,  $t_{WR}$ , and  $t_{PLH}$ .

When the  $V_{DD}$  voltage becomes equal or less than ( $-V_{DET}$ ), discharge of the capacitor connected to the  $C_D$  pin starts. Therefore, if the discharge is not enough and  $V_{DD}$  voltage returns to ( $+V_{DET}$ ) or more, thereafter the delay time will be shorter than  $t_{PLH}$  which is expected.

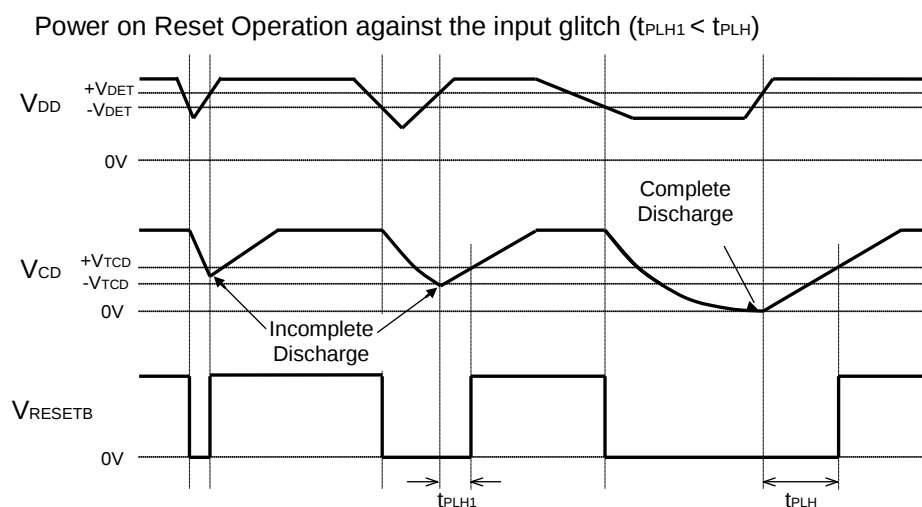


### • Minimum Operating Voltage

We specified the minimum operating voltage as the minimum input voltage in which the condition of RESETB pin being 0.1V or lower than 0.1V. (Herein, pull-up resistance is set as 100k $\Omega$  in the case of the Nch open-drain output type.)

### • Manual Reset (MR) Function

By setting MR pin as "L", the output of RESETB can be forced to set "L". After pull-down the MR pin to "L", the delay time ( $t_{MR}$ ) to the output "L" from RESETB is  $1\mu s$  as maximum. MR pin is pulled-up via the built-in resistor. (Typ.  $110k\Omega$ ). If MR pin voltage  $> V_{DD}$  voltage, a current flows into MR pin. However, the current value is limit by the pull-up resistor, therefore there is not bad impact on the operation. When the "L" signal is input to MR pin, the discharge of  $C_D$  pin capacitor ( $C_D$ ) starts. If the term of "L" for MR pin is short,  $C_D$  will not be discharged enough. As a result, the delay time after setting "H" for MR pin will be shorter than expected. Because of this, confirm the operation under the same conditions as users' applications. For example, in case of  $C_D$  is set at  $0.1\mu F$ , and the condition to maintain the delay time value after MR pin's returning to "H", is described as the minimum "L" term of MR pin, or  $150\mu s$ . When MR input pulse ( $t_{MRW}$ ) is less than  $3.0\mu s$ , output delay time ( $t_{PLH}$ ) might not exist.

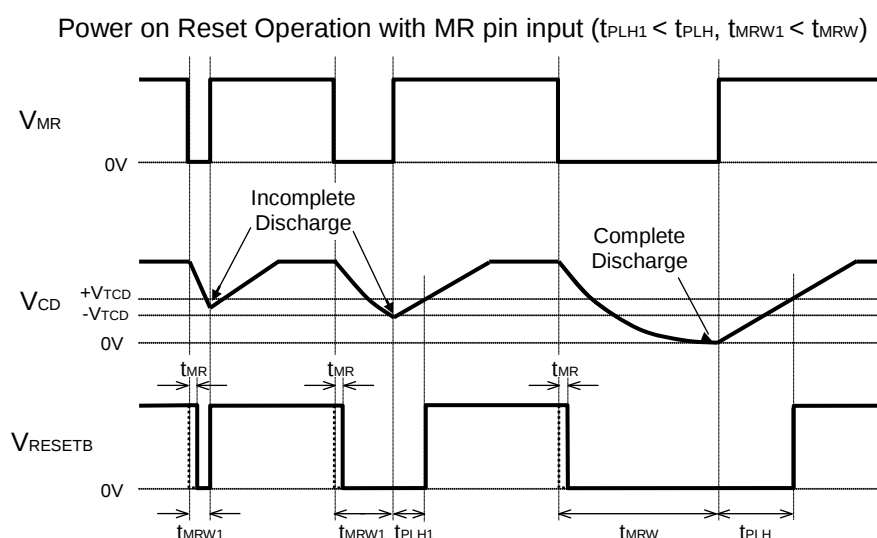

### • Inhibit (INH) Function

If INH pin is set at "L", the watchdog timer stops monitoring the clock, and the RESETB output will be dominant by the voltage detector's operation. Therefore, if the supply voltage is set at more than the detector threshold level, RESETB outputs "H" regardless the clock pulse. INH pin is pulled up with a resistor (Typ.  $110k\Omega$ ) internally.

### • RESETB Output



RESETB pin's output type is selectable either the Nch open-drain output or CMOS output. If the Nch open-drain type output is selected, the RESETB pin is pulled up with an external resistor to an appropriate voltage source.

### • Clock Pulse Input

Built-in watchdog timer is cleared with the SCK clock pulse within the watchdog timeout period.

## APPLICATION INFORMATION

### Typical Application Circuits

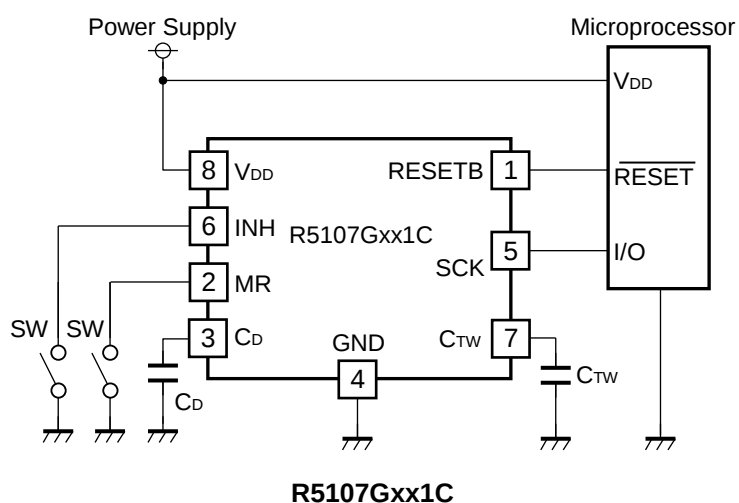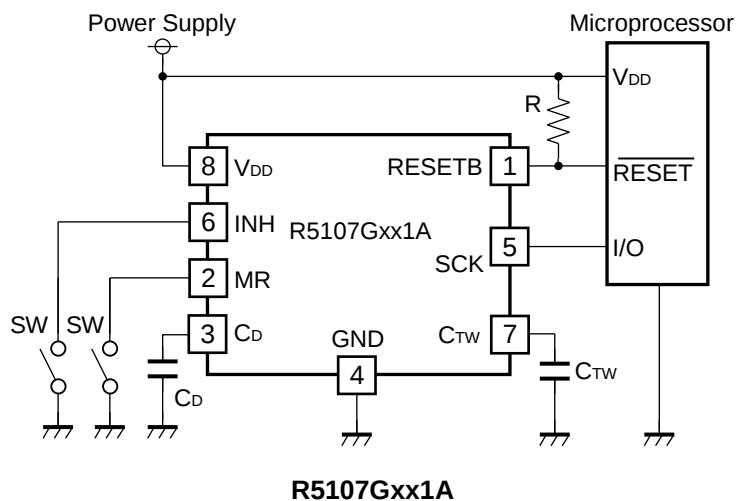

## TECHNICAL NOTES

### When connecting resistors to the device's input pin

When connecting a resistor (R1) to an input of this device, the input voltage decreases by [Device's Consumption Current] x [Resistance Value] only. And, the cross conduction current<sup>(1)</sup>, which occurs when changing from the detecting state to the release state, is decreased the input voltage by [Cross Conduction Current] x [Resistance Value] only. And then, this device will enter the re-detecting state if the input voltage reduction is larger than the difference between the detector voltage and the released voltage.

When the input resistance value is large and the VDD is gone up at mildly in the vicinity of the released voltage, repeating the above operation may result in the occurrence of output.

As shown in Figure A/B, set R1 to become 100kΩ or less as a guide, and connect C<sub>IN</sub><sup>(2)</sup> of 0.1μF and more to between the input pin and GND. Besides, make evaluations including temperature properties under the actual usage condition, with using the evaluation board like this way. As result, make sure that the cross conduction current has no problem.

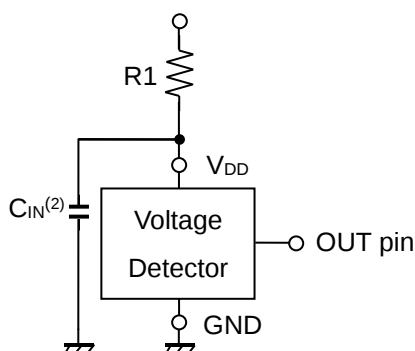


Figure A

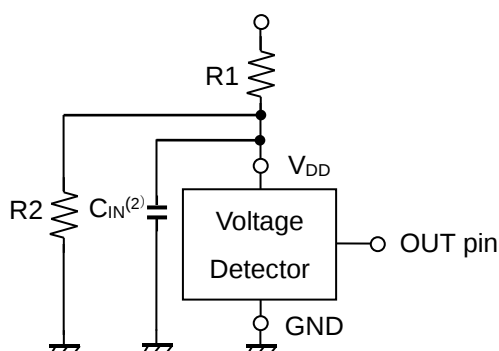


Figure B

---

<sup>(1)</sup> In the CMOS output type, a charging current for OUT pin is included.



<sup>(2)</sup> Note the bias dependence of capacitors.

---




## TYPICAL CHARACTERISTICS

Note: Typical Characteristics are intended to be used as reference data; they are not guaranteed.




### 1) Supply Current vs. Input Voltage

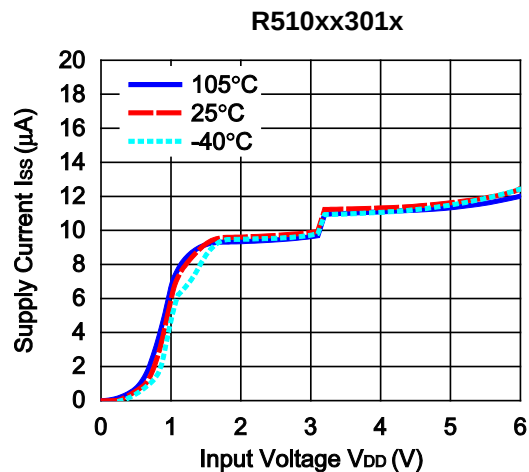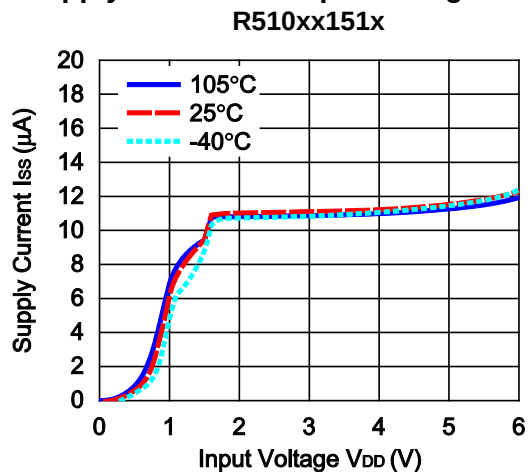


### 2) Detector Threshold vs. Temperature

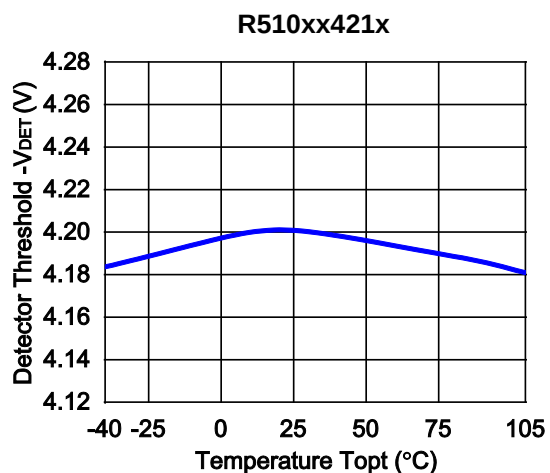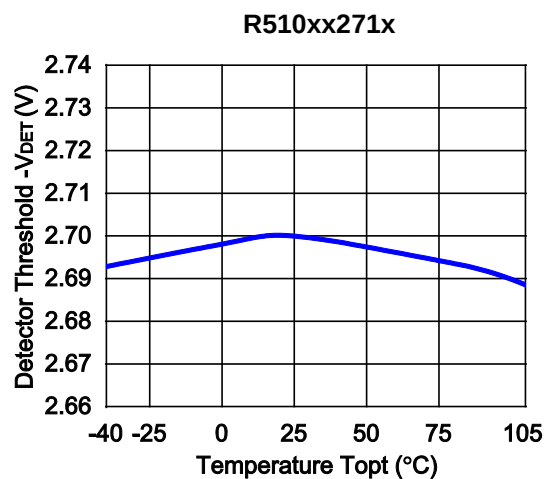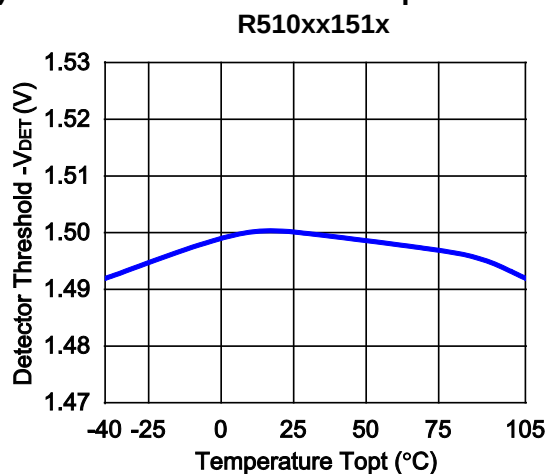



3) Detector Threshold Hysteresis vs. Temperature

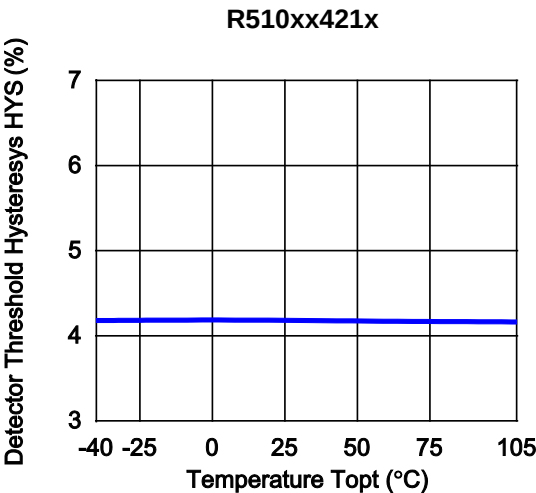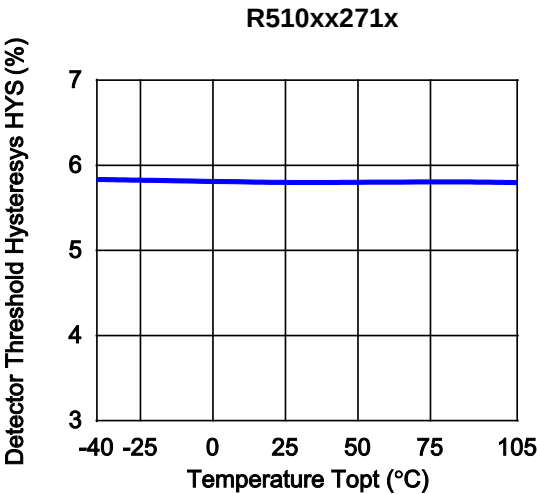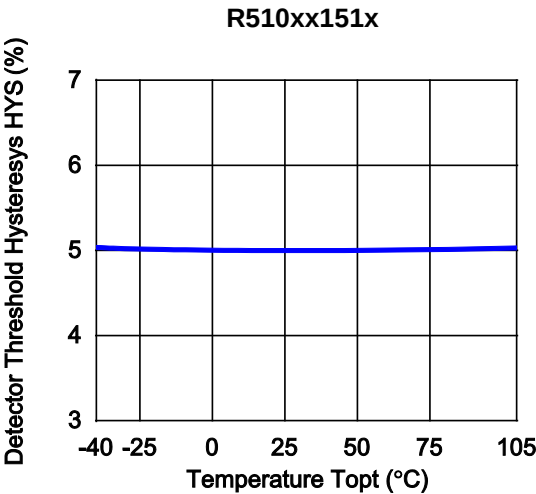




4) Nch Driver Output Current vs. Vds

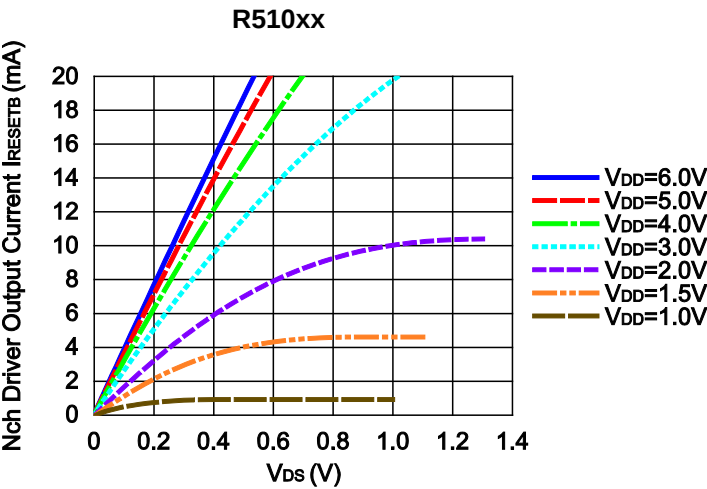


## 5) Nch Driver Output Current vs. Input Voltage

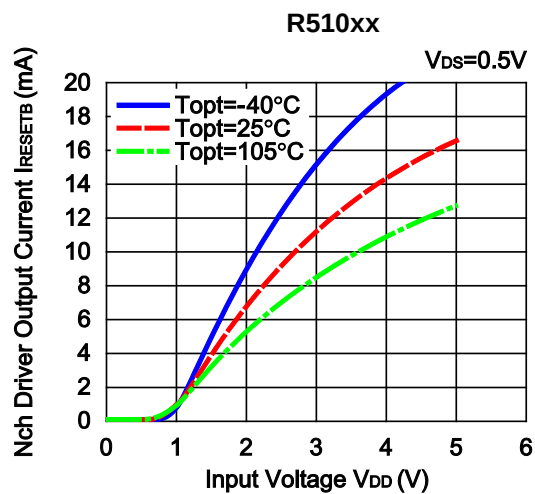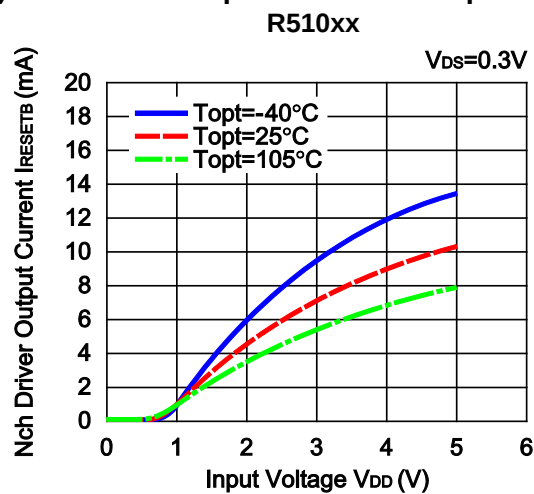


## 6) Pch Driver Output Current vs. Input Voltage

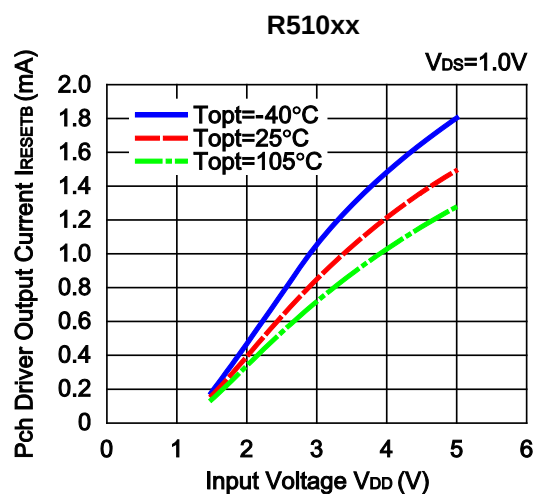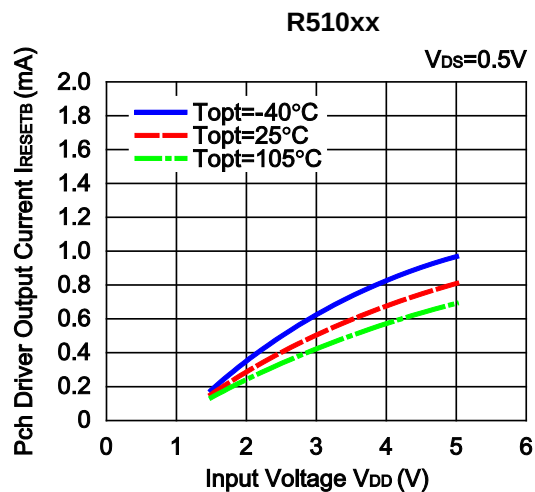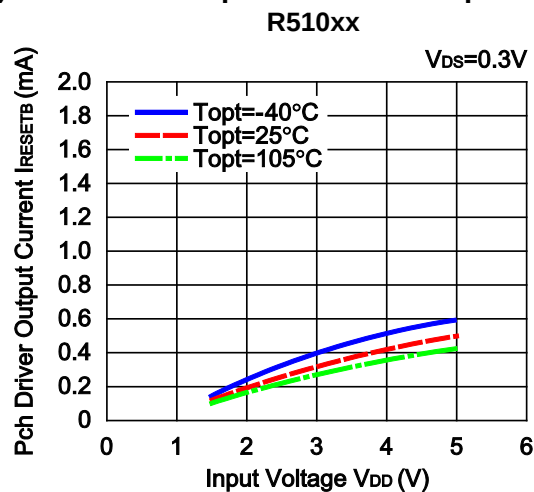


7) Released Delay Time vs. Input Voltage  
R510xx

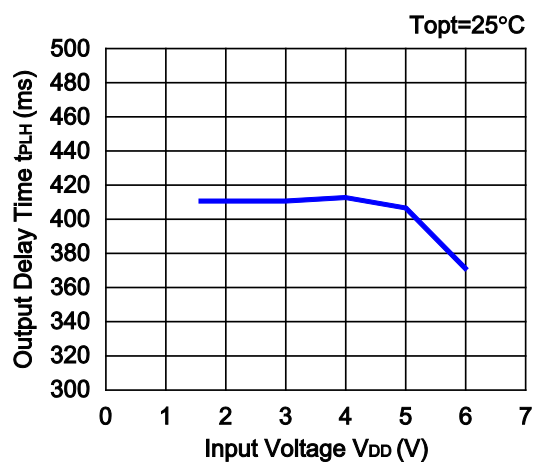


8) Released Delay Time vs. Temperature  
R510xx

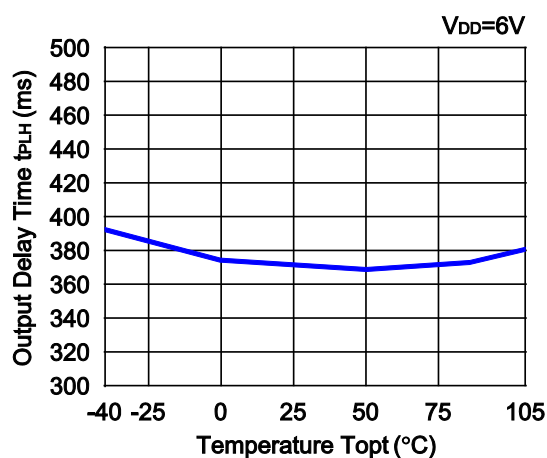


9) Detector Output Delay Time vs. Temperature  
R510xx

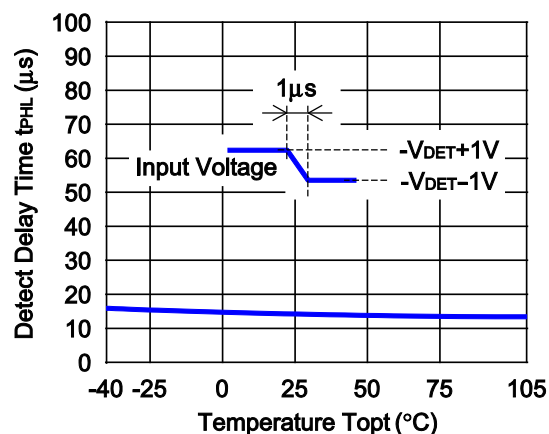


10) WDT Reset Timer vs. Temperature  
R510xx

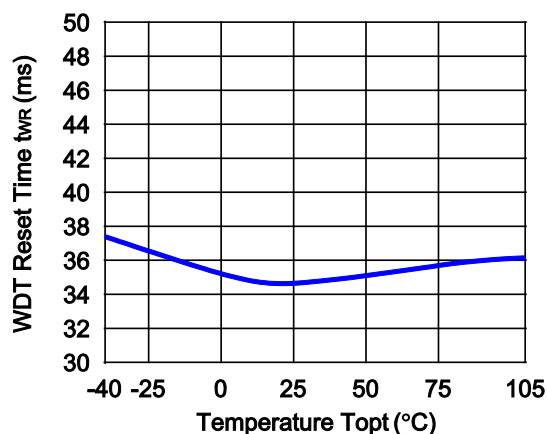

11) WDT Timeout Period vs. Temperature  
R510xx


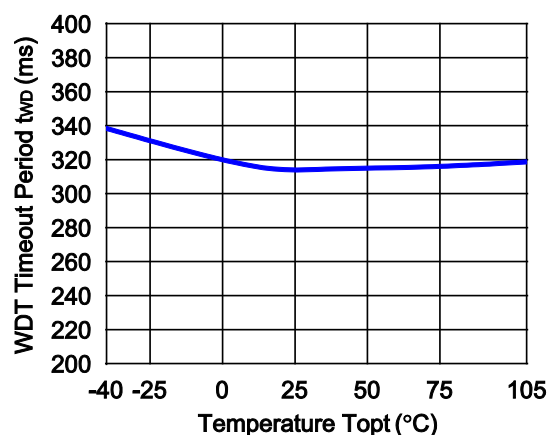


12) WDT Reset Timer vs. Input Voltage  
R510xx

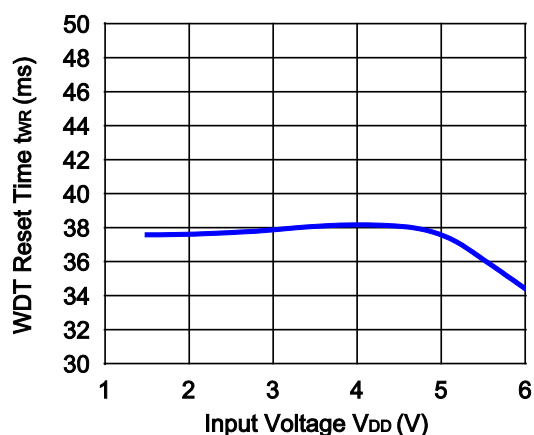

## 13) WDT Timeout Period vs. Input Voltage

## 14) Output Delay Time vs. External Capacitance

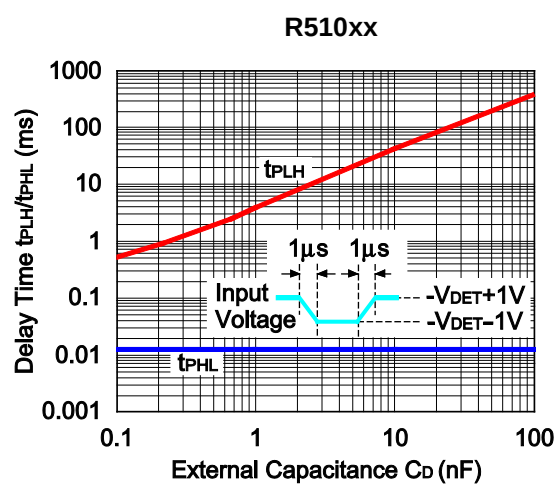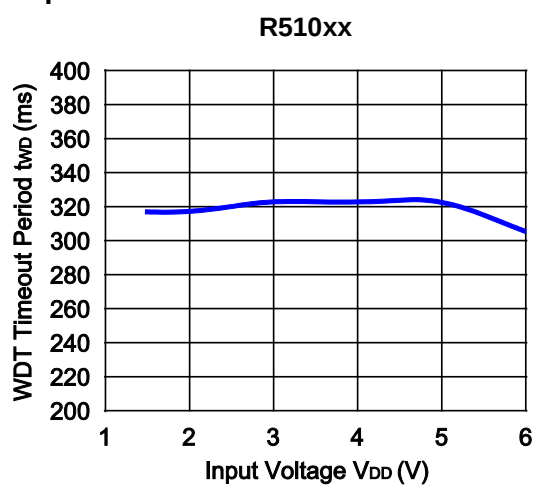


The power dissipation of the package is dependent on PCB material, layout, and environmental conditions. The following conditions are used in this measurement.

Measurement Conditions


|                  | Standard Test Land Pattern                        |
|------------------|---------------------------------------------------|
| Environment      | Mounting on Board (Wind Velocity = 0 m/s)         |
| Board Material   | Glass Cloth Epoxy Plastic (Double-Sided Board)    |
| Board Dimensions | 40 mm × 40 mm × 1.6 mm                            |
| Copper Ratio     | Top Side: Approx. 50%<br>Bottom Side: Approx. 50% |
| Through-holes    | φ 0.5 mm × 44 pcs                                 |

Measurement Result (Ta = 25°C, Tjmax = 125°C)

|                    | Standard Test Land Pattern                                                          |
|--------------------|-------------------------------------------------------------------------------------|
| Power Dissipation  | 380 mW                                                                              |
| Thermal Resistance | $\theta_{ja} = (125 - 25^{\circ}\text{C}) / 0.38 \text{ W} = 263^{\circ}\text{C/W}$ |
|                    | $\theta_{jc} = 60^{\circ}\text{C/W}$                                                |

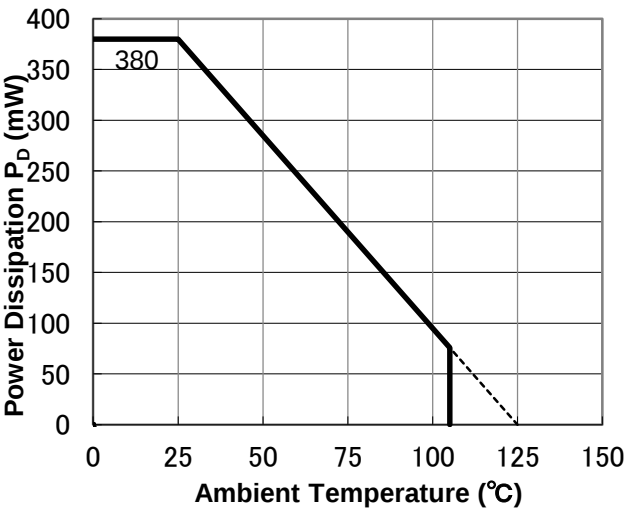


Power Dissipation vs. Ambient Temperature

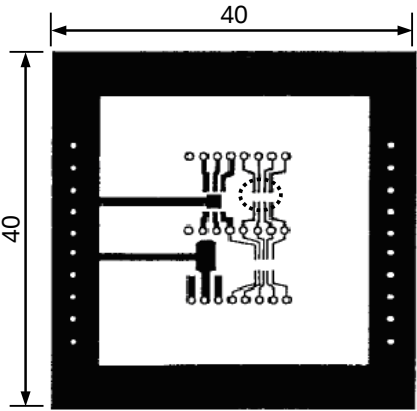

○ IC Mount Area (mm)

Measurement Board Pattern

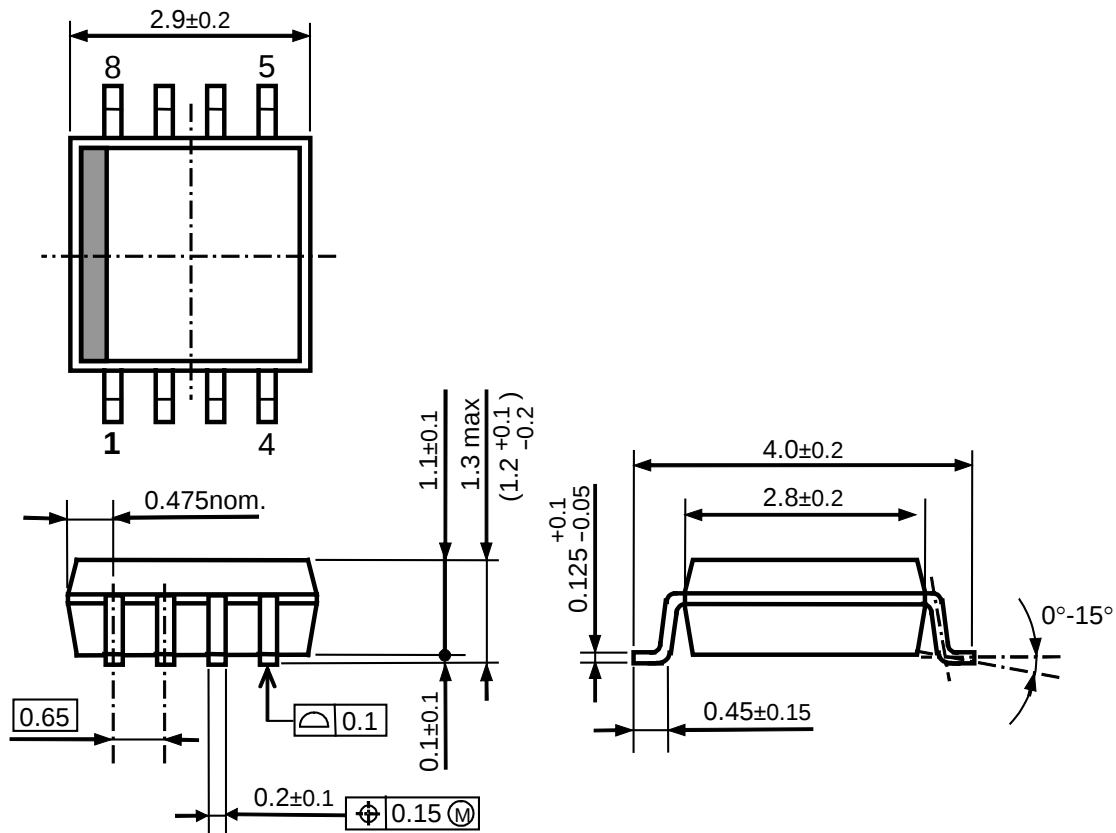

SSOP-8G Package Dimensions (Unit: mm)



1. The products and the product specifications described in this document are subject to change or discontinuation of production without notice for reasons such as improvement. Therefore, before deciding to use the products, please refer to Ricoh sales representatives for the latest information thereon.
2. The materials in this document may not be copied or otherwise reproduced in whole or in part without prior written consent of Ricoh.
3. Please be sure to take any necessary formalities under relevant laws or regulations before exporting or otherwise taking out of your country the products or the technical information described herein.
4. The technical information described in this document shows typical characteristics of and example application circuits for the products. The release of such information is not to be construed as a warranty of or a grant of license under Ricoh's or any third party's intellectual property rights or any other rights.
5. The products listed in this document are intended and designed for use as general electronic components in standard applications (office equipment, telecommunication equipment, measuring instruments, consumer electronic products, amusement equipment etc.). Those customers intending to use a product in an application requiring extreme quality and reliability, for example, in a highly specific application where the failure or misoperation of the product could result in human injury or death (aircraft, spacevehicle, nuclear reactor control system, traffic control system, automotive and transportation equipment, combustion equipment, safety devices, life support system etc.) should first contact us.
6. We are making our continuous effort to improve the quality and reliability of our products, but semiconductor products are likely to fail with certain probability. In order to prevent any injury to persons or damages to property resulting from such failure, customers should be careful enough to incorporate safety measures in their design, such as redundancy feature, fire containment feature and fail-safe feature. We do not assume any liability or responsibility for any loss or damage arising from misuse or inappropriate use of the products.
7. Anti-radiation design is not implemented in the products described in this document.
8. Please contact Ricoh sales representatives should you have any questions or comments concerning the products or the technical information.



**Ricoh is committed to reducing the environmental loading materials in electrical devices with a view to contributing to the protection of human health and the environment.**

Ricoh has been providing RoHS compliant products since April 1, 2006 and Halogen-free products since April 1, 2012.

**RICOH** RICOH ELECTRONIC DEVICES CO., LTD.

<http://www.e-devices.ricoh.co.jp/en/>

#### Sales & Support Offices

##### **RICOH ELECTRONIC DEVICES CO., LTD.**

**Higashi-Shinagawa Office (International Sales)**  
3-32-3, Higashi-Shinagawa, Shinagawa-ku, Tokyo 140-8655, Japan  
Phone: +81-3-5479-2857 Fax: +81-3-5479-0502

##### **RICOH EUROPE (NETHERLANDS) B.V.**

**Semiconductor Support Centre**  
Prof. W.H. Keesomlaan 1, 1183 DJ Amstelveen, The Netherlands  
Phone: +31-20-5474-309

##### **RICOH INTERNATIONAL B.V. - German Branch**

**Semiconductor Sales and Support Centre**  
Oberrather Strasse 6, 40472 Düsseldorf, Germany  
Phone: +49-211-6546-0

##### **RICOH ELECTRONIC DEVICES KOREA CO., LTD.**

3F, Haesung Bldg, 504, Teheran-ro, Gangnam-gu, Seoul, 135-725, Korea  
Phone: +82-2-2135-5700 Fax: +82-2-2051-5713

##### **RICOH ELECTRONIC DEVICES SHANGHAI CO., LTD.**

Room 403, No.2 Building, No.690 Bibo Road, Pu Dong New District, Shanghai 201203, People's Republic of China  
Phone: +86-21-5027-3200 Fax: +86-21-5027-3299

##### **RICOH ELECTRONIC DEVICES CO., LTD.**

**Taipei office**  
Room 109, 10F-1, No.51, Hengyang Rd., Taipei City, Taiwan (R.O.C.)  
Phone: +886-2-2313-1621/1622 Fax: +886-2-2313-1623

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Ricoch Electronics:](#)

[R5107G381A-TR-FE](#) [R5107G441A-TR-FE](#) [R5107G251C-TR-FE](#) [R5107G301A-TR-FE](#) [R5107G411A-TR-FE](#)



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.