

Semirigid, encapsulant-lined, heat-shrinkable tubing

SCL is encapsulant-lined, heat-shrinkable tubing that provides moisture resistance, strain relief, and electrical insulation for electrical splices, terminations, breakouts, and mechanical connections.

SCL is constructed as a dual-wall tubing. The outer wall is a semirigid, crosslinked polyolefin, while the inner wall is a meltable polyolefin that flows with the application of heat.

Heating SCL shrinks the outer jacket and melts the inner “encapsulant” wall to flow and fill surface irregularities. While still hot, the tubing can be pinched and blocked to form a wire breakout. SCL provides a splash-resistant, moisture-resistant covering suitable for many applications. SCL also performs satisfactorily if briefly exposed to common solvents or chemicals.

The installed tubing provides rugged protection against abrasion, vibration, and flexing. A wide range of applications can be accommodated with only a few sizes of SCL tubing.

SCL tubing is UL-recognized at 125°C, 600 V, and meets the requirements of AMS-DTL-23053/4, Class 1.

**Temperature rating**


Full recovery temperature:	135°C
Continuous operating temperature:	-55°C to 110°C

**Specifications\***

Type	Raychem	Military	UL
SCL	RT-1301	AMS-DTL-23053/4, Class 1	E85381

\* When ordering, always specify latest issue.

**Dimensions (millimeters/inches)**

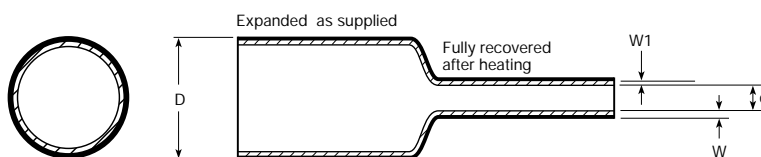

Size	Additional standard color	Inside diameter		Recovered wall thickness			
		D (min.) Expanded as supplied	d (max.) Recovered after heating	W Total wall**	W1 (nom.) Meltable wall	W1 (nom.) Meltable wall	W1 (nom.) Meltable wall
1/8	Brown	3.2 0.125	0.6 0.023	0.96 ± 0.15	0.038 ± 0.006	0.51	0.020
3/16	Gray	4.7 0.187	1.5 0.060	1.09 ± 0.15	0.043 ± 0.006	0.64	0.025
1/4	White	6.4 0.250	2.0 0.080	1.19 ± 0.15	0.047 ± 0.006	0.69	0.027
3/8	Red	9.5 0.375	3.4 0.135	1.27 ± 0.18	0.050 ± 0.007	0.76	0.030
1/2	Blue	12.7 0.500	5.0 0.195	1.39 ± 0.18	0.055 ± 0.007	0.89	0.035
3/4	Yellow	19.1 0.750	8.0 0.313	1.65 ± 0.18	0.065 ± 0.007	1.01	0.040
1	N/A	25.4 1.000	10.2 0.400	1.90 ± 0.18	0.075 ± 0.007	1.01	0.040

\*\*Wall thickness will be less if tubing recovery is restricted during shrinkage.

**Ordering information**

Standard colors	Black for all sizes, plus one additional color per size as per dimensions table
Size selection	Always order the largest size that will shrink snugly over the component being covered.
Standard packaging	4-foot lengths
Ordering description	Specify product name, size, and color; for example, SCL1/4-0 (0=Black).

**Specification values**

	Property	Unit	Requirement	Method of test
<b>Physical</b>	Dimensions	mm ( <i>inches</i> )	See reverse	ASTM D 2671
	Longitudinal change	percent	+1, -10 maximum	ASTM D 2671
	Flow of inner wall		No openings upon reheating	AMS-DTL-23053/4
	Tensile strength	psi ( <i>MPa</i> )	1500 ( <i>10.3</i> ) minimum	ASTM D 2671
	Ultimate elongation	percent	200 minimum	ASTM D 2671
	Low-temperature brittleness (-55°C/-67°F)		No failure	ASTM D 746 Procedure B
	Heat shock (4 hours at 250°C/482°F)		No dripping, flowing, or cracking of outer wall	AMS-DTL-23053
	Heat resistance (168 hours at 175°C/347°F)		No dripping, flowing, or cracking of outer wall	AMS-DTL-23053
<b>Electrical</b>	Dielectric strength	volts/mil	500 minimum	ASTM D 149
	Volume resistivity	ohm-cm	10 <sup>15</sup> minimum	ASTM D 257
<b>Chemical</b>	Corrosive effect (16 hours at 121°C/250°F)		Noncorrosive	ASTM D 2671
	Fungus resistance		Rating of 1 or less	ASTM G 21
	Water absorption (24 hours at 23°C/73°F)	percent	0.1 maximum	ASTM D 570
	Fluid resistance (24 hours at 23°C/73°F) in: JP-8 fuel (MIL-T-5624) Skydrol 500 Hydraulic fluid (MIL-H-5606) Aviation gasoline 100/130 Water			ASTM D 2671
	Followed by tests for:			
	Dielectric strength	volts/mil	400 minimum	ASTM D 2671
	Tensile strength	psi	1000 minimum	ASTM D 2671

Note: Consult RT-1301 for specific details about test procedures.

Skydrol is a trademark of Monsanto Company.  
Raychem is a trademark of Tyco Electronics Corporation.

**Users should independently evaluate the suitability of the product for their application.**

**Tyco Electronics Corporation**

300 Constitution Drive  
Menlo Park, CA 94025-1164  
USA  
Tel: (800) 926-2425 (US & Canada)  
Tel: +1 (650) 361-3860 (All other countries)

Faraday Road  
Dorcan, Swindon, SN3 5HH  
United Kingdom  
Tel: +44 1793 528171

3816 Noborito, Tama-ku  
Kawasaki, Kanagawa 214-8533  
Japan  
Tel: +81 44 900 5102

Asia Pacific Headquarters  
26 Ang Mo Kio, Industrial Park 2  
Singapore 569507  
Tel: +65 4866 151

All information, including illustrations, is believed to be reliable. Users, however, should independently evaluate the suitability of each product for their application. Tyco Electronics Corporation makes no warranties as to the accuracy or completeness of the information, and disclaims any liability regarding its use. Tyco Electronics Corporation's only obligations are those in the Standard Terms and Conditions of Sale for these products and in no case will Tyco Electronics Corporation be liable for any incidental, indirect, or consequential damages arising from the sale, resale, use, or misuse of the product. Tyco Electronics Corporation's Specifications are subject to change without notice. In addition, Tyco Electronics Corporation reserves the right to make changes in materials or processing without notification to the Buyer which do not affect compliance with any applicable specification.

**For more information about this product visit [www.tycoelectronics.com](http://www.tycoelectronics.com)**



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.