


#### Agency Approvals

| AGENCY  | AGENCY FILE NUMBER |
|---|--------------------|
|  | E128662/E230531    |

#### Maximum Ratings and Thermal Characteristics (T<sub>A</sub>=25°C unless otherwise noted)

| Parameter   | Symbol                            | Value      | Unit |
|---|-----------------------------------|------------|------|
| Peak Pulse Power Dissipation by 10x1000µs test waveform (Fig.1) (Note 1)              | P <sub>PPM</sub>                  | 15000      | W    |
| Steady State Power Dissipation on infinite heat sink at T <sub>L</sub> =75°C (Fig. 5) | P <sub>D</sub>                    | 8.0        | W    |
| Peak Forward Surge Current, 8.3ms Single Half Sine Wave Unidirectional only (Note 2)  | I <sub>FSM</sub>                  | 400        | A    |
| Operating Junction and Storage Temperature Range                                      | T <sub>J</sub> , T <sub>STG</sub> | -55 to 175 | °C   |
| Typical Thermal Resistance Junction to Lead   | R <sub>θJL</sub>                  | 8.0        | °C/W |
| Typical Thermal Resistance Junction to Ambient  | R <sub>θJA</sub>                  | 40         | °C/W |

#### Notes:

1. Non-repetitive current pulse, per Fig. 3 and derated above T<sub>A</sub> = 25°C per Fig. 2.
2. Measured on 8.3ms single half sine wave or equivalent square wave, duty cycle=4 per minute maximum.

#### Description

The 15KPA Series is designed specifically to protect sensitive electronic equipment from voltage transients induced by lightning and other transient voltage events.

#### Features

- Halogen-Free
- RoHS compliant
- Typical maximum temperature coefficient  
 $\Delta V_{BR} = 0.1\% \times V_{BR} @ 25^\circ\text{C} \times \Delta T$
- Glass passivated chip junction in P600 package
- 15000W peak pulse capability at 10x1000µs waveform, repetition rate (duty cycles):0.01%
- Fast response time: typically less than 1.0ps from 0 Volts to BV min
- Excellent clamping capability
- Low incremental surge resistance
- Typical I<sub>R</sub> less than 2µA above 36V
- High temperature soldering guaranteed: 260°C/40 seconds / 0.375" (9.5mm) lead length, 5 lbs., (2.3kg) tension
- Plastic package has Underwriters Laboratory Flammability classification 94V-O
- Matte Tin Lead-free plated


#### Applications

TVS devices are ideal for the protection of I/O interfaces, V<sub>CC</sub> bus and other vulnerable circuits used in telecom, computer, industrial and consumer electronic applications.

# Transient Voltage Suppression Diodes

## Axial Leaded – 15000W > 15KPA series

### Electrical Characteristics


| Part Number (Uni) | Part Number (Bi) | Reverse Stand off Voltage $V_R$ (Volts) | Breakdown Voltage $V_{BR}$ (Volts) @ $I_T$ | Test Current $I_T$ (mA) | Maximum Peak Pulse Current $I_{PP}$ (A) | Maximum Reverse Leakage $I_R$ @ $V_R$ ( $\mu$ A) | Maximum Clamping Voltage $V_C$ @ $I_{PP}$ (V) | Agency Approval  |
|-------------------|------------------|---|--|-------------------------|---|--|---|---|
|                   |                  |   | MIN  |                         |   |  |   |   |
| 15KPA17A          | 15KPA17CA        | 17                                      | 18.99                                      | 50                      | 515.4                                   | 5000   | 29.3  | X   |
| 15KPA18A          | 15KPA18CA        | 18                                      | 20.11                                      | 50                      | 488.7                                   | 5000   | 30.9  | X   |
| 15KPA20A          | 15KPA20CA        | 20                                      | 22.34                                      | 20                      | 440.2                                   | 1500   | 34.3  | X   |
| 15KPA22A          | 15KPA22CA        | 22                                      | 24.57                                      | 10                      | 407.0                                   | 500  | 37.1  | X   |
| 15KPA24A          | 15KPA24CA        | 24                                      | 26.81                                      | 5                       | 371.0                                   | 150  | 40.7  | X   |
| 15KPA26A          | 15KPA26CA        | 26                                      | 29.04                                      | 5                       | 343.2                                   | 50   | 44.0  | X   |
| 15KPA28A          | 15KPA28CA        | 28                                      | 31.28                                      | 5                       | 317.9                                   | 25   | 47.5  | X   |
| 15KPA30A          | 15KPA30CA        | 30                                      | 33.51                                      | 5                       | 297.8                                   | 15   | 50.7  | X   |
| 15KPA33A          | 15KPA33CA        | 33                                      | 36.90                                      | 5                       | 276.1                                   | 2  | 54.7  | X   |
| 15KPA36A          | 15KPA36CA        | 36                                      | 40.20                                      | 5                       | 252.5                                   | 2  | 59.8  | X   |
| 15KPA40A          | 15KPA40CA        | 40                                      | 44.70                                      | 5                       | 229.5                                   | 2  | 65.8  | X   |
| 15KPA43A          | 15KPA43CA        | 43                                      | 48.00                                      | 5                       | 216.3                                   | 2  | 69.8  | X   |
| 15KPA45A          | 15KPA45CA        | 45                                      | 50.30                                      | 5                       | 207.4                                   | 2  | 72.8  | X   |
| 15KPA48A          | 15KPA48CA        | 48                                      | 53.60                                      | 5                       | 194.3                                   | 2  | 77.7  | X   |
| 15KPA51A          | 15KPA51CA        | 51                                      | 57.00                                      | 5                       | 182.1                                   | 2  | 82.9  | X   |
| 15KPA54A          | 15KPA54CA        | 54                                      | 60.30                                      | 5                       | 172.2                                   | 2  | 87.7  | X   |
| 15KPA58A          | 15KPA58CA        | 58                                      | 64.80                                      | 5                       | 161.0                                   | 2  | 93.8  | X   |
| 15KPA60A          | 15KPA60CA        | 60                                      | 67.00                                      | 5                       | 155.0                                   | 2  | 97.4  | X   |
| 15KPA64A          | 15KPA64CA        | 64                                      | 71.50                                      | 5                       | 144.9                                   | 2  | 104.2   | X   |
| 15KPA70A          | 15KPA70CA        | 70                                      | 78.20                                      | 5                       | 132.9                                   | 2  | 113.6   | X   |
| 15KPA75A          | 15KPA75CA        | 75                                      | 83.80                                      | 5                       | 123.8                                   | 2  | 122.0   | X   |
| 15KPA78A          | 15KPA78CA        | 78                                      | 87.10                                      | 5                       | 119.7                                   | 2  | 126.1   | X   |
| 15KPA85A          | 15KPA85CA        | 85                                      | 94.90                                      | 5                       | 109.7                                   | 2  | 137.6   | X   |
| 15KPA90A          | 15KPA90CA        | 90                                      | 100.50                                     | 5                       | 103.7                                   | 2  | 145.6   | X   |
| 15KPA100A         | 15KPA100CA       | 100                                     | 111.70                                     | 5                       | 93.6                                    | 2  | 161.3   | X   |
| 15KPA110A         | 15KPA110CA       | 110                                     | 122.90                                     | 5                       | 84.5                                    | 2  | 178.6   | X   |
| 15KPA120A         | 15KPA120CA       | 120                                     | 134.00                                     | 5                       | 78.5                                    | 2  | 192.3   | X   |
| 15KPA130A         | 15KPA130CA       | 130                                     | 145.20                                     | 5                       | 72.5                                    | 2  | 208.3   | X   |
| 15KPA150A         | 15KPA150CA       | 150                                     | 167.60                                     | 5                       | 62.4                                    | 2  | 241.9   | X   |
| 15KPA160A         | 15KPA160CA       | 160                                     | 178.70                                     | 5                       | 58.4                                    | 2  | 258.6   | X   |
| 15KPA170A         | 15KPA170CA       | 170                                     | 189.90                                     | 5                       | 55.4                                    | 2  | 272.7   | X   |
| 15KPA180A         | 15KPA180CA       | 180                                     | 201.10                                     | 5                       | 52.3                                    | 2  | 288.5   | X   |
| 15KPA200A         | 15KPA200CA       | 200                                     | 223.40                                     | 5                       | 47.3                                    | 2  | 319.1   | X   |
| 15KPA220A         | 15KPA220CA       | 220                                     | 245.70                                     | 5                       | 35.2                                    | 2  | 428.6   | X   |
| 15KPA240A         | 15KPA240CA       | 240                                     | 268.10                                     | 5                       | 39.3                                    | 2  | 384.6   | X   |
| 15KPA260A         | 15KPA260CA       | 260                                     | 290.40                                     | 5                       | 36.2                                    | 2  | 416.7   | X   |
| 15KPA280A         | 15KPA280CA       | 280                                     | 312.80                                     | 5                       | 33.2                                    | 2  | 454.5   | X   |

For bidirectional type having  $V_R$  of 30 volts and less, the  $I_R$  limit is double.


For parts without A, the  $V_{BR}$  is  $\pm 10\%$  and  $V_C$  is 5% higher than with A parts

**Ratings and Characteristic Curves** ( $T_A=25^\circ\text{C}$  unless otherwise noted)


**Figure 1 - Peak Pulse Power Rating Curve**

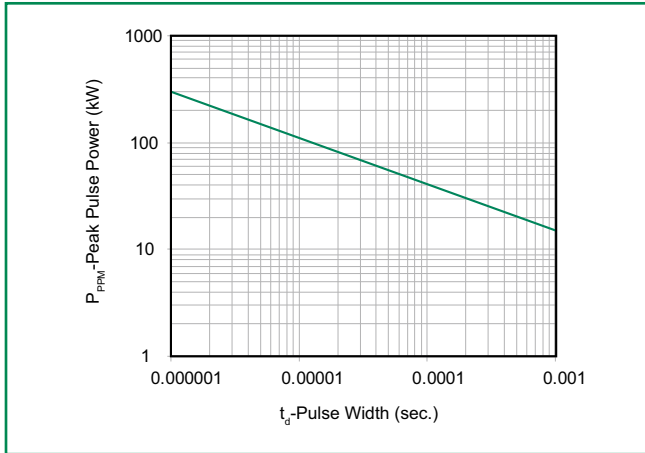


**Figure 2 - Pulse Derating Curve**

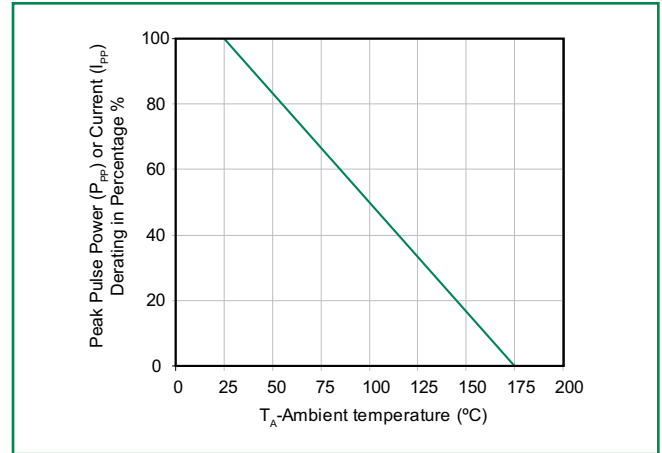


**Figure 3 - Test Pulse Waveform**

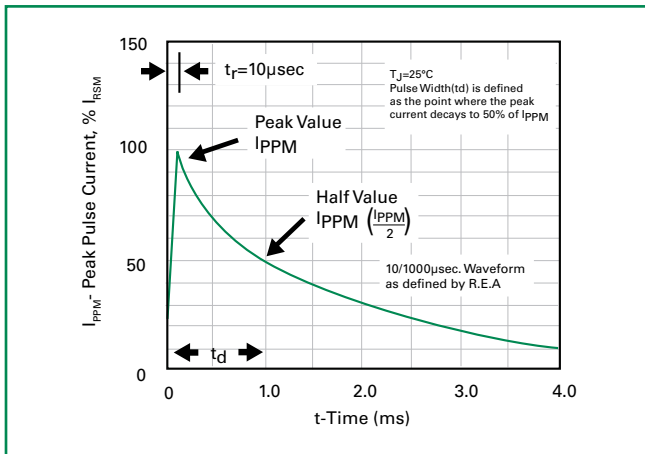


**Figure 4 - Typical Junction Capacitance**

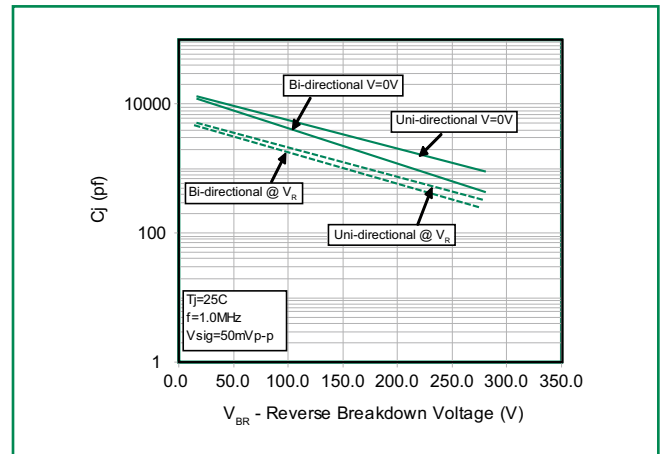

**Figure 5 - Steady State Power Derating Curve**

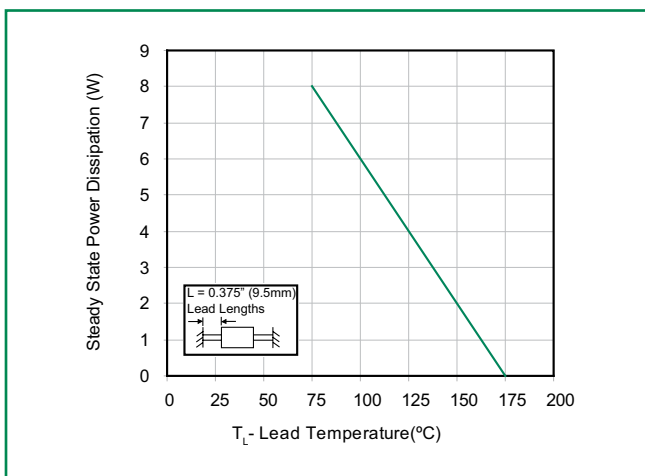


**Figure 6 - Maximum Non-Repetitive Forward Surge Current**

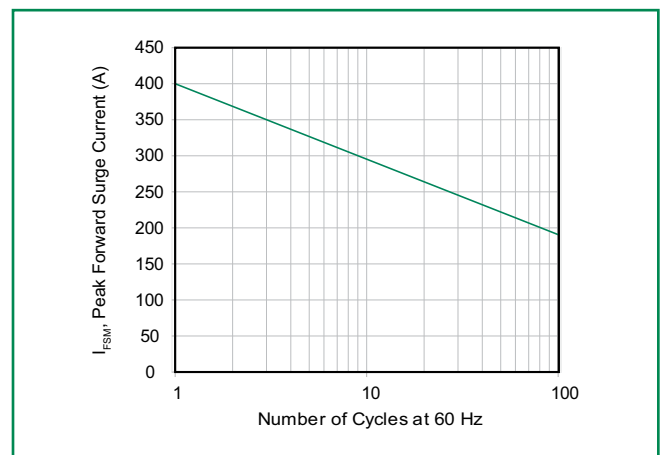

**15KPA Series**

## Soldering Parameters

|  |                                    |                         |
|--|------------------------------------|-------------------------|
| Reflow Condition                                       |                                    | Lead-free assembly      |
| Pre Heat   | - Temperature Min ( $T_{s(min)}$ ) | 150°C                   |
|  | - Temperature Max ( $T_{s(max)}$ ) | 200°C                   |
|  | - Time (min to max) ( $t_s$ )      | 60 – 180 secs           |
| Average ramp up rate (Liquidus Temp ( $T_L$ ) to peak) |                                    | 3°C/second max          |
| $T_{s(max)}$ to $T_L$ - Ramp-up Rate                   |                                    | 3°C/second max          |
| Reflow   | - Temperature ( $T_L$ ) (Liquidus) | 217°C                   |
|  | - Time (min to max) ( $t_s$ )      | 60 – 150 seconds        |
| Peak Temperature ( $T_p$ )                             |                                    | 260 <sup>+0/-5</sup> °C |
| Time within 5°C of actual peak Temperature ( $t_p$ )   |                                    | 20 – 40 seconds         |
| Ramp-down Rate   |                                    | 6°C/second max          |
| Time 25°C to peak Temperature ( $T_p$ )                |                                    | 8 minutes Max.          |
| Do not exceed  |                                    | 280°C                   |

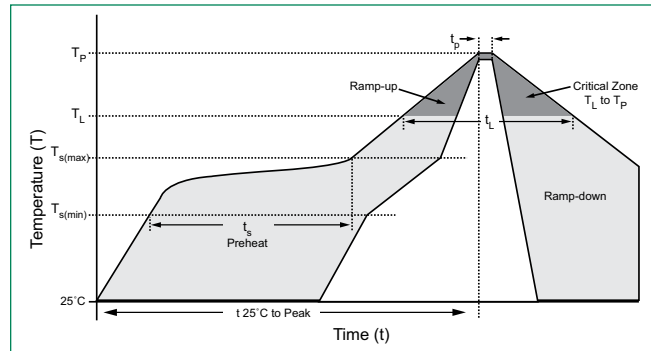

## Flow/Wave Soldering (Solder Dipping)

|                           |            |
|---------------------------|------------|
| <b>Peak Temperature :</b> | 265°C      |
| <b>Dipping Time :</b>     | 10 seconds |
| <b>Soldering :</b>        | 1 time     |


## Physical Specifications

|                 |   |
|-----------------|---|
| <b>Weight</b>   | 0.07oz., 2.5g                                       |
| <b>Case</b>     | P600 molded plastic body over passivated junction.  |
| <b>Polarity</b> | Color band denotes the cathode except Bipolar.      |
| <b>Terminal</b> | Matte Tin axial leads, solderable per JESD22-B102D. |

## Environmental Specifications


|                           |              |
|---------------------------|--------------|
| <b>Temperature Cycle</b>  | JESD22-A104  |
| <b>Pressure Cooker</b>    | JESD 22-A102 |
| <b>High Temp. Storage</b> | JESD22-A103  |
| <b>HTRB</b>               | JESD22-A108  |
| <b>Thermal Shock</b>      | JESD22-A106  |

## Dimensions

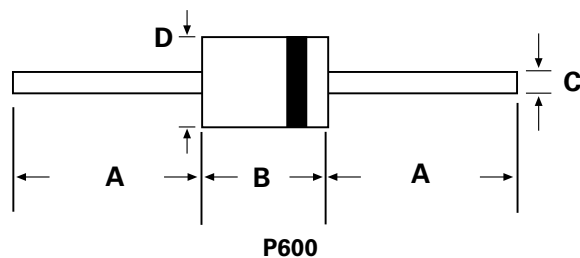


| Dimensions | Inches |       | Millimeters |      |
|------------|--------|-------|-------------|------|
|            | Min    | Max   | Min         | Max  |
| A          | 1.000  | -     | 25.40       | -    |
| B          | 0.340  | 0.360 | 8.60        | 9.10 |
| C          | 0.048  | 0.052 | 1.22        | 1.32 |
| D          | 0.340  | 0.360 | 8.60        | 9.10 |

### Part Numbering System

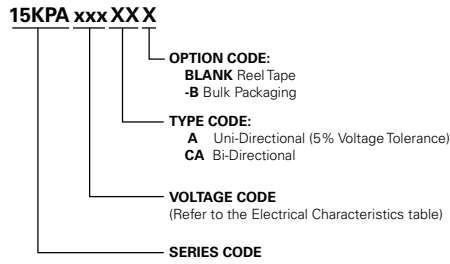

### Part Marking System

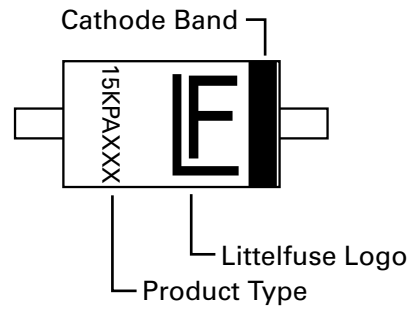

### Packaging

| Part Number  | Component Package | Quantity | Packaging Option | Packaging Specification                  |
|--------------|-------------------|----------|------------------|--|
| 15KPAxxxXX   | P600              | 800      | Tape & Reel      | EIA STD RS-296E                          |
| 15KPAxxxXX-B | P600              | 500      | BULK             | Littelfuse Concord Packing Spec. DM-0016 |

15KPA Series



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.