

### 75 Watts

- Ultra Slim Design - 32 mm
- 150% Peak Load for 3 seconds
- Ambient Operation from -25 °C to +70 °C
- Full Load at 60 °C
- High Efficiency - Up to 91%
- Volt-Free Contact for DC OK
- Selectable Parallel Operation
- 85 to 264 VAC Operation
- 3 Year Warranty



#### Dimensions:

##### DSR75:

1.26 x 4.88 x 4.69" (32.0 x 124.0 x 119.0 mm)


### Models & Ratings

| Output Voltage | Output Power | Output Voltage Trim <sup>(3)</sup> | Output Current | Peak Current <sup>(2)</sup> | Typical Efficiency <sup>(1)</sup> | Model Number |
|----------------|--------------|------------------------------------|----------------|-----------------------------|-----------------------------------|--------------|
| 12 V           | 75 W         | 12.0-14.0 V                        | 6.3 A          | 9.45 A                      | 88%                               | DSR75PS12    |
| 24 V           | 75 W         | 24.0-28.0 V                        | 3.2 A          | 4.80 A                      | 91%                               | DSR75PS24    |
| 48 V           | 75 W         | 48.0-56.0 V                        | 1.6 A          | 2.40 A                      | 91%                               | DSR75PS48    |

### Notes

1. Typical efficiency at 230 VAC and full load.
2. Peak current is for a maximum of 3 s, see Application Notes. Average power is not to exceed nominal output power.
3. Output current should be limited so that nominal output power is not exceeded.

### Mechanical Details

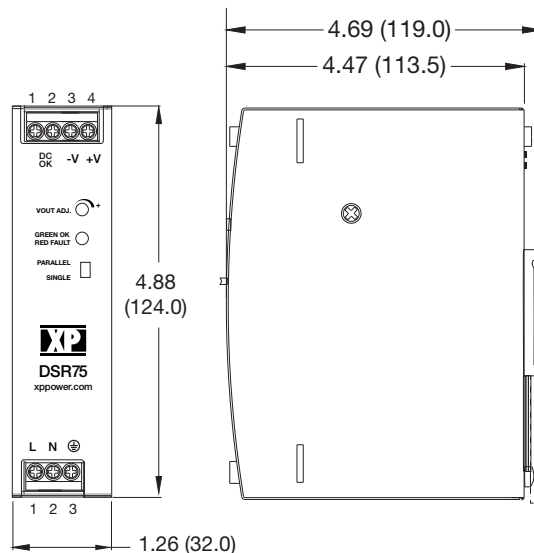

| Pin Connector |     |             |
|---------------|-----|-------------|
| Conn          | Pin | Designation |
| AC I/P        | 1   | L           |
|               | 2   | N           |
|               | 3   | Ground      |
| DC O/P        | 1   | DC OK       |
|               | 2   | DC OK       |
|               | 3   | -Vout       |
|               | 4   | +Vout       |

### Notes

1. All dimensions in inches (mm)
2. Weight: 1.06 lbs (480g)
3. Tolerance: ±0.02 in (±0.5 mm)

### Input

| Characteristic            | Minimum                              | Typical | Maximum | Units | Notes & Conditions                          |
|---------------------------|--------------------------------------|---------|---------|-------|---|
| Input Voltage - Operating | 85                                   |         | 264     | VAC   |   |
| Input Frequency           | 47                                   | 50/60   | 63      | Hz    |   |
| Power Factor              |                                      | 0.95    |         |       | At 230 VAC. Conforms to EN61000-3-2 Class A |
| Input Current - Full Load |                                      | 0.8/0.4 |         | A     | 115/230 VAC                                 |
| Inrush Current            |                                      |         | 30/60   | A     | At 115/230 VAC. Cold start, 25 °C           |
| Earth Leakage Current     |                                      |         | 1.0     | mA    | At 264 VAC, 60 Hz                           |
| Input Protection          | T5.0 A / 250 V internal in-line fuse |         |         |       |   |

### Output

| Characteristic            | Minimum | Typical | Maximum     | Units    | Notes & Conditions  |
|---------------------------|---------|---------|-------------|----------|---|
| Output Voltage - V1       | 12      |         | 48          | VDC      | See Models and Ratings table  |
| Initial Set Accuracy      |         |         | ±1          | %        | At 100% load  |
| Output Voltage Adjustment |         |         |             | %        | See Models and Ratings table  |
| Minimum Load              | 0       |         |             | A        | No minimum load required  |
| Start Up Delay            |         |         | 500         | ms       | At 100 VAC  |
| Hold Up Time              | 20      |         |             | ms       | At full load  |
| Line Regulation           |         |         | ±0.5        | %        |   |
| Load Regulation           |         |         | ±1          | %        |   |
| Transient Response - V1   |         |         | 5           | %        | Recovery within 1% in less than 200 µs for a 50% step load change at 0.2 A/µs |
| Ripple & Noise            |         |         | 100/120/240 | mV pk-pk | 12 V/24 V/48 V models. Measured at 20 MHz bandwidth 0-70°C                    |
|                           |         |         | 200/240/240 |          | 12 V/24 V/48 V models. Measured at 20 MHz bandwidth -25-0°C                   |
| Overvoltage Protection    | 15      |         | 20          | V        | 12 V model, at 115/230 VAC input  |
|                           | 29      |         | 40          | V        | 24 V model, at 115/230 VAC input  |
|                           | 58      |         | 65          | V        | 48 V model  |
| Overload Protection       | 110     |         | 150         | %        | Trip & restart. See application note.   |
| Short Circuit Protection  |         |         |             |          | Trip & restart (hiccup mode), auto recovery                                   |
| Thermal Protection        |         | 110 ±10 |             | °C       | Measured internally, recycle AC to reset                                      |
| Temperature Coefficient   |         |         | 0.03        | %/°C     |   |

### General

| Characteristic  | Minimum   | Typical    | Maximum | Units  | Notes & Conditions                             |
|---|---|------------|---------|--------|--|
| Efficiency  |   | 91         |         | %      | See Models & Ratings table                     |
| Isolation: Input to Output<br>Input to Ground<br>Output to Ground | 3000  |            |         | VAC    |  |
|   | 2500  |            |         | VAC    |  |
|   | 500   |            |         | VAC    |  |
| Switching Frequency   |   | 65         |         | kHz    | PFC, fixed                                     |
|   | 60  |            | 400     | kHz    | Main converter, variable, at 115/230 VAC input |
| DC OK Signal  | Volt free contacts rated at 60 VDC/0.3 A, 30 VDC/1.0 A or 30 VAC/0.3 A (resistive load) |            |         |        |  |
| Output LED  | Green LED to indicate output on.  |            |         |        |  |
| Mean Time Between Failure   | 300   |            |         | kHrs   | MIL-HDBK-217F, +25 °C GB                       |
| Weight  |   | 1.06 (480) |         | lb (g) |  |

### Environmental

| Characteristic        | Minimum | Typical | Maximum | Units | Notes & Conditions  |
|-----------------------|---------|---------|---------|-------|---|
| Operating Temperature | -25     |         | +70     | °C    | See derating curve in Application Notes                         |
| Storage Temperature   | -40     |         | +85     | °C    |   |
| Cooling               |         |         |         |       | Natural convection  |
| Operating Humidity    | 20      |         | 95      | %RH   | Non-condensing  |
| Operating Altitude    |         |         | 5000    | m     |   |
| Shock                 |         | 4       |         | g     | IEC68-2-27, 22 ms half sine, 3 times in each of 6 axes          |
| Vibration             |         | 2       |         | g     | IEC68-2-6, 10-500 Hz, 10 mins/sweep. 60 mins for each of 3 axes |

### EMC: Emissions

| Phenomenon           | Standard    | Test Level | Criteria | Notes & Conditions |
|----------------------|-------------|------------|----------|--------------------|
| Conducted            | EN55032     | Class B    |          |                    |
| Radiated             | EN55032     | Class B    |          |                    |
| Harmonic Current     | EN61000-3-2 | Class A    |          |                    |
| Voltage Fluctuations | EN61000-3-3 |            |          |                    |


### EMC: Immunity

| Phenomenon             | Standard    | Test Level           | Criteria | Notes & Conditions |
|------------------------|-------------|----------------------|----------|--------------------|
| ESD Immunity           | EN61000-4-2 | 6 kV                 | A        | Contact            |
|                        |             | 8 kV                 |          | Air Discharge      |
| Radiated Immunity      | EN61000-4-3 | 10 V/m               | A        |                    |
| EFT/Burst              | EN61000-4-4 | 3                    | A        |                    |
| Surges                 | EN61000-4-5 | Installation class 3 | A        |                    |
| Conducted              | EN61000-4-6 | 10 V                 | A        |                    |
| Magnetic Fields        | EN61000-4-8 | 4                    | A        |                    |
| Dips and Interruptions | EN55024     | Dip: 30%, 10 ms      | A        |                    |
|                        |             | Dip: 60%, 100 ms     | A/B      | High Line/Low Line |
|                        |             | Dip: 100%, 5000 ms   | B        |                    |

### Safety Approvals

| Safety Agency | Safety Standard | Notes & Conditions                                  |
|---------------|-----------------|---|
| UL            | UL508/UL60950   | Industrial Control Equipment/Information Technology |
| TUV           | EN60950-1       | Information Technology                              |
| CB            | IEC60950-1      | Information Technology                              |

### Mechanical Details

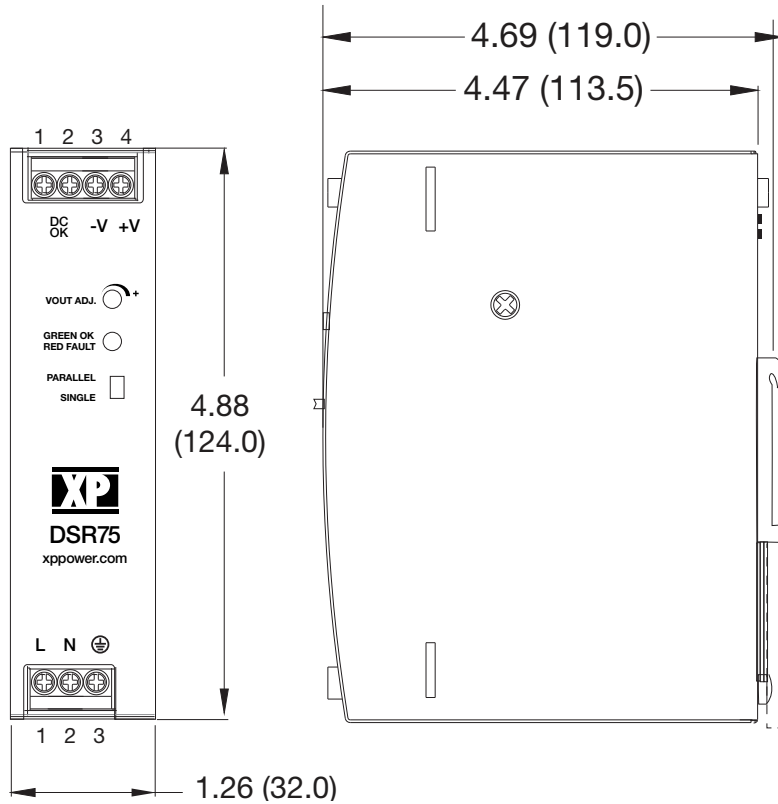

| Pin Connector |     |             |
|---------------|-----|-------------|
| Conn          | Pin | Designation |
| AC I/P        | 1   | L           |
|               | 2   | N           |
|               | 3   | Ground      |
| DC O/P        | 1   | DC OK       |
|               | 2   | DC OK       |
|               | 3   | -Vout       |
|               | 4   | +Vout       |


### Notes

- All dimensions in inches (mm)
- Weight: 1.06 lbs (480 g)
- Tolerance:  $\pm 0.02$  in ( $\pm 0.5$  mm)

### Application Notes

#### Derating Curves


##### DSR75PS12

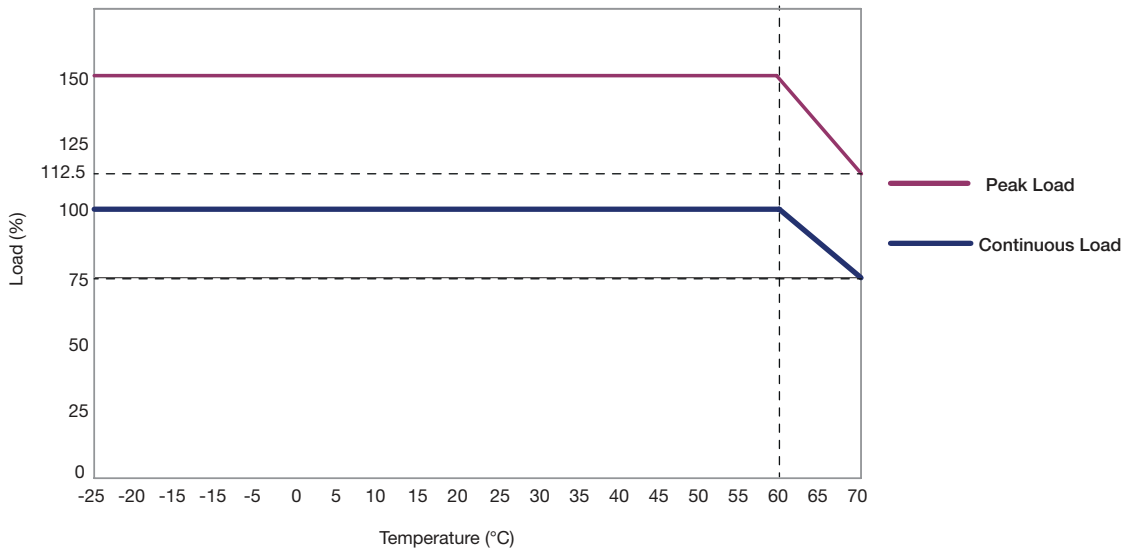


### Application Notes

#### Derating Curves

##### DSR75PS24

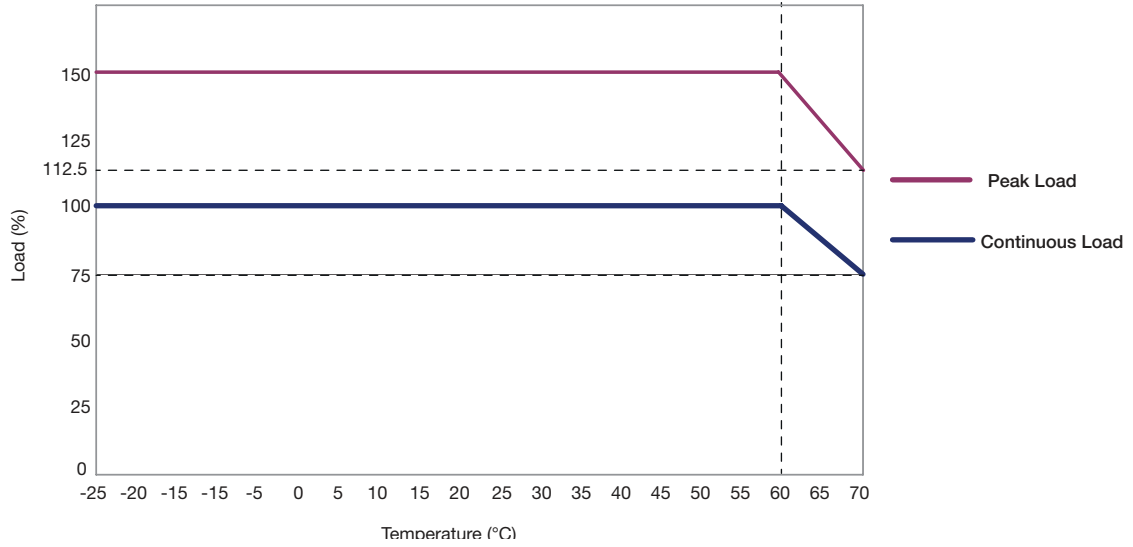

##### DSR75PS48

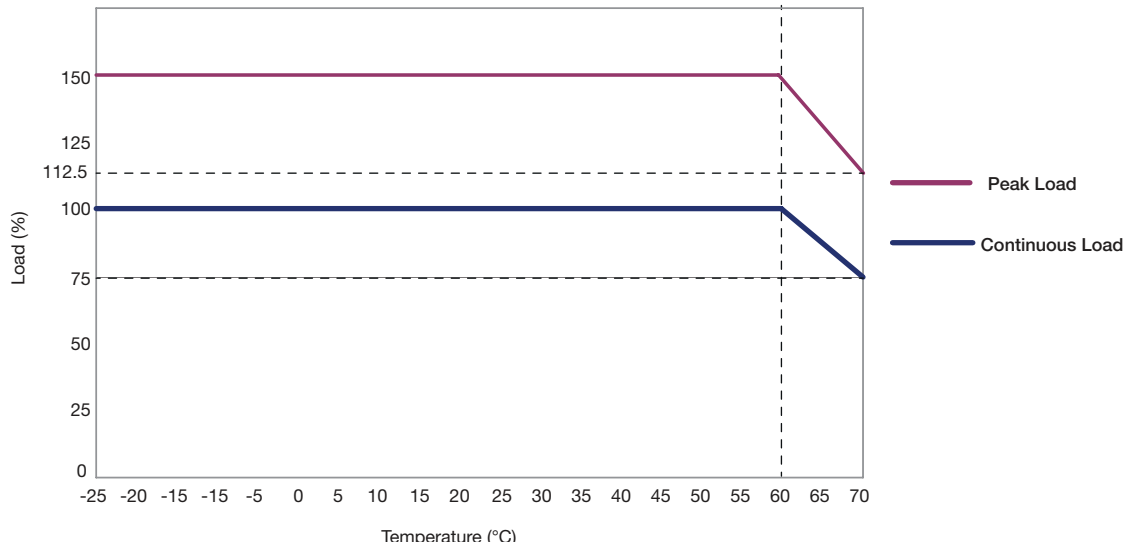

### DC OK



Open = Output fail, if voltage drops below 80% of nominal  
 Closed = Output good

Contact Rating: 0.3 A at 60 VDC, 1.0 A at 30 VDC, 0.5 A at 30 VAC.  
 500 VDC isolation to output.

### Peak Load and Overload

A peak load can be used for a certain period after which the output goes into overload mode. Overload operation is trip and restart. The peak load duration depends on the value of the load, e.g. a peak load of 150% can be taken for approximately 3s. After this time the output will turn off for approximately 7s before turning back on.

If the load has reduced to 100% or less than normal operation is resumed. If the load remains at 150% then the output is maintained for a further 3s before turning off for 7s. See example plot below.



If the peak load is less than 150%, the duration of the peak can be longer than 3s before the output turns off, for example, a peak load of 130% could typically be taken for up to 13s and a peak load of 140% could typically be taken for up to 5s. The off duration is always approximately 7s.

Average power is not to exceed nominal output power.



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.