


### PERFORMANCE MEDICAL SWITCHERS

#### FEATURES:

- **Wide-range ac input 85-264 Vac**
- **2-year warranty**
- **Conducted EMI exceeds FCC Class B and CISPR 22 Class B (Commercial models) and CISPR 11 Class B (Medical models)**
- **Commercial Approved to UL1950, IEC950, EN60950 and CSA22.2-234 L3**
- **Medical Approved to UL2601-1, IEC601-1 and CSA22.2 No. 601.1**
- **Complies with EN61000-3-2 Class A**
- **RoHS Compliant Model Available (G suffix)**

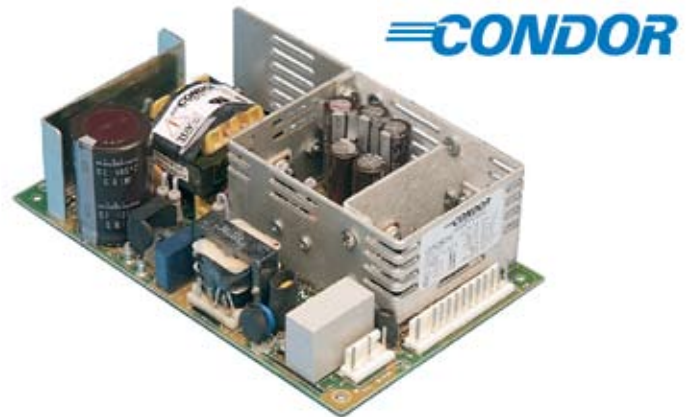

#### SPECIFICATIONS

<p><b>Ac Input</b> 85-264 Vac, 47-63 Hz single phase.</p>	<p><b>Output Noise</b> 0.5% rms, 1% pk-pk, 20 MHz bandwidth, differential mode. Measured with noise probe directly across output terminals of the power supply.</p>																
<p><b>Input Current</b> Maximum input current at 120 Vac, 60 Hz with full rated output load: 2.3 A</p>	<p><b>Transient Response</b> Main output—500 <math>\mu</math>s typical response time for return to within 0.5% of final value for a 50% load step change. <math>\Delta i/\Delta t &lt; 0.2</math> A/<math>\mu</math>s. Maximum voltage deviation is 3.5%. Startup/shutdown overshoot less than 3%.</p>																
<p><b>Hold-Up Time</b> 20 ms minimum from loss of ac input at full load, nominal line (115 Vac).</p>	<p><b>Remote Sense</b> Provided as a standard feature on single-output models.</p>																
<p><b>Output Power</b> 80 W continuous, 110 W with air flow. Peak ratings are for 60 s maximum duration, 10% duty cycle. During peak load condition, output regulation may exceed total regulation limits.</p>	<p><b>Voltage Adjustment</b> Built-in potentiometer adjusts voltage <math>\pm 5\%</math> on outputs 1 &amp; 2.</p>																
<p><b>Overload Protection</b> Fully protected against short circuit and output overload. Short circuit protection is cycling type power limit on outputs 1 &amp; 2; foldback type on outputs 3 &amp; 4. Recovery after fault is automatic. Factory set to begin power limiting at 120 W. See output ratings chart for additional notes or conditions.</p>	<p><b>EMI/EMC Compliance</b> All models include built-in EMI filtering to meet the following emissions requirements:</p> <table border="1"> <thead> <tr> <th>EMI SPECIFICATIONS</th> <th>COMPLIANCE LEVEL</th> </tr> </thead> <tbody> <tr> <td>Conducted Emissions GPC80</td> <td>EN55022 Class B; FCC Class B</td> </tr> <tr> <td>Conducted Emissions GPM80</td> <td>EN55011 Class B; FCC Class B</td> </tr> <tr> <td>Static Discharge</td> <td>EN61000-4-2, 6 kV contact, 8 kV air</td> </tr> <tr> <td>RF Field Susceptibility</td> <td>EN61000-4-3, 3 V/meter</td> </tr> <tr> <td>Fast Transients/Bursts</td> <td>EN61000-4-4, 2 kV, 5 kHz</td> </tr> <tr> <td>Surge Susceptibility</td> <td>EN61000-4-5, 1 kV diff., 2 kV com.</td> </tr> <tr> <td>Line Frequency Harmonics</td> <td>EN61000-3-2 Class A</td> </tr> </tbody> </table>	EMI SPECIFICATIONS	COMPLIANCE LEVEL	Conducted Emissions GPC80	EN55022 Class B; FCC Class B	Conducted Emissions GPM80	EN55011 Class B; FCC Class B	Static Discharge	EN61000-4-2, 6 kV contact, 8 kV air	RF Field Susceptibility	EN61000-4-3, 3 V/meter	Fast Transients/Bursts	EN61000-4-4, 2 kV, 5 kHz	Surge Susceptibility	EN61000-4-5, 1 kV diff., 2 kV com.	Line Frequency Harmonics	EN61000-3-2 Class A
EMI SPECIFICATIONS	COMPLIANCE LEVEL																
Conducted Emissions GPC80	EN55022 Class B; FCC Class B																
Conducted Emissions GPM80	EN55011 Class B; FCC Class B																
Static Discharge	EN61000-4-2, 6 kV contact, 8 kV air																
RF Field Susceptibility	EN61000-4-3, 3 V/meter																
Fast Transients/Bursts	EN61000-4-4, 2 kV, 5 kHz																
Surge Susceptibility	EN61000-4-5, 1 kV diff., 2 kV com.																
Line Frequency Harmonics	EN61000-3-2 Class A																
<p><b>Overvoltage Protection</b> Main outputs: 124% <math>\pm</math> 12% typical.</p>	<p><b>Commercial Leakage Current</b> 0.7 mA 254 Vac @ 60 Hz input.</p>																
<p><b>Efficiency</b> 70% at full rated load, nominal input voltage, depending on model and load distribution.</p>	<p><b>Commercial Safety</b> Approved to UL1950, CSA22.2 No. 234 Level 3, IEC950 and EN60950. UL file #E135803 commercial; CSA #LR46516 all. The output(s) are intended for safety earthed Signal Output and Intermediate Circuits only. All dc outputs are SELV under normal and single fault conditions.</p>																
<p><b>Input Protection</b> Internal ac fuse provided. Designed to blow only if a catastrophic failure occurs in the unit.</p>	<p><b>Medical Leakage Current</b> 35 <math>\mu</math>A 254 Vac @ 60 Hz input.</p>																
<p><b>Inrush Current</b> Inrush is limited by internal thermistors. Inrush at 240 Vac under cold start conditions will not exceed 34 A.</p>	<p><b>Medical Commercial Safety</b> Approved to UL2601-1, CSA-C22.2 No. 601.1 Level 3 and IEC601.1. UL file E116994; CSA #LR46516. The output(s) are intended for safety earthed Signal Output and Intermediate Circuits only. The output(s) are not acceptable for patient connection without additional isolation. All dc outputs are SELV under normal and single fault conditions.</p>																
<p><b>Temperature Coefficient</b> 0.03%/<math>^{\circ}</math>C typical on all outputs.</p>																	
<p><b>Environmental</b> Designed for 0 to 50<math>^{\circ}</math>C operation at full rated output power; derate output current and total output power by 2.5% per <math>^{\circ}</math>C above 50<math>^{\circ}</math>C. See Environmental and Packaging Specifications on next page.</p>																	
<p><b>Power Fail (optional)</b> TTL- or CMOS-compatible output goes low (&lt; 0.5 V) 5 ms before output voltage drops more than 4% below nominal voltage upon loss of ac power. The signal is factory set to trip on 84 to 94 Vac brown-out depending upon incoming line impedance and distortion. Other settings are available to the user through adjustment of built-in potentiometer (consult factory for assistance). For Power fail option, add -PF after model number.</p>																	

Commercial Model	Medical Model	RoHS Suffix*	Output No.	Output	Output Minimum	Output Maximum (B)	Output Maximum (C)	Output Peak	Noise P-P	Total Regulation (A)
GPC80A	GPM80A	G	1	+5 V	1.0 A	12 A	12 A	16 A	50 mV	2%
			2	+12V	0 A	3 A	4 A	5 A	120 mV	2%
			3	-12V	0 A	1 A	1.2 A	1.2 A	120 mV	3%
			4	+12V	0 A	1 A	1.2 A	1.2 A	120 mV	3%
GPC80B	GPM80B	G	1	+5 V	1.0 A	12 A	12 A	16 A	50 mV	2%
			2	+12V	0 A	3 A	4 A	5 A	120 mV	2%
			3	-12V	0 A	1 A	1.2 A	1.2 A	120 mV	3%
			4	-5V	0 A	1 A	1.2 A	1.2 A	50 mV	3%
GPC80C	GPM80C	G	1	+5 V	1 A	12 A	12 A	16 A	50 mV	2%
			2	+12V	0 A	3 A	4 A	5 A	120 mV	2%
			3	-15V	0 A	1 A	1.2 A	1.2 A	150 mV	3%
			4	+15V	0 A	1 A	1.2 A	1.2 A	150 mV	3%
GPC80D	GPM80D	G	1	+5 V	1 A	12 A	12 A	16 A	50 mV	2%
			2	+24V	0 A	2 A	3 A	4 A	240 mV	2%
			3	-12V	0 A	1 A	1.2 A	1.2 A	120 mV	3%
			4	+12V	0 A	1 A	1.2 A	1.2 A	120 mV	3%
GPC80 E	GPM80E	G	1	+5 V	1 A	12 A	12 A	16 A	50 mV	2%
			2	+24V	0 A	2 A	3 A	4 A	240 mV	2%
			3	-15V	0 A	1 A	1.2 A	1.2 A	150 mV	3%
			4	+15V	0 A	1 A	1.2 A	1.2 A	150 mV	3%
GPC80P	GPM80P	G	1	+5 V	1 A	12 A	12 A	16 A	50 mV	2%
			2	+24V	0.5 A	3.5 A	4.5 A	4.5 A	400 mV	+10%/-5% D
			3	-12V	0 A	1 A	1.2 A	1.2 A	120 mV	3%
			4	+12V	0 A	2 A	2 A	2.5 A	120 mV	3%
GPC80-5	GPM80-5	G	1	5 V	0 A	16 A	20 A	22 A	50 mV	2%
GPC80-12	GPM80-12	G	1	12 V	0 A	6.7 A	9.2 A	9.2 A	120 mV	2%
GPC80-15	GPM80-15	G	1	15 V	0 A	5.3 A	7.3 A	7.3 A	150 mV	2%
GPC80-24	GPM80-24	G	1	24 V	0 A	3.4 A	4.6 A	4.6 A	240 mV	2%
GPC80-28	GPM80-28	G	1	28 V	0 A	2.9 A	3.9 A	3.9 A	280 mV	2%
GPC80-48	GPM80-48	G	1	48 V	0 A	1.7 A	2.3 A	2.3 A	480 mV	2%

\* Add "G" suffix to part number for RoHS compliant model. Contact factory for availability.

A. Total regulation is defined as the maximum deviation from the nominal voltage for all steady-state conditions of initial voltage setting, input line voltage and output load.

B. Ratings for unrestricted natural convection cooling; output 1 & 2 combined load not to exceed 14A continuous; total power = 80W.

C. Ratings with 26 cfm forced air cooling; output 1 & 2 combined load not to exceed 16A continuous; total power = 110W.

D. To maintain these regulation conditions, the +5V current must be at least 1/4 of V2 and not greater than 5 times the V2 current. Requires +5V to be adjusted within ±1% with at least a 1A load to maintain regulation on this input.

E. For Power Fail option, add -PF after the model number.

## GPC80/GPM80 MECHANICAL SPECIFICATIONS

### INPUT: J1

AMP P/N 640445-5 0.156 [3.96mm] CTR HEADER

PIN 1) AC GROUND  
PIN 2) N/C  
PIN 3) AC NEUTRAL  
PIN 4) N/C  
PIN 5) AC LINE

### MATING CONNECTORS AMP P/N

#### HOUSING

INPUT 640250-5 770476-1  
OUTPUT 1-640250-3 770476-1

NOTE: 5A MAXIMUM RECOMMENDED CURRENT PER CONNECTOR PIN

OPTIONAL ENCLOSURE AVAILABLE, ORDER PIN 08-30466-1180

WEIGHT 1.8 LBS MAX. [0.82 kg MAX.]

### OUTPUT: J2


AMP P/N 1-640445-3 0.156 [3.96mm] CTR HEADER

J2	MULTI OUTPUT MODELS	SINGLE OUTPUT MODELS	J2 CONT.	MULTI OUTPUT MODELS	SINGLE OUTPUT MODELS
PIN 1)	OUTPUT #1	OUTPUT #1	PIN 8)	OUTPUT #2	COMMON
PIN 2)	OUTPUT #1	OUTPUT #1	PIN 9)	OUTPUT #2	COMMON
PIN 3)	OUTPUT #1	OUTPUT #1	PIN 10)	POWER FAIL	POWER FAIL
PIN 4)	COMMON	OUTPUT #1	PIN 11)	OUTPUT #3	+ SENSE
PIN 5)	COMMON	COMMON	PIN 12)	KEY	KEY
PIN 6)	COMMON	COMMON	PIN 13)	OUTPUT #4	- SENSE
PIN 7)	COMMON	COMMON			

### TOLERANCES:

X.XX = ± 0.030 (0.76MM)

X.XXX = ± 0.010 (0.25MM)

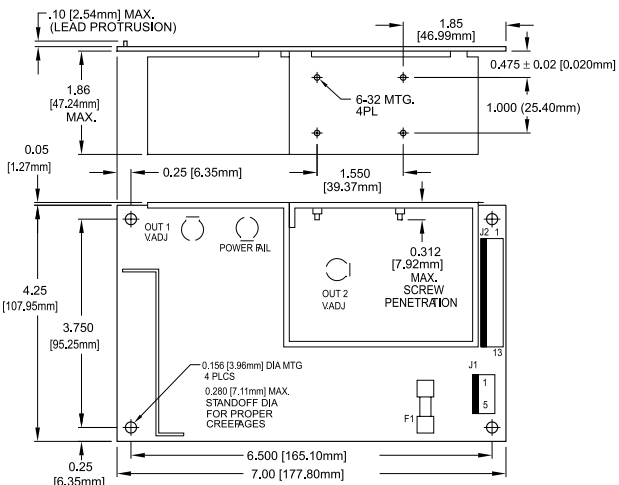

ENVIRONMENTAL SPECIFICATIONS	OPERATING	NON-OPERATING
Temperature (A)	See individual specs	-40 to +85°C
Humidity (A)	0 to 95% RH	0 to 95% RH
Shock (B)	20 g <sub>pk</sub>	40 g <sub>pk</sub>
Altitude	-500 to 10,000 ft	-500 to 40,000 ft
Vibration (C)	1.5 g <sub>rms</sub> , 0.003 g <sup>2</sup> /Hz	5 g <sub>rms</sub> , 0.026 g <sup>2</sup> /Hz

A. Units should be allowed to warm up/operate under non-condensing conditions before application of power.

B. Shock testing—half-sinusoidal, 10 ± 3 ms duration, ± direction, 3 orthogonal axes, total 6 shocks.

C. Random vibration—10 to 2000Hz, 6dB/octave roll-off from 350 to 2000Hz, 3 orthogonal axes. Tested for 10 min./axis operating and 1 hr./axis non-operating.



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.