

DHB34 Varistor Series



Agency Approvals

| Agency | Agency Approval | Agency File Number |
|--------|-----------------|--------------------|
| | UL1449 | E320116 |
| | 22.2-1 | 91788 |

Additional Information



Datasheet



Resources



Samples

Description

The DHB34 Series of transient surge suppressors is comprised of two industrial high-energy Metal-Oxide Varistors (MOV) discs placed in parallel as a single device. They are designed to provide surge suppression in the AC mains outdoor and service entrance environment (distribution panels) of buildings. DHB34 applications also include industrial heavy motors, controls, and power supplies such as used in the oil-drilling, mining, and transportation fields, including HVAC and motor/generator applications.

The DHB34 Series provides rigid terminals for through-hole solder mounting on printed circuit boards, thereby eliminating the need for screw mounting.

Features

- Lead-Free, Halogen-Free and RoHS Compliant
- Wide operating voltage range
 $V_{M(AC)RMS}$ 110V to 750V
- High-energy absorption capability
 $W_{TM} = 220J$ to 1050J
- High peak pulse current (Each of two discs placed in parallel) capability
 $I_{TM} = 40,000A$
- Rigid terminals for secure through-hole solder mounting
- No derating up to 85°C ambient
- Dual Disc Device - two 34mm varistor discs in parallel in a single package.

Absolute Maximum Ratings

• For ratings of individual members of a series, see Device Ratings and Specifications chart

| Continuous | DHB34 Series | Units |
|--|--------------|------------|
| Steady State Applied Voltage: | | |
| AC Voltage Range ($V_{M(AC)RMS}$) | 110 to 750 | V |
| DC Voltage Range ($V_{M(DC)}$) | 148 to 970 | V |
| Transients: | | |
| Peak Pulse Current (I_{TM}) | | |
| For 8/20 μ s Current Wave (See Figure 2) | 40000 | A |
| Single Pulse Energy Range | | |
| For 2ms Current Wave (W_{TM}) | 220 to 1050 | J |
| Operating Ambient Temperature Range (T_A) | -55 to + 85 | °C |
| Storage Temperature Range (T_{STG}) | -55 to + 125 | °C |
| Temperature Coefficient (α^V) of Clamping Voltage (V_C) at Specified Test Current | <0.01 | %/°C |
| Hi-Pot Encapsulation (COATING Isolation Voltage Capability) | 2500 | V |
| COATING Insulation Resistance | 1000 | M Ω |

CAUTION: Stresses above those listed in "Absolute Maximum Ratings" may cause permanent damage to the device. This is a stress only rating and operation of the device at these or any other conditions above those indicated in the operational sections of this specification is not implied.

DHB34 Series Ratings & Specifications

| Lead-free and RoHS Compliant Models | Model Size Disc Dia. (mm) | Maximum Rating (85°C) | | | | Specifications (25°C) | | | | |
|-------------------------------------|---------------------------|-----------------------|-------------|--------------|-------------------------------|---|-------------|-------|---|---------------------|
| | | Continuous | | Transient | | Varistor Voltage at 1mA DC Test Current | | | Maximum Clamping Voltage V_C at 200A Current (8/20 μ s) | Typical Capacitance |
| | | V_{RMS} | V_{DC} | Energy (2ms) | Peak Current (8 x 20 μ s) | | | | | |
| | | $V_{M(AC)}$ | $V_{M(DC)}$ | W_{TM} | I_{TM} | Min | $V_{N(DC)}$ | Max | V_C | $f = 1\text{MHz}$ |
| Part Number | | (V) | (V) | (J) | (A) | (V) | (V) | (V) | (V) | (pF) |
| V111DHB34 | 34 | 110 | 148 | 220 | 40,000 ¹ | 156 | 173 | 190 | 288 | 11,600 |
| V131DHB34 | 34 | 130 | 175 | 270 | 40,000 ² | 184.5 | 205 | 225.5 | 345 | 10,000 |
| V141DHB34 | 34 | 140 | 188 | 291 | 40,000 ³ | 198 | 220 | 242 | 375 | 9,000 |
| V151DHB34 | 34 | 150 | 200 | 300 | 40,000 ⁴ | 216 | 240 | 264 | 405 | 8,000 |
| V181DHB34 | 34 | 180 | 240 | 330 | 40,000 | 254 | 282 | 310 | 468 | 6,800 |
| V201DHB34 | 34 | 200 | 265 | 350 | 40,000 | 283 | 314 | 345 | 533 | 6,350 |
| V251DHB34 | 34 | 250 | 330 | 370 | 40,000 | 351 | 390 | 429 | 650 | 5,000 |
| V271DHB34 | 34 | 275 | 369 | 400 | 40,000 | 387 | 430 | 473 | 730 | 4,500 |
| V301DHB34 | 34 | 300 | 410 | 430 | 40,000 | 423 | 470 | 517 | 780 | 4,100 |
| V321DHB34 | 34 | 320 | 420 | 460 | 40,000 | 459 | 510 | 561 | 830 | 3,800 |
| V331DHB34 | 34 | 330 | 435 | 475 | 40,000 | 467 | 518.5 | 570 | 843 | 3,750 |
| V351DHB34 | 34 | 350 | 460 | 500 | 40,000 | 495 | 549.5 | 604 | 894 | 3,600 |
| V391DHB34 | 34 | 385 | 510 | 550 | 40,000 | 545 | 604 | 663 | 1,000 | 3,500 |
| V421DHB34 | 34 | 420 | 560 | 600 | 40,000 | 612 | 680 | 748 | 1,130 | 3,000 |
| V441DHB34 | 34 | 440 | 585 | 630 | 40,000 | 622 | 690 | 758 | 1,147 | 2,900 |
| V481DHB34 | 34 | 480 | 640 | 650 | 40,000 | 675 | 750 | 825 | 1,240 | 2,700 |
| V511DHB34 | 34 | 510 | 675 | 700 | 40,000 | 738 | 820 | 902 | 1,350 | 2,500 |
| V551DHB34 | 34 | 550 | 710 | 755 | 40,000 | 778 | 863.5 | 949 | 1,404 | 2,390 |
| V571DHB34 | 34 | 575 | 730 | 770 | 40,000 | 819 | 910 | 1001 | 1,480 | 2,200 |
| V661DHB34 | 34 | 660 | 850 | 900 | 40,000 | 945 | 1050 | 1155 | 1,720 | 2,000 |
| V681DHB34 | 34 | 680 | 875 | 925 | 40,000 | 962 | 1067.5 | 1173 | 1,777 | 1,900 |
| V751DHB34 | 34 | 750 | 970 | 1050 | 40,000 | 1080 | 1200 | 1320 | 2,000 | 1,800 |

Note:

- 40kA capability depends on applications rated up to 97 V_{RMS} . 30kA applies if > 97 V_{RMS} .
- 40kA capability depends on applications rated up to 115 V_{RMS} . 30kA applies if > 115 V_{RMS} .
- 40kA capability depends on applications rated up to 123 V_{RMS} . 30kA applies if > 123 V_{RMS} .
- 40kA capability depends on applications rated up to 132 V_{RMS} . 30kA applies if > 132 V_{RMS} .

Power Dissipation Ratings



Should transients occur in rapid succession, the average power 100 dissipation result is simply the energy (watt-seconds) per pulse times the number of pulses per second. The power so developed must be within the specifications shown on the Device Ratings and Specifications table for the specific device. The operating values must be derated as shown in above.

Peak Pulse Current Test Waveform



O_1 = Virtual Origin of Wave
 T = Time from 10% to 90% of Peak
 T_1 = Rise Time = $1.25 \times T$
 T_2 = Decay Time
Example - For an $8/20 \mu s$ Current Waveform:
 $8 \mu s = T_1$ = Rise Time
 $20 \mu s = T_2$ = Decay Time

Maximum Clamping Voltage



Repetitive Surge Capability



NOTE: If pulse ratings are exceeded, a shift of V_{NIDC} (at specified current) of more than $\pm 10\%$ could result. This type of shift, which normally results in a decrease of V_{NIDC} , may result in the device not meeting the original published specifications, but it does not prevent the device from continuing to function, and to provide ample protection.

Soldering Parameters

Non Lead-free Profile

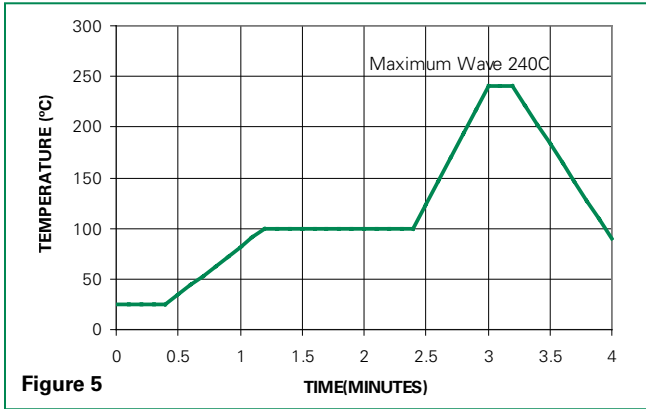


Figure 5

Lead-free Profile



Figure 6

| | | |
|---|-------------------------------|-------------------------|
| Reflow Condition | | Pb – Free assembly |
| Pre Heat | - Temperature Min (Ts(min)) | 150°C |
| | - Temperature Max (Ts(max)) | 200°C |
| | - Time (min to max) (ts) | 60 – 180 secs |
| Average ramp up-rate (Liquidus Temp (TL) to peak) | | 5°C/second max |
| TS(max) to TL - Ramp-up Rate | | 5°C/second max |
| Reflow | - Temperature (TL) (Liquidus) | 217°C |
| | - Temperature (tL) | 60 – 150 seconds |
| Peak Temperature (TP) | | 250 ^{+0/-5} °C |
| Time within 5°C of actual peak Temperature (tp) | | 20 – 40 seconds |
| Ramp-down Rate | | 5°C/second max |
| Time 25°C to peak Temperature (TP) | | 8 minutes Max. |
| Do not exceed | | 260°C |


Physical Specifications

| | |
|----------------------------------|--|
| Lead Material | Tin-coated Copper |
| Soldering Characteristics | Solderability per MIL-STD-202, Method 208 |
| Insulating Material | Cured, flame retardant epoxy polymer meets UL94V-0 requirements. |
| Device Labeling | Marked with LF, voltage, amperage rating, and date code. |

Environmental Specifications

| | |
|--------------------------------------|--|
| Operating/Storage Temperature | -55°C to +85°C/-55°C to +125°C |
| Humidity Aging | +85°C, 85% RH, 1000 hours +/-10% Voltage change |
| Thermal Shock | +85°C to -40°C 5 times +/-10% Voltage change |
| Solvent Resistance | MIL-STD-202, Method 215 |
| Moisture Sensitivity | Level 1, J-STD-020 |

Dimensions (mm)

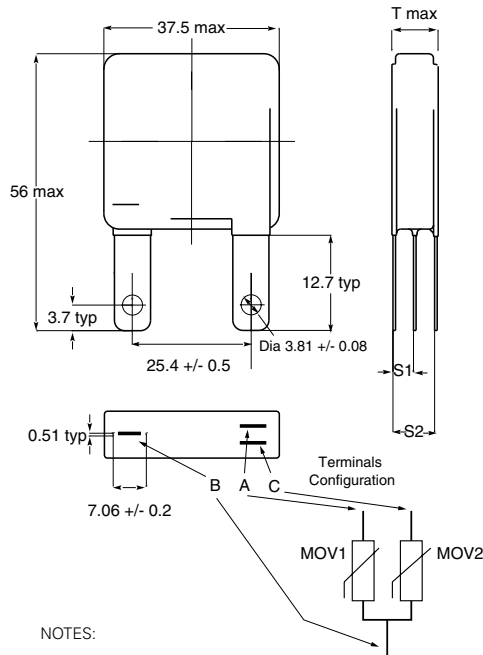


NOTES:

- **Terminals Configuration:**
Terminals A & B are connected to one varistor element.
Terminals B & C connected to second varistor element.
- **Dimensions:**
Measures are in mm is typical, unless otherwise specified.

Table of Dimensions - Thickness and Terminal Offsets

| Part Type | T Max | S1 +/- 1.15 mm | S2 +/- 2.30mm |
|-----------|-------|----------------|---------------|
| V111DHB34 | 7.6 | 2.65 | 5.50 |
| V131DHB34 | 7.8 | 2.85 | 5.70 |
| V141DHB34 | 8.2 | 3.00 | 6.00 |
| V151DHB34 | 8.8 | 3.15 | 6.30 |
| V181DHB34 | 9.0 | 3.25 | 6.50 |
| V201DHB34 | 9.2 | 3.35 | 6.70 |
| V251DHB34 | 9.10 | 3.00 | 6.00 |
| V271DHB34 | 9.55 | 3.25 | 6.50 |
| V301DHB34 | 10.20 | 3.50 | 7.00 |
| V321DHB34 | 10.60 | 3.66 | 7.24 |
| V331DHB34 | 10.65 | 3.70 | 7.40 |
| V351DHB34 | 10.5 | 4.10 | 8.20 |
| V391DHB34 | 11.2 | 4.45 | 8.90 |
| V421DHB34 | 12.65 | 4.50 | 9.00 |
| V441DHB34 | 12.80 | 4.55 | 9.10 |
| V481DHB34 | 13.55 | 4.80 | 9.60 |
| V511DHB34 | 13.4 | 5.25 | 10.50 |
| V551DHB34 | 14.6 | 5.70 | 11.40 |
| V571DHB34 | 14.8 | 5.80 | 11.60 |
| V661DHB34 | 17.20 | 6.65 | 13.30 |
| V681DHB34 | 17.5 | 7.00 | 14.00 |
| V751DHB34 | 18.20 | 7.35 | 14.70 |

Part Numbering System

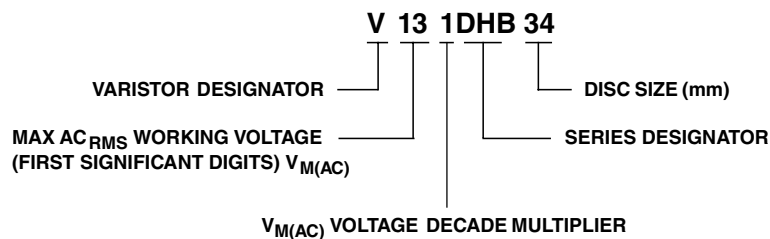

Disclaimer Notice - Information furnished is believed to be accurate and reliable. However, users should independently evaluate the suitability of and test each product selected for their own applications. Littelfuse products are not designed for, and may not be used in, all applications. Read complete Disclaimer Notice at www.littelfuse.com/disclaimer-electronics.



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.