

# NHD-5.0-800480TF-ATXL#

## TFT (Thin-Film-Transistor) Color Liquid Crystal Display Module

|         |                                                                 |
|---------|-----------------------------------------------------------------|
| NHD-    | Newhaven Display                                                |
| 5.0-    | 5.0" Diagonal                                                   |
| 800480- | 800xRGBx480 Pixels                                              |
| TF-     | Model                                                           |
| A-      | Built-in Driver / No Controller                                 |
| T-      | White LED Backlight                                             |
| X-      | TFT                                                             |
| L-      | 12:00 Optimum View, Enhanced Optical Characteristics, Wide Temp |
| #       | <b>RoHS Compliant</b>                                           |

### Newhaven Display International, Inc.

2661 Galvin Court

Elgin IL, 60124

Ph: 847-844-8795

Fax: 847-844-8796

[www.newhavendisplay.com](http://www.newhavendisplay.com)

[nhtech@newhavendisplay.com](mailto:nhtech@newhavendisplay.com)

[nhsales@newhavendisplay.com](mailto:nhsales@newhavendisplay.com)


## Document Revision History

| Revision | Date      | Description                        | Changed by |
|----------|-----------|------------------------------------|------------|
| 0        | 3/20/2013 | Initial Release                    | AK         |
| 1        | 8/28/2013 | Electrical characteristics updated | AK         |
| 2        | 9/16/2014 | Electrical characteristics updated | ML         |

## Functions and Features

- 800xRGBx480 resolution, up to 16.7M colors
- 18-LED backlight
- 24 bit RGB interface
- Enhanced Optical Characteristics

# Mechanical Drawing

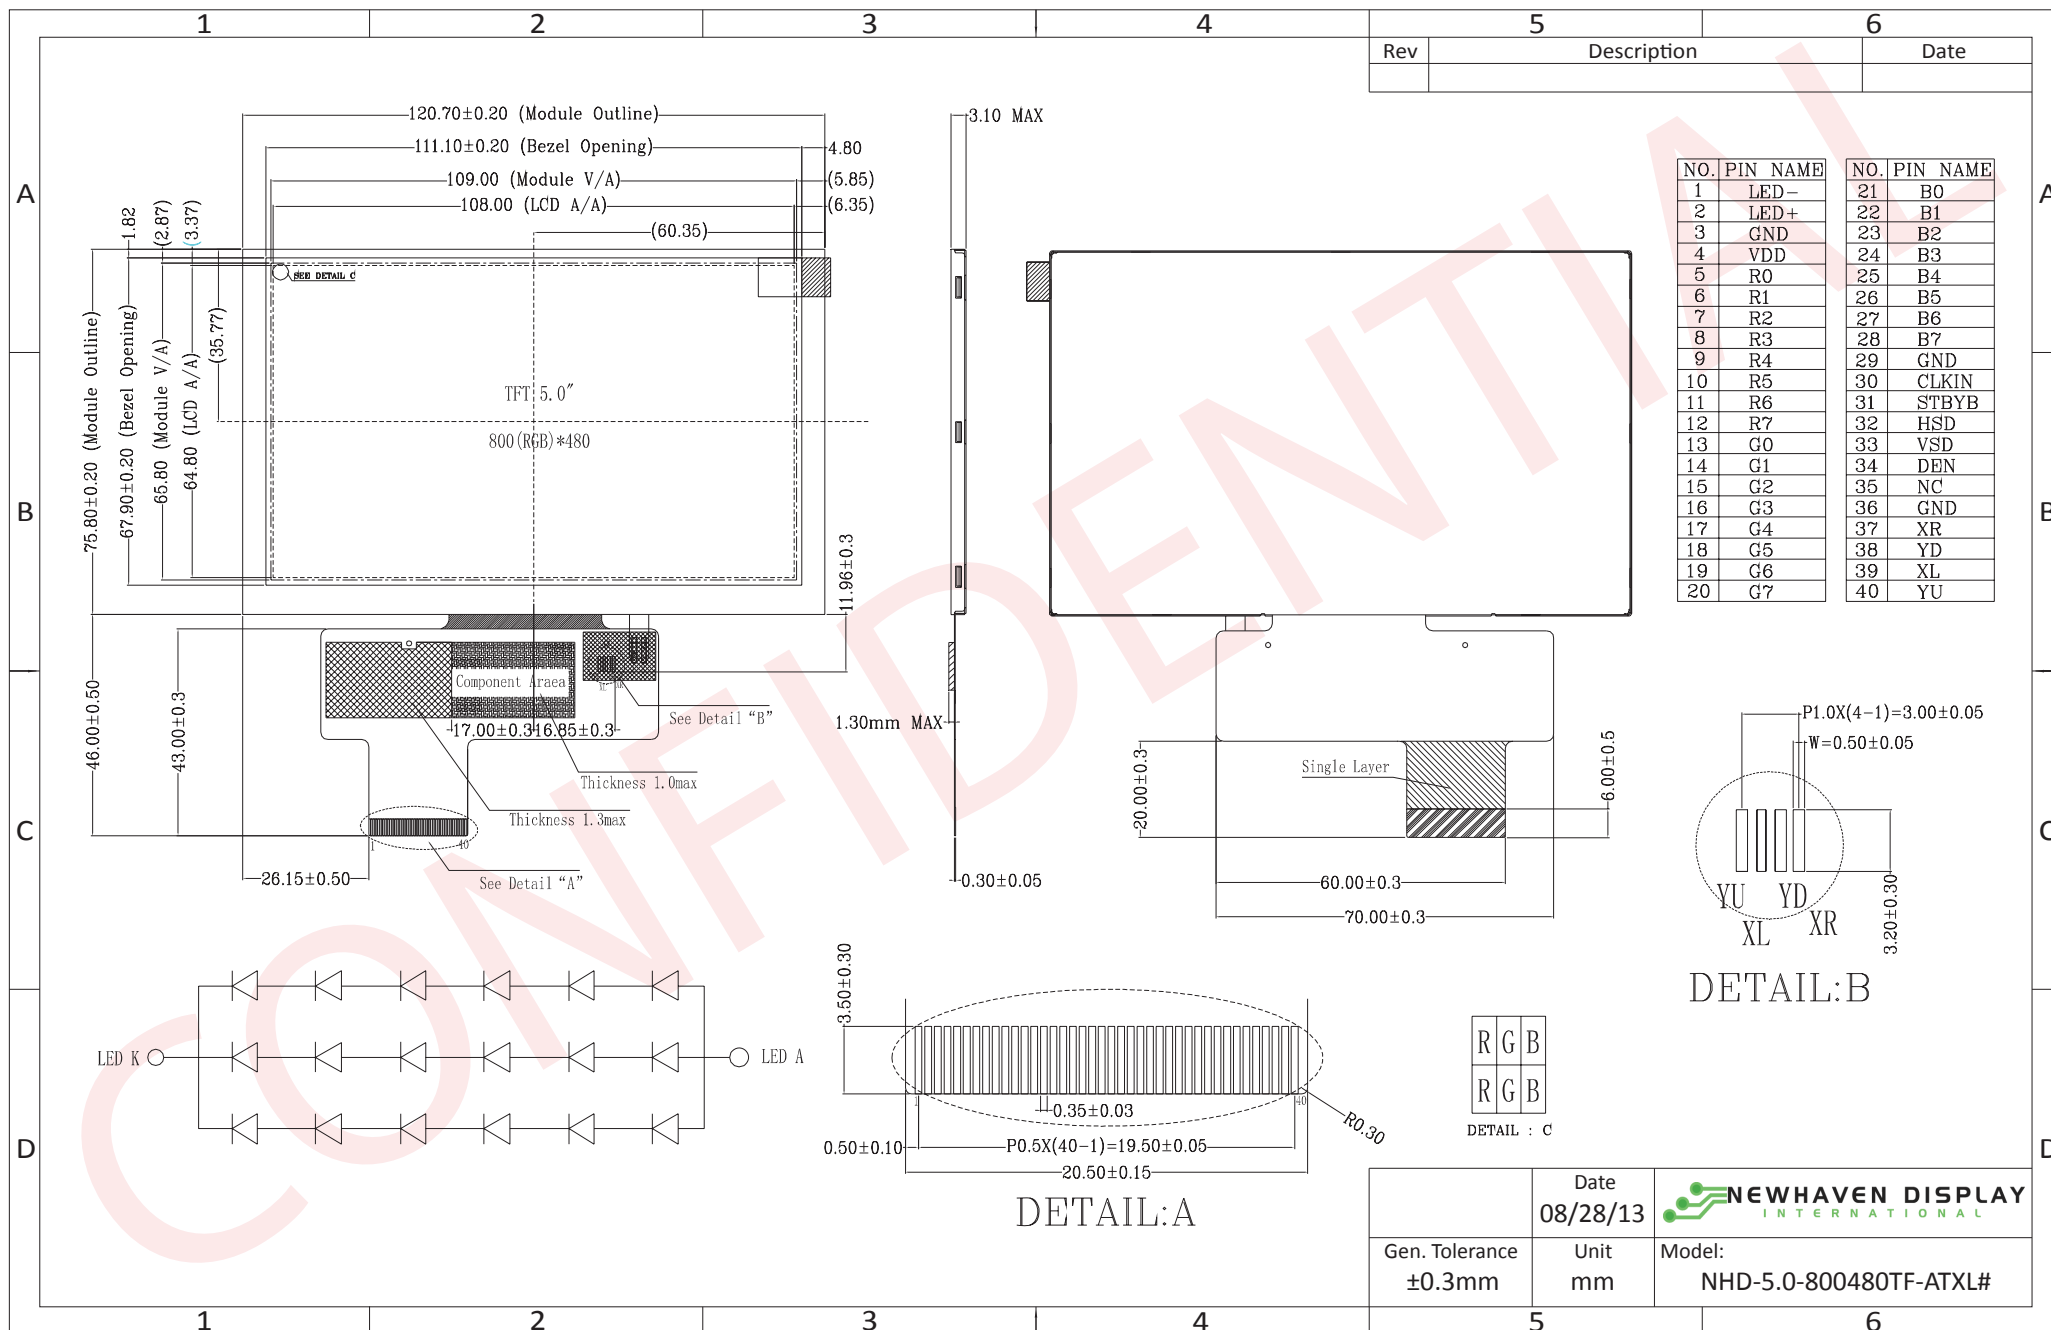

The drawing contained herein is the exclusive property of Newhaven Display International, Inc. and shall not be copied, reproduced, and/or disclosed in any format without permission.

## Pin Description

| Pin No. | Symbol  | External Connection | Function Description                  |
|---------|---------|---------------------|---------------------------------------|
| 1       | LED-    | LED Power Supply    | Ground for Backlight                  |
| 2       | LED+    | LED Power Supply    | Backlight Power Supply (60mA @ 19.2V) |
| 3       | GND     | Power Supply        | Ground                                |
| 4       | VDD     | Power Supply        | Power supply for LCD and logic (3.3V) |
| 5-12    | [R0-R7] | MPU                 | Red Data Signals                      |
| 13-20   | [G0-G7] | MPU                 | Green Data Signals                    |
| 21-28   | [B0-B7] | MPU                 | Blue Data Signals                     |
| 29      | GND     | Power Supply        | Ground                                |
| 30      | CLKIN   | MPU                 | Clock for input data (Rising Edge)    |
| 31      | STBYB   | MPU                 | 1: Normal Operation; 0: Standby Mode  |
| 32      | HSD     | MPU                 | Line synchronization signal           |
| 33      | VSD     | MPU                 | Frame synchronization signal          |
| 34      | DEN     | MPU                 | Data Enable signal                    |
| 35      | NC      | -                   | No Connect                            |
| 36      | GND     | Power Supply        | Ground                                |
| 37      | XR      | -                   | No Connect                            |
| 38      | YD      | -                   | No Connect                            |
| 39      | XL      | -                   | No Connect                            |
| 40      | YU      | -                   | No Connect                            |

**Recommended LCD connector:** 0.5mm pitch 40-Conductor FFC. Molex p/n: 54104-4031 (top contact)

**Backlight connector:** on LCD connector

**Mates with:** ---

## Electrical Characteristics

| Item                        | Symbol | Condition    | Min.    | Typ. | Max.    | Unit |
|-----------------------------|--------|--------------|---------|------|---------|------|
| Operating Temperature Range | Top    | Absolute Max | -20     | -    | +70     | °C   |
| Storage Temperature Range   | Tst    | Absolute Max | -30     | -    | +80     | °C   |
| Supply Voltage              | VDD    |              | 3.0     | 3.3  | 3.6     | V    |
| Supply Current              | IDD    | VDD=3.3V     | -       | 77   | -       | mA   |
| "H" Level input             | Vih    |              | 0.7*VDD | -    | VDD     | V    |
| "L" Level input             | Vil    |              | 0       | -    | 0.3*VDD | V    |
| "H" Level output            | Voh    |              | VDD-0.4 | -    | -       | V    |
| "L" Level output            | Vol    |              | -       | -    | GND+0.4 | V    |
| Backlight Supply Voltage    | VLED   |              | 16.2    | 19.2 | 20.4    | V    |
| Backlight Supply Current    | ILED   |              | 45      | 60   | 75      | mA   |

## Optical Characteristics:

| Item                  | Symbol | Condition | Min. | Typ. | Max. | Unit              |
|-----------------------|--------|-----------|------|------|------|-------------------|
| Viewing Angle –Top    |        | Cr ≥ 10   | 60   | 75   | -    | °                 |
| Viewing Angle –Bottom |        |           | 50   | 65   | -    | °                 |
| Viewing Angle – Left  |        |           | 60   | 75   | -    | °                 |
| Viewing Angle – Right |        |           | 60   | 75   | -    | °                 |
| Contrast Ratio        | Cr     |           | 500  | 600  | -    |                   |
| Luminance             | YL     |           | 400  | 450  | -    | cd/m <sup>2</sup> |
| Response Time         | Tr+Tf  | -         | -    | 20   | 30   | ms                |

## Driver Information

Built-in HX8264-D02 Source Driver: [http://www.newhavendisplay.com/app\\_notes/HX8264-D02.pdf](http://www.newhavendisplay.com/app_notes/HX8264-D02.pdf)

Built in HX8664-B Gate Driver: [http://www.newhavendisplay.com/app\\_notes/HX8664-B.pdf](http://www.newhavendisplay.com/app_notes/HX8664-B.pdf)

## Timing Characteristics

| Parameter              | Symbol    | Spec. |      |      | Unit |
|------------------------|-----------|-------|------|------|------|
|                        |           | Min.  | Typ. | Max. |      |
| HS setup time          | $T_{hst}$ | 8     | -    | -    | ns   |
| HS hold time           | $T_{hhd}$ | 8     | -    | -    | ns   |
| VS setup time          | $T_{vst}$ | 8     | -    | -    | ns   |
| VS hold time           | $T_{vhd}$ | 8     | -    | -    | ns   |
| Data setup time        | $T_{dsu}$ | 8     | -    | -    | ns   |
| Data hold time         | $T_{dhd}$ | 8     | -    | -    | ns   |
| DE setup time          | $T_{esu}$ | 8     | -    | -    | ns   |
| DE hold time           | $T_{ehd}$ | 8     | -    | -    | ns   |
| VDD Power On Slew rate | $T_{POR}$ | -     | -    | 20   | ms   |
| RSTB pulse width       | $T_{Rst}$ | 10    | -    | -    | us   |
| CLKIN cycle time       | $T_{cph}$ | 20    | -    | -    | ns   |
| CLKIN pulse duty       | $T_{cwh}$ | 40    | 50   | 60   | %    |
| Output stable time     | $T_{sst}$ | -     | -    | 6    | us   |


## Horizontal timing

| Parameter                | Symbol | Spec. |      |      | Unit |
|--------------------------|--------|-------|------|------|------|
|                          |        | Min.  | Typ. | Max. |      |
| Horizontal Display Area  | thd    | 800   |      |      | DCLK |
| DCLK frequency           | fclk   | -     | 30   | 50   | MHz  |
| One Horizontal Line      | th     | 889   | 928  | 1143 | DCLK |
| HS pulse width           | thpw   | 1     | 48   | 255  | DCLK |
| HS Back Porch (Blanking) | thb    | 88    |      |      | DCLK |
| HS Front Porch           | thfp   | 1     | 40   | 255  | DCLK |
| DE mode Blanking         | th-thd | 85    | 128  | 512  | DCLK |


## Vertical timing

| Parameter                | Symbol | Spec. |      |      | Unit  |
|--------------------------|--------|-------|------|------|-------|
|                          |        | Min.  | Typ. | Max. |       |
| Vertical Display Area    | tvd    | 480   |      |      | $T_H$ |
| VS period time           | tv     | 513   | 525  | 767  | $T_H$ |
| VS pulse width           | tvpw   | 3     | 3    | 255  | $T_H$ |
| VS Back Porch (Blanking) | tvb    | 32    |      |      | $T_H$ |
| VS Front Porch           | tvfp   | 1     | 13   | 255  | $T_H$ |
| DE mode Blanking         | tv-tvd | 4     | 45   | 255  | $T_H$ |

## Horizontal Timing

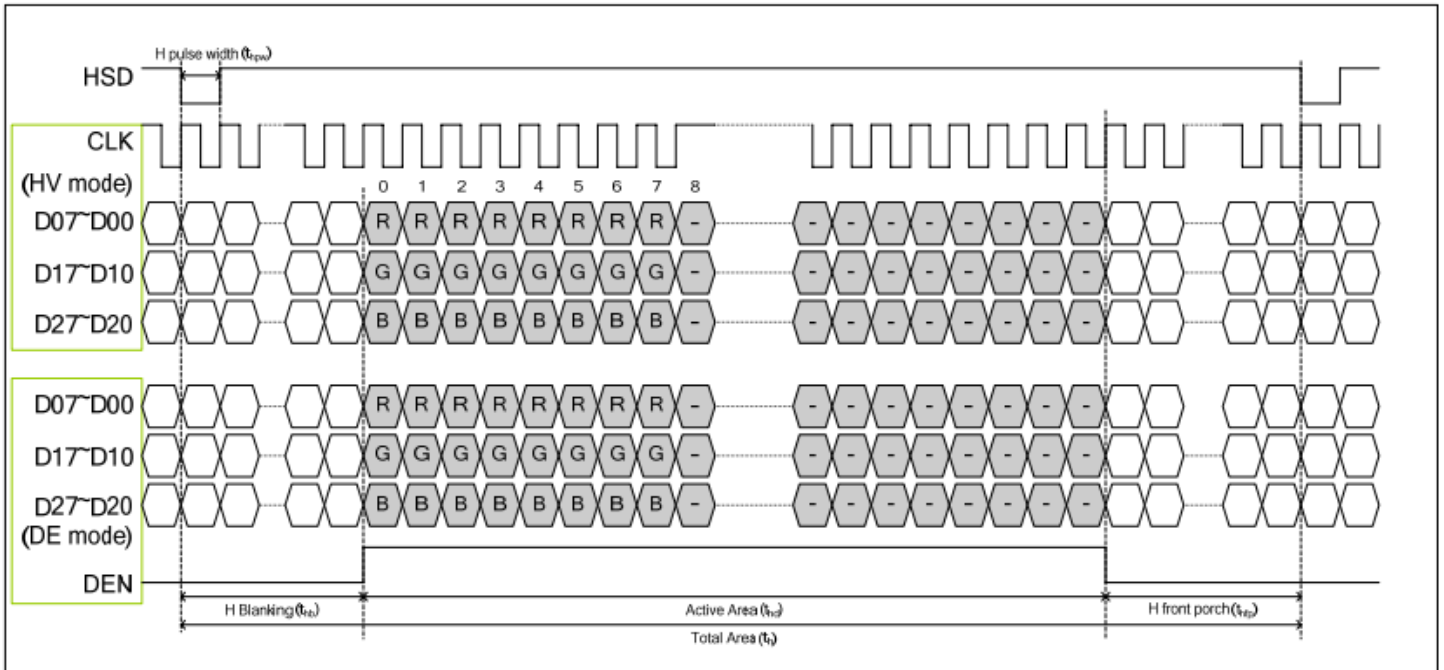


## Vertical Timing

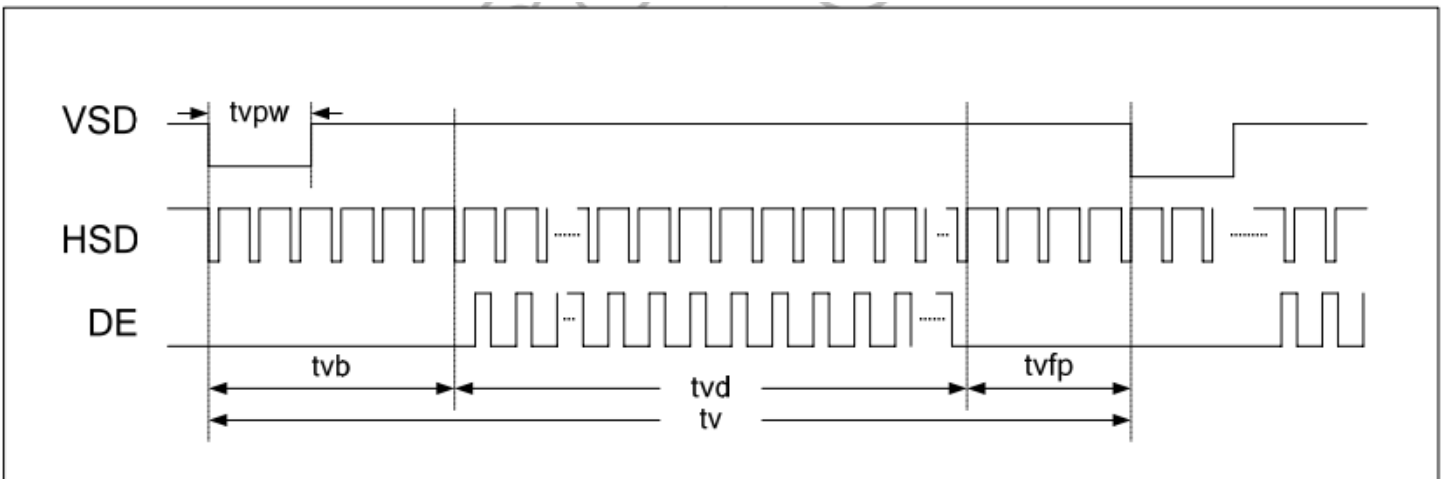


## Parallel 24-bit RGB mode

| Parameter                      | Symbol | Min. | Typ. | Max. | Unit  | Conditions    |
|--------------------------------|--------|------|------|------|-------|---------------|
| CLKIN Frequency                | Fclk   | -    | 40   | 50   | MHz   | VDD=3.0V~3.6V |
| CLKIN Cycle Time               | Tclk   | 20   | 25   | -    | ns    | -             |
| CLKIN Pulse Duty               | Tcwh   | 40   | 50   | 60   | %     | Tclk          |
| Time from HSD to Source Output | Thso   |      | 64   |      | CLKIN | -             |
| Time from HSD to LD            | Thld   |      | 64   |      | CLKIN | -             |
| Time from HSD to STV           | Thstv  |      | 2    |      | CLKIN | -             |
| Time from HSD to CKV           | Thckv  |      | 20   |      | CLKIN | -             |
| Time from HSD to OEV           | Thoev  |      | 4    |      | CLKIN | -             |
| LD Pulse Width                 | Twld   |      | 10   |      | CLKIN | -             |
| CKV Pulse Width                | Twckv  |      | 66   |      | CLKIN | -             |
| OEV Pulse Width                | Twoev  |      | 74   |      | CLKIN | -             |

## Input Clock and Data Timing

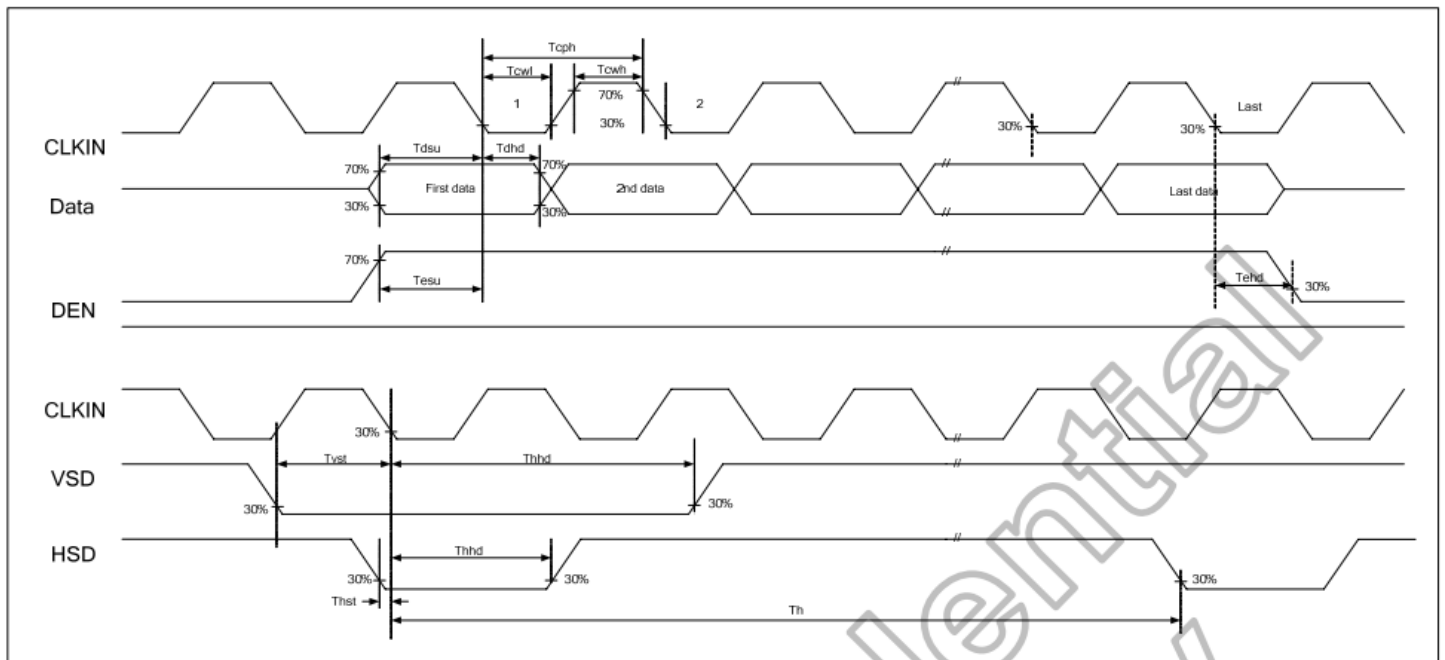


## Source Output Timing

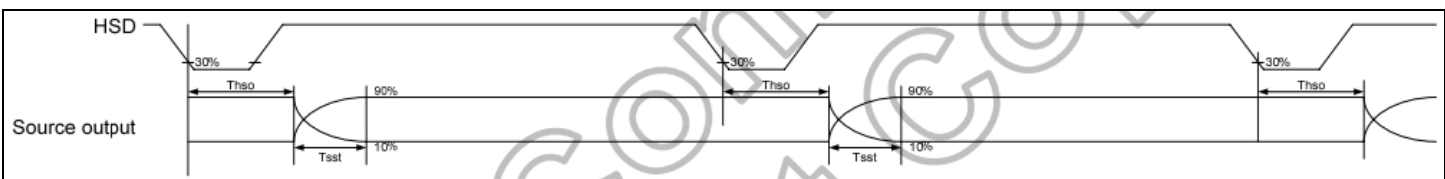





## Vertical Timing HV (Cascade)

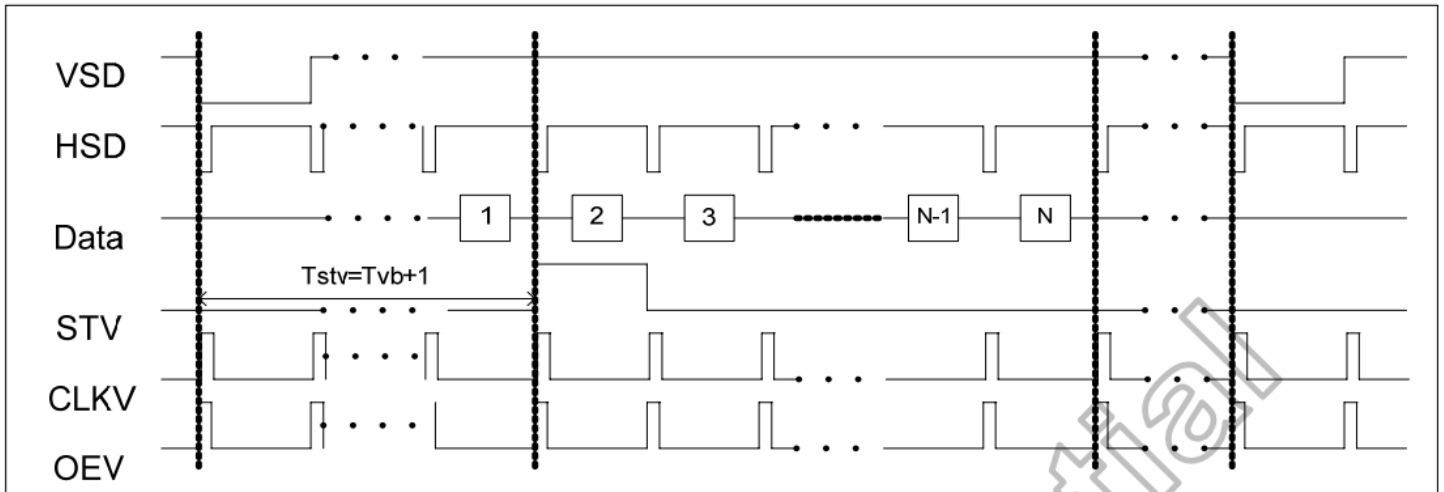


## Vertical Timing DE (Cascade)

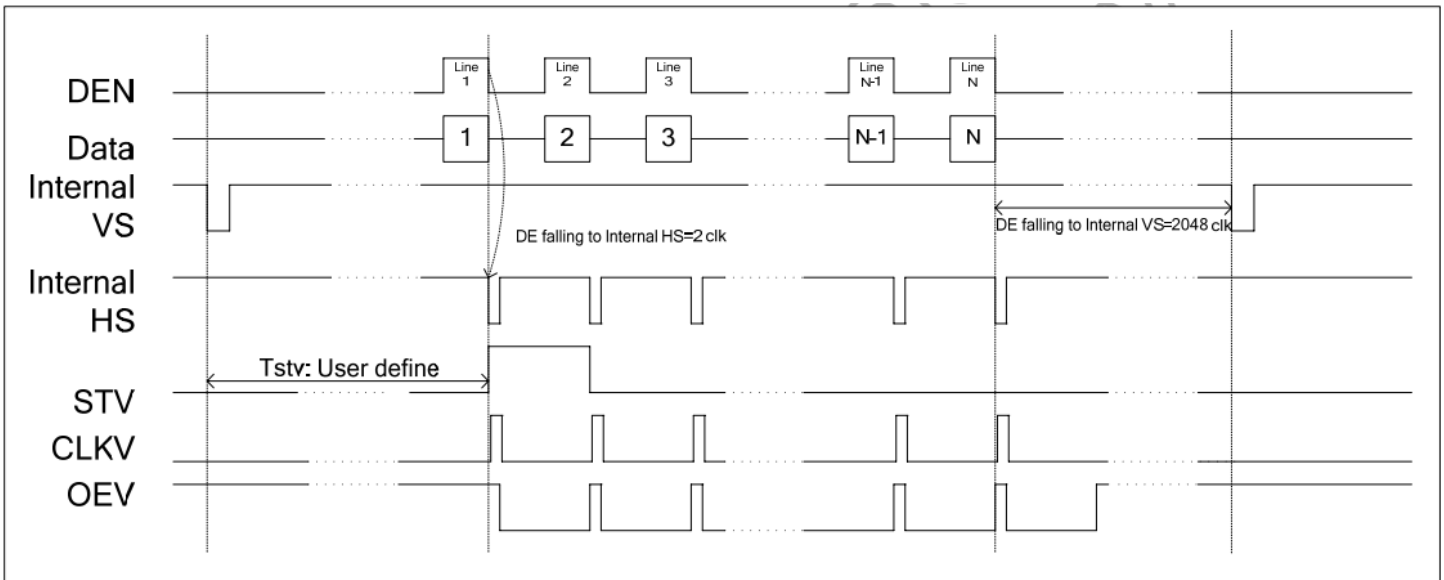


## Gate Output Timing

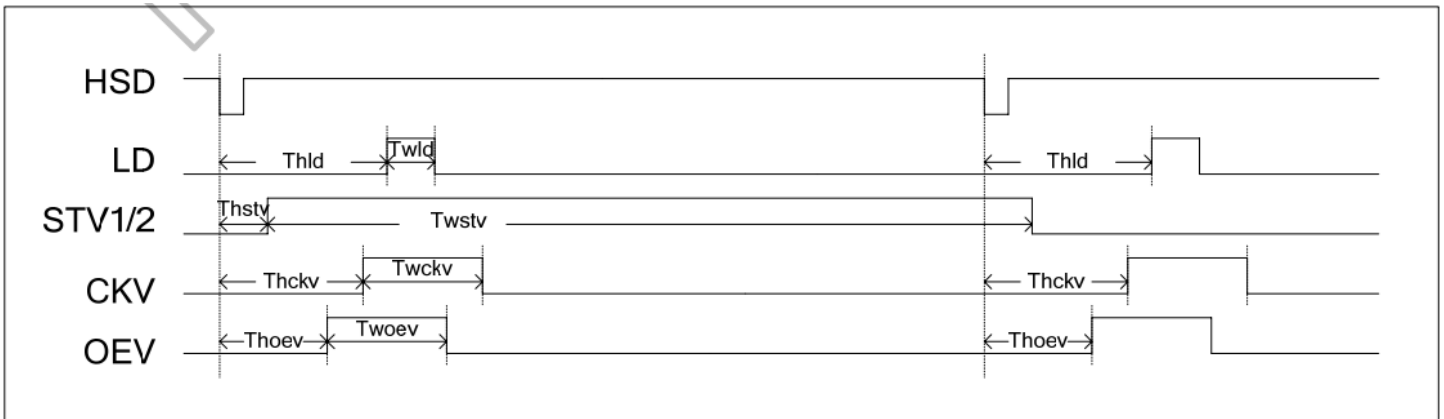


## Vertical Timing HV (Dual Gate)

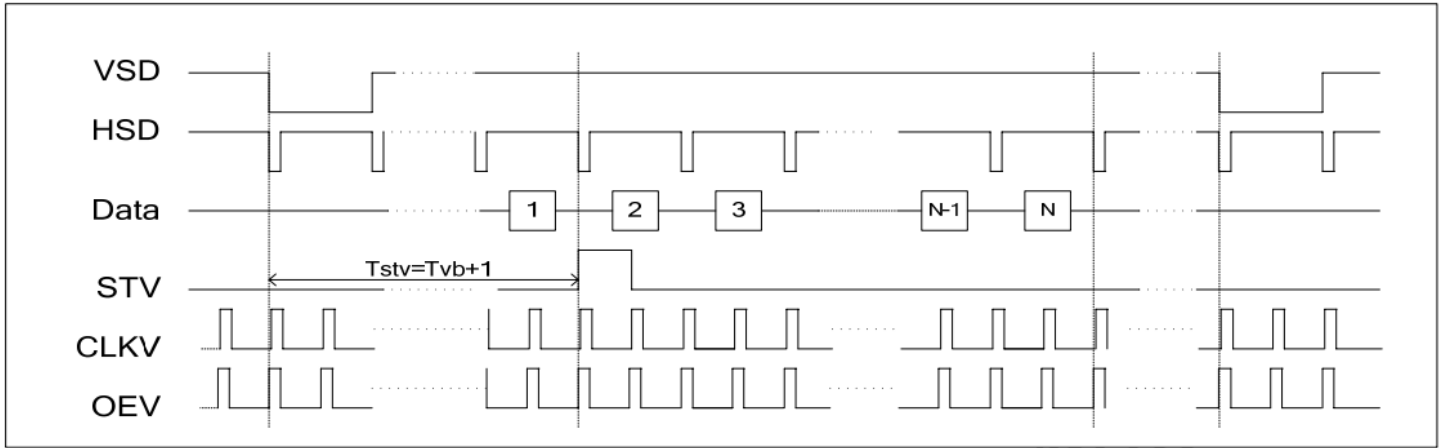


## Vertical Timing DE (Dual Gate)

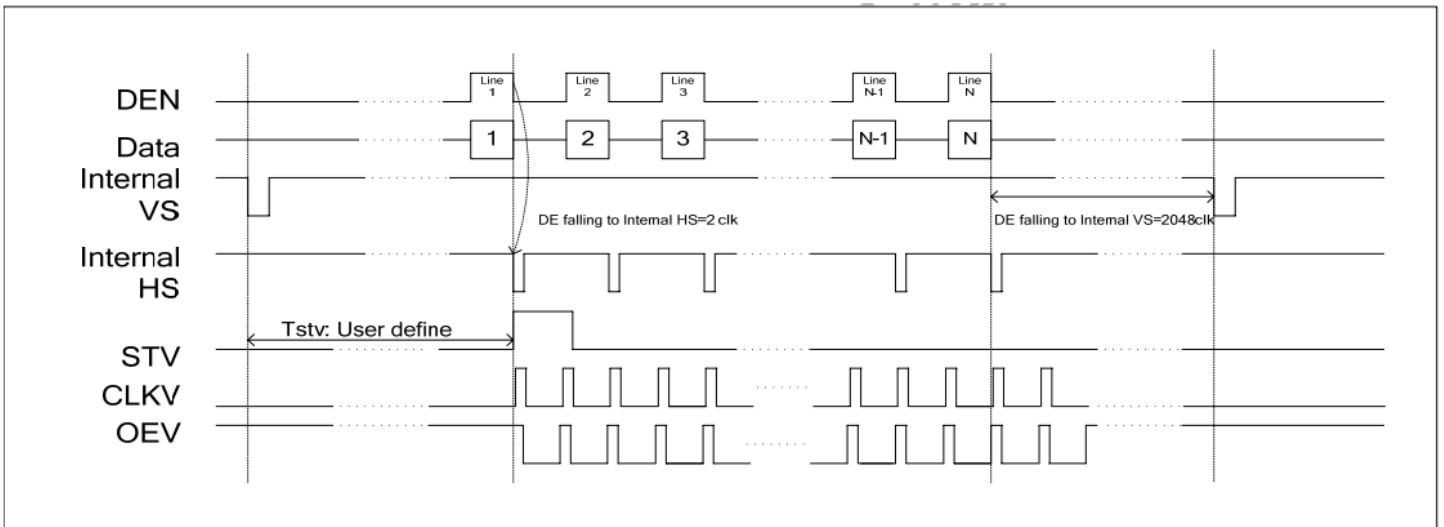


## Gate Output Timing (Dual Gate)

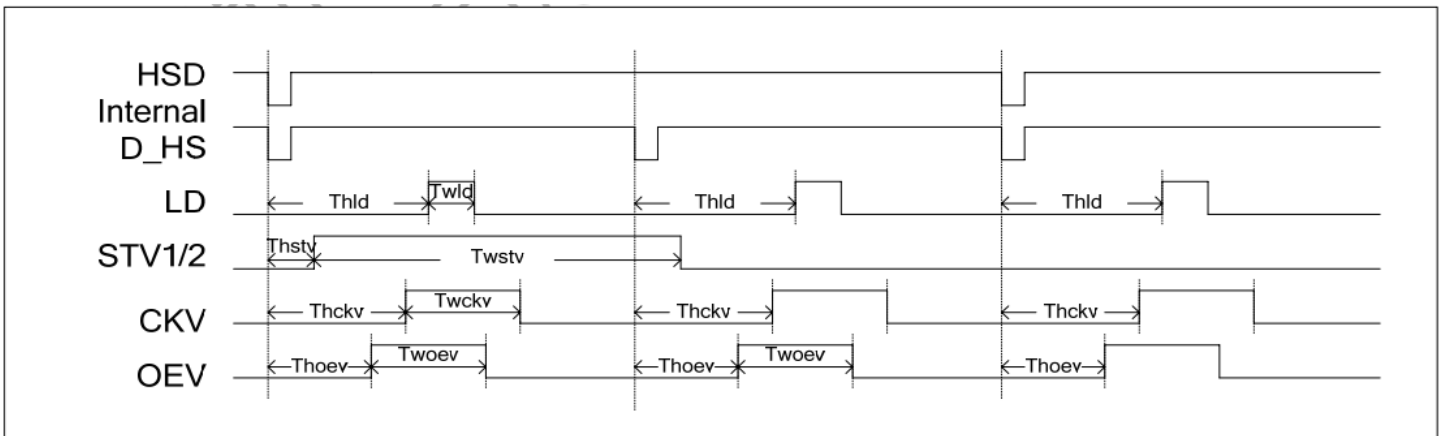

## Power ON/OFF Sequence

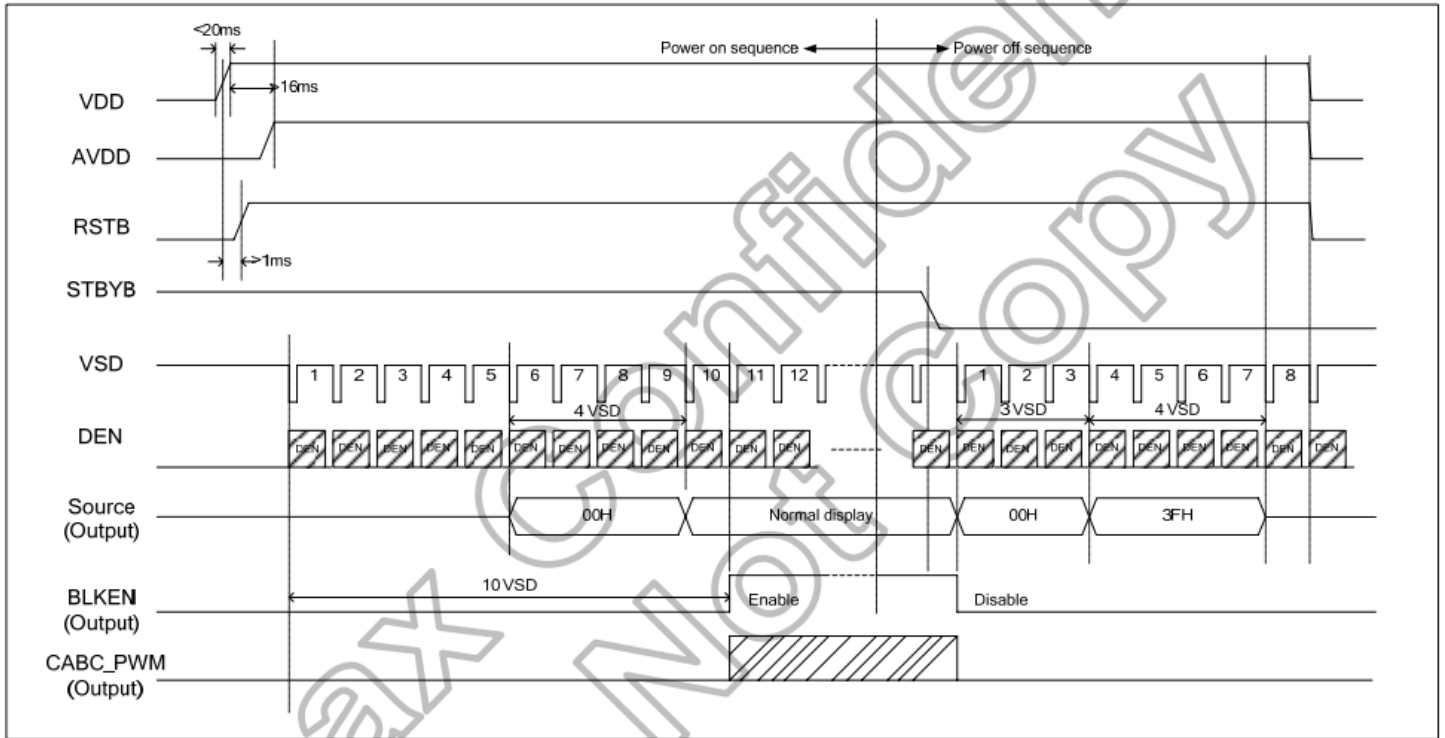

## Enter/Exit Standby Mode Sequence

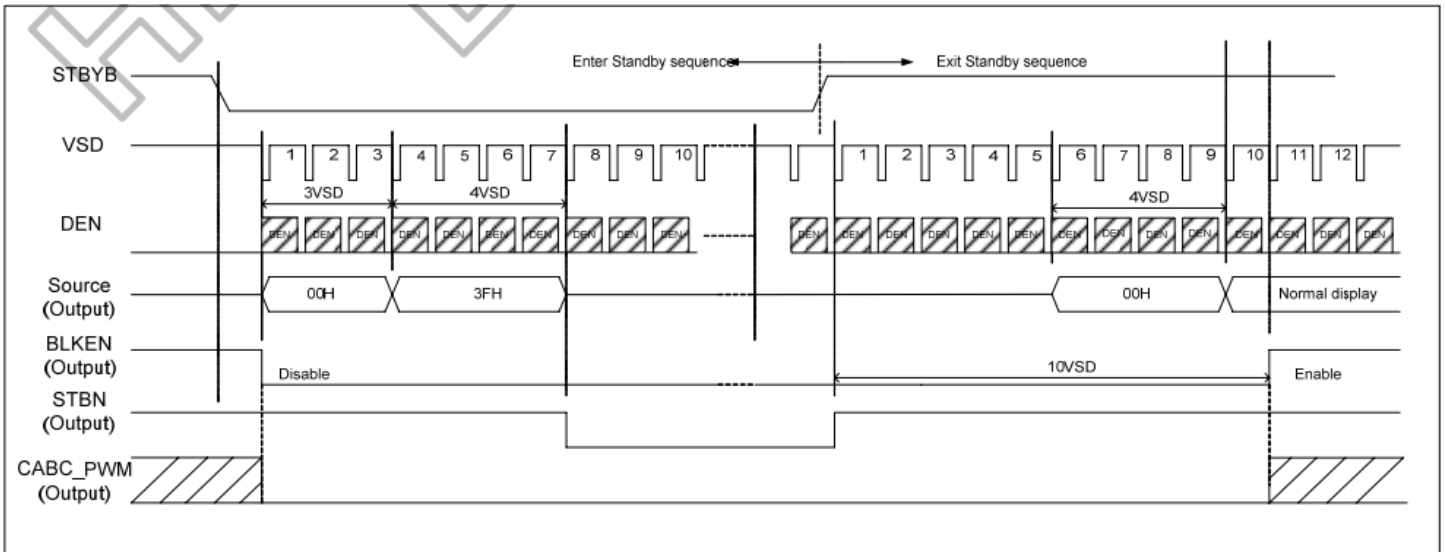

## Quality Information

| Test Item                             | Content of Test                                                                                                                 | Test Condition                                                                      | Note |
|---------------------------------------|---------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|------|
| High Temperature storage              | Endurance test applying the high storage temperature for a long time.                                                           | +80°C , 96hrs                                                                       | 2    |
| Low Temperature storage               | Endurance test applying the low storage temperature for a long time.                                                            | -30°C , 96hrs                                                                       | 1,2  |
| High Temperature Operation            | Endurance test applying the electric stress (voltage & current) and the high thermal stress for a long time.                    | +70°C 96hrs                                                                         | 2    |
| Low Temperature Operation             | Endurance test applying the electric stress (voltage & current) and the low thermal stress for a long time.                     | -20°C , 96hrs                                                                       | 1,2  |
| High Temperature / Humidity Operation | Endurance test applying the electric stress (voltage & current) and the high thermal with high humidity stress for a long time. | +50°C , 90% RH , 96hrs                                                              | 1,2  |
| Thermal Shock resistance              | Endurance test applying the electric stress (voltage & current) during a cycle of low and high thermal stress.                  | -20°C,30min -> 25°C,5min ->70°C,30min = 1 cycle<br>20 cycles                        |      |
| Vibration test                        | Endurance test applying vibration to simulate transportation and use.                                                           | 10-55Hz , 15mm amplitude.<br>60 sec in each of 3 directions X,Y,Z<br>For 15 minutes | 3    |
| Static electricity test               | Endurance test applying electric static discharge.                                                                              | VS=800V, RS=1.5kΩ, CS=100pF<br>One time                                             |      |

**Note 1:** No condensation to be observed.

**Note 2:** Conducted after 4 hours of storage at 25°C, 0%RH.

**Note 3:** Test performed on product itself, not inside a container.

## Precautions for using LCDs/LCMs

See Precautions at [www.newhavendisplay.com/specs/precautions.pdf](http://www.newhavendisplay.com/specs/precautions.pdf)

## Warranty Information and Terms & Conditions

[http://www.newhavendisplay.com/index.php?main\\_page=terms](http://www.newhavendisplay.com/index.php?main_page=terms)



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.