

Small Signal Product

## Switching Diode

### FEATURES

- Fast switching speed
- Surface device type mounting
- Moisture sensitivity level 1
- High conductance power dissipation
- For general purpose switching applications
- Pb free version and RoHS compliant
- Packing code with suffix "G" means green compound (halogen-free)



**SOT-363**



### MECHANICAL DATA

- Case: SOT-363 small outline plastic package
- Terminal: Matte tin plated, lead free., solderable per MIL-STD-202, Method 208 guaranteed
- High temperature soldering guaranteed : 260°C/10s

| MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS (T <sub>A</sub> =25°C unless otherwise noted) |                                   |            |      |
|----------------------------------------------------------------------------------------------|-----------------------------------|------------|------|
| PARAMETER                                                                                    | SYMBOL                            | VALUE      | UNIT |
| Power Dissipation                                                                            | P <sub>D</sub>                    | 200        | mW   |
| Repetitive Peak Reverse Voltage                                                              | V <sub>RRM</sub>                  | 80         | V    |
| Reverse Voltage                                                                              | V <sub>R</sub>                    | 57         | V    |
| Average Rectified Forward Current                                                            | I <sub>F(AV)</sub>                | 500        | mA   |
| Average Rectified Output Current                                                             | I <sub>O</sub>                    | 250        | mA   |
| Non-Repetitive Peak Forward Surge Current                                                    |                                   | @ t = 1 μs | 4    |
|                                                                                              |                                   | @ t = 1 s  | 1.5  |
| Thermal Resistance (Junction to Ambient)                                                     | R <sub>θJA</sub>                  | 625        | °C/W |
| Junction and Storage Temperature Range                                                       | T <sub>J</sub> , T <sub>STG</sub> | -55 to 150 | °C   |

| PARAMETER                 | SYMBOL                                                     | MIN   | MAX   | UNIT |
|---------------------------|------------------------------------------------------------|-------|-------|------|
| Reverse Breakdown Voltage | I <sub>R</sub> =100μA<br>V <sub>(BR)</sub>                 | 80    | -     | V    |
| Forward Voltage           | I <sub>F</sub> =5.0mA                                      | 0.620 | 0.715 | V    |
|                           | I <sub>F</sub> =10mA                                       | -     | 0.855 |      |
|                           | I <sub>F</sub> =100mA                                      | -     | 1.000 |      |
|                           | I <sub>F</sub> =150mA                                      | -     | 1.250 |      |
| Reverse Leakage Current   | V <sub>R</sub> =70V                                        | -     | 100   | nA   |
|                           | V <sub>R</sub> =75V, T <sub>J</sub> =150°C                 | -     | 50    | μA   |
|                           | V <sub>R</sub> =25V, T <sub>J</sub> =150°C                 | -     | 30    | μA   |
|                           | V <sub>R</sub> =20V                                        | -     | 25    | nA   |
| Junction Capacitance      | V <sub>R</sub> =6V, f=1MHz<br>C <sub>J</sub>               | -     | 3.5   | pF   |
| Reverse Recovery Time     | I <sub>F</sub> =5mA, V <sub>R</sub> =6V<br>t <sub>rr</sub> | -     | 4.0   | ns   |

Note 1: Device mounted on FR-4 PCB, 1 inch × 0.85 inch × 0.062 inch

Note 2: Short duration test pulse used to minimize self-heating effect

Small Signal Product

| ORDERING INFORMATION       |              |                     |         |              |
|----------------------------|--------------|---------------------|---------|--------------|
| PART NO.                   | PACKING CODE | PACKING CODE SUFFIX | PACKAGE | PACKING      |
| MBD4448Hxxx<br>(Note 1, 2) | RE           | G                   | SOT-363 | 3K / 7" Reel |


Note 1: "xxx" is Device Code from "AQW" - "TW"

Note 2: Whole series with green compound

| EXAMPLE        |            |              |                     |                |
|----------------|------------|--------------|---------------------|----------------|
| PREFERRED P/N  | PART NO.   | PACKING CODE | PACKING CODE SUFFIX | DESCRIPTION    |
| MBD4448HTW REG | MBD4448HTW | RE           | G                   | Green compound |


DIMENSIONS

**SOT-363**

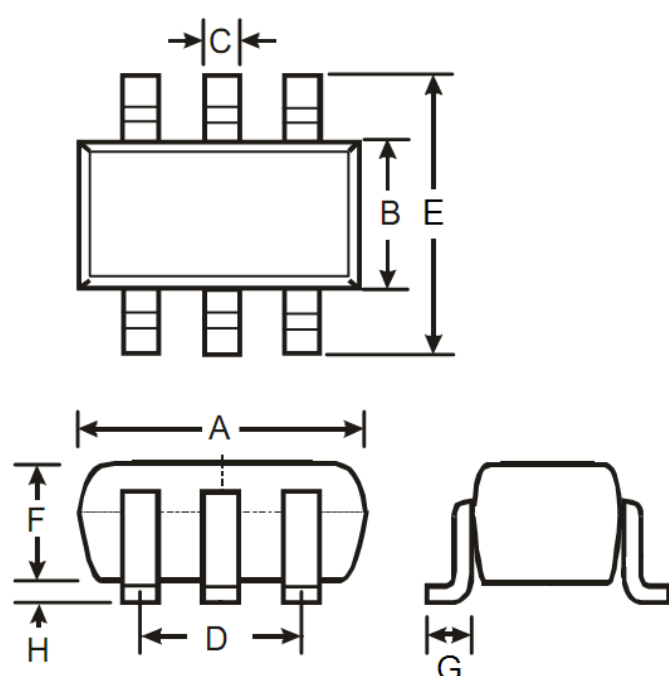

| DIM. | Unit (mm) |      | Unit (inch) |       |
|------|-----------|------|-------------|-------|
|      | Min       | Max  | Min         | Max   |
| A    | 2.00      | 2.20 | 0.079       | 0.087 |
| B    | 1.15      | 1.35 | 0.045       | 0.053 |
| C    | 0.15      | 0.35 | 0.006       | 0.014 |
| D    | 1.20      | 1.40 | 0.047       | 0.055 |
| E    | 2.15      | 2.45 | 0.085       | 0.096 |
| F    | 0.85      | 1.05 | 0.033       | 0.041 |
| G    | 0.25      | 0.46 | 0.010       | 0.018 |
| H    | 0.00      | 0.10 | 0.000       | 0.004 |


SUGGESTED PAD LAYOUT

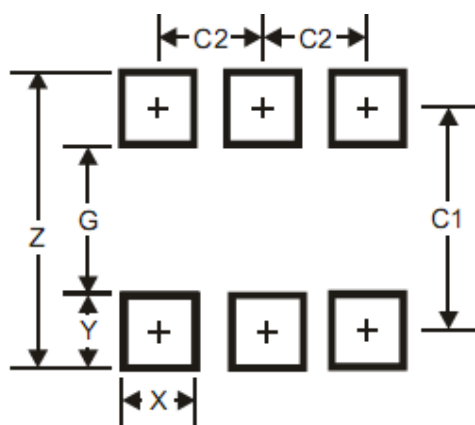


| DIM. | Unit (mm) | Unit (inch) |
|------|-----------|-------------|
|      | Typ.      | Typ.        |
| Z    | 2.50      | 0.098       |
| G    | 1.30      | 0.051       |
| X    | 0.42      | 0.017       |
| Y    | 0.60      | 0.024       |
| C1   | 1.90      | 0.075       |
| C2   | 0.65      | 0.026       |

Small Signal Product


PIN CONFIGURATION




**MBD4448HAQW**




**MBD4448HADW**



**MBD4448HCDW**



**MBD4448HSDW**



**MBD4448HTW**

MARKING

| Part no.    | Marking code |
|-------------|--------------|
| MBD4448HAQW | KA5          |
| MBD4448HADW | KA6          |
| MBD4448HCDW | KA7          |
| MBD4448HSDW | KA8          |
| MBD4448HTW  | KAA          |

### Notice

Specifications of the products displayed herein are subject to change without notice. TSC or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies.

Information contained herein is intended to provide a product description only. No license, express or implied, to any intellectual property rights is granted by this document. Except as provided in TSC's terms and conditions of sale for such products, TSC assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of TSC products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify TSC for any damages resulting from such improper use or sale.



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.