

## Low Voltage Protection Switch

### Features

- ▶ Up to  $\pm 20V$  input voltage protection
- ▶ Low on-resistance -  $6.5\Omega$  typical
- ▶ Fast switching speed
- ▶ Effectively, a simple two terminal device
- ▶ No external power supplies needed

### Applications

- ▶ Ethernet system protection
- ▶ Resettable fuse
- ▶ High side switch
- ▶ Data acquisition

### General Description


The Supertex FP0030 is a 20V current limiting protection device. It is designed to protect Ethernet systems from high transient voltages.

The FP0030 can be considered as a normally closed switch with a typical switch resistance of  $6.5\Omega$ . The device starts to turn off when the voltage drop across the two terminals exceeds a nominal value of  $\pm 1.5V$ . In the off state, the FP0030 can withstand up to  $\pm 20V$  across its terminals. A small amount of current, typical  $800\mu A$  is allowed to flow through the device.

The FP0030 can also be used as a resettable fuse to protect power lines against output short circuit conditions.

The FP0030 is available in a 3-Lead SOT-23 package.

### Typical Application Circuit

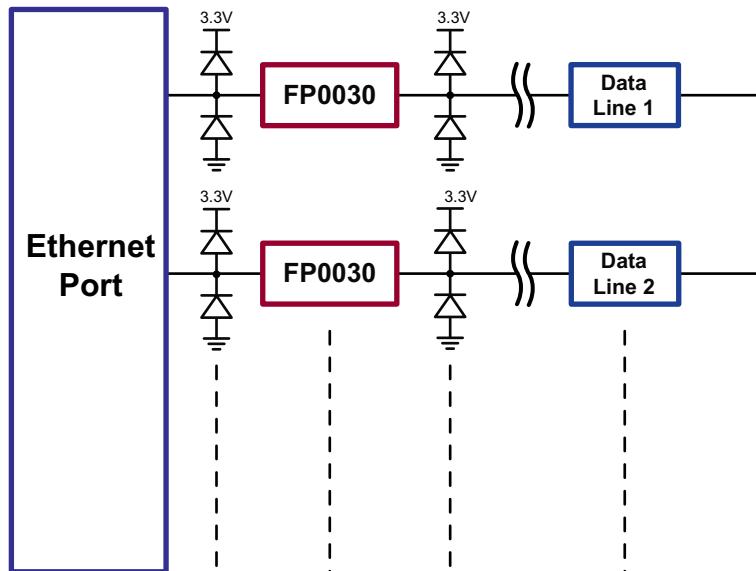

## Ordering Information

Part Number	Package	Packing
FP0030K1-G	3-Lead SOT-23	3000/Reel

-G indicates package is RoHS compliant ('Green')



## Absolute Maximum Ratings

Parameter	Value
$V_{A-B}$ , Differential voltage drop	0 to $\pm 22V$
Maximum junction temperature	+125°C
Storage temperature range	-65° to +150°C
Power dissipation, $T_A$ @25°C	360mW <sup>1</sup>

Absolute Maximum Ratings are those values beyond which damage to the device may occur. Functional operation under these conditions is not implied. Continuous operation of the device at the absolute rating level may affect device reliability. All voltages are referenced to device ground.

Note:

1. Mounted on FR4 board, 25mm x 25mm x 1.57mm.

## Typical Thermal Resistance

Package	$\theta_{ja}$
3-Lead SOT-23	203°C/W

## Pin Configuration



SOT-23 (K1)

## Product Marking

F03W


W = Code for week sealed  
\_\_\_\_ = "Green" Packaging

Package may or may not include the following marks: Si or SOT-23 (K1)


## Electrical Characteristics ( $T_j = 25^\circ C$ unless otherwise specified)

Sym	Parameter	Min	Typ	Max	Units	Conditions
$BV_{A-B}$	Differential input voltage range from A to B	$\pm 20$	-	-	V	$I_{A-B} = \pm 2.0mA$
$R_{SW}$	Switch ON-resistance from A to B	-	6.5	8.5	$\Omega$	$I_{A-B} = \pm 50mA, V_A = V_B = 0V$
$V_{TRIP}$	$V_{A-B}$ trip point to turn off	-	$\pm 1.5$	-	V	---
$V_{OFF}$	Switch turn off voltage	-	$\pm 3.2$	-	V	$I_{A-B} = \pm 1.0mA$
$I_{A-B(OFF)}$	Switch off current	-	$\pm 800$	$\pm 1500$	$\mu A$	$V_{A-B} = \pm 15V$
$I_{PEAK}$	Peak switching current	-	$\pm 155$	-	mA	---
$T_{OFF}$	Turn off time	-	30	60	ns	See Figure 1
$T_{ON}$	Turn on time	-	1.0	2.0	$\mu s$	See Figure 2
$C_{SW(ON)}$	Switch ON-capacitance from A to B or B to A	-	32	-	pF	SW = ON
$C_{SW(OFF)}$	Switch OFF-capacitance from A to B or B to A	-	11	-	pF	$V_{SW} = 10V$
$T_j$	Operating junction temperature	-40	-	+125	°C	---

## Block Diagram

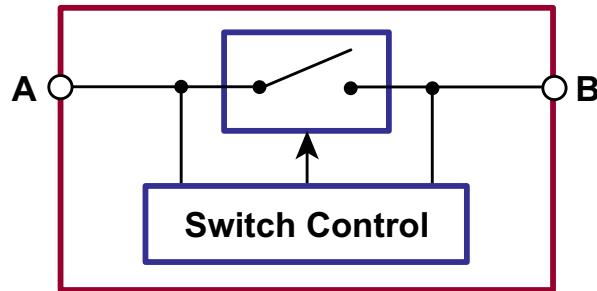

## Typical I-V Characteristics

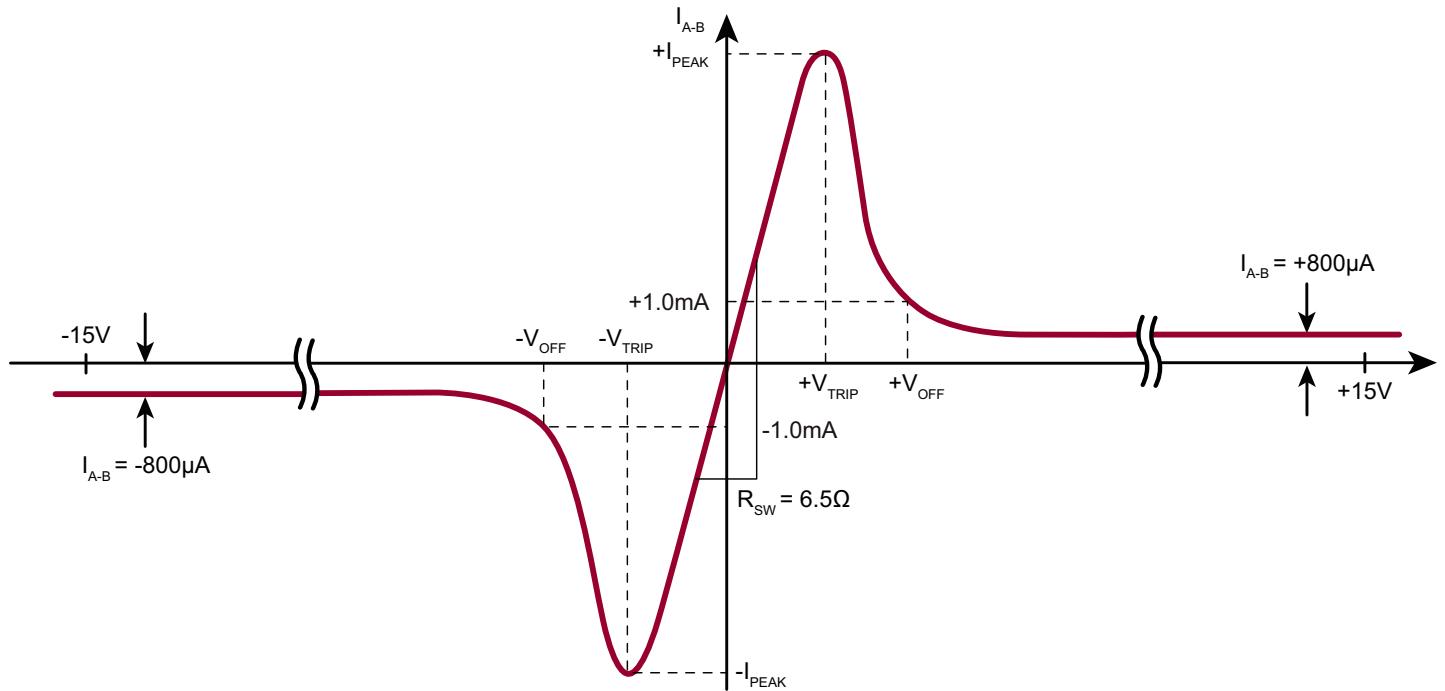

## Functional Description

The Supertex FP0030 can be considered as a normally closed switch controlled by a switch control (please refer to the block diagram). The switch control monitors the voltage drop across terminals A and B. If the voltage difference is greater than  $\pm 1.5V$ , the switch will start to open. Once in the

open state, only a small amount of current, typical  $800\mu A$ , flows through the switch to detect if the high voltage is still present or not. The switch will not close until the voltage across terminal A and B drops below  $\pm 1.5V$ .

## Test Circuits for $T_{ON}$ and $T_{OFF}$

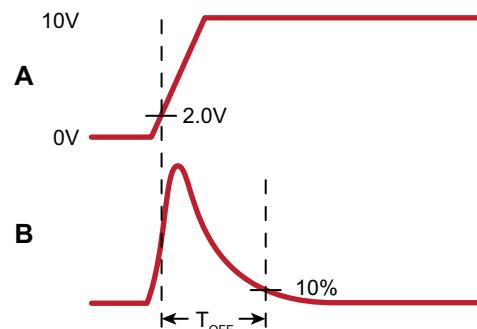
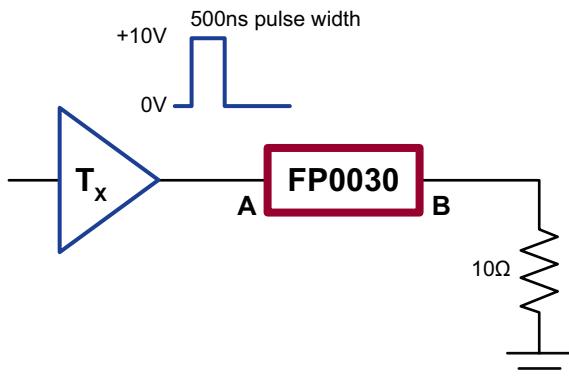


Figure 1:  $T_{OFF}$  Test Circuit

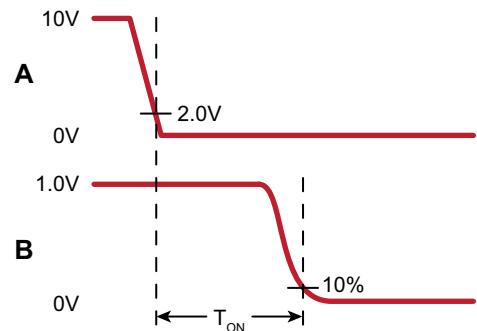
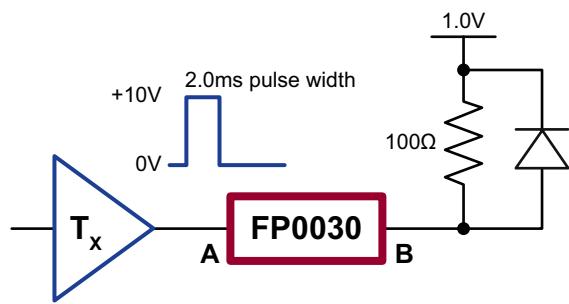






Figure 2:  $T_{ON}$  Test Circuit

## Pin Description

Pin Name	Description
A	Switch terminal A
SUB	Internally connect to the back of the die. Leave floating. <b>DO NOT GROUND!</b>
B	Switch terminal B

# 3-Lead TO-236AB (SOT-23) Package Outline (K1)

*2.90x1.30mm body, 1.12mm height (max), 1.90mm pitch*

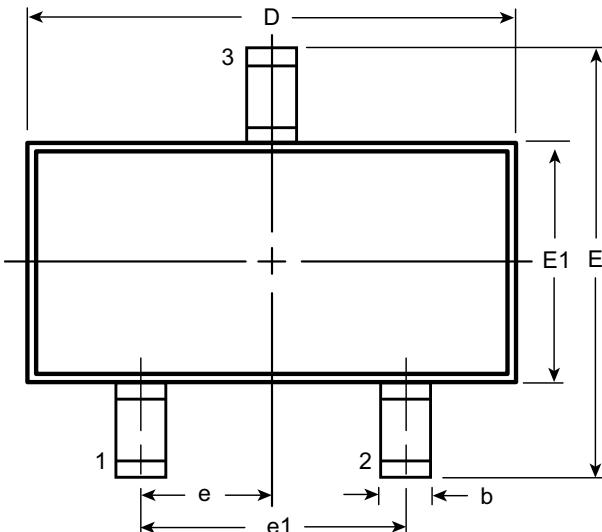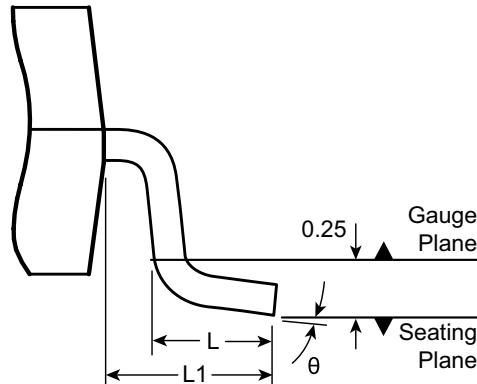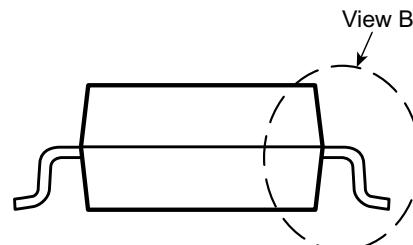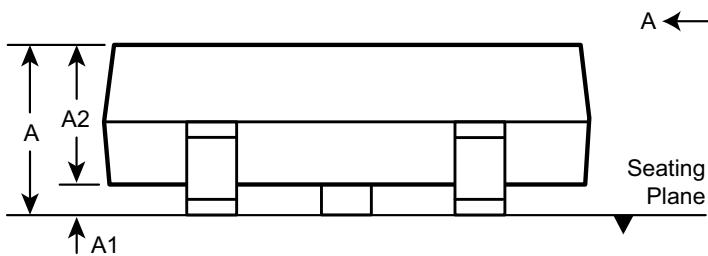**Top View****View B**

Symbol	A	A1	A2	b	D	E	E1	e	e1	L	L1	θ
Dimension (mm)	MIN	0.89	0.01	0.88	0.30	2.80	2.10	1.20	BSC	0.20 <sup>†</sup>	0.54	0°
	NOM	-	-	0.95	-	2.90	-	1.30		0.50		-
	MAX	1.12	0.10	1.02	0.50	3.04	2.64	1.40		0.60		8°

JEDEC Registration TO-236, Variation AB, Issue H, Jan. 1999.

† This dimension differs from the JEDEC drawing.

Drawings not to scale.

Supertex Doc.#: DSPD-3TO236ABK1, Version C041309.

(The package drawing(s) in this data sheet may not reflect the most current specifications. For the latest package outline information go to <http://www.supertex.com/packaging.html>.)

**Supertex inc.** does not recommend the use of its products in life support applications, and will not knowingly sell them for use in such applications unless it receives an adequate "product liability indemnification insurance agreement." **Supertex inc.** does not assume responsibility for use of devices described, and limits its liability to the replacement of the devices determined defective due to workmanship. No responsibility is assumed for possible omissions and inaccuracies. Circuitry and specifications are subject to change without notice. For the latest product specifications refer to the **Supertex inc.** (website: <http://www.supertex.com>)



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

#### Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помошь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помошь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: [org@eplast1.ru](mailto:org@eplast1.ru)

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.