

MRC300,DH2,HT,DV

Re-circulating Chiller (Heating Option)



The MRC Series is a bench top re-circulating chiller that offers dependable, compact performance by controlling the temperature of a coolant in a liquid circuit. The coolant is re-circulated using a pump with high MTBF. Heat from coolant is absorbed by a heat exchanger and dissipated thru high density heat sinks equipped with brand name fans. The thermoelectric modules are custom designed to achieve long life operation. The unit is regulated with an easy to use digital temperature controller and is housed inside an aesthetic sheet metal casing. Custom configurations are available, however, MOQ applies.

FEATURES

- Compact Design
- Precise Temperature Control
- Reliable Solid State Operation
- Low Noise
- RoHS Compliant

APPLICATIONS

- Medical Imaging Systems
- Medical Lasers
- Photonics Laser Systems
- Industrial Instrumentation
- Laboratory Testing

Specifications

Cooling capacity ¹	290 Watts
Resistance Heater	250 Watts (853 BTU/hr)
Input voltage	115 to 230 VAC
Operating environment temperature range ²	4.4°C to 45°C (40°F to 113°F)
Control temperature range using distilled H ₂ O as coolant, °C (°F) ³	2°C to 40°C (35°F to 104°F)
Control temperature range using 70% distilled H ₂ O and 30% glycol as coolant ²	-12°C to 40°C (10.4°F to 104°F)
Controller accuracy	±0.16°C
Current, 115VAC (230VAC)	8.5 (4.3) Amps
Input power	507 Watts
Frequency	50/60 Hz
Dimensions, (h x w x d)	39.1 x 20.3 x 33.8 cm (15.4 x 8.0 x 13.3) in
Weight	13.6 kgs (30 lbs)
Maximum flow rate	3.3 lpm (0.87 gpm)
Fluid capacity	450 mL (15.2 oz)
UL Rating	UL61010-1/IEC61010-1

¹ Capacity rating is given at a temperature of 25°C (77°F) for the ambient air and exiting fluid.

² For ambient conditions outside this range, please contact Laird Technologies.

³ For temperature settings below 5°C, an appropriate coolant must be used.

global solutions: local support™

Americas: +1.800.843.4556

Europe: +49.8031.2460.0

Asia: +86.755.2714.1166




CLV-customerservice@lairdtech.com

www.lairdtech.com/thermal

MRC300, DH2, HT, DV

Re-circulating Chiller (Heating Option)

Performance Curves

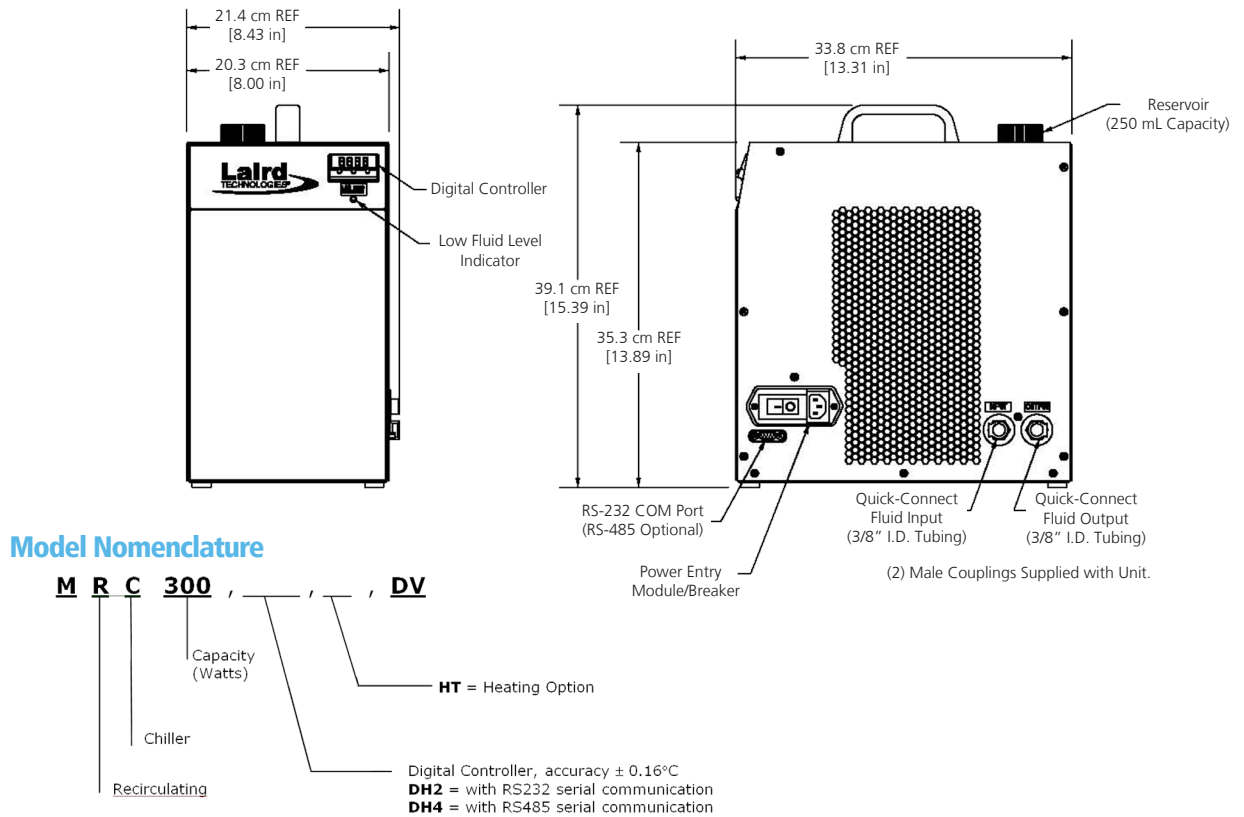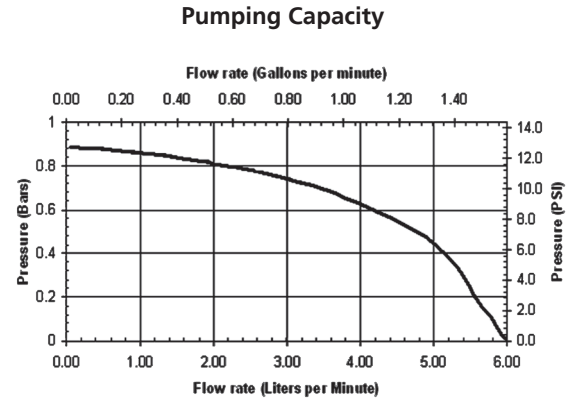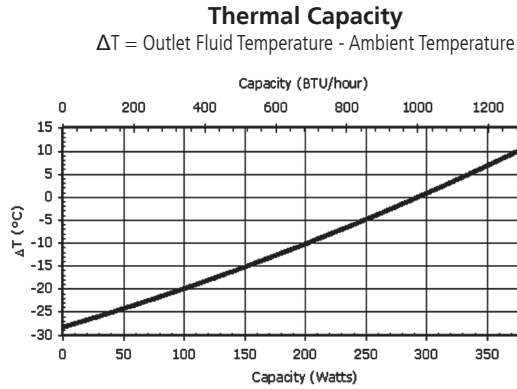

Notes

1. Use distilled water as coolant for control temperatures above 5°C .
2. To prevent freezing, use coolant with 70% distilled water and 30% glycol mix for control temperatures at or below 5°C .
3. Unit comes with a 115 VAC North American cord and a 230 VAC European cord.

THR-DS-MRC300 HT 1010

Any information furnished by Laird Technologies, Inc. and its agents is believed to be accurate and reliable. All specifications are subject to change without notice. Responsibility for the use and application of Laird Technologies materials rests with the end user, since Laird Technologies and its agents cannot be aware of all potential uses. Laird Technologies makes no warranties as to the fitness, merchantability or suitability of any Laird Technologies materials or products for any specific or general uses. Laird Technologies shall not be liable for incidental or consequential damages of any kind. All Laird Technologies products are sold pursuant to the Laird Technologies Terms and Conditions of sale in effect from time to time, a copy of which will be furnished upon request. © Copyright 2010 Laird Technologies, Inc. All Rights Reserved. Laird, Laird Technologies, the Laird Technologies Logo, and other marks are trade marks or registered trade marks of Laird Technologies, Inc. or an affiliate company thereof. Other product or service names may be the property of third parties. Nothing herein provides a license under any Laird Technologies or any third party intellectual property rights. Document A16311-00 Rev A, 09/17/2010.



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.