

DEVELOPMENT BOARD



RV-3028-C7

Extreme Low Power RTC Module

DATE:	April 2018	Revision No.: 1
-------	------------	-----------------

Page 1/3
Headquarters: Micro Crystal AG
Muehlestrasse 14
CH-2540 Grenchen
Switzerland Tel +41 32 655 82 82
Fax +41 32 655 82 83
Internet www.microcrystal.com
Email sales@microcrystal.com

RV-3028-C7


The RV-3028-C7 is soldered onto the Development Board.

Every pin is accessible at test pins 1 – 8 and at the test vias situated around the device.

The following passive components are already soldered on the board:


C1	10 nF	Decoupling capacitor between V _{SS} and V _{DD}
C2	100µF	Capacitor for Back-up power
C3, C4		Option, to place alternative capacitors or battery for back-up power
R1	330 Ω	Current limiting resistor for LED
LED1	green	Supply, current consumption of the LED has to be considered, J2 to switch off
R2	10 kΩ	Pull-up resistor INT to V _{DD}
R3	10 kΩ	Pull-up resistor SCL to V _{DD}
R4	10 kΩ	Pull-up resistor SDA to V _{DD}
R5	10 kΩ	Pull-down resistor to define V _{BACKUP} input in case it is not used

DEVELOPMENT BOARD

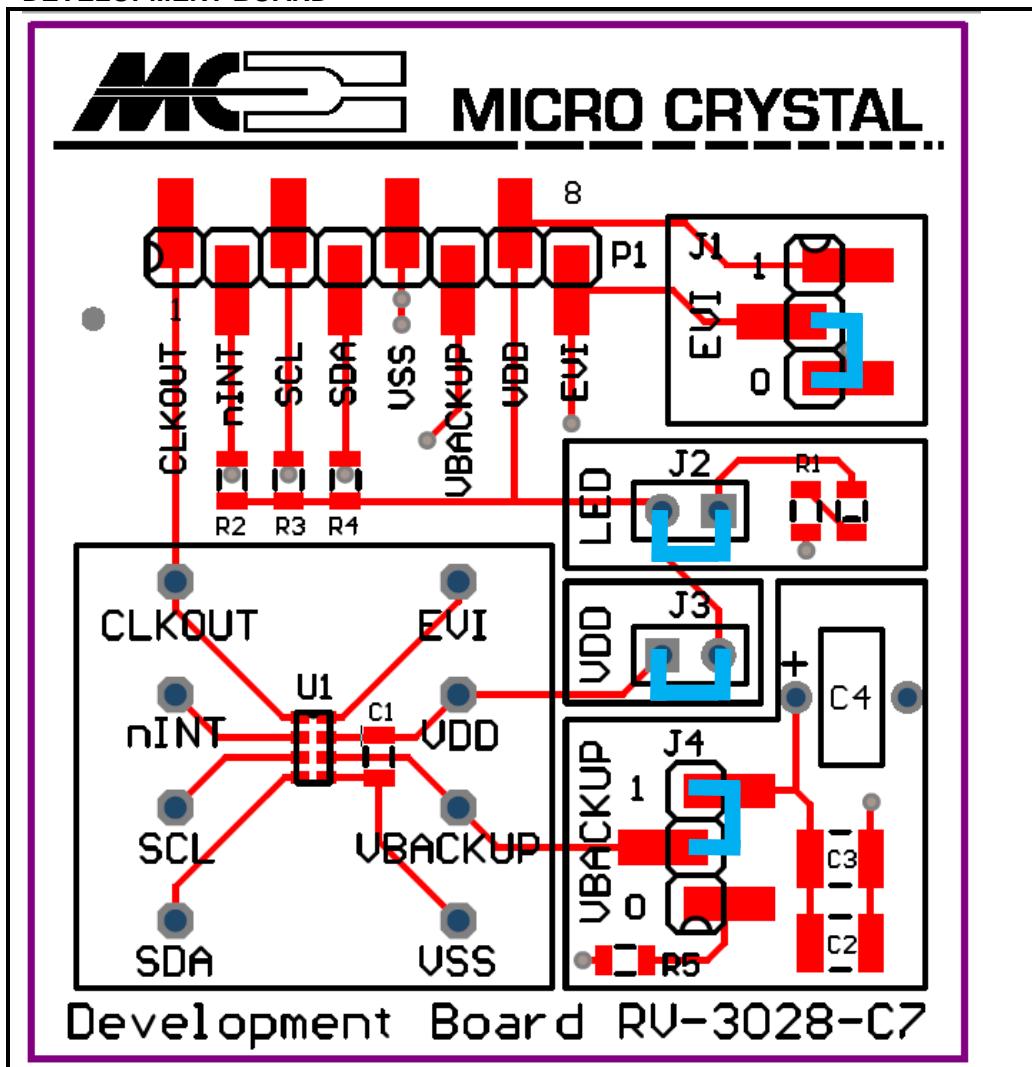


- | |
|-------------------------|
| JUMPER 1 |
| EVI = HIGH |
| EVI = LOW |
| JUMPER 2 |
| LED |
| JUMPER 3 |
| VDD, CURRENT MEASURMENT |
| JUMPER 4 |
| SUPERCAP |
| SET INPUT TO VSS |

SCHEMATICS

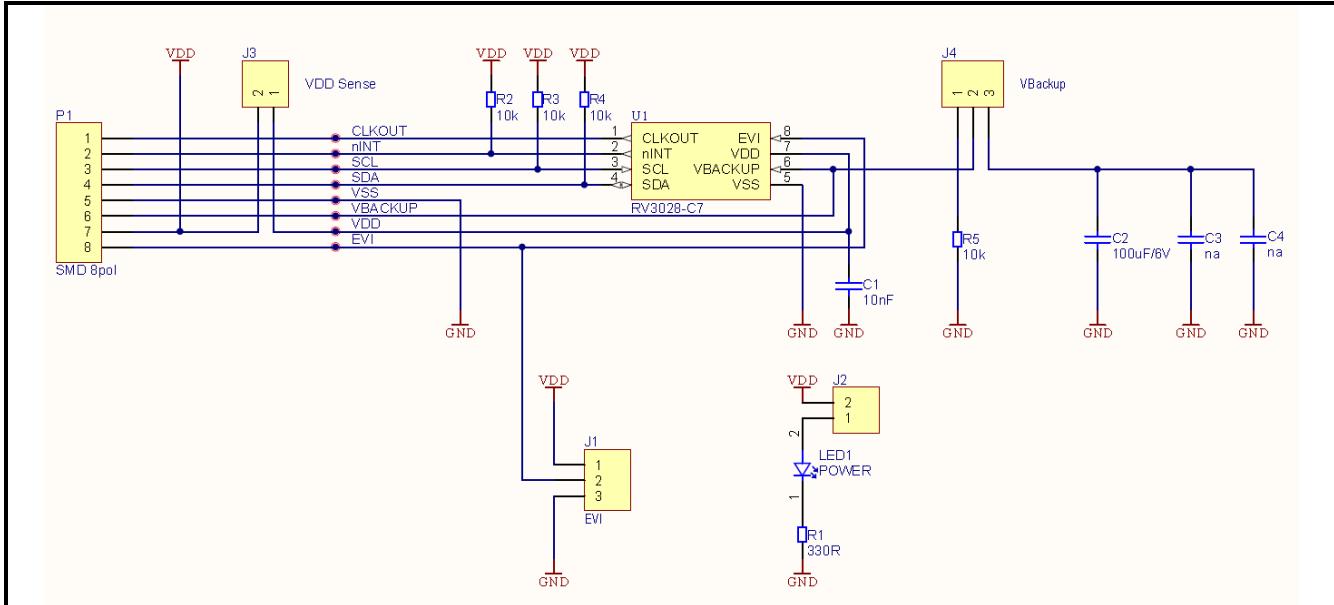

PINOUT RV-3028-C7



# 1	CLKOUT	# 8	EVI
# 2	INT	# 7	V _{DD}
# 3	SCL	# 6	V _{BACKUP}
# 4	SDA	# 5	V _{ss}

PIN DESCRIPTION

Symbol	Pin #	Description
CLKOUT	1	Clock Output; push-pull; Normal and Interrupt driven clock output can be activated concurrently. 1. Normal clock output is controlled by the CLKOE bit. When CLKOE is set to 1 (default), the CLKOUT pin drives the square wave on the CLKOUT pin. When CLKOE bit is set to 0, the CLKOUT pin is LOW. 2. Interrupt driven clock output is controlled by an interrupt event. When CLKIE is set to 1 the occurrence of the interrupt selected in the Clock Interrupt Mask Register (12h) allows the square wave output on the CLKOUT pin. Writing 0 to CLKIE will disable new interrupts from driving square wave on CLKOUT. When CLKF flag is cleared, the CLKOUT pin is LOW. Depending of the settings in the FD field, the CLKOUT pin can drive the square wave of 32.768 kHz (default), 8192 Hz, 1024 Hz, 64 Hz, 32 Hz or 1 Hz, or the predefined periodic countdown timer interrupt. When FD field is 111 the CLKOUT pin is LOW.
INT	2	Interrupt Output; open-drain; active LOW; requires pull-up resistor; used to output Alarm, Periodic Countdown Timer, Periodic Time Update and External Event Interrupt signals. Interrupt output also in V _{BACKUP} Power state.
SCL	3	I ² C Serial Clock Input; requires pull-up resistor. In V _{BACKUP} Power state, the SCL pin is disabled.
SDA	4	I ² C Serial Data Input-Output; open-drain; requires pull-up resistor. In V _{BACKUP} Power state, the SDA pin is disabled (high impedance)
V _{ss}	5	Ground
V _{BACKUP}	6	Backup Supply Voltage. When the backup switchover function is not needed, V _{BACKUP} must be tied to V _{ss} with a 10 kΩ resistor
V _{DD}	7	Positive supply voltage; positive or negative steps in supply voltage may affect oscillator performance, recommend 10 nF decoupling capacitor close to the device
EVI	8	External Event Input; used for interrupt generation, interrupt driven clock output and time stamp function. Remains active also in V _{BACKUP} Power state. This pin should not be left floating

Datasheet and Application-Manual are available for download under: www.microcrystal.com



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помошь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помошь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.