

# SD-330AC

## Wireless LAN Serial Device Server

*Link Serial Devices to your 802.11ac Enterprise Network*



The Silex SD-330AC is designed to securely connect devices equipped with the RS-232C serial interfaces. Industrial automation, building automation, medical devices, security access and control, point of sale devices, LED signs, bar code/label and other specialty printers, or virtually any other device with a serial port can now be enabled with secure, robust wireless network capability.

SD-330AC eliminates the need to connect the RS-232C device directly to the computer and is expected to improve the freedom of installation of the device and efficiency by remote maintenance and through a reduction in work time.

### Key Features:

- **Secure wireless LAN environment**


In addition to general security, WPA2-EAP and IEEE 802.1x enterprise security are included, so the serial device can be deployed in a secure wireless environment.

- Open (128bit)
- WPA-PSK (AUTO)
- WPA2-PSK (AES)
- WPA-EAP (AUTO)
- WPA2-EAP (AES)
- IEEE 802.1x(EAP-TLS/EAP-TTLS/PEAP/EAP-FAST/LEAP)

- **Supports various connection modes**


#### 1) Serial Port Emulation Mode:

It is a function to emulate the standard Windows COM port on network using the application "SX Virtual Link for Serial Device Server". User can communicate with serial devices over the network using this application

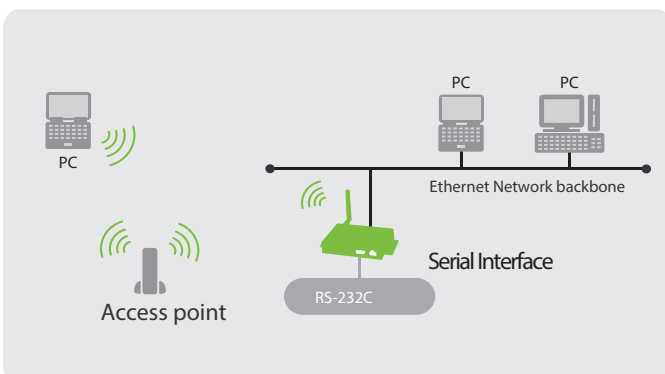

#### 2) eCable Mode:

This function allows serial devices with no network interface to communicate with each other using two SD-330AC's. Here one SD-330AC acts as receiver and the other acts as transmitter with serial devices connected to them at each end. When the network connection is established, these serial devices can communicate with each other through SD-330AC, thus freeing the user from cable length limitations.

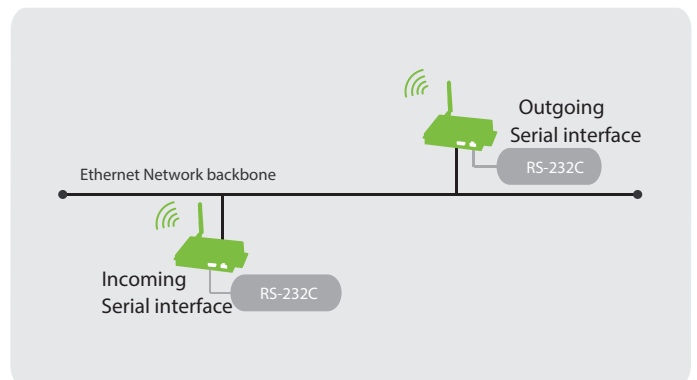

- **Wired LAN / Wireless LAN compatible**

This product can be used in a wired LAN or wireless LAN environment.

#### 1) Wired LAN mode:

It supports 10Base-T / 100Base-TX automatic recognition function.

#### 2) Wireless LAN mode:

##### ■ Infrastructure mode

If there is an existing wireless LAN environment, this product can be used as a wireless handset (station).

##### ■ AP mode

This product is equipped with access point mode.

Up to 5 wireless devices can be connected to this product.

※ Available channels in access point mode are as follows.

- 1 to 13ch, 36 to 48ch

※ Security available in access point mode are as follows.

(WEP and IEEE 802.1x are not supported.)

- WPA-PSK (AUTO)
- WPA2-PSK (AES)

## SX Virtual Link Software

SX Virtual Link software for Serial Device Server is an application that allows the user to connect their computer to a serial device that is connected to a device server. Users only have to select the serial device listed in the SX Virtual Link application and click on 'Connect' to connect their computer to the server. Some of the highlights of the SX Virtual Link are:

- Ease of use
- Ability to allow control from the task tray
- Ability to send remote messages to other users to request disconnect from the serial device in use



SX Virtual Link for Serial Device Server

## Other Serial Device Server

For environments with restrictions that can not introduce wireless LAN devices, we also offer wired LAN-only models.

## Wired LAN only Serial Device Server SD-300



- 10Base-T / 100Base-TX (automatic identification)
- RS-232C x 1 Port

※ Please refer to the specifications on the right for differences with wired LAN models.

## Embedded Option

## Small Intelligent Module SX-590



- Single stream, 1x1
- UART, Ethernet (10/100)
- Offload wireless LAN driver, security supplicant, TCP / IP communication processing

## Specifications

|  |  |
|--|--|
| Product Name   | SD-330AC   |
| Wired LAN  | 10Base-T / 100Base-TX  |
| Wireless Standard  | IEEE802.11a/b/g/n/ac   |
| Security<br><i>Note: 802.1x is only available in wireless station (client) mode</i>                            | WPA-PSK, (AUTO)<br>WPA2-PSK (AES)<br>IEEE 802.1X<br>(LEAP, PEAP, TTLS, TLS, EAP-FAST)  |
| Device Interface   | RS-232C  |
| Supported OS<br>(SX-Virtual Link Serial Port Emulator) Note: RAW TCP mode and eCable mode are not OS dependent | Windows 10,<br>Windows 8 / 8.1 (32/64-bit), 7 (32/64-bit),<br>Vista (32/64-bit), XP (32/64-bit), 2000,<br>Windows Server 2012/2008/2003<br>(32/64-bit) |
| Supported Protocol   | TCP / IP   |
| Configuration Methods  | Configuration utility, Web browser, TELNET, AMC Manager  |
| Dimension  | 125.7 X 75.1 X 24.1mm<br>(body only, excluding protrusions)  |
| Weight   | 305g (body only, including antennas)   |
| Environmental Condition  | Operating Temperature: 0 to +50°C<br>Humidity : 20 ~ 80% RH<br><br>Storage Temperature: -20 to +70°C<br>Humidity : 20 ~ 90% RH                         |
| Power Consumption  | 2.5W (DC5V/0.5A)   |
| Regulatory Compliance  | VCCI Class B, FCC Class B, ICES-003 Class B, CE Class B, RoHS  |
| Supported software   | SX Virtual Link for Serial Device Server<br>AMC Manager  |
| Included Items   | Body, AC adapter, setup guide, rubber feet, wireless LAN antenna GPL inquiry sheet, warranty card  |

silex technology is a registered trademark of silex technology, Inc. Other product or brand names may be registered trademarks or trademarks of their respective owners. Technical information and specifications are subject to change without notice. © 2019 silex technology, Inc. All rights reserved.

## silex global sales & support locations



**US Office**  
silex technology america, Inc.  
US toll free 657-218-5199  
www.silextechnology.com  
sales@silexamerica.com

**Europe Office**  
silex technology europe, GmbH  
+49-2154-88967-0  
Germany toll free 0800-7453938  
www.silexeurope.com  
contact@silexeurope.com

**India Office**  
silex technology india, Pvt. Ltd.,  
+91-44-43033234  
www.silex-india.com  
support@silex-india.com

**Corporate Headquarters**  
silex technology, Inc.  
+81-774-98-3781  
www.silex.jp  
support@silex.jp



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.