


PCL-727

12-bit, 12-ch Analog Output ISA Card with 32-ch Digital I/O

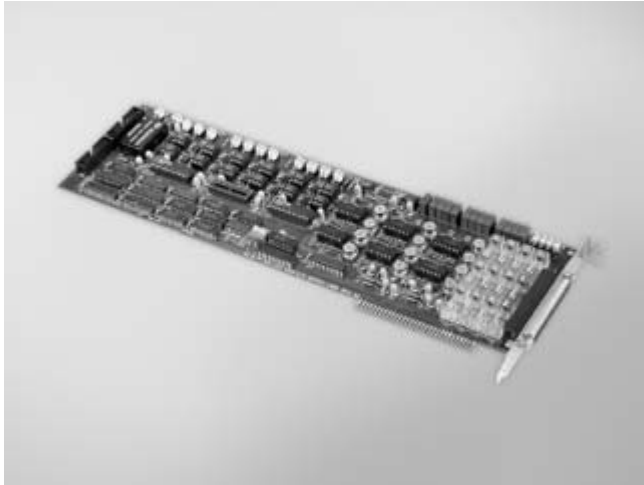

Features

- 12 independent analog output channels
- Fuse on each channel
- BoardID™ switch
- Synchronized output function

Introduction

The PCL-727 provides 12 analog output channels on a full-size add-on card. In addition to its analog output, the PCL-727 provides 16 digital output channels and 16 digital input channels. It is an ideal and economical solution for industrial applications that requires multiple analog and/or current output channels.

Specifications

Analog Output

- **Channels** 12
- **Resolution** 12 bits
- **Output Rate** Static update
- **Output Range** (Software programmable)

| | |
|--------------------------|---------------|
| Bipolar (V) | ±5 |
| Unipolar (V) | 0 ~ 5, 0 ~ 10 |
| Current Loop (mA) | 4 ~ 20 |

- **Driving Capability** 15 mA
- **Operation Modes** Software polling, synchronized output
- **Current Loop Excitation Voltage** 8 ~ 36 V

Digital Input

- **Channels** 16
- **Compatibility** 5 V/TTL
- **Input Voltage** Logic 0: 0.8 V max.
Logic 1: 2.0 V min.
- **Input loading** 0.5 V @ 0.4 mA max. (low)
2.7 V @ 50 µA max. (high)

Digital Output

- **Channels** 16
- **Compatibility** 5 V/TTL
- **Output Voltage** Logic 0: 0.5 V, Logic 1: 2.4 V
- **Output Capability** Sink: 0.8 mA @ 0.5 V
Source: 0.4 mA @ 2.4 V

General

- **Bus Type** ISA
- **I/O Connectors** 1 x DB37 female connector
2 x 20-pin box header
- **Power Consumption** 5 V @ 500 mA typical, 1A max.
12 V @ 50 mA typical, 110 mA max.
-12 V @ 14 mA typical, 90 mA max.
- **Dimensions (L x H)** 340 x 100 mm (13.4" x 3.9")
- **Operating Temperature** 0 ~ 50° C (32 ~ 122° F)
- **Storage Temperature** 0 ~ 65° C (32 ~ 149° F)
- **Storage Humidity** 5 ~ 95% RH, non-condensing

Ordering Information

- **PCL-727** 12-bit, 12-ch AO ISA Card w/ Digital I/O
- **PCL-10120-1** 20-pin Flat Cable, 1 m
- **PCL-10120-2** 20-pin Flat Cable, 2 m
- **PCL-10137-1** DB37 Cable, 1 m
- **PCL-10137-2** DB37 Cable, 2 m
- **PCL-10137-3** DB37 Cable, 3 m
- **ADAM-3937** DB37 DIN-rail Wiring Board
- **PCLD-780** Screw Terminal Board w/ Two 20-pin Flat Cables
- **PCLD-782** 16-ch Isolated DI Board w/ 1m 20-pin Flat Cable
- **PCLD-785** 16-ch Relay Board w/ One 1m 20-pin Flat Cable



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.