

Photovoltaic MOSFET drivers of wide variation

Photovoltaic MOSFET Driver (APV1, 2)

FEATURES

1. High-speed switching

Since release time is typ. 0.1 ms, the MOSFET can be turned off quickly in a urgent situation.

2. High insulation

DIP type: 5,000 V

SOP type: 2,500 V



SSOP type: 1,500 V

3. Extensive product lineup

Products include SSOP, SOP4-pin and DIP6-pin.

TYPICAL APPLICATIONS

- Power supply (Vcc) for electronic circuits
- Driving MOSFET



RoHS compliant

TYPES

Output rating		Package	Part No.				Packing quantity	
Drop-out voltage (Typ.)	Short circuit current (Typ.)		Through hole terminal	Surface-mount terminal				
			Tube packing style	Tube packing style	Tape and reel packing style		Tube	Tape and reel
Picked from 1/2/3-pin side*1	Picked from 4/5/6-pin side*2							
8.7V	14μA	DIP6-pin	APV1122	APV1122A	APV1122AX	APV1122AZ	1 tube contains 50 pcs. 1 batch contains 500 pcs.	1,000 pcs.
8.7V	14μA	SOP4-pin*3	—	APV1121S	APV1121SX	APV1121SZ	1 tube contains 100 pcs.	
8.2V	8μA		—	APV2121S	APV2121SX	APV2121SZ	1 batch contains 2,000 pcs.	
8.2V	8μA	SSOP*4	—	—	APV2111VY	APV2111VW	—	3,500 pcs.

Notes: *1 SOP type is picked from 1/2-pin side, SSOP type is picked from 1/4-pin side.

*2 SOP type is picked from 3/4-pin side, SSOP type is picked from 2/3-pin side.

*3 For space reasons, the two initial letters of the part number "AP", package (SOP) indicator "S" and the packing style indicator "X" or "Z" are not marked on the device. (Ex. the label for product number APV1121SX is V1121).

*4 Tape and reel package is the standard packing style.

For space reasons, the two initial letters of the part number "AP", package (SSOP) indicator "V" and the packing style are not marked on the device. (Ex. the label for product number APV2111VY is V2111).

RATING

1. Absolute maximum ratings (Ambient temperature: 25°C 77°F)


Item		Symbol	APV1122(A)	APV1121S	APV2121S	APV2111V	Remarks
Input	LED forward current	I _F	50mA				
	LED reverse voltage	V _R	5V				
	Peak forward current	I _{FP}	1A				f = 100 Hz, Duty Ratio = 0.1%
	Power dissipation	P _{in}	75mW				
I/O isolation voltage		V _{iso}	5,000V AC	2,500V AC	2,500V AC	1,500V AC	
Temperature limits	Operating	T _{opr}	-40°C to +85°C -40°F to +185°F				Non-condensing at low temperatures
	Storage	T _{stg}	-40°C to +100°C -40°F to +212°F				

Photovoltaic MOSFET Driver


2. Electrical characteristics (Ambient temperature: 25°C 77°F)

Item			Symbol	APV1122(A)	APV1121S	APV2121S	APV2111V	Condition
Input	LED operate current	Typical	I _{Fon}	0.6mA		0.85mA		V _{OC} = 5V
		Maximum		3mA				
	LED turn off current	Minimum	I _{Foff}	0.2mA				V _{OC} = 1V
		Typical		0.5mA		0.75mA		
	LED dropout voltage	Typical	V _F	1.15V				I _F = 10mA
		Maximum		1.5V				
Output	Drop-out voltage*	Minimum	V _{OC}	6V		5V		I _F = 10mA
		Typical		8.7V		8.2V		
	Short circuit current**	Minimum	I _{SC}	5μA		3μA		I _F = 10mA
		Typical		14μA		8μA		
Transfer characteristics	Turn on time***	Typical	T _{on}	0.4ms		0.8ms		I _F = 10mA, C _L = 1,000pF
	Turn off time***	Typical	T _{off}	0.1ms				I _F = 10mA, C _L = 1,000pF
	I/O capacitance	Typical	C _{iso}	0.8pF				V _B = 0V, f = 1MHz
		Maximum		1.5pF				
		Initial I/O isolation resistance	Minimum	R _{iso}	1,000MΩ			


*Drop-out voltage measurement circuit
APV1122(A)




APV1121S, APV2121S, APV2111V




**Short circuit current measurement circuit
APV1122(A)




APV1121S, APV2121S, APV2111V

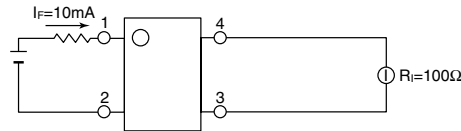


***Turn on/Turn off time measurement circuit
APV1122(A)

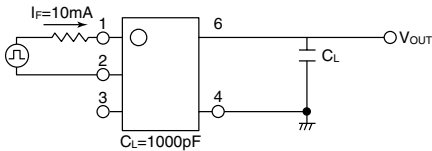

APV1121S, APV2121S, APV2111V

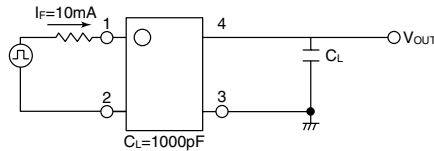

***Turn on time

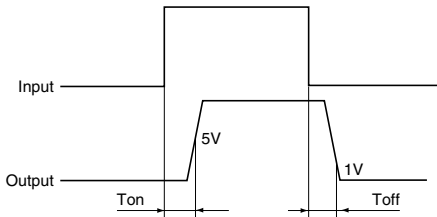

RECOMMENDED OPERATING CONDITIONS

Please obey the following conditions to ensure proper device operation and resetting.

Item	Symbol	Recommended value	Unit
Input LED current	I_F	10	mA

■ For Dimensions.

■ For Schematic and Wiring Diagrams.

■ For Cautions for Use.

■ These products are not designed for automotive use.

If you are considering to use these products for automotive applications, please contact your local Panasonic Corporation technical representative.


For more information.

Photovoltaic MOSFET Driver

REFERENCE DATA


1. Drop-out voltage vs. ambient temperature characteristics

Input current: 10mA

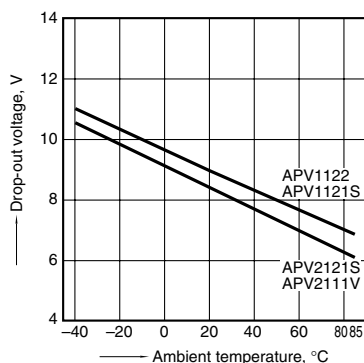


2. Short circuit current vs. ambient temperature characteristics

Input current: 10mA

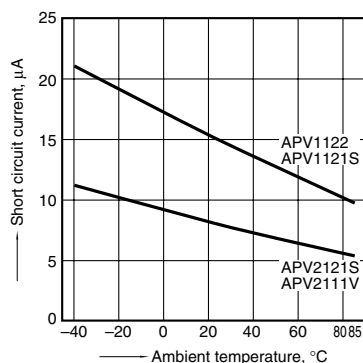


3. LED operate current vs. ambient temperature characteristics

Drop-out voltage: 5V

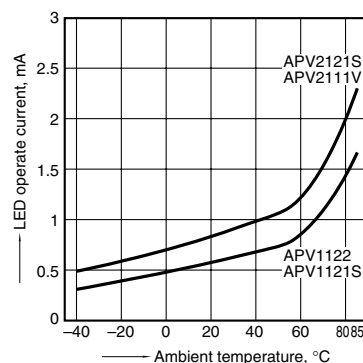


4. LED turn off current vs. ambient temperature characteristics

Drop-out voltage: 1V

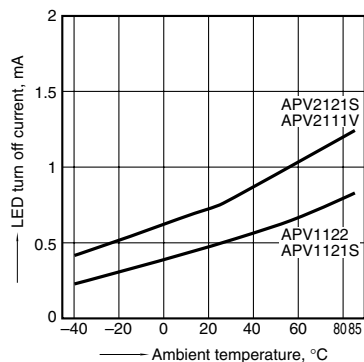

5. LED dropout voltage vs. ambient temperature characteristics


LED forward current: 5 to 50mA

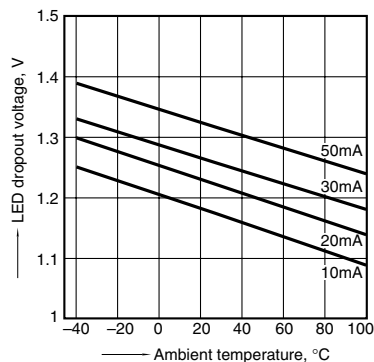

6. Turn on time vs. ambient temperature characteristics

LED forward current: 10mA


Load capacity: 1,000pF; output voltage: 5V

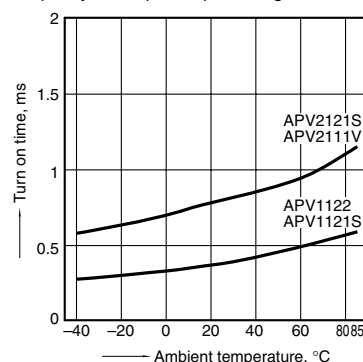

7. Turn off time vs. ambient temperature characteristics


LED forward current: 10mA

Load capacity: 1,000pF; output voltage: 1V

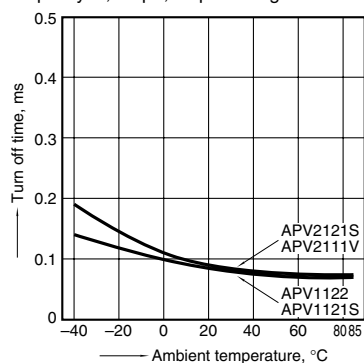


8. Turn on time vs. LED forward current characteristics

Load capacity: 1,000pF; output voltage: 5V

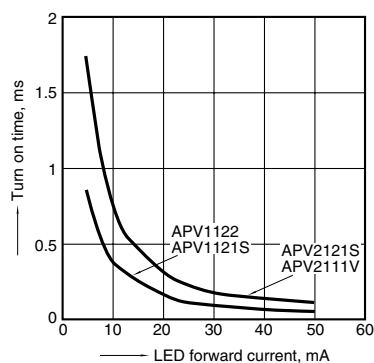


9. Turn off time vs. LED forward current characteristics


Load capacity: 1,000pF; output voltage: 1V

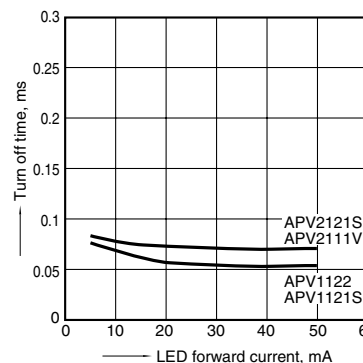

10. Drop-out voltage vs. LED forward current characteristics

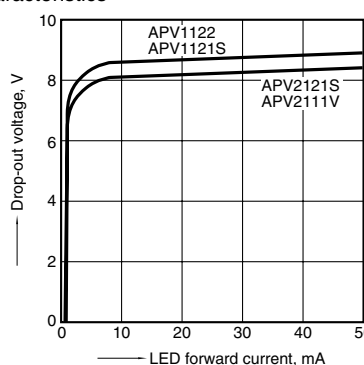

11. Short circuit current vs. LED forward current characteristics

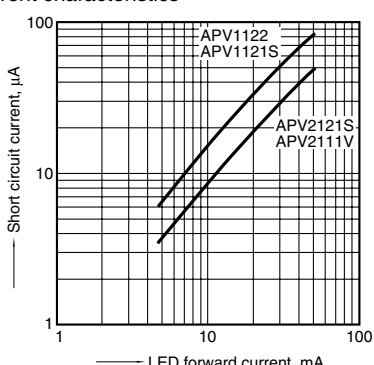



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.