
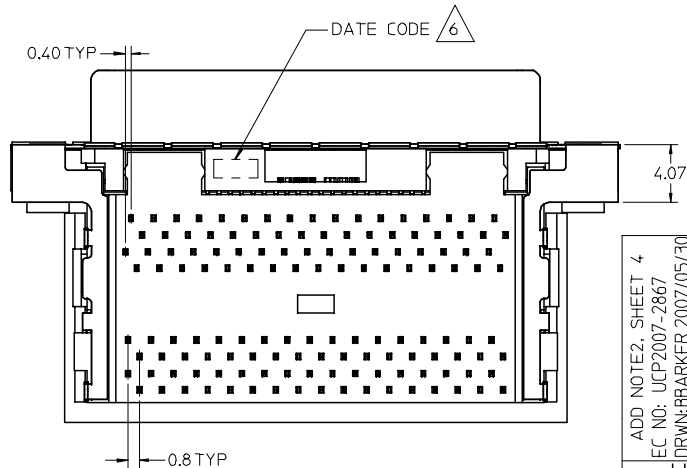
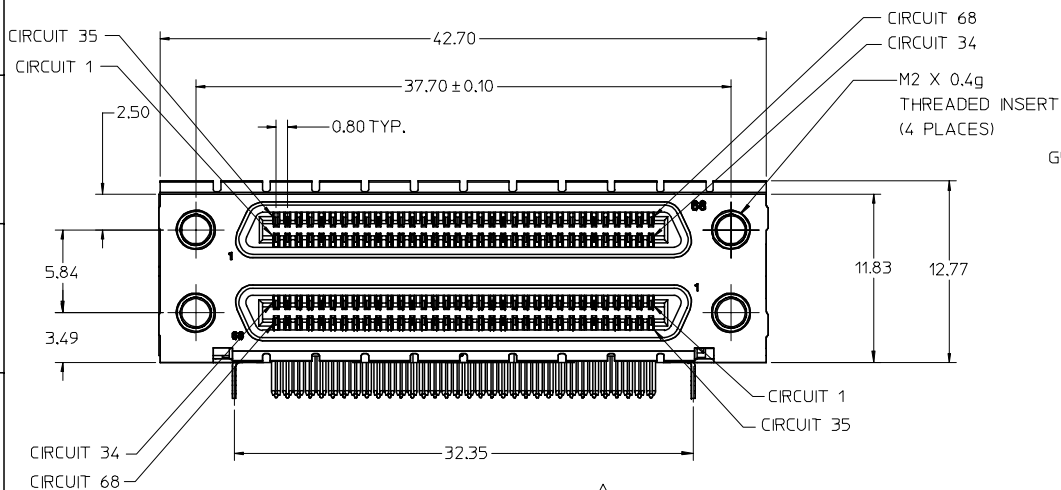


J
I
H
G
F
E
D
C
B
A

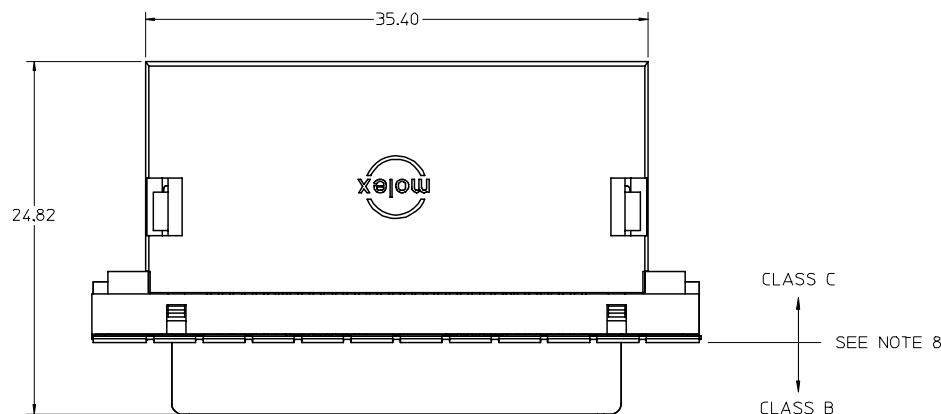

NOTES:

1. MATERIALS:

HOUSING, COVER, AND TAIL ALIGNER: HIGH TEMPERATURE THERMOPLASTIC, UL94, V-0 RATED, COLOR: BLACK
TERMINAL: PHOSPHOR BRONZE ALLOY
BRACKET: BRASS
SHELL: STEEL
INSERT: BRASS

2. FINISHES:

TERMINAL: 0.05-0.25 MICROMETERS GOLD FLASH IN CRITICAL AREA OVER 0.75 MICROMETERS MINIMUM PALLADIUM NICKEL IN CRITICAL AREA, 1.87 MICROMETERS MINIMUM TIN IN SOLDER TAIL AREA, ALL OVER NICKEL.
BRACKET: 5.0 MICROMETERS MINIMUM BRIGHT TIN.
SHIELD: 3.81 MICROMETERS MINIMUM BRIGHT TIN OVER 1.27 MICROMETERS MINIMUM NICKEL OVER COPPER FLASH (OPTIONAL).
INSERT: 2.54 MICROMETERS MINIMUM NICKEL.

3. PRODUCT SPECIFICATION: PS-71425-9999.



4. PACKAGING SPECIFICATION: TRAY PACK PER PK-74337-001.

5. APPLICABLE STANDARDS: EIA-700AAAF AND SFF-8441.

△ DATE CODE: YR/WK PER EIA-476-A.

7. TORQUE TO INSTALL SCREWLOCKS INTO THREADED INSERTS: 0.37 Nm MAXIMUM

8. PRODUCT COMPLIES WITH COSMETIC SPECIFICATION PS-45499-002. SEE TOP VIEW FOR SURFACE CLASSIFICATIONS.

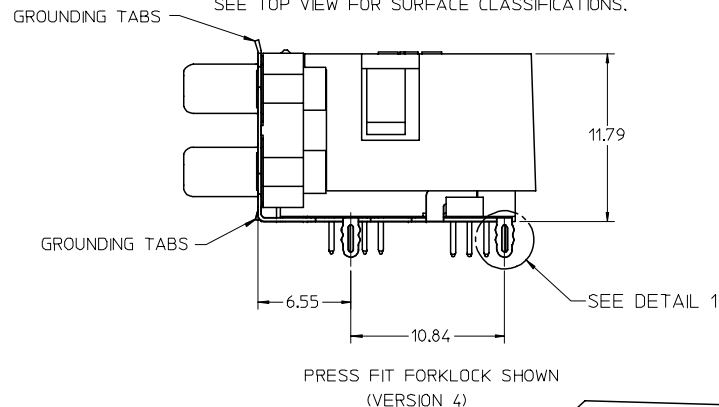



WITH COVER OPTION

ADD NOTE2, SHEET 4 EC NO: UCP2007-2867 DRWN:BBARKER 2007/05/30 CHKD: SDANNEL 2007/05/30 APPR: SMILLER 2007/06/01		DESCRIPTION	QUALITY SYMBOLS ▽ ± 0 ▽ ± 0	GENERAL TOLERANCES (UNLESS SPECIFIED)			SCALE 3:1	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION		REVISE ON CAD ONLY		
				mm	INCH	DIMENSION STYLE MM ONLY		TITLE SALES ASSEMBLY VHD CI STACKED					
4 PLACES ± --- ± ---				DRAWN BY DATE		MOLEX MOLEX INCORPORATED							
3 PLACES ± --- ± ---				RKADAMS 04/8/27									
2 PLACES ± 0.13 ± ---				CHECKED BY DATE									
1 PLACE ± 0.25 ± ---				BBARKER 04/8/27									
ANGULAR ± 1 °				APPROVED BY DATE		MATERIAL NO.		DOCUMENT NO.		SHEET NO.			
DRAFT WHERE APPLICABLE				SMILLER 04/8/27		SEE TABLE		SD-74337-004		1 OF 4			
MUST REMAIN WITHIN DIMENSIONS				THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION									




12 11 10 9 8 7 6 5 4 3 2 74337

J
I
H
G
F
E
D
C
B
A

J
I
H
G
F
E
D
C
B
A

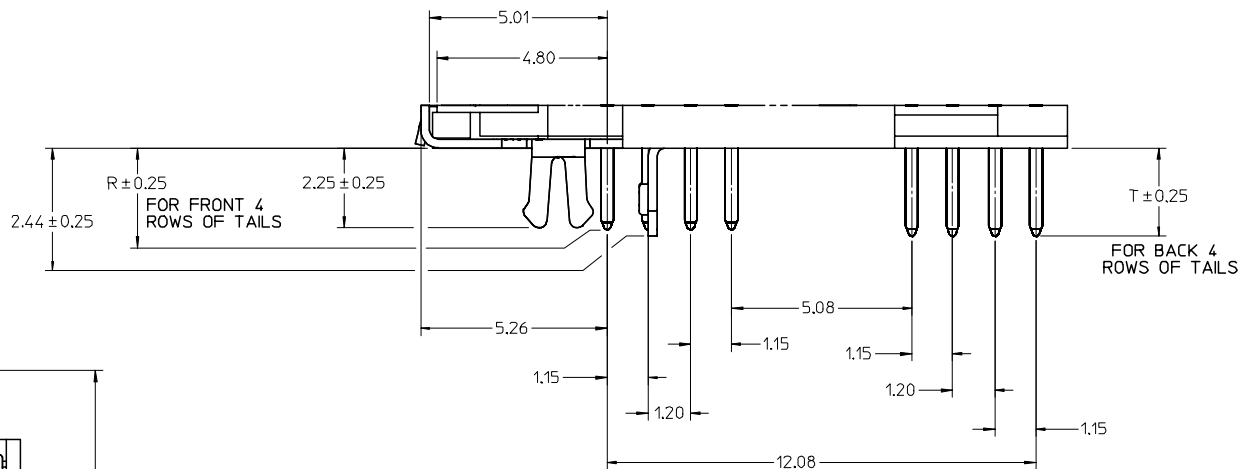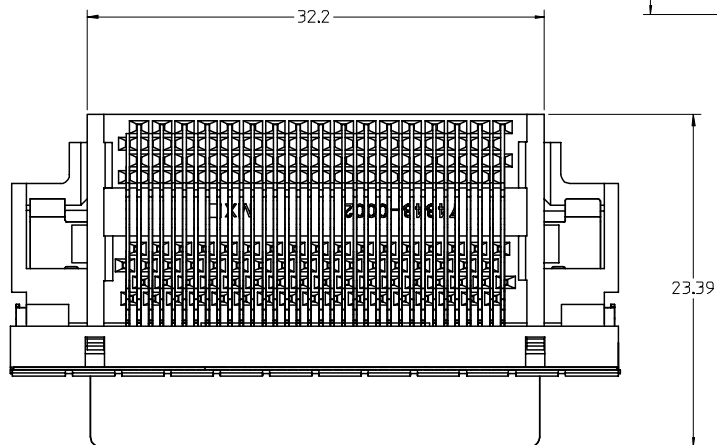

Detail1
SCALE 10:1

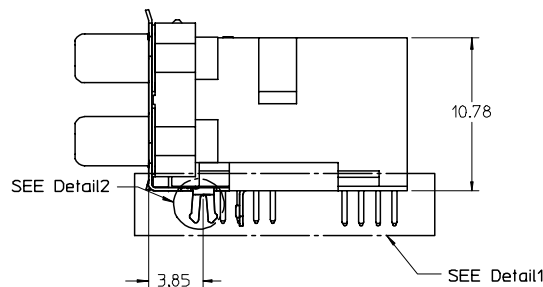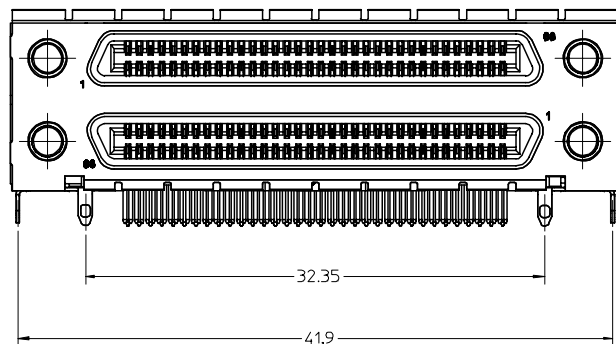


WITHOUT COVER OPTION

UPDATE REV LEVEL EC NO: UCP2007-2867 DRWN: BBARKER 2007/05/30 CHKD: SDANNELL 2007/05/30 APPR: SMILLER 2007/06/01	DESCRIPTION REV	QUALITY SYMBOLS ▽=0 ◇=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		SCALE 4:1	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION		REVISE ON CAD ONLY	
				mm	INCH	DIMENSION STYLE MM ONLY		TITLE SALES ASSEMBLY VHDCI STACKED		
			4 PLACES	± ---	± ---	DRAWN BY RKADAMS	DATE 04/8/27	MOLEX INCORPORATED		
			3 PLACES	± ---	± ---					
			2 PLACES	± 0.13	± ---	CHECKED BY BBARKER	DATE 04/8/27	MATERIAL NO. SEE TABLE		
			1 PLACE	± 0.25	± ---					
			ANGULAR ± 1 °			APPROVED BY SMILLER	DATE 04/8/27	DOCUMENT NO. SD-74337-004		
			DRAFT WHERE APPLICABLE							
			MUST REMAIN WITHIN DIMENSIONS							
						SHEET NO. 2 OF 4				

11 10 9 8 7 6 5 4 3 2 1


VERSION 1 PART NUMBERS

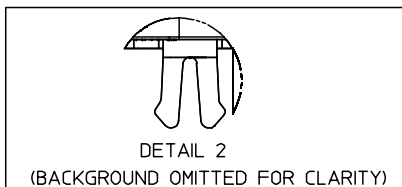

BOARD RETENTION: SNAP FIT

PCB THICKNESS	COVER	R DIM.	T DIM.	INCLUDES LOOSE PACKED SCREWLOCKS 71433-0002 SEE DRAWING SD-71433-005	GROUNDING TABS	PART NUMBER
1.60±0.16	YES	2.30	2.48	NO	YES	74337-0911
1.60±0.16	YES	2.08		NO	YES	74337-0912
1.60±0.16	NO	2.30	2.48	NO	YES	74337-0915
1.60±0.16	NO	2.08		NO	YES	
1.60±0.16	YES	2.30	2.48	YES	YES	
1.60±0.16	YES	2.08		YES	YES	
1.60±0.16	NO	2.30	2.48	YES	YES	
1.60±0.16	NO	2.08		YES	YES	
2.36±0.16	YES	3.44	3.62	NO	YES	
2.36±0.16	NO	3.44	3.62	NO	YES	
2.36±0.16	YES	3.44	3.62	YES	YES	74337-0972
2.36±0.16	NO	3.44	3.62	YES	YES	
1.60±0.16	YES	2.08		INSTALLED ON PART	YES	

VERSION 4 PART NUMBERS

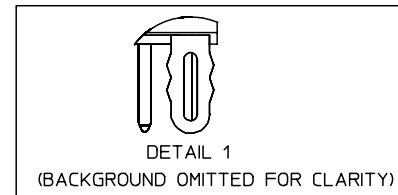

BOARD RETENTION: PRESS FIT

PCB THICKNESS	COVER	R DIM.	T DIM.	INCLUDES LOOSE PACKED SCREWLOCKS 71433-0002 SEE DRAWING SD-71433-005	GROUNDING TABS	PART NUMBER
1.60±0.16	YES	2.30	2.48	NO	YES	
1.60±0.16	YES	2.08		NO	NO	74337-0951
1.60±0.16	NO	2.30	2.48	NO	YES	
1.60±0.16	NO	2.08		NO	YES	
1.60±0.16	YES	2.08		NO	YES	
1.60±0.16	YES	2.30	2.48	YES	YES	
1.60±0.16	YES	2.08		YES	YES	
1.60±0.16	NO	2.30	2.48	YES	YES	
1.60±0.16	NO	2.08		YES	YES	
2.36±0.16	YES	3.44	3.62	NO	YES	74337-0952
2.36±0.16	NO	3.44	3.62	NO	YES	
2.36±0.16	YES	3.44	3.62	YES	YES	
2.36±0.16	NO	3.44	3.62	YES	YES	
1.60±0.16	YES	2.08		INSTALLED ON PART	YES	



OPTIONAL SCREWLOCK
71433-0002



UPDATE REV LEVEL
EC NO: UCP2007-2867
DRWN: BBARKER 2007/05/30
CHKD: SDANNELL 2007/05/30
APPR: SMILLER 2007/06/01

QUALITY SYMBOLS
▽=0
▽=0

GENERAL TOLERANCES (UNLESS SPECIFIED)
mm INCH
4 PLACES ± --- ± ---
3 PLACES ± --- ± ---
2 PLACES ± 0.13 ± ---
1 PLACE ± 0.25 ± ---
ANGULAR ± 1 °
DRAFT WHERE APPLICABLE
MUST REMAIN WITHIN DIMENSIONS

SCALE 3:1
DESIGN UNITS METRIC
DIMENSION STYLE MM ONLY
DRAWN BY DATE
RKADAMS 04/8/27
CHECKED BY DATE
BBARKER 04/8/27
APPROVED BY DATE
SMILLER 04/8/27
THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

THIRD ANGLE PROJECTION
REVISE ON CAD ONLY
TITLE
SALES ASSEMBLY
VHDCI STACKED
MOLEX INCORPORATED
MATERIAL NO. SEE TABLE
DOCUMENT NO. SD-74337-004
SHEET NO. 3 OF 4

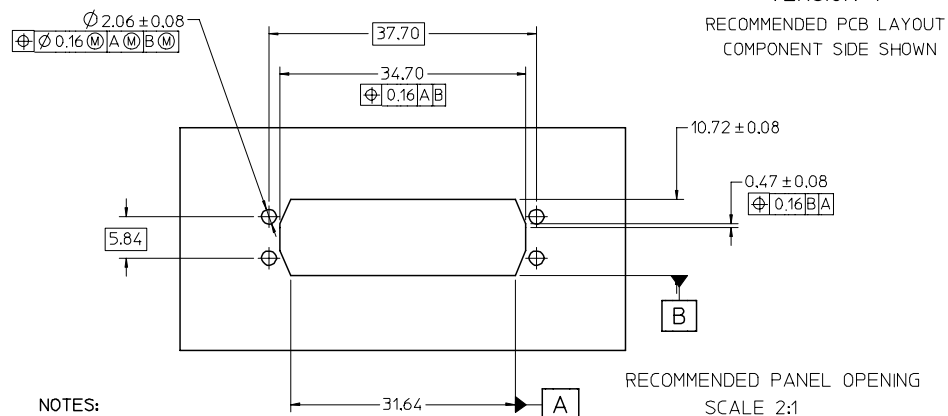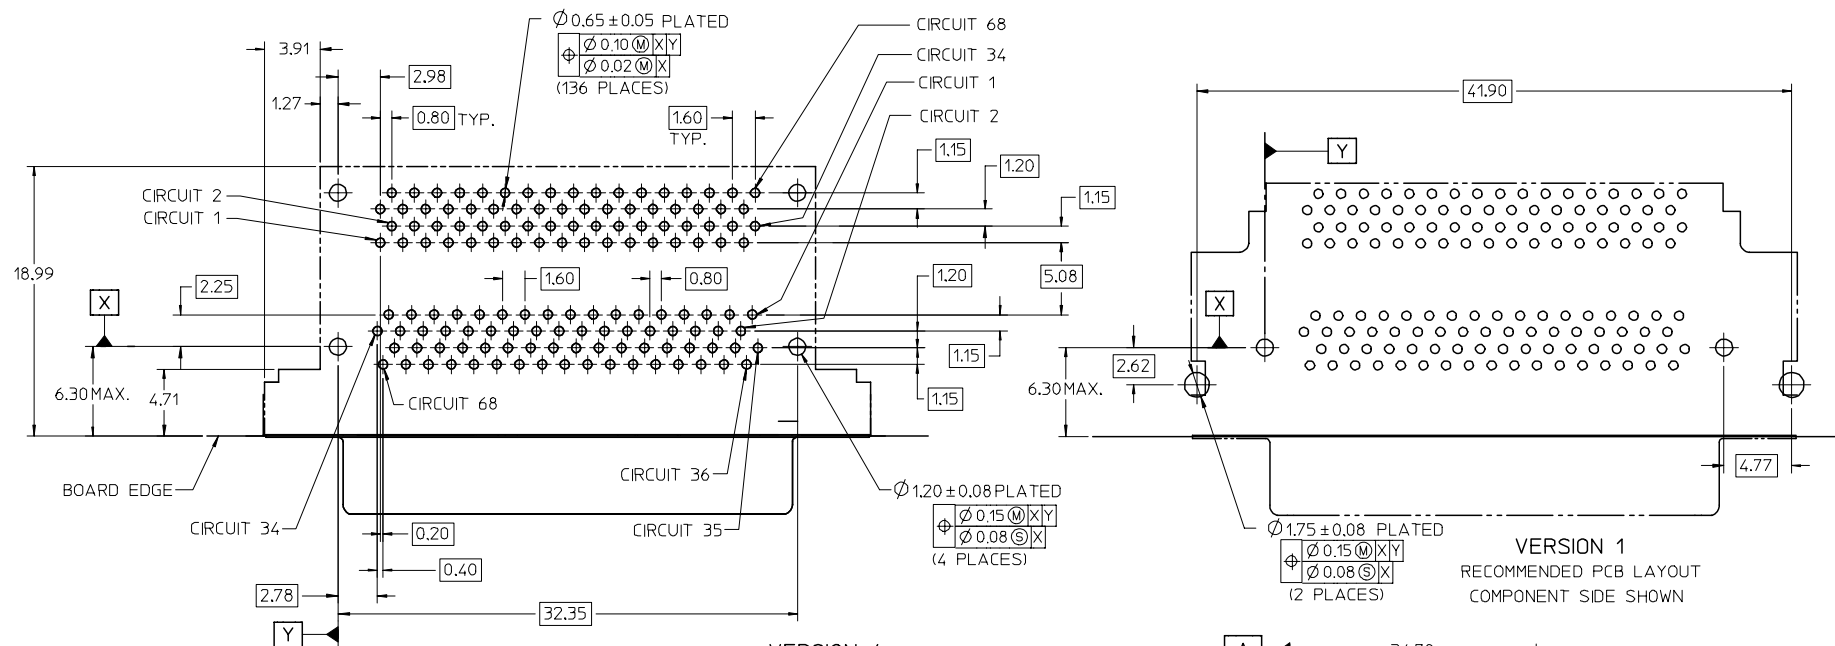


NOTES:

1. FOR FULL MATE WITH PLUG, PANEL THICKNESS SHOULD NOT EXCEED 1.0mm.

FUNCTIONAL MATING WITH MOLEX PLUG CAN STILL BE MAINTAINED WITH PANELS AS THICK AS 2.5mm (BUT PLUG AND RECEPTACLE WILL NOT BE FULLY MATED).

2. GUIDELINES FOR CHOOSING A MOLEX SCREWLOCK:

PANEL THICKNESS	RECOMMENDED SCREWLOCK
LESS THAN OR EQUAL TO 1.00 MM	71433-0002
1.01 TO 2.15 MM	71433-0010

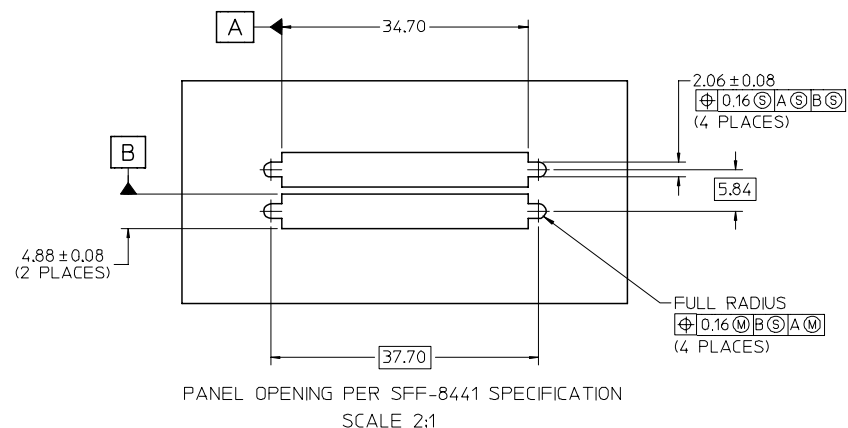

ADD NOTE 2 EC NO: UCP2007-2867 DRWN:BBARKER 2007/05/30 CHKD: SDANNEL2007/05/30 APPR: SMILLER 2007/06/01	DESCRIPTION	QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED)		SCALE 3:1	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION		REVISE ON CAD ONLY			
		 = 0		mm	INCH	DIMENSION STYLE		TITLE				
			4 PLACES	± ---	± ---	MM ONLY		SALES ASSEMBLY				
			3 PLACES	± ---	± ---	DRAWN BY DATE		VHDCI STACKED				
			2 PLACES	± 0.13	± ---	RKADAMS 04/8/27		MOLEX INCORPORATED				
			1 PLACE	± 0.25	± ---	CHECKED BY DATE						
			ANGULAR ± 1 °		BBARKER 04/8/27		MOLEX					
		 = 0	DRAFT WHERE APPLICABLE		APPROVED BY DATE		MATERIAL NO.		DOCUMENT NO.		SHEET NO.	
					SMILLER 04/8/27		SEE TABLE		SD-74337-004		4 OF 4	
			MUST REMAIN WITHIN DIMENSIONS		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION							



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.