

VARIOCON

Sleeve Housings

VARIOCON sleeve housings are available in four designs in plastic, metal powder-coated and EMC metal-coated.

There is no need for a panel mounting base with standard panel feed-throughs. VARIOCON sleeve housings form a seal directly on the mounting panel using two locking screws. This locking method saves space, can be accessed easily from above, resists vibration and fulfills the requirements of IP 67/IP 69k protection.

The screws with either a cylinder or knurled head can be screwed in or out with a standard Philips screwdriver or by hand (no tools).

The shape of the housing has a user-friendly design and is fitted with a large marker label. The angled cable exit means the cable can be routed as desired, from the side and straight.

The metal housings are equipped with a PG 16 resp. PG 21 cable entry.

The metal housings are also optionally available with M 20 or M 25 cable entry.



Type description

| | VC | - | K | - | T | 1 | - | Z | - | PG 16 |
|---|------------------------------------|---|---|---|---|---|---|---|---|-------|
| VARIOCON | | | | | | | | | | |
| K | = Plastic | | | | | | | | | |
| MP | = Metal, Powder coating | | | | | | | | | |
| MEMV | = Metal, EMC coating | | | | | | | | | |
| T | = Sleeve housing | | | | | | | | | |
| Housing type | | | | | | | | | | |
| Z | = Locking screw with cylinder head | | | | | | | | | |
| R | = Locking screw with knurled head | | | | | | | | | |
| PG 16 = PG thread (PG 16 / PG 21) | | | | | | | | | | |
| M 20 = metric cable entry (M 20 / M 25) | | | | | | | | | | |

VARIOCON

Sleeve Housing in Plastic, with PG Support




| Description | Type | Cable gland | Type | Order No. | Pcs./Pkt. |
|---|------|--------------|-----------|------------|-----------|
| Sleeve housing, locking screws with cylinder head | 1 | PG 16 | VC-K-T1-Z | 18 52 93 0 | 5 |
| | 2 | PG 21 | VC-K-T2-Z | 18 52 94 3 | |
| | 3 | PG 21 | VC-K-T3-Z | 18 52 95 6 | |
| | 4 | PG 21 | VC-K-T4-Z | 18 52 96 9 | |
| Sleeve housing, locking screws with knurled head | 1 | PG 16 | VC-K-T1-R | 18 55 09 2 | 5 |
| | 2 | PG 21 | VC-K-T2-R | 18 55 10 2 | |
| | 3 | PG 21 | VC-K-T3-R | 18 55 11 5 | |
| | 4 | PG 21 | VC-K-T4-R | 18 55 12 8 | |
| Accessories Marker labels, 5-section, unprinted, can be labeled with M-PEN or CMS system | | color: white | VC-BZS WH | 18 52 87 5 | 5 |

Technical data

Housing material
Sealing material
Locking screws

PA (UL 94 / V0)
santoprene
high-grade steel, V4A

| Sleeve housings | | Dimensions [mm] | | | |
|-----------------|------------|-----------------|------|-----|-----|
| Type | Width [mm] | a | b | c | d |
| 1 | 33 | 65 | 65 | 59 | 66 |
| 2 | 33 | 75 | 75 | 74 | 81 |
| 3 | 33 | 79.3 | 74.9 | 89 | 96 |
| 4 | 33 | 76.3 | 75 | 104 | 111 |

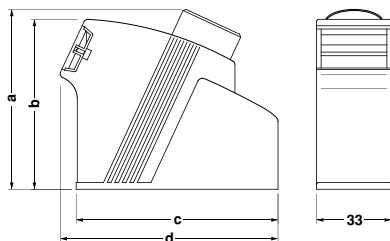

Dimensions: VC-K-T...

VARIOCON

Sleeve Housing with Powder Coating, with PG Support




| Description | Type | Cable gland | Type | Order No. | Pcs./Pkt. |
|---|------|--------------|------------|------------|-----------|
| Sleeve housing, locking screws with cylinder head | 1 | PG 16 | VC-MP-T1-Z | 18 84 89 8 | 5 |
| | 2 | PG 21 | VC-MP-T2-Z | 18 84 90 8 | |
| | 3 | PG 21 | VC-MP-T3-Z | 18 84 91 1 | |
| | 4 | PG 21 | VC-MP-T4-Z | 18 84 92 4 | |
| Sleeve housing, locking screws with knurled head | 1 | PG 16 | VC-MP-T1-R | 18 55 53 9 | 5 |
| | 2 | PG 21 | VC-MP-T2-R | 18 55 54 2 | |
| | 3 | PG 21 | VC-MP-T3-R | 18 55 55 5 | |
| | 4 | PG 21 | VC-MP-T4-R | 18 55 56 8 | |
| Accessories Marker labels, 5-section, unprinted, can be labeled with M-PEN or CMS system | | color: white | VC-BZS WH | 18 52 87 5 | 5 |

Technical data

Housing material
Housing surface
Sealing material
Locking screws

zinc die-cast
powder coating
santoprene
brass, nickel-plated

| Sleeve Housings | | Dimensions [mm] | | | |
|-----------------|------------|-----------------|------|-----|-----|
| Type | Width [mm] | a | b | c | d |
| 1 | 33 | 65 | 65 | 59 | 66 |
| 2 | 33 | 75 | 75 | 74 | 81 |
| 3 | 33 | 79.3 | 74.9 | 89 | 96 |
| 4 | 33 | 76.3 | 75 | 104 | 111 |

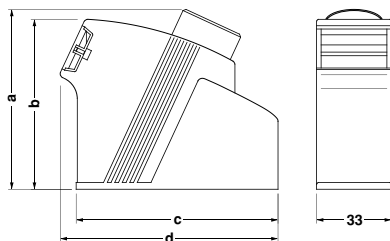

Dimensions: VC-MP-T...

VARIOCON

Sleeve Housing with EMC Coating, Conductive Seal and PG Support




| Description | Type | Cable gland | Type | Order No. | Pcs./Pkt. |
|---|------|--------------|--------------|------------|-----------|
| Sleeve housing, locking screws with cylinder head | 1 | PG 16 | VC-MEMV-T1-Z | 18 53 32 4 | 5 |
| | 2 | PG 21 | VC-MEMV-T2-Z | 18 53 33 7 | |
| | 3 | PG 21 | VC-MEMV-T3-Z | 18 53 34 0 | |
| | 4 | PG 21 | VC-MEMV-T4-Z | 18 53 35 3 | |
| Sleeve housing, locking screws with knurled head | 1 | PG 16 | VC-MEMV-T1-R | 18 55 13 1 | 5 |
| | 2 | PG 21 | VC-MEMV-T2-R | 18 55 14 4 | |
| | 3 | PG 21 | VC-MEMV-T3-R | 18 55 15 7 | |
| | 4 | PG 21 | VC-MEMV-T4-R | 18 55 16 0 | |
| Accessories Marker labels, 5-section, unprinted, can be labeled with M-PEN or CMS system | | color: white | VC-BZS WH | 18 52 87 5 | 5 |

Technical data

Housing material
Housing surface
Sealing material
Locking screws

zinc die-cast
copper-nickel coating
santoprene / conductive
brass, nickel-plated

| Sleeve housings | | Dimensions [mm] | | | |
|-----------------|------------|-----------------|------|-----|-----|
| Type | Width [mm] | a | b | c | d |
| 1 | 33 | 65 | 65 | 59 | 66 |
| 2 | 33 | 75 | 75 | 74 | 81 |
| 3 | 33 | 79.3 | 74.9 | 89 | 96 |
| 4 | 33 | 76.3 | 75 | 104 | 111 |

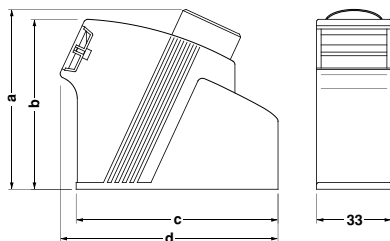

Dimensions: VC-MEMV-T...

VARIOCON

Sleeve Housing with Powder Coating and Metric Cable Entry




| Description | Type | Cable gland | Type | Order No. | Pcs./Pkt. |
|---|------|--------------|----------------|------------|-----------|
| Sleeve housing, locking screws with cylinder head | 1 | M 20 | VC-MP-T1-Z-M20 | 18 86 67 6 | 5 |
| | 2 | M 25 | VC-MP-T2-Z-M25 | 18 86 68 9 | |
| | 3 | M 25 | VC-MP-T3-Z-M25 | 18 86 69 2 | |
| | 4 | M 25 | VC-MP-T4-Z-M25 | 18 86 70 2 | |
| Sleeve housing, locking screws with knurled head | 1 | M 20 | VC-MP-T1-R-M20 | 18 86 63 4 | 5 |
| | 2 | M 25 | VC-MP-T2-R-M25 | 18 86 64 7 | |
| | 3 | M 25 | VC-MP-T3-R-M25 | 18 86 65 0 | |
| | 4 | M 25 | VC-MP-T4-R-M25 | 18 86 66 3 | |
| Accessories Marker labels, 5-section, unprinted, can be labeled with M-PEN or CMS system | | color: white | VC-BZS WH | 18 52 87 5 | 5 |

Technical data

Housing material
Housing surface
Sealing material
Locking screws

zinc die-cast
powder coating
santoprene
brass, nickel-plated

| Sleeve housings | | Dimensions [mm] | | |
|-----------------|------------|-----------------|-----|-----|
| Type | Width [mm] | b | c | d |
| 1 | 33 | 65 | 59 | 66 |
| 2 | 33 | 75 | 74 | 81 |
| 3 | 33 | 74.9 | 89 | 96 |
| 4 | 33 | 75 | 104 | 111 |

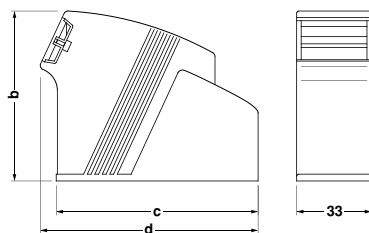

Dimensions: VC-MP-T...M...

VARIOCON

Sleeve Housing with EMC Coating, Conductive Seal and Metric Cable Entry




| Description | Type | Cable gland | Type | Order No. | Pcs./Pkt. |
|---|------|--------------|------------------|------------|-----------|
| Sleeve housing, locking screws with cylinder head | 1 | M 20 | VC-MEMV-T1-Z-M20 | 18 86 55 3 | 5 |
| | 2 | M 25 | VC-MEMV-T2-Z-M25 | 18 86 56 6 | |
| | 3 | M 25 | VC-MEMV-T3-Z-M25 | 18 86 57 9 | |
| | 4 | M 25 | VC-MEMV-T4-Z-M25 | 18 86 58 2 | |
| Sleeve housing, locking screws with knurled head | 1 | M 20 | VC-MEMV-T1-R-M20 | 18 86 59 5 | 5 |
| | 2 | M 25 | VC-MEMV-T2-R-M25 | 18 86 60 5 | |
| | 3 | M 25 | VC-MEMV-T3-R-M25 | 18 86 61 8 | |
| | 4 | M 25 | VC-MEMV-T4-R-M25 | 18 86 62 1 | |
| Accessories Marker labels, 5-section, unprinted, can be labeled with M-PEN or CMS system | | color: white | VC-BZS WH | 18 52 87 5 | 5 |

Technical data

Housing material
Housing surface
Sealing material
Locking screws

zinc die-cast
copper-nickel coating
santoprene / conductive
brass, nickel-plated

| Sleeve housings | | Dimensions [mm] | | |
|-----------------|------------|-----------------|-----|-----|
| Type | Width [mm] | b | c | d |
| 1 | 33 | 65 | 59 | 66 |
| 2 | 33 | 75 | 74 | 81 |
| 3 | 33 | 74.9 | 89 | 96 |
| 4 | 33 | 75 | 104 | 111 |

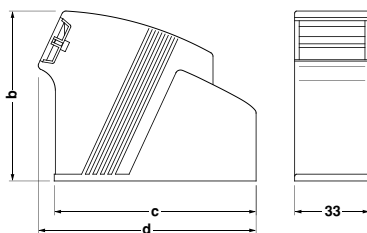

Dimensions: VC-MEMV-T...M...



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.