



Features

- Split knurled or plain shaft options
- DPDT push-pull switch
- Metal bushing and shaft
- Carbon element
- Linear and audio taper options
- RoHS compliant*



PDB183-GTR - 17 mm Guitar Potentiometer w/Push-Pull Switch

Electrical Characteristics

Taper..... Linear, audio
Standard Resistance Range
..... 10K ohms to 1M ohms
Standard Resistance Tolerance..... $\pm 20\%$
Residual Resistance..... 1 % max.

Environmental Characteristics


Operating Temperature	-10 °C to +50 °C
Power Rating	
Linear	0.2 watt
Audio	0.1 watt
Maximum Operating Voltage	
Linear	200 V
Audio	150 V
Sliding Noise	47 mV max.

Mechanical Characteristics

Mechanical Angle 300 ° ± 5 °
Rotational Torque 30 to 100 g-cm
Stop Strength..... 5 kg-cm min.
Rotational Life..... 15,000 cycles
Switch Life 15,000 cycles
Switch Type DPDT
Switch Travel 4.3 ± 0.2 mm
(.169 ± .008 in.)

Soldering Condition
Manual/Wave
.....260 °C max. for 3 seconds max.
Wash..... Not recommended
Hardware..... Two flat washers and
two mounting nuts supplied per
potentiometer

Derating Curve

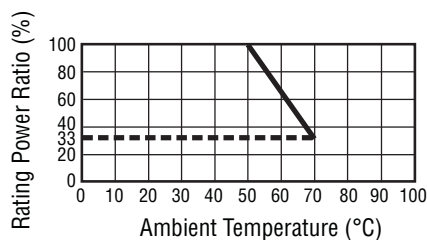


Standard Resistance Table

Resistance (Ohms)	Resistance Code
10,000	103
25,000	253
50,000	503
100,000	104
250,000	254
300,000	304
500,000	504
1,000,000	105

Product Dimensions

PDB183-GTR01,
PDB183-GTR02

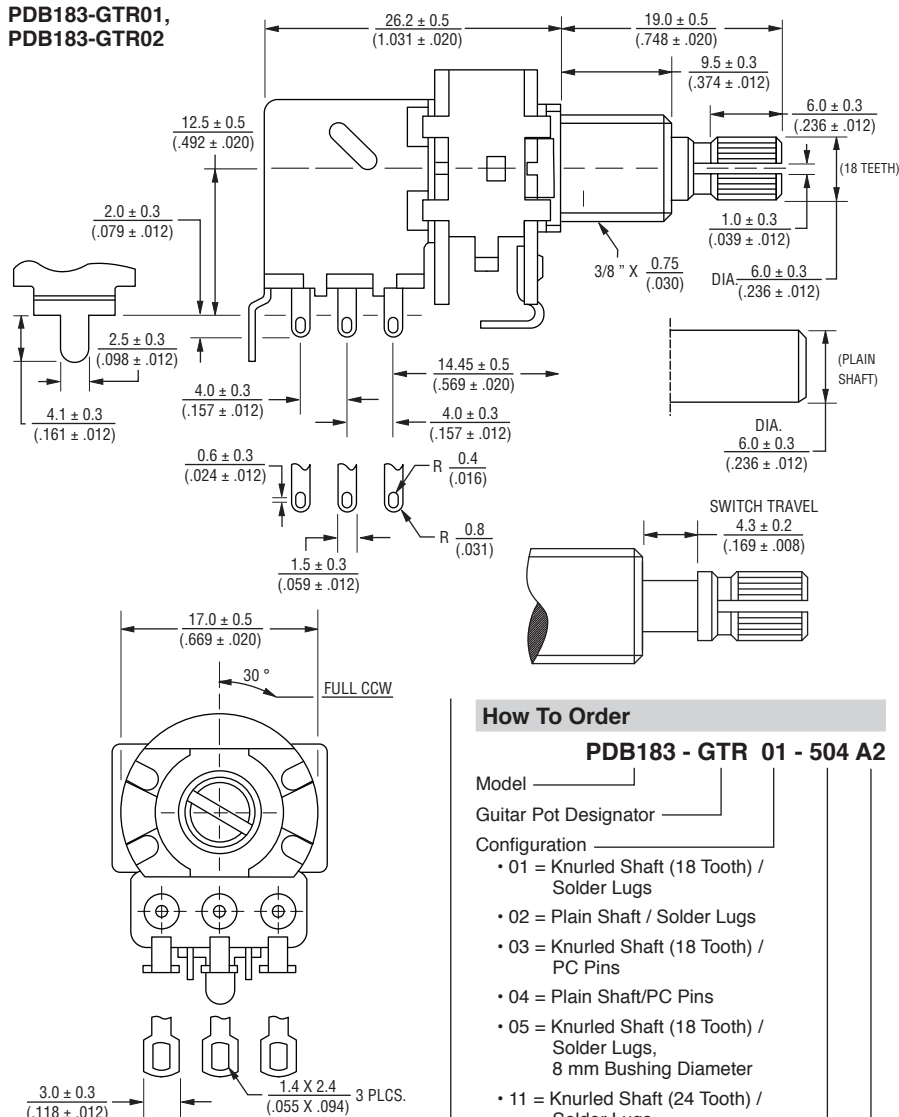

How To Order

PDB183 - GTR 01 - 504 A2

Model _____

Guitar Pot Designator _____

Configuration _____

- 01 = Knurled Shaft (18 Tooth) / Solder Lugs
- 02 = Plain Shaft / Solder Lugs
- 03 = Knurled Shaft (18 Tooth) / PC Pins
- 04 = Plain Shaft/PC Pins
- 05 = Knurled Shaft (18 Tooth) / Solder Lugs, 8 mm Bushing Diameter
- 11 = Knurled Shaft (24 Tooth) / Solder Lugs
- 13 = Knurled Shaft (24 Tooth) / PC Pins
- 21 = Knurled Shaft (18 Tooth) / Solder Lugs / Dual Gang
- 22 = Plain Shaft / Solder Lugs/ Dual Gang
- 31 = Knurled Shaft (18 Tooth) / Solder Lugs, Long Bushing
- 32 = Plain Shaft / Solder Lugs / Long Bushing

Resistance Code (See table) _____



Resistance Taper (See taper charts) _____

PDB183-GTR - 17 mm Guitar Potentiometer w/Push-Pull Switch

BOURNS®


Product Dimensions

**PDB183-GTR03,
PDB183-GTR04**

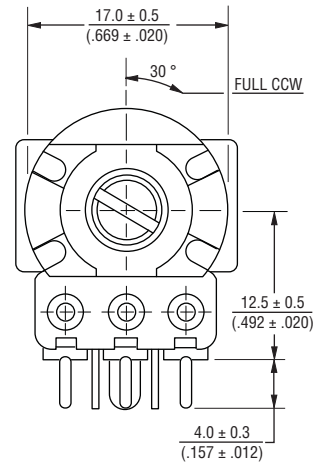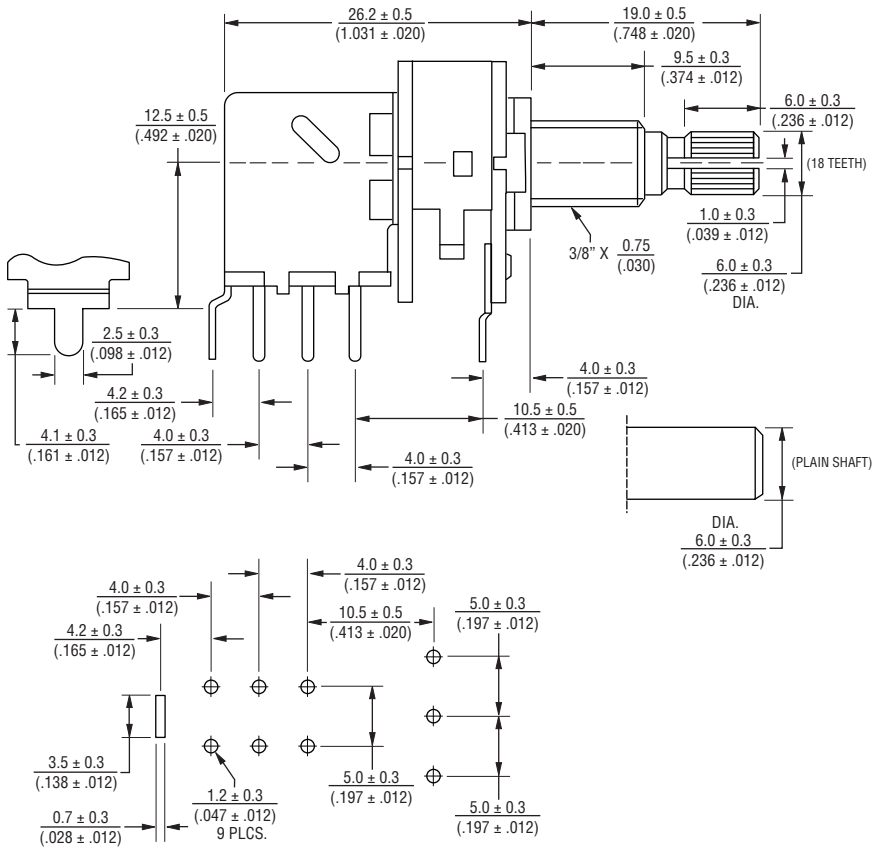


Circuit


Single Gang




Dual Gang




Switch



Schematic



PDB183-GTR05

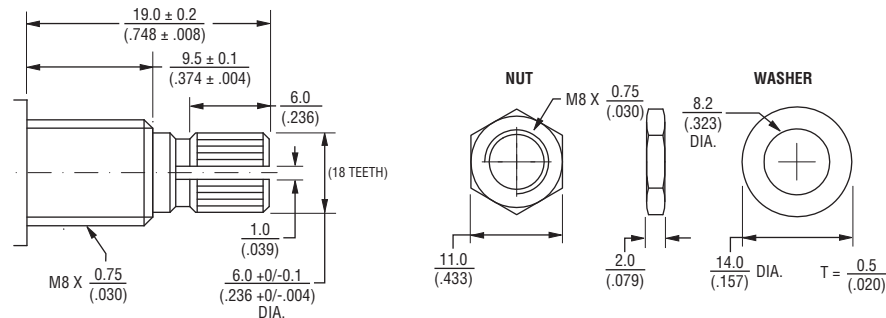

DIMENSIONS: $\frac{\text{MM}}{\text{(INCHES)}}$

Specifications are subject to change without notice.
The device characteristics and parameters in this data sheet can and do vary in different applications and actual device performance may vary over time.
Users should verify actual device performance in their specific applications.

BOURNS®

Technical drawing showing the assembly of a bolt, nut, and washer. The dimensions are as follows:

- Bolt:**
 - Thread: M3/8" - 32 UNF
 - Head Diameter: 12.7 ± 0.5 (.472 ± .020)
 - Head Thickness: 2.5 ± 0.2 (.098 ± .008)
- NUT:**
 - Thread: M3/8" - 32 UNF
- WASHER:**
 - Inner Diameter: 9.5 ± 0.2 (.374 ± .008) DIA.
 - Outer Diameter: 14.0 ± 0.5 (.157 ± .020) DIA.

17.0 $\pm$ 0.5
(.669 $\pm$.020)

30°

FULL CCW

3 PLCS.
1.5 X 2.5
(.059 X .098)

5.0 $\pm$ 0.3
(.197 $\pm$.012)

5.0 $\pm$ 0.3
(.197 $\pm$.012)

Technical drawing of a shaft with the following dimensions and tolerances:




- Overall length: 27.5 ± 0.2 ($1.083 \pm .008$)
- Distance from left end to start of thread: 19.0 ± 0.1 ($.748 \pm .004$)
- Thread specification: $\frac{3}{8}$ " X $\frac{0.75}{(.030)}$
- Thread length: $C \frac{0.5}{(.020)}$
- Thread angle: $X 45^\circ$
- End face diameter: $\frac{6.0 \pm 0.3}{(.236 \pm .012)}$ DIA.

The device characteristics and parameters in this data sheet can and do vary in different applications and actual device performance may vary over time. Users should verify actual device performance in their specific applications.


PDB183-GTR - 17 mm Guitar Potentiometer w/Push-Pull Switch

BOURNS®

Tapers

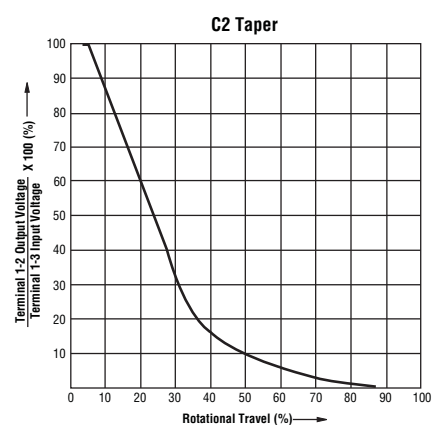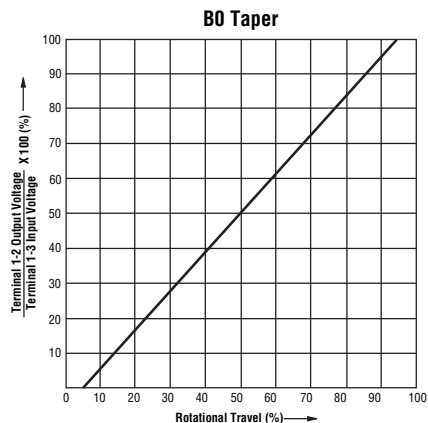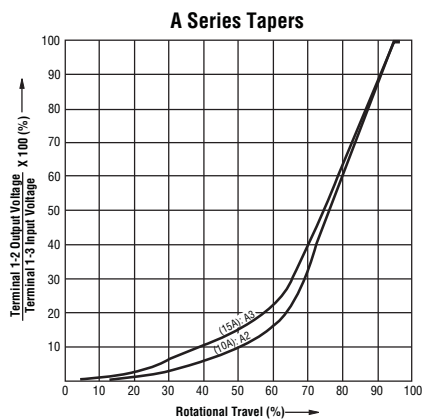

Typical Part Marking

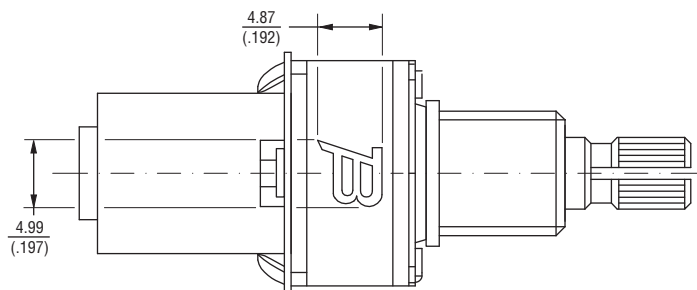

DIMENSIONS: $\frac{\text{MM}}{(\text{INCHES})}$

REV. 09/16

Specifications are subject to change without notice.

The device characteristics and parameters in this data sheet can and do vary in different applications and actual device performance may vary over time.

Users should verify actual device performance in their specific applications.



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.