


KINO-QM57A

Mini-ITX SBC with Socket G1 for Intel® mobile Core™ i7/i5/i3/Celeron® CPU, VGA/Dual HDMI/LVDS, PCIe GbE, USB 2.0, PCIe Mini, SATA 3Gb/s, Audio and RoHS

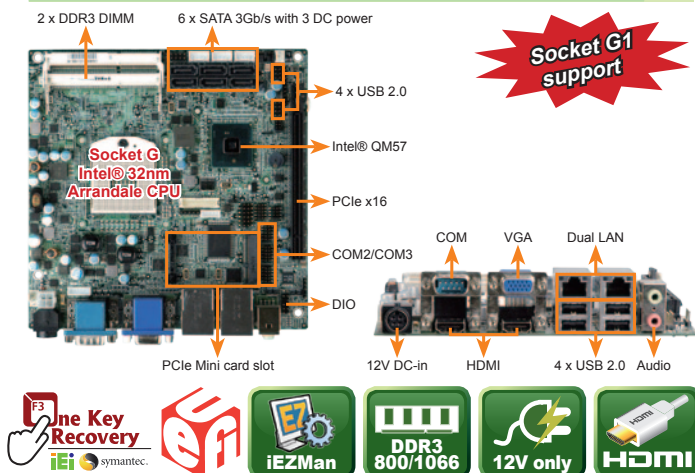

Features

1. Mini-ITX SBC with Socket G for Intel® 32nm/45nm mobile Core™ i7/i5/i3 and Celeron® processor
2. 800/1066MHz dual-channel DDR3 SO-DIMM supported (System max. 8GB)
3. Analog CRT/18-bit or 24-bit dual-channel LVDS/Dual HDMI outputs supported
4. Intel® GbE LAN with Intel® AMT 6.0 support, iEZman UI is bounded for remote control under Windows® environment
5. UEFI software interface between OS and platform firmware
6. IEI One Key Recovery solution allows you to create rapid OS backup and recovery

Specifications

- ◆ CPU
Socket G1 for Intel® mobile Core™ i7/i5/i3 and Celeron® processor (Socket 988)
- ◆ PCH: Intel® QM57
- ◆ Memory
Two 204-pin 800/1066MHz dual-channel DDR3 SDRAM SO-DIMM supported (system max. 8GB)
- ◆ BIOS: UEFI BIOS
- ◆ Ethernet
LAN1: Intel® 82577 GbE LAN controller with Intel® AMT 6.0 supported by iEZman software UI
LAN2: Intel® 82574L GbE LAN
- ◆ Graphics Engine
Gen 5.75 with 12 Execution Units DirectX® 10, OpenGL® 2.1
- ◆ Display Output
Dual display supported
1 x VGA
2 x HDMI
1 x 18/24-bit dual-channel LVDS support
- Note:
The Intel® quad-core processor is a discrete processor which does not integrate a graphics engine. If a quad-core processor is used on the motherboard, an additional graphic card must be installed in order to support display output. Otherwise, the display will show "No display output" when connected to the on-board display port.
- ◆ Super I/O: Fintek F81865
- ◆ Audio: Realtek ALC888 HD Audio codec
- ◆ I/O Interface
3 x RS-232 8 x USB 2.0
1 x RS-232/422/485 with auto flow control
1 x 6-pin header for KB/MS
6 x SATA 3Gb/s with RAID 0/1/5/10, support three SATA power connectors
- ◆ Expansion
1 x PCIe Mini Card 1 x PCIe x16
- ◆ Watchdog Timer
Software programmable supports 1~255 sec. system reset
- ◆ Digital I/O
8-bit digital I/O, 4-bit input/4-bit output
- ◆ Fan Connector
1 x 4-pin CPU fan connector
1 x 3-pin system fan connector
- ◆ Power Supply
Single voltage 12V DC input
1 x External 4-pin DIN DC jack
1 x Internal 4-pin (2x2) power connector
Support AT/ATX mode
- ◆ Power Consumption
12V@5.27A (2.66GHz Intel® Core™ i7 620M CPU with two 2GB 1333MHz DDR3 DIMMs)
- ◆ Operating Temperature
0°C ~ 60°C (32°F ~ 140°F)
- ◆ Storage Temperature: -10°C ~ 70°C
- ◆ Operating Humidity: 5% ~ 95%, non-condensing
- ◆ Dimensions: 170mm x 170mm
- ◆ Weight: GW:1000g/NW:350g

Packing List


1 x KINO-QM57A single board computer	
3 x SATA with power output cable (P/N: 32801-000100-300-RS)	
1 x Dual RS-232 cable w/bracket (P/N: 19800-000112-RS)	1 x Mini jumper pack
1 x I/O shielding (P/N: 45014-0029C0-00-RS)	1 x QIG
1 x One Key Recovery CD	1 x Utility CD

Ordering Information

Part No.	Description
KINO-QM57A-R10	Mini-ITX SBC with Socket G1 for Intel® mobile Core™ i7/i5/i3/Celeron® CPU, VGA/Dual HDMI/LVDS, PCIe GbE, USB 2.0, PCIe Mini, SATA 3Gb/s and audio, RoHS
19800-003100-300-RS	Dual USB cable
SAIDE-KIT01-R10	SATA to IDE/CF converter board
WMPCIE-V01-R30	PCIe Mini card wireless LAN module
VMUSB-V01-R20	USB Mini card wireless LAN module
63000-FSP096AHB-RS	96W/12V power adaptor 90VAC~260VAC, DIN 4 pin
19800-004300-100-RS	RS-232/422/485 cable with bracket
CF-989A-RS-R12	CPU cooler for mobile socket-G (PGA988) up to 55W processor, Copper, 60mm x 60mm x 27.6mm, RoHS
CF-989B-RS-R11	CPU cooler for mobile socket-G (PGA988) 50W processor, Aluminum, 60x60x27.6mm, RoHS

KINO-HM551

Mini-ITX SBC with Socket G1 for Intel® mobile Core™ i7/i5/i3 and Celeron® CPU, VGA/DVI/LVDS/HDMI, Dual PCIe GbE, USB 2.0, Dual PCIe Mini, SATA 3Gb/s and Audio, RoHS

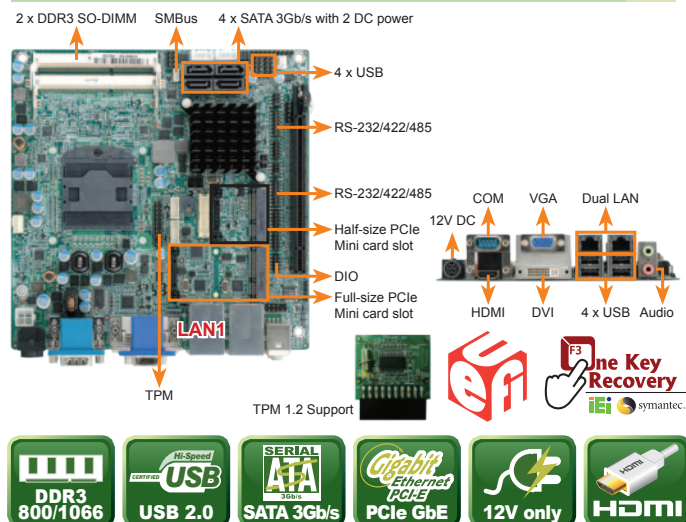

Features

1. Mini-ITX SBC with Socket G1 for Intel® mobile Core™ i7/i5/i3 and Celeron® processor
2. DDR3 800/1066MHz dual-channel SDRAM supported up to 8GB
3. 18/24-bit dual-channel LVDS/Analog CRT/DVI/HDMI output supported
4. PCIe x16 slot and dual PCIe Mini card for high speed device expansion
5. TPM V1.2 hardware security function supported by TPM module
6. IEI One Key Recovery solution allows you to create rapid OS backup and recovery

Specifications

- ◆ CPU
Socket G1 for Intel® mobile Core™ i7/i5/i3 and Celeron® processor (Socket 988)
- ◆ PCH: Intel® HM55
- ◆ Memory
Two 204-pin 4GB (max.) 800/1066MHz dual-channel DDR3 SDRAM SO-DIMM supported (System max. 8GB)
- ◆ BIOS: UEFI BIOS
- ◆ Ethernet
Dual LAN: Realtek RTL8111E PCIe GbE controller with ASF 2.0 support
- ◆ Graphics Engine
Gen 5.75 with 12 Execution Units DirectX® 10, OpenGL® 2.1
- ◆ Display Interface
Dual display supported
1 x VGA
2 x HDMI
1 x 18/24-bit dual-channel LVDS support
- Note:
The Intel® quad-core processor is a discrete processor which does not integrate a graphics engine. If a quad-core processor is used on the motherboard, an additional graphic card must be installed in order to support display output. Otherwise, the display will show "No display output" when connected to the on-board display port.
- ◆ Super I/O: Fintek F81865
- ◆ Audio: Realtek ALC888 HD Audio codec
- ◆ TPM: 1 x TPM connector (2x10 pin)
- ◆ Expansions
1 x PCIe Mini card slot
1 x Half-size PCIe Mini card slot
1 x PCIe x16 slot
- ◆ I/O Interface
4 x RS-232 8 x USB 2.0
2 x RS-232/422/485 with auto flow control
4 x SATA 3Gb/s with two DC power connector
1 x 6-pin header for KB/MS
- ◆ SMBus: 1 x 4-pin wafer connector
- ◆ Watchdog Timer
Software programmable supports 1~255 sec. system reset
- ◆ Digital I/O
8-bit digital I/O, 4-bit input/4-bit output
- ◆ Fan Connector
1 x 4-pin CPU fan connector
1 x 3-pin system fan connector
- ◆ Power Supply
Single voltage 12V DC input
1 x External 4-pin DIN DC jack
1 x Internal 4-pin (2x2) power connector
AT/ATX power mode selected by jumper
- ◆ Power Consumption
12V@4.67A (2.66GHz Intel® Core™ i7 620M CPU with two 1333MHz 4GB DDR3 DIMM)
- ◆ Operating Temperature: -10°C ~ 60°C
- ◆ Storage Temperature: -20°C ~ 70°C
- ◆ Operating Humidity: 5% ~ 95%, non-condensing
- ◆ Dimensions: 170mm x 170mm
- ◆ Weight: GW: 900g/NW: 450g

Packing List

1 x KINO-HM551 single board computer	
1 x Dual RS-232 cable with bracket (P/N: 19800-000112-RS)	
2 x SATA with power cable (P/N: 32801-000100-300-RS)	1 x Mini jumper pack
1 x I/O shielding (P/N: 45014-0032C0-00-RS)	1 x Utility CD
1 x One Key Recovery CD	1 x QIG

Ordering Information

Part No.	Description
KINO-HM551-R10	Mini-ITX SBC with Socket G1 for Intel® mobile Core™ i7/i5/i3 and Celeron® CPU, VGA/DVI/LVDS/HDMI, Dual PCIe GbE, USB 2.0, Dual PCIe Mini, SATA 3Gb/s and Audio, RoHS
19800-003100-300-RS	Dual USB cable with bracket
SAIDE-KIT01-R10	SATA to IDE/CF converter board
19800-004300-100-RS	RS-232/422/485 cable with bracket
32000-023800-RS	KB/MS Y cable
CF-989A-RS-R12	CPU cooler for mobile socket-G (PGA988) up to 55W processor, Copper, 60mm x 60mm x 27.6mm, RoHS
TPM-IN01-R11	20-pin Infineon TPM module, software management tool, firmware V3.17



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.