



## | P4000

Pressure Sensor

### Introduction

The P4000 series of pressure sensors incorporates a stainless steel isolation diaphragm and welded construction to withstand harsh environments. The sensor uses piezo-resistive sensing technology and is paired with our custom ASIC to produce a stable, accurate output. Using a 5 Vdc input, the sensors provide a 0.5 to 4.5 Vdc output proportional to pressure. Internal temperature compensation provides an accurate, easy-to-use device. The rugged construction of the P4000 series is specifically designed to withstand high overpressure spikes and provide compatibility with a wide range of process media including refrigerants and hydraulic oils.



### Features

- Welded Stainless Steel Construction
- Isolation Diaphragm
- Absolute or Sealed Gage Reference
- Low Power Consumption
- High Vibration Tolerance
- Outstanding EMI/RFI Protection
- Amplified Linear Output
- Temperature Compensated

### Applications

- On & Off-Highway Vehicle
- Hydraulic Systems
- Pressurized Tools
- Instruments
- Pneumatic Controls
- Refrigerant Control & Recovery



### MAIN FEATURES

<b>Pressure Ranges</b>	0 to 100 up to 0 to 5000 PSI
<b>Electrical Connection</b>	Packard Electric Metri-Pack 150 Series, Deutsch
<b>Pressure Connection</b>	1/8 – 27 NPT, 7/16 – 20 UNF – for more options see how to order section
<b>Housing Material</b>	304 Stainless Steel (1.4301)
<b>Output Signal</b>	0.5 - 4.5 VDC



## TECHNICAL SPECIFICATIONS

### Pressure Ranges

<b>From 0 to ...<sup>(1)</sup></b>	PSI (gage)	100	200	300	500	750	1000	1500	2000	3000	4000	5000
<b>Proof pressure</b>	PSI (gage)	300	900	900	150	1500	3000	5000	5000	8000	8000	8000
<b>Burst pressure</b>	PSI (gage)	3750	3750	3750	3750	3750	15000	15000	15000	15000	15000	15000

### Physical

<b>Operating Life Cycle</b>	min. 1 million full pressure cycles over the full range
<b>Vibration Resistance</b>	MIL-STD 202, Method 204, Condition A (10 G's sinusoidal)
<b>Shock Resistance</b>	75 G's ½ sine wave
<b>Drop Test</b>	1m onto concrete surface
<b>Weight</b>	80 grams (without mating connector)
<b>Ingress Protection</b>	IP67
<b>Media Temperature</b>	-40°C to + 150°C
<b>Environmental Temperature</b>	- 40°C to + 125 °C
<b>Storage Temperature</b>	- 40°C to + 125 °C
<b>Media</b>	All fluids compatible with stainless steel 304 (1.4301)

### Performance

<b>Total error band<sup>(2)</sup></b>	+/-2% of span (-40 ≤ T ≤ 125° C)
---------------------------------------	----------------------------------

### Electrical

<b>Output Signal</b>	0.5... 4.5 VDC ratiometric
<b>Operating Supply Signal</b>	5.0 ± 0.5 VDC 10%
<b>Power Consumption</b>	<16 mW
<b>Excitation Current</b>	< 3 mA
<b>Oversvoltage Protection</b>	16 VDC
<b>Short-circuit Proofness</b>	Yes <sup>(3)</sup>
<b>Reverse Polarity Protection</b>	Yes <sup>(4)</sup>
<b>Output Load</b>	≥ 25 kΩ
<b>Response Time</b>	≤ 10 ms max. to 63% of full scale pressure with step change on input



## GENERAL NOTES

<sup>(1)</sup> For more options see Ordering Options

<sup>(2)</sup> Including accuracy, calibration, temperature, non-linearity, hysteresis, non-repeatability, error

<sup>(3)</sup> For min. 3 intervals at 5 minutes each

<sup>(4)</sup> For min. 10 seconds on assigned pins




# DIMENSIONS

Dimensions in mm [Inch]

## Pressure Sensor with Electrical Connection

Packard (metri-pack 150) Pin Call Outs			
Output	Pin 1	Pin 2	Pin 3
0.5-4.5 VDC ratiometric	GND	Vsup	Vout

Thread Size	DIM "A"	DIM "B" (Low Pressure) Connector		DIM "B" (High Pressure) Connector	
		Packard	Deutsch	Packard	Deutsch
1/8 - 27 NPT	9.91 [.39]	48.01 [1.89] MAX	56.39 [2.22] MAX	53.85 [2.12] MAX	61.98 [2.44] MAX
Schrader (7/16 - 20 UNF)	12.45 [.49]	48.01 [1.89] MAX	56.39 [2.22] MAX	-	-
7/16 - 20 UNF SAE J1926/2	11 [.433]	48.01 [1.89] MAX	56.39 [2.22] MAX	53.85 [2.12] MAX	61.98 [2.44] MAX
1/2 - 20 UNF SAE J1926/2	11 [.433]	48.01 [1.89] MAX	56.39 [2.22] MAX	53.85 [2.12] MAX	61.98 [2.44] MAX

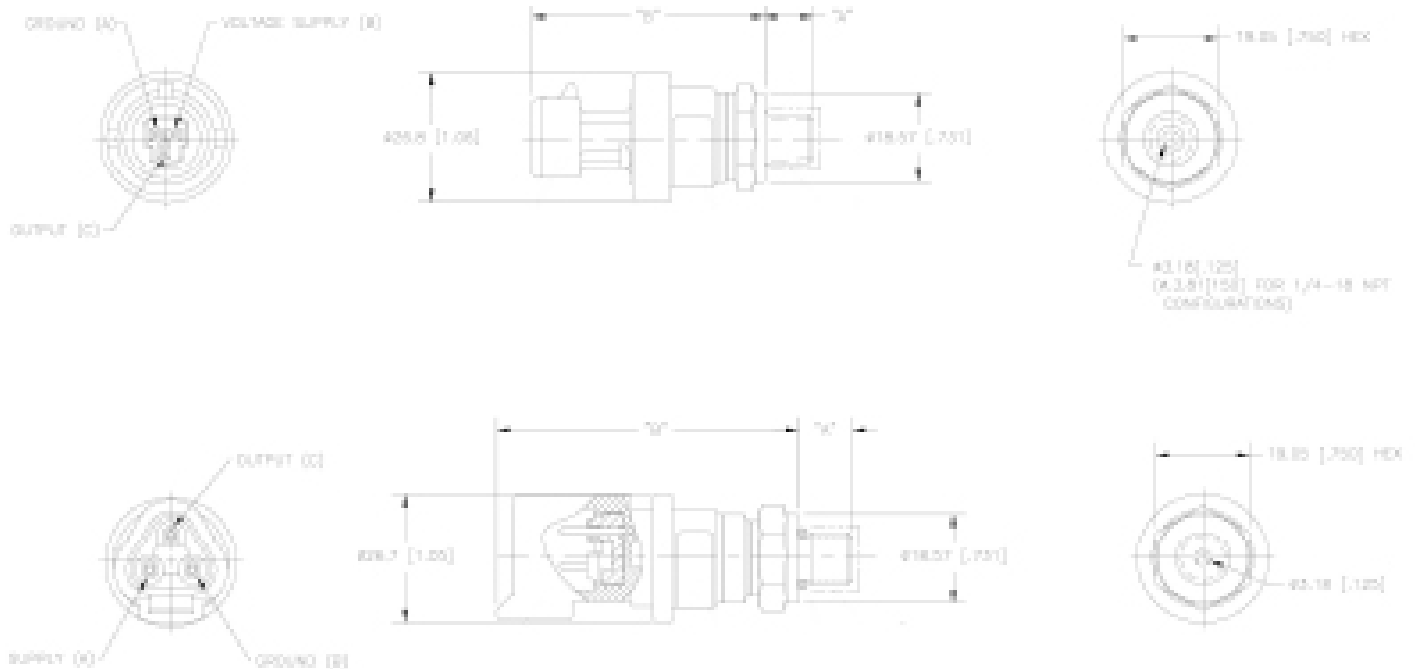

## Approvals & Certificates

UL Standard(s) for Safety: Electrical Equipment for measurement, Control and Laboratory Use - UL SA10552



## ORDERING OPTIONS

Example : P4000-1000-AB1BA

P4000 Pressure Sensor, 0 – 1000 PSI Absolute, Nitrile External O- Ring, 1/8-27 NPT Pressure Connection, with Deutsch Built-in Connector , without further electrical options

<b>Family</b>	P4000	1000	A	B	1	B	A
<b>Pressure Ranges (PSI)</b>	100: 0-100 150: 0-150 200: 0-200 250: 0-250 300: 0-300 500: 0-500	600: 0-600 750: 0-750 1000: 0-1000 1500: 0-1500 2000: 0-2000 2500: 0-2500	3000: 0-3000 3500: 0-3500 4000: 0-4000 4500: 0-4500 5000: 0-5000				
<b>Reference</b>	A: Absolute S: Sealed Gauge						
<b>External O-Ring</b>	A: None B: Nitrile						
<b>Pressure Connection (port)</b>	1: 1/8 - 27 NPT 2: Schrader (7/16 - 20 UNF) 3: 7/16 - 20 UNF SAE J1926/2 4: 1/2 - 20 UNF SAE J1926/2 5: 1/4 - 18 NPT						
<b>Built-in Connection</b>	A: Packard PA66 GF33 B: Deutsch C: Deutsch, Voltage regulated D: Packard with mating connector 36" leads 16 AWG E: Deutsch with mating connector 36" leads 16 AWG F: Deutsch, voltage regulated with mating connector 36" leads 16 AWG G: Packard PEI GF30 H: Packard with mating connector 12" leads 16 AWG J: M12 with straight mating connector assy (2 meter leads, 22 AWG) K: Metripack 150, with mating connector assy 48" leads 16 AWG						
<b>Options</b>	A: 4.5 VDC @ full scale pressure B: 4.75 VDC @full scale pressure						



## WARNINGS



### RISK OF MATERIAL DAMAGE AND HOT ENCLOSURE

- The product's side panels may be hot, allow the product to cool before touching
- Follow proper mounting instructions including torque values
- Do not allow liquids or foreign objects to enter this product

**Failure to follow these instructions can result in serious injury, or equipment damage.**



### HAZARD OF ELECTRIC SHOCK, EXPLOSION OR ARC FLASH

- Disconnect all power before installing or working with this equipment
- Verify all connections and replace all covers before turning on power

**Failure to follow these instructions will result in death or serious injury.**

Page 4

Sensata Technologies, Inc. ("Sensata") data sheets are solely intended to assist designers ("Buyers") who are developing systems that incorporate Sensata products (also referred to herein as "components"). Buyer understands and agrees that Buyer remains responsible for using its independent analysis, evaluation and judgment in designing Buyer's systems and products. Sensata data sheets have been created using standard laboratory conditions and engineering practices. Sensata has not conducted any testing other than that specifically described in the published documentation for a particular data sheet. Sensata may make corrections, enhancements, improvements and other changes to its data sheets or components without notice.

Buyers are authorized to use Sensata data sheets with the Sensata component(s) identified in each particular data sheet. HOWEVER, NO OTHER LICENSE, EXPRESS OR IMPLIED, BY ESTOPPEL OR OTHERWISE TO ANY OTHER SENSATA INTELLECTUAL PROPERTY RIGHT, AND NO LICENSE TO ANY THIRD PARTY TECHNOLOGY OR INTELLECTUAL PROPERTY RIGHT, IS GRANTED HEREIN. SENSATA DATA SHEETS ARE PROVIDED "AS IS". SENSATA MAKES NO WARRANTIES OR REPRESENTATIONS WITH REGARD TO THE DATA SHEETS OR USE OF THE DATA SHEETS, EXPRESS, IMPLIED OR STATUTORY, INCLUDING ACCURACY OR COMPLETENESS. SENSATA DISCLAIMS ANY WARRANTY OF TITLE AND ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, QUIET ENJOYMENT, QUIET POSSESSION, AND NON-INFRINGEMENT OF ANY THIRD PARTY INTELLECTUAL PROPERTY RIGHTS WITH REGARD TO SENSATA DATA SHEETS OR USE THEREOF.

All products are sold subject to Sensata's terms and conditions of sale supplied at [www.sensata.com](http://www.sensata.com) SENSATA ASSUMES NO LIABILITY FOR APPLICATIONS ASSISTANCE OR THE DESIGN OF BUYERS' PRODUCTS. BUYER ACKNOWLEDGES AND AGREES THAT IT IS SOLELY RESPONSIBLE FOR COMPLIANCE WITH ALL LEGAL, REGULATORY AND SAFETY-RELATED REQUIREMENTS CONCERNING ITS PRODUCTS, AND ANY USE OF SENSATA COMPONENTS IN ITS APPLICATIONS, NOTWITHSTANDING ANY APPLICATIONS-RELATED INFORMATION OR SUPPORT THAT MAY BE PROVIDED BY SENSATA.

Mailing Address: Sensata Technologies, Inc., 529 Pleasant Street, Attleboro, MA 02703, USA.

## CONTACT US

### Americas

+1 (800) 350 2727  
sensors@sensata.com  
switches@sensata.com

### Europe, Middle East & Africa

+359 (2) 809 1826  
pressure-info.eu@sensata.com

### Asia Pacific

sales.isasia@list.sensata.com  
China +86 (21) 2306 1500  
Japan +81 (45) 277 7117  
Korea +82 (31) 601 2004  
India +91 (80) 67920890  
Rest of Asia +886 (2) 27602006  
ext 2808



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.