

### Features

- ◆ I/O isolation voltage 3000 VACrms
- ◆ Reinforced insulation, rated for 300 VAC working voltage
- ◆ Certified to IEC/EN/UL 60950-1 safety standards
- ◆ Safety barrier 100 % production test
- ◆ Low coupling capacity
- ◆ Single-in-line package (SIP)
- ◆ Lead-free design, RoHS compliant
- ◆ 3-year product warranty



The TMV-EN series is a range of 1 Watt non-regulated DC/DC converters with high I/O-isolation. This product features an isolation barrier which is approved for supplementary an reinforced insulation. SMD construction and a special designed toroidal transformer made it possible to built these converters in a standard SIP package with a very small footprint. These features making the TMV-EN series an economical solution in many DC/DC converter applications requiring safety agency approval.

### Models

Order code	Input voltage	Output voltage	Output current max.	Efficiency typ.
TMV 0505 EN	5 VDC ±10 %	5 VDC	200 mA	66 %
TMV 0512 EN		12 VDC	80 mA	66 %
TMV 0515 EN		15 VDC	65 mA	66 %
TMV 0505D EN		±5 VDC	±100 mA	66 %
TMV 0512D EN		±12 VDC	±40 mA	72 %
TMV 0515D EN		±15 VDC	±30 mA	73 %
TMV 1205 EN	12 VDC ±10 %	5 VDC	200 mA	66 %
TMV 1212 EN		12 VDC	80 mA	66 %
TMV 1215 EN		15 VDC	65 mA	66 %
TMV 1205D EN		±5 VDC	±100 mA	66 %
TMV 1212D EN		±12 VDC	±40 mA	74 %
TMV 1215D EN		±15 VDC	±30 mA	75 %

### Input Specifications

Input current no load / full load	5 Vin models: 55 mA / 300 mA typ. 12 Vin models: 30 mA / 125 mA typ.
Surge voltage (1 sec. max.)	5 Vin models: 9 V max. 12 Vin models: 29 V max.
Reverse voltage protection	0.3 A max.
Reflected input ripple current	can be reduced by ext. 1–3.3 µF polyester film capacitor
Input filter	internal capacitor
Input fuse	recommended, required for compliance with CB
– recommended min. fuse rating	5 V models: 500 mA 12 V models: 200 mA

### Output Specifications

Voltage set accuracy	±3 % max.
Voltage balance (dual output models)	1 % max.
Regulation	– Input variation: 1.2 % / 1 % change of Vin – Load variation 20 – 100 %: <10 %
Ripple and noise (20 MHz Bandwidth)	100 mVp-p typ.
Temperature coefficient	±0.02 %/K
Short circuit protection	limited 0.5 sec. max.
Capacitive load	single output models: 680 µF max. dual output models: 220 µF max. (each output)

### Isolation / Safety

Isolation voltage	– Isolation test voltage (tested for 1 sec.) – I/O isolation voltage (60 sec.) – Rated max. working voltage	4'500 Vpk 3'000 VACrms 300 VACrms / 640 Vpk
Isolation capacitance (input/output)		15 pF typ.
Isolation resistance (input/output)		>10 Gohm
Safety standards		IEC 60950-1:2005 +A1:2009 EN 60950-1:2006 +A1:2010 +A11:2009 +A12:2011 UL 60950-1, CSA C22.2 No. 60950-1-03
Safety approvals	– CB report (IEC & EN) – UL certification	<a href="http://www.tracopower.com/products/tmv-en-cb.pdf">www.tracopower.com/products/tmv-en-cb.pdf</a> <a href="http://www.tracopower.com/products/tmv-en-ul.pdf">www.tracopower.com/products/tmv-en-ul.pdf</a>

### General Specifications

Temperature ranges	– Operating – Max. ambient approved IEC/UL 60950-1 – Case temperature	–40°C to +85°C (with derating) +70°C +90°C max.
Derating		2.85 %/K above 70°C
Humidity (non condensing)		95 % rel H max.
Temperature coefficient		±0.02 %/K typ.
Reliability, calculated MTBF (MIL-HDBK-217F at +25°C, ground benign)		>2'000'000 h
Switching frequency		80 kHz typ. (frequency modulation)
Frequency change over line and load		±30 % max.
Altitude during operation		4'000m max. (13'000 ft) approved
Environmental compliance	– Reach – RoHS	<a href="http://www.tracopower.com/overview/tmv-en">www.tracopower.com/overview/tmv-en</a> RoHS directive 2011/65/EU


All specifications valid at nominal input voltage, full load and +25°C after warm-up time unless otherwise stated.

**Physical Specifications**

Casing material	non conductive plastic (UL 94V-0 rated)
Package weight	4.0 g (0.14 oz)
Soldering temperature	max. 265°C / 10 sec.

**Application note:** [www.tracopower.com/products/tmv-en-application.pdf](http://www.tracopower.com/products/tmv-en-application.pdf)

**Outline Dimensions**

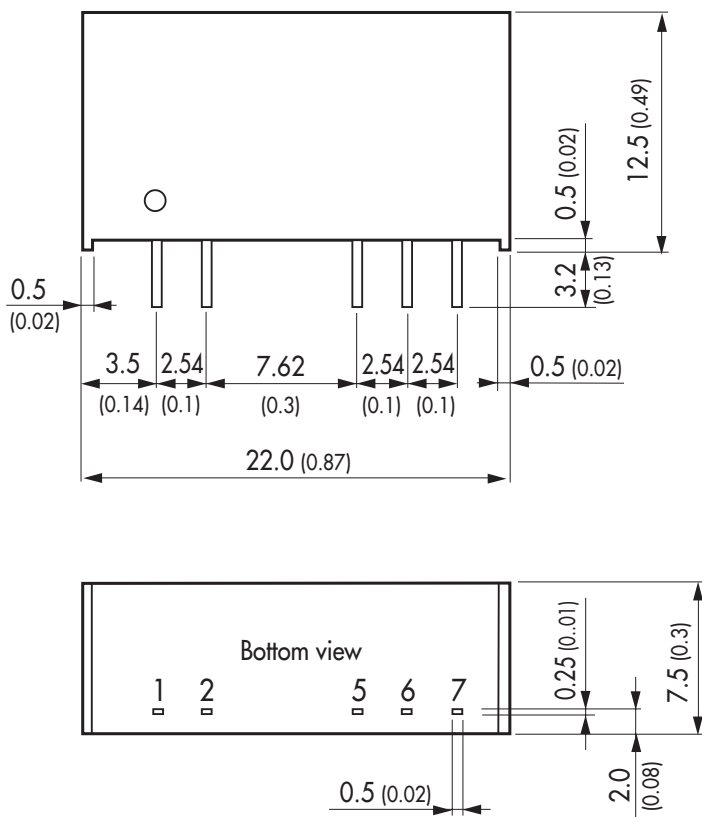

Pin-Out		
Pin	Single	Dual
1	+Vin (Vcc)	+Vin (Vcc)
2	-Vin (GND)	-Vin (GND)
5	-Vout	-Vout
6	No pin	Common
7	+Vout	+Vout

Dimensions in [mm], ( ) = Inch  
Tolerance ±0.5 (0.02)  
Pin pitch tolerance ±0.13 (0.005)  
Pin width tolerance ±0.05 (0.002)

Specifications can be changed without notice! Make sure you are using the latest documentation, downloadable at [www.tracopower.com](http://www.tracopower.com)



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.