



GOT3846T-832

8.4" SVGA TFT Fanless Touch Panel
Computer with Intel® Atom™ Processor
(-20°C +55°C)

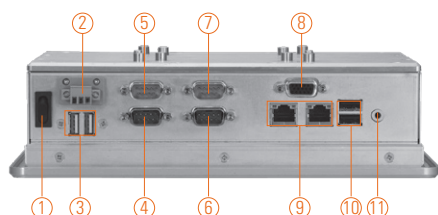

- | | |
|---------------------------|----------------------|
| 1. Power switch | 6. COM 2 (RS-232) |
| 2. DC power input | 7. COM 4 (RS-232) |
| 3. USB 2.0 x 2 | 8. VGA |
| 4. COM 1 (RS-232/422/485) | 9. Ethernet x 2 |
| 5. COM 3 (RS-232) | 10. USB 2.0 x 2 |
| | 11. Audio (Line-out) |

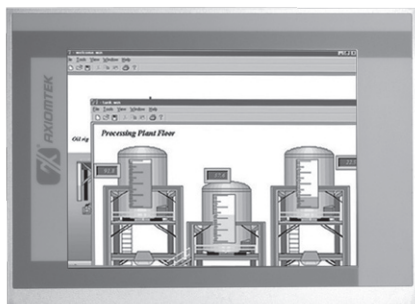

Introduction

The GOT3846T-832 is the 8.4" fanless touch panel computer. By supporting a wide temperature range from -20°C ~ +55°C, it is especially designed for harsh environments. The GOT3846T-832 adopts a modern, super sleek fanless design, is equipped with a 8.4" TFT LCD, and low power consumption Intel processor. In response to customer's requests for wireless applications, the GOT3846T-832 has a Mini card slot and an optional fixed rotational WLAN antenna for wireless network connection. By just plugging in the Mini card WLAN card, customers have instant access wireless LAN. The GOT3846T-832 is used extensively for variety of industry needs including transportation, packing field surveillance, building automation, and more.

Wide-temperature (-20°C ~ +55°C) supported

The GOT3846T-832 adopts unique extended temperature technology, with a temperature range from -20°C ~ +55°C, with a fanless cooling system and compact design for harsh environments.

WLAN antenna supported (optional)

The GOT3846T-832 provides a Mini card slot and an optional fixed rotational WLAN antenna for wireless network connections. By simply plugging in the wireless LAN card, customers can use the unit in a wireless environment.

Anti-vibration up to 1G


With a special vibration-resistant design patent, GOT3846T-832 can work well under 1G (5-500Hz) in operation mode, and equipped with a 2.5" HDD.

Features

- 8.4" SVGA (800 x 600) color TFT LCD display
- Fanless design with Intel® Atom™ processor N2600 1.6 GHz
- Supports wide temperature range of -20°C ~ +55°C
- Aluminum front bezel & chassis
- Supports WLAN module & external antenna
- Supports 4 USB 2.0 & 4 COM ports
- Supports panel mount, wall mount, VESA arm, desktop stand



▲ Side view



▲ Rear view

Specifications

Front Bezel	IP65, NEMA 4 rugged protection, aluminum front bezel	
LCD Panel	Display Type	8.4" SVGA TFT LCD
	Brightness (cd/m ²)	450 nits
	Resolution	800 x 600
	View Angle (H/V)	160°/140°
Main System	CPU	Intel® Atom™ processor N2600 1.6 GHz
	Chipset	Intel® NM10 Express
	System Memory	1 x 204-pin DDR3 800 SO-DIMM max. up to 2 GB
	BIOS	AMI 8 Mbit with RPL/PXE LAN boot Rom
	Storage	1 x 2.5" SATA HDD
		1 x CompactFlash™ (optional)
	Watchdog Timer	255 levels, 0-255 sec.
	Onboard Graphics	Integrated Intel® GFX
I/O Connector	3 x RS-232 (COM 2/3/4)	
	1 x RS-232/422/485 (COM 1)	
	1 x VGA	
	1 x Audio (Line-out)	
	4 x USB 2.0	
	2 x 10/100/1000Mbps Ethernet	

Specifications

Expansion Interface	1 x PCIe Mini Card
Touchscreen	Resistive type
Power Supply	10~30VDC (phoenix type)
Dimensions	248 mm (9.76") x 58.3 mm (2.29") x 183 mm (7.2")
Packing Dimensions	390 mm (15.35") x 190 mm (7.48") x 430 mm (16.92")
Weight (net/gross)	3.4 kg (7.49 lb)/5.8 kg (12.78 lb)
Environment	Operating temperature: -20°C ~ +55°C (-4°F ~ 131°F) (with W.T. DRAM/HDD/CF) Storage Temperature: -30°C ~ +80°C (-22°F ~ +176°F) Relative humidity: 10% ~ 95% @ 40°C; non-condensing Operation vibration: 1G, 5~500Hz, random for 2.5" HDD 2G, 5~500Hz, random for CompactFlash™
Certification	CE

* W.T.: Wide Temperature. All W.T. supported products have to be sorted by Axiomtek.

Ordering Information

GOT3846T-832	8.4" SVGA TFT fanless touch panel computer with Intel® Atom™ N2600 (-20°C ~ +55°C)
--------------	---

* Specification and certifications are based on options and may vary.

Optional EOS Installation

Windows® Embedded Standard 7 (32-bit)

Optional OS Installation

Windows® 7 (32-bit)

Overview

Industrial Panel
Computers &
Monitors

Heavy-duty
Fanless Touch
Panel Computers


Digital
Signage
Solutions

Healthcare
& Medical
Solutions

Open Frame
Panel
Computers

Accessories

Dimensions

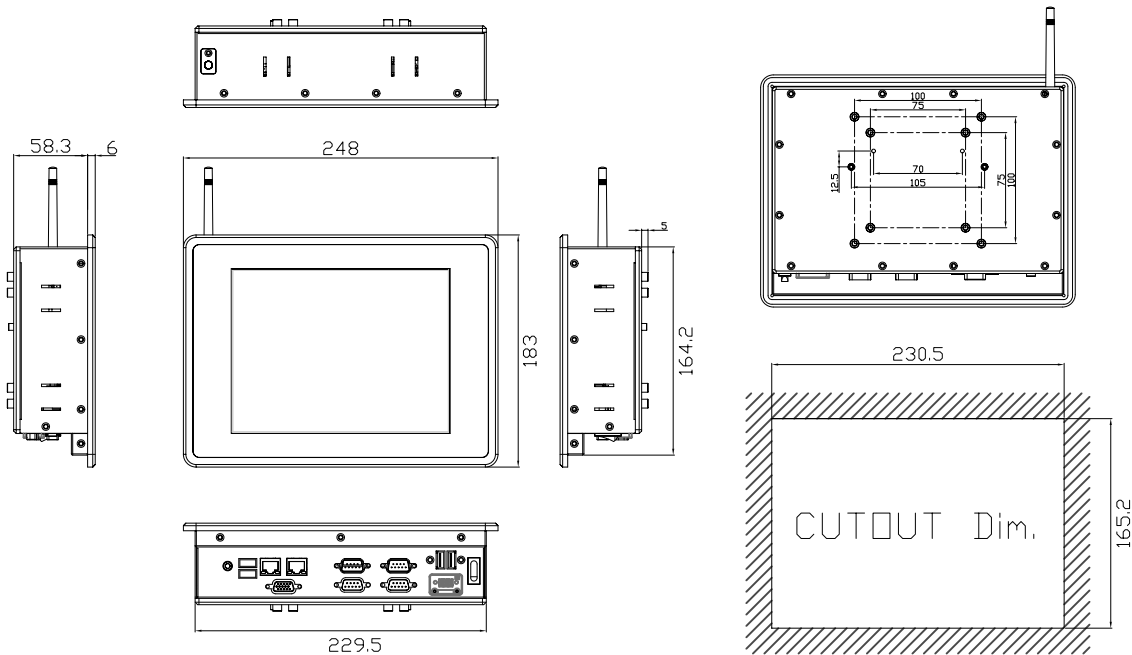



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.