National Semiconductor

November 1995

LMX1501A/LMX1511 PLLatinum™ 1.1 GHz Frequency Synthesizer for RF Personal Communications

General Description

The LMX1501A and the LMX1511 are high performance frequency synthesizers with integrated prescalers designed for RF operation up to 1.1 GHz. They are fabricated using National's ABiC IV BiCMOS process.

The LMX1501A and the LMX1511 contain dual modulus prescalers which can select either a 64/65 or a 128/129 divide ratio at input frequencies of up to 1.1 GHz. Using a proprietary digital phase locked loop technique, the LMX1501A/11's linear phase detector characteristics can generate very stable, low noise local oscillator signals.

Serial data is transferred into the LMX1501A and the LMX1511 via a three line MICROWIRE™ interface (Data, Enable, Clock). Supply voltage can range from 2.7V to 5.5V. The LMX1501A and the LMX1511 feature very low current consumption, typically 6 mA at 3V.

The LMX1501A is available in a JEDEC 16-pin surface mount plastic package. The LMX1511 is available in a TSSOP 20-pin surface mount plastic package.

Features

- RF operation up to 1.1 GHz
- 2.7V to 5.5V operation
- Low current consumption: I_{CC} = 6 mA (typ) at V_{CC} = 3V
- Dual modulus prescaler: 64/65 or 128/129
- Internal balanced, low leakage charge pump
- Small-outline, plastic, surface mount JEDEC, 0.150″ wide, (1501A) or TSSOP, 0.173″ wide, (1511) package

Applications

- Cellular telephone systems (AMPS, NMT, ETACS)
- Portable wireless communications (PCS/PCN, Cordless)
- Advanced cordless telephone systems (CT-1/CT-1+, CT-2, ISM902-928)
- Other wireless communication systems

Block Diagram

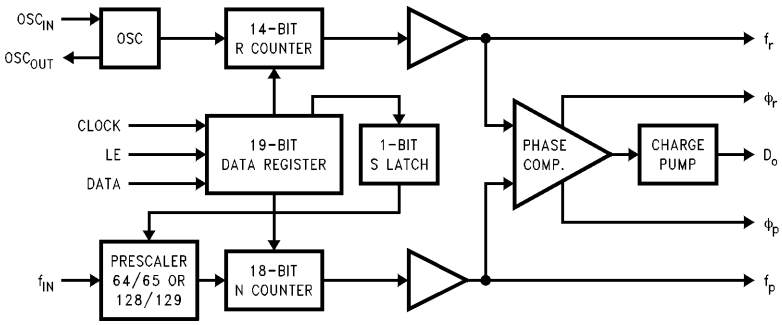

TL/W/12340–1

TRI-STATE® is a registered trademark of National Semiconductor Corporation.
MICROWIRE™ and PLLatinum™ are trademarks of National Semiconductor Corporation.

©1995 National Semiconductor Corporation

RRD-B30M115/Printed in U. S. A.

Connection Diagrams

LMX1501A



TL/W/12340–2

JEDEC 16-Lead (0.150″ Wide) Small Outline Molded Package (M)
Order Number LMX1501AM or LMX1501AMX
See NS Package Number M16A

LMX1511



TL/W/12340–3

20-Lead (0.173″ Wide) Thin Shrink Small Outline Package (TM)
Order Number LMX1511TM or LMX1511TMX
See NS Package Number MTC20

Pin Descriptions

Pin No. 1501A	Pin No. 1511	Pin Name 1501A/1511	I/O	Description
1	1	OSC_{IN}	I	Oscillator input. A CMOS inverting gate input intended for connection to a crystal resonator for operation as an oscillator. The input has a $V_{CC}/2$ input threshold and can be driven from an external CMOS or TTL logic gate. May also be used as a buffer for an externally provided reference oscillator.
2	3	OSC_{OUT}	O	Oscillator output.
3	4	V_P		Power supply for charge pump must be $\geq V_{CC}$.
4	5	V_{CC}		Power supply voltage input. Input may range from 2.7V to 5.5V. Bypass capacitors should be placed as close as possible to this pin and be connected directly to the ground plane.
5	6	D_o	O	Internal charge pump output. For connection to a loop filter for driving the input of an external VCO.
6	7	GND		Ground.
7	8	LD	O	Lock detect. Output provided to indicate when the VCO frequency is in ''lock''. When the loop is locked, the pin's output is HIGH with narrow low pulses.
8	10	f_{IN}	I	Prescaler input. Small signal input from the VCO.
9	11	CLOCK	I	High impedance CMOS Clock input. Data is clocked in on the rising edge, into the various counters and registers.
10	13	DATA	I	Binary serial data input. Data entered MSB first. LSB is control bit. High impedance CMOS input.
11	14	LE	I	Load enable input (with internal pull-up resistor). When LE transitions HIGH, data stored in the shift registers is loaded into the appropriate latch (control bit dependent). Clock must be low when LE toggles high or low. See Serial Data Input Timing Diagram.
12	15	FC	I	Phase control select (with internal pull-up resistor). When FC is LOW, the polarity of the phase comparator and charge pump combination is reversed.
X	16	BISW	O	Analog switch output. When LE is HIGH, the analog switch is ON, routing the internal charge pump output through BISW (as well as through D_o).
13		f_r	O	Monitor pin of phase comparator input. Programmable reference divider output.
14		f_p	O	Monitor pin of phase comparator input. Programmable divider output.
X	17	f_{OUT}	O	Monitor pin of phase comparator input. CMOS Output.
15	18	ϕ_p	O	Output for external charge pump. ϕ_p is an open drain N-channel transistor and requires a pull-up resistor.
16	20	ϕ_r	O	Output for external charge pump. ϕ_r is a CMOS logic output.
X	2,9,12,19	NC		No connect.

Functional Block Diagram

LMX1501A

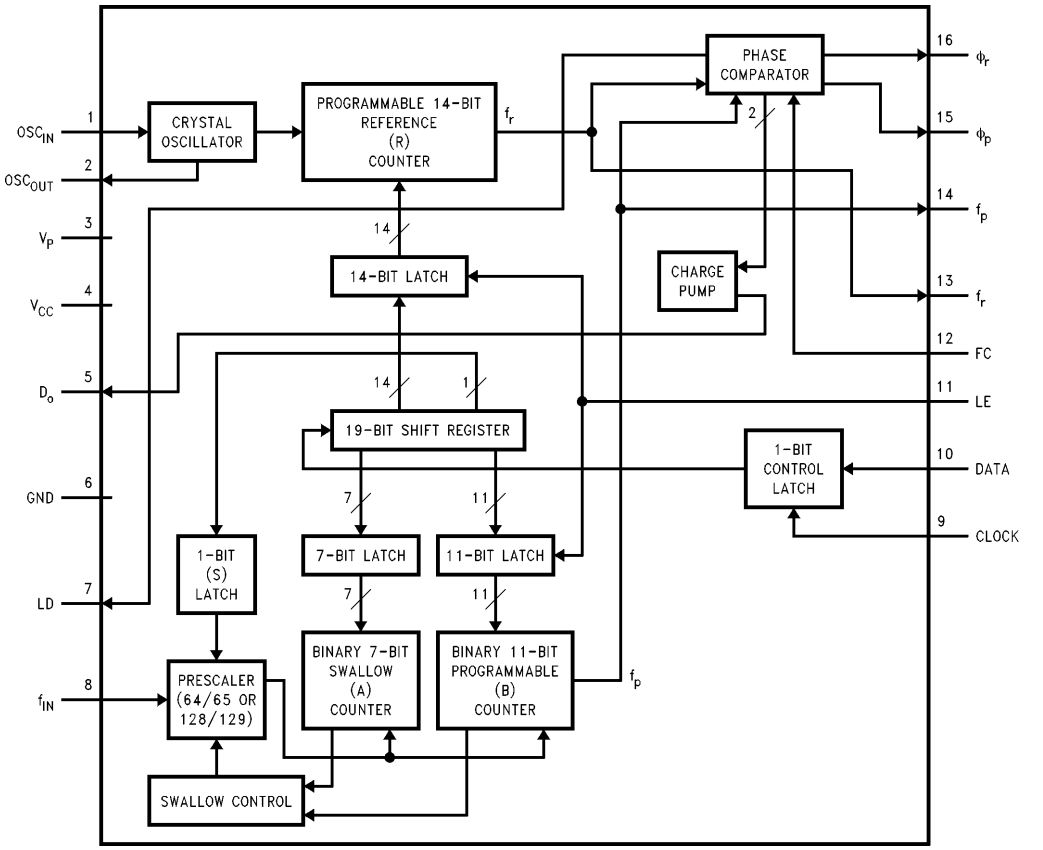

TL/W/12340–40

Functional Block Diagram (Continued)

LMX1511

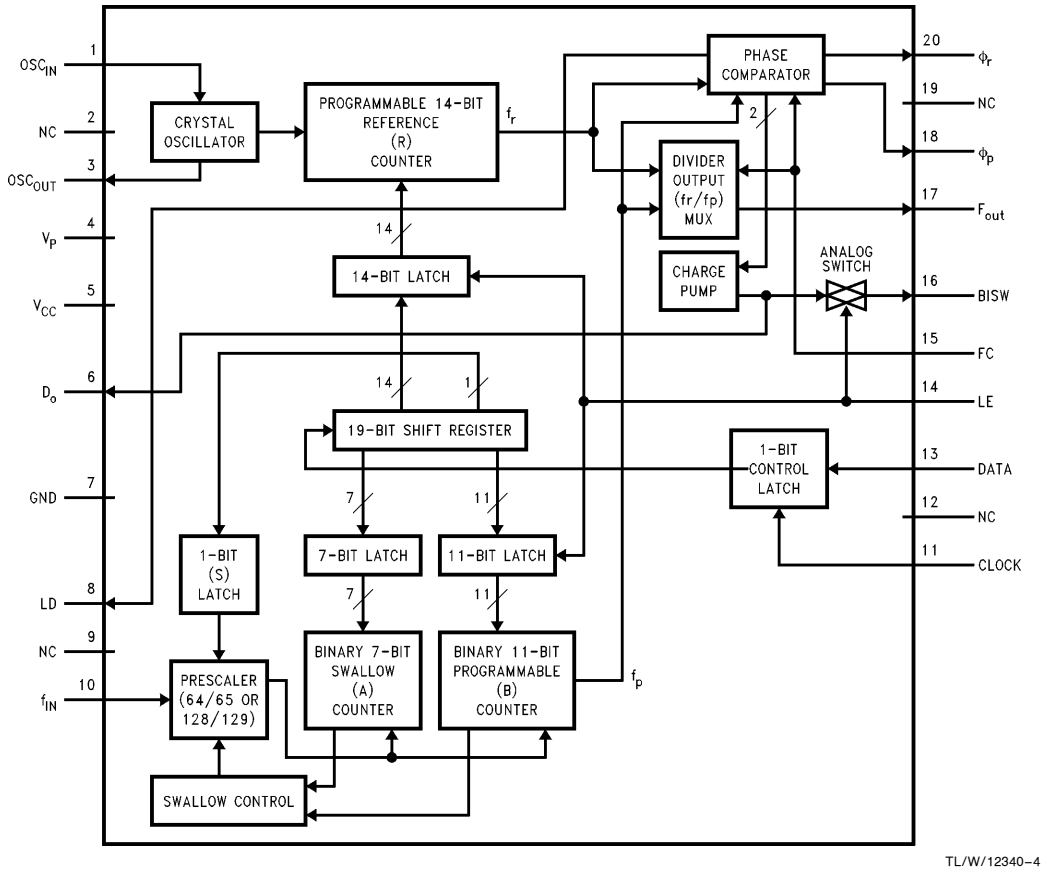

TL/W/12340–4

Absolute Maximum Ratings (Note 1)

If Military/Aerospace specified devices are required, please contact the National Semiconductor Sales Office/Distributors for availability and specifications.

Power Supply Voltage
- V_{CC} −0.3V to +6.5V
- V_P −0.3V to +6.5V

Voltage on Any Pin with GND = 0V (V_I) −0.3V to +6.5V

Storage Temperature Range (T_S) −65°C to +150°C

Lead Temperature (T_L) (solder, 4 sec.) +260°C

Recommended Operating Conditions

Power Supply Voltage
- V_{CC} 2.7V to 5.5V
- V_P V_{CC} to 5.5V

Operating Temperature (T_A) −40°C to +85°C

Note 1: Absolute Maximum Ratings indicate limits beyond which damage to the device may occur. Operating Ratings indicate conditions for which the device is intended to be functional, but do not guarantee specific performance limits. For guaranteed specifications and test conditions, see the Electrical Characteristics. The guaranteed specifications apply only for the test conditions listed.

Electrical Characteristics V_{CC} = 5.0V, V_P = 5.0V; −40°C < T_A < 85°C, except as specified

Symbol	Parameter	Conditions	Min	Typ	Max	Units
I_{CC}	Power Supply Current	V_{CC} = 3.0V		6.0	8.0	mA
		V_{CC} = 5.0V		6.5	8.5	mA
f_{IN}	Maximum Operating Frequency		1.1			GHz
f_{OSC}	Maximum Oscillator Frequency		20			MHz
f_ϕ	Maximum Phase Detector Frequency		10			MHz
Pf_{IN}	Input Sensitivity	V_{CC} = 2.7V to 5.5V	−10		+6	dBm
V_{OSC}	Oscillator Sensitivity	OSC_{IN}	0.5			V_{PP}
V_{IH}	High-Level Input Voltage	*	0.7 V_{CC}			V
V_{IL}	Low-Level Input Voltage	*			0.3 V_{CC}	V
I_{IH}	High-Level Input Current (Clock, Data)	V_{IH} = V_{CC} = 5.5V	−1.0		1.0	μA
I_{IL}	Low-Level Input Current (Clock, Data)	V_{IL} = 0V, V_{CC} = 5.5V	−1.0		1.0	μA
I_{IH}	Oscillator Input Current	V_{IH} = V_{CC} = 5.5V			100	μA
I_{IL}		V_{IL} = 0V, V_{CC} = 5.5V	−100			μA
I_{IH}	High-Level Input Current (LE, FC)	V_{IH} = V_{CC} = 5.5V	−1.0		1.0	μA
I_{IL}	Low-Level Input Current (LE, FC)	V_{IL} = 0V, V_{CC} = 5.5V	−100		1.0	μA

*Except f_{IN} and OSC_{IN}

Electrical Characteristics $V_{CC} = 5.0V$, $V_P = 5.0V$; $-40°C < T_A < 85°C$, except as specified (Continued)

Symbol	Parameter	Conditions	Min	Typ	Max	Units
$I_{D_o\text{-source}}$	Charge Pump Output Current	$V_{D_o} = V_P/2$		−5.0		mA
$I_{D_o\text{-sink}}$		$V_{D_o} = V_P/2$		5.0		mA
$I_{D_o\text{-Tri}}$	Charge Pump TRI-STATE® Current	$0.5V \le V_{D_o} \le V_P - 0.5V$ $T = 25°C$	−5.0		5.0	nA
V_{OH}	High-Level Output Voltage	$I_{OH} = -1.0$ mA**	$V_{CC} - 0.8$			V
V_{OL}	Low-Level Output Voltage	$I_{OL} = 1.0$ mA**			0.4	V
V_{OH}	High-Level Output Voltage (OSC_{OUT})	$I_{OH} = -200\ \mu A$	$V_{CC} - 0.8$			V
V_{OL}	Low-Level Output Voltage (OSC_{OUT})	$I_{OL} = 200\ \mu A$			0.4	V
I_{OL}	Open Drain Output Current (ϕ_p)	$V_{CC} = 5.0V$, $V_{OL} = 0.4V$	1.0			mA
I_{OH}	Open Drain Output Current (ϕ_p)	$V_{OH} = 5.5V$			100	μA
R_{ON}	Analog Switch ON Resistance (1511)			100		Ω
t_{CS}	Data to Clock Set Up Time	See Data Input Timing	50			ns
t_{CH}	Data to Clock Hold Time	See Data Input Timing	10			ns
t_{CWH}	Clock Pulse Width High	See Data Input Timing	50			ns
t_{CWL}	Clock Pulse Width Low	See Data Input Timing	50			ns
t_{ES}	Clock to Enable Set Up Time	See Data Input Timing	50			ns
t_{EW}	Enable Pulse Width	See Data Input Timing	50			ns

**Except OSC_{OUT}

Typical Performance Characteristics

I_{CC} vs V_{CC}

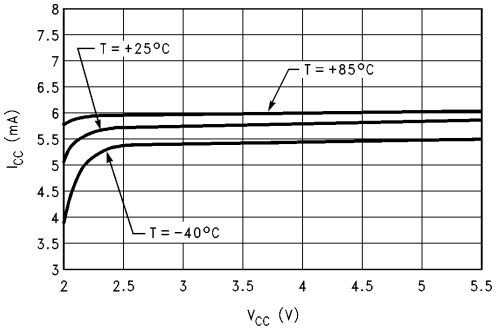

TL/W/12340–5

I_{D_O} TRI-STATE vs D_o Voltage

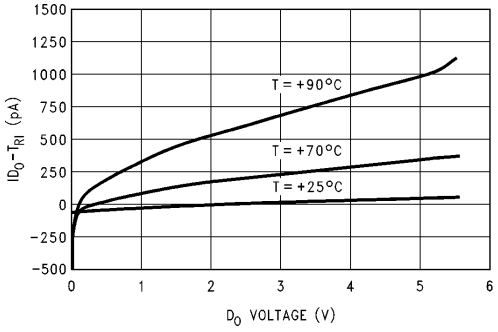

TL/W/12340–6

Charge Pump Current vs D_o Voltage

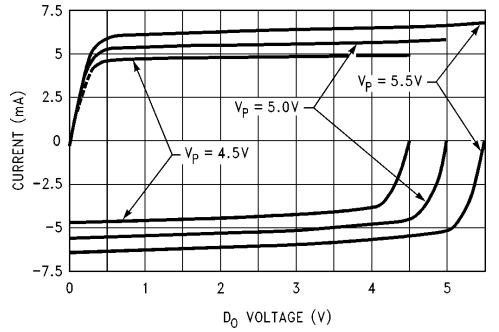

TL/W/12340–7

Charge Pump Current vs D_o Voltage

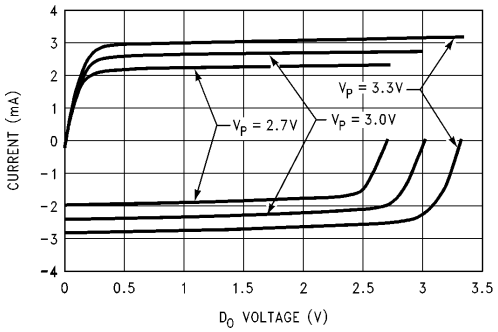

TL/W/12340–8

Charge Pump Current Variation

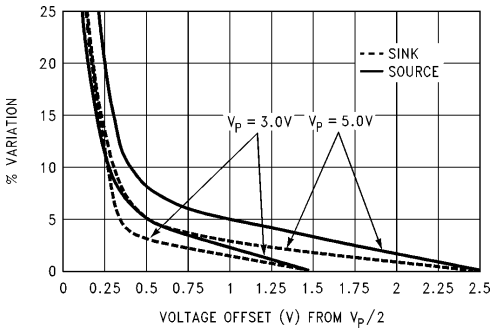

TL/W/12340–9

Oscillator Input Sensitivity

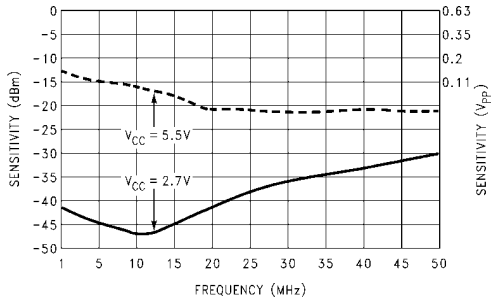

TL/W/12340–10

Typical Performance Characteristics (Continued)

Input Sensitivity vs Frequency

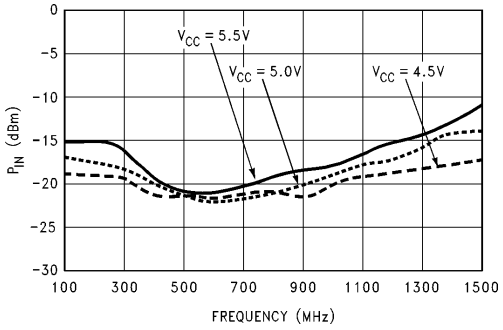

TL/W/12340–11

Input Sensitivity vs Frequency

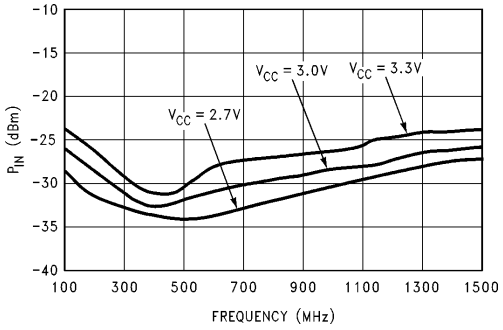

TL/W/12340–12

Input Sensitivity at Temperature Variation, V_{CC} = 5V

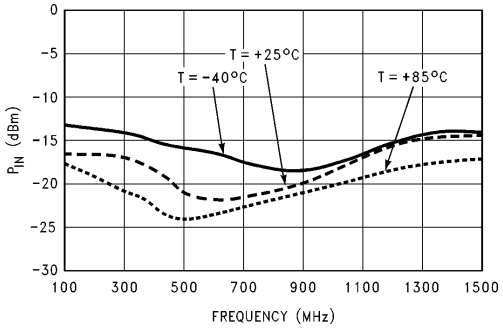

TL/W/12340–13

Input Sensitivity at Temperature Variation, V_{CC} = 3V

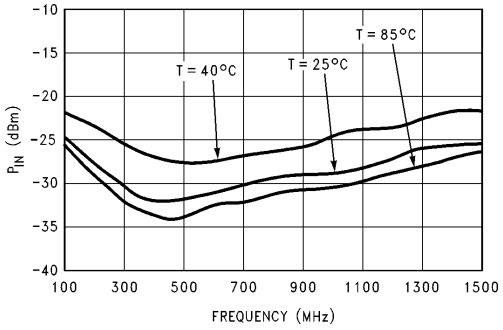

TL/W/12340–14

LMX1501A Input Impedance vs Frequency
V_{CC} = 2.7V to 5.5V, f_{IN} = 100 MHz to 1,600 MHz

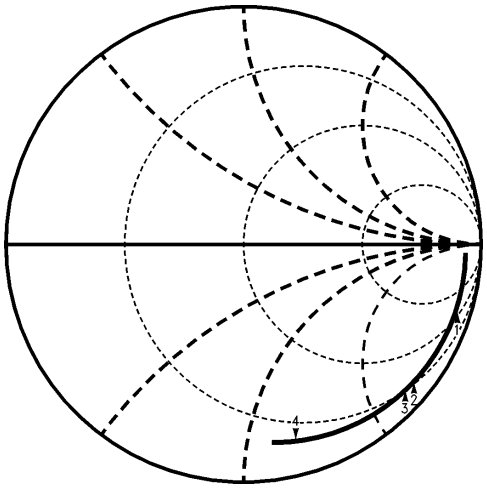

TL/W/12340–15

Marker 1 = 500 MHz, Real = 67, Imag. = −317
Marker 2 = 900 MHz, Real = 24, Imag. = −150
Marker 3 = 1 GHz, Real = 19, Imag. = −126
Marker 4 = 1,500 MHz, Real = 9, Imag. = −63

LMX1511 Input Impedance vs Frequency
V_{CC} = 2.7V to 5.5V, f_{IN} = 100 MHz to 1,600 MHz

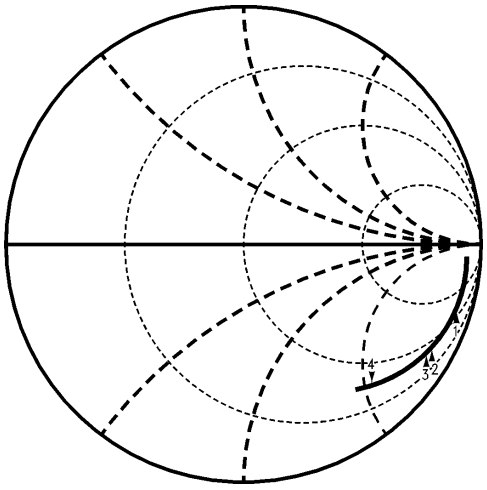

TL/W/12340–16

Marker 1 = 500 MHz, Real = 69, Imag. = −330
Marker 2 = 900 MHz, Real = 36, Imag. = −193
Marker 3 = 1 GHz, Real = 35, Imag. = −172
Marker 4 = 1,500 MHz, Real = 30, Imag. = −106

Charge Pump Current Specification Definitions

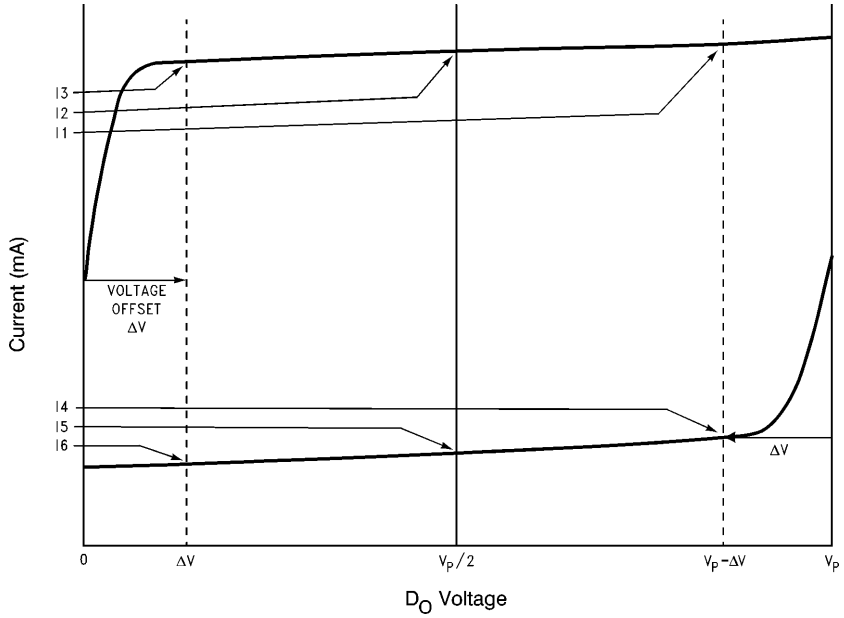

TL/W/12340–17

I1 = CP sink current at $V_{D_o} = V_P - \Delta V$

I2 = CP sink current at $V_{D_o} = V_P/2$

I3 = CP sink current at $V_{D_o} = \Delta V$

I4 = CP source current at $V_{D_o} = V_P - \Delta V$

I5 = CP source current at $V_{D_o} = V_P/2$

I6 = CP source current at $V_{D_o} = \Delta V$

ΔV = Voltage offset from positive and negative rails. Dependent on VCO tuning range relative to V_{CC} and ground. Typical values are between 0.5V and 1.0V.

1. I_{D_o} vs V_{D_o} = Charge Pump Output Current magnitude variation vs Voltage =
   $[½ * |I1| - |I3|]/[½ * \{|I1| + |I3|\}] * 100\%$ and $[½ * |I4| - |I6|]/[½ * \{|I4| + |I6|\}] * 100\%$
2. $I_{D_{o\text{-sink}}}$ vs $I_{D_{o\text{-source}}}$ = Charge Pump Output Current Sink vs Source Mismatch =
   $[|I2| - |I5|]/[½ * \{|I2| + |I5|\}] * 100\%$
3. I_{D_o} vs T_A = Charge Pump Output Current magnitude variation vs Temperature =
   $[|I2 @ temp| - |I2 @ 25°C|]/|I2 @ 25°C| * 100\%$ and $[|I5 @ temp| - |I5 @ 25°C|]/|I5 @ 25°C| * 100\%$
4. K_ϕ = Phase detector/charge pump gain constant = $½*\{|I2|+|I5|\}$

RF Sensitivity Test Block Diagram

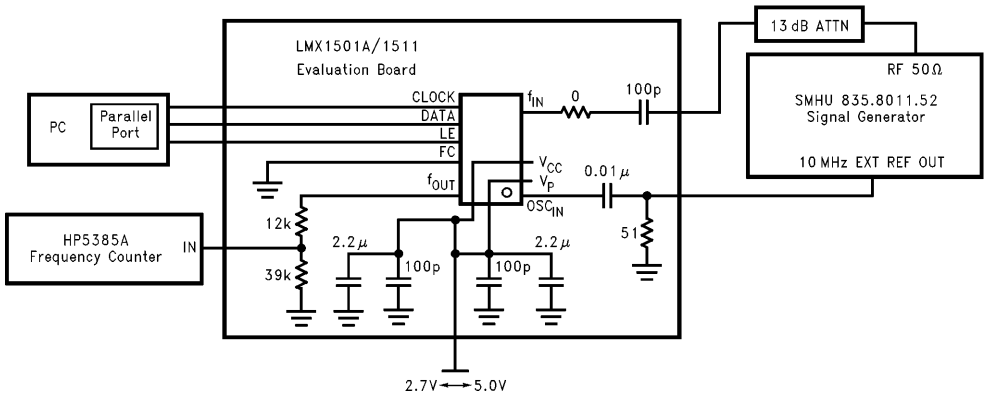

TL/W/12340–18

Note 1: N = 10,000 R = 50 P = 64

Note 2: Sensitivity limit is reached when the error of the divided RF output, f_{OUT}, is greater than or equal to 1 Hz.

Functional Description

The simplified block diagram below shows the 19-bit data register, the 14-bit R Counter and the S Latch, and the 18-bit N Counter (intermediate latches are not shown). The data stream is clocked (on the rising edge) into the DATA input, MSB first. If the Control Bit (last bit input) is HIGH, the DATA is transferred into the R Counter (programmable reference divider) and the S Latch (prescaler select: 64/65 or 128/129). If the Control Bit (LSB) is LOW, the DATA is transferred into the N Counter (programmable divider).

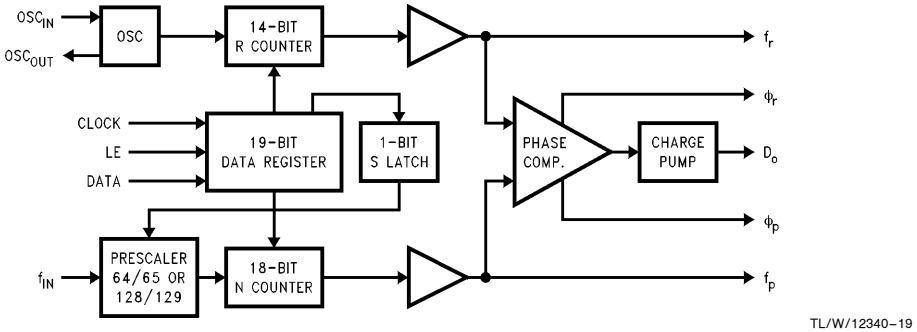

TL/W/12340–19

PROGRAMMABLE REFERENCE DIVIDER (R COUNTER) AND PRESCALER SELECT (S LATCH)

If the Control Bit (last bit shifted into the Data Register) is HIGH, data is transferred from the 19-bit shift register into a 14-bit latch (which sets the 14-bit R Counter) and the 1-bit S Latch (S15, which sets the prescaler: 64/65 or 128/129). Serial data format is shown below.

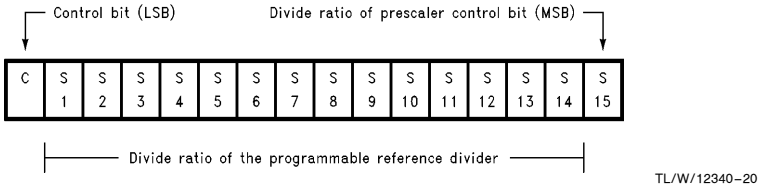

TL/W/12340–20

14-BIT PROGRAMMABLE REFERENCE DIVIDER RATIO (R COUNTER)

Divide Ratio R	S 14	S 13	S 12	S 11	S 10	S 9	S 8	S 7	S 6	S 5	S 4	S 3	S 2	S 1
3	0	0	0	0	0	0	0	0	0	0	0	0	1	1
4	0	0	0	0	0	0	0	0	0	0	0	1	0	0
•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
16383	1	1	1	1	1	1	1	1	1	1	1	1	1	1

Notes: Divide ratios less than 3 are prohibited.

Divide ratio: 3 to 16383

S1 to S14: These bits select the divide ratio of the programmable reference divider.

C: Control bit (set to HIGH level to load R counter and S Latch)

Data is shifted in MSB first.

1-BIT PRESCALER SELECT (S LATCH)

Prescaler Select P	S 15
128/129	0
64/65	1

Functional Description (Continued)

PROGRAMMABLE DIVIDER (N COUNTER)

The N counter consists of the 7-bit swallow counter (A counter) and the 11-bit programmable counter (B counter). If the Control Bit (last bit shifted into the Data Register) is LOW, data is transferred from the 19-bit shift register into a 7-bit latch (which sets the 7-bit Swallow (A) Counter) and an 11-bit latch (which sets the 11-bit programmable (B) Counter). Serial data format is shown below.

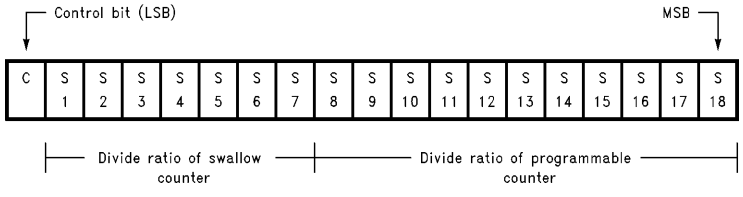

TL/W/12340–21

Note: S8 to S18: Programmable counter divide ratio control bits (3 to 2047)

7-BIT SWALLOW COUNTER DIVIDE RATIO (A COUNTER)

Divide Ratio A	S 7	S 6	S 5	S 4	S 3	S 2	S 1
0	0	0	0	0	0	0	0
1	0	0	0	0	0	0	1
•	•	•	•	•	•	•	•
127	1	1	1	1	1	1	1

Note: Divide ratio: 0 to 127

$B \geq A$

11-BIT PROGRAMMABLE COUNTER DIVIDE RATIO (B COUNTER)

Divide Ratio B	S 18	S 17	S 16	S 15	S 14	S 13	S 12	S 11	S 10	S 9	S 8
3	0	0	0	0	0	0	0	0	0	1	1
4	0	0	0	0	0	0	0	0	1	0	0
•	•	•	•	•	•	•	•	•	•	•	•
2047	1	1	1	1	1	1	1	1	1	1	1

Note: Divide ratio: 3 to 2047 (Divide ratios less than 3 are prohibited)

$B \geq A$

PULSE SWALLOW FUNCTION

$f_{VCO} = [(P \times B) + A] \times f_{OSC}/R$

f_{VCO}: Output frequency of external voltage controlled oscillator (VCO)

B: Preset divide ratio of binary 11-bit programmable counter (3 to 2047)

A: Preset divide ratio of binary 7-bit swallow counter ($0 \leq A \leq 127$, $A \leq B$)

f_{OSC}: Output frequency of the external reference frequency oscillator

R: Preset divide ratio of binary 14-bit programmable reference counter (3 to 16383)

P: Preset modulus of dual modulus prescaler (64 or 128)

Functional Description (Continued)

SERIAL DATA INPUT TIMING

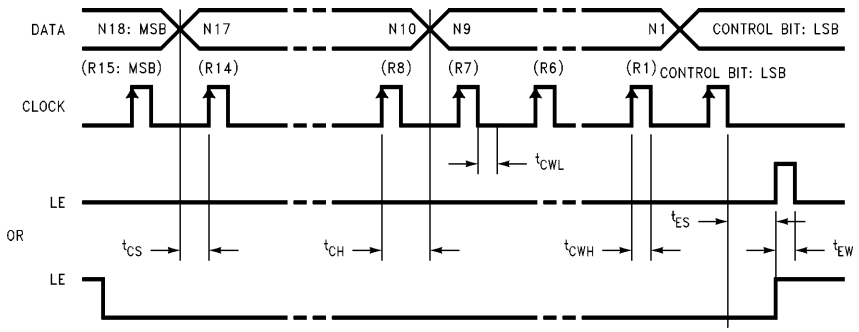

TL/W/12340–22

Notes: Parenthesis data indicates programmable reference divider data.

Data shifted into register on clock rising edge.

Data is shifted in MSB first.

Test Conditions: The Serial Data Input Timing is tested using a symmetrical waveform around $V_{CC}/2$. The test waveform has an edge rate of 0.6 V/ns with amplitudes of 2.2V @ V_{CC} = 2.7V and 2.6V @ V_{CC} = 5.5V.

Phase Characteristics

In normal operation, the FC pin is used to reverse the polarity of the phase detector. Both the internal and any external charge pump are affected.

Depending upon VCO characteristics, FC pin should be set accordingly:

When VCO characteristics are like (1), FC should be set HIGH or OPEN CIRCUIT;

When VCO characteristics are like (2), FC should be set LOW.

When FC is set HIGH or OPEN CIRCUIT, the monitor pin of the phase comparator input, f_{out}, is set to the reference divider output, f_r. When FC is set LOW, f_{out} is set to the programmable divider output, f_p.

VCO Characteristics



TL/W/12340–23

PHASE COMPARATOR AND INTERNAL CHARGE PUMP CHARACTERISTICS

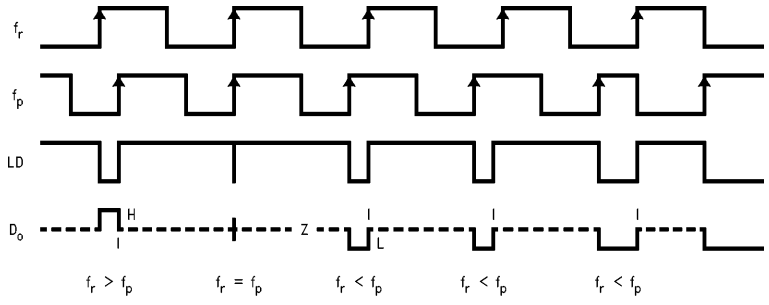

TL/W/12340–24

Notes: Phase difference detection range: -2π to $+2\pi$

The minimum width pump up and pump down current pulses occur at the D_o pin when the loop is locked.

FC = HIGH

Analog Switch (1511 only)

The analog switch is useful for radio systems that utilize a frequency scanning mode and a narrow band mode. The purpose of the analog switch is to decrease the loop filter time constant, allowing the VCO to adjust to its new frequency in a shorter amount of time. This is achieved by adding another filter stage in parallel. The output of the charge pump is normally through the D_O pin, but when LE is set HIGH, the charge pump output also becomes available at BISW. A typical circuit is shown below. The second filter stage (LPF-2) is effective only when the switch is closed (in the scanning mode).

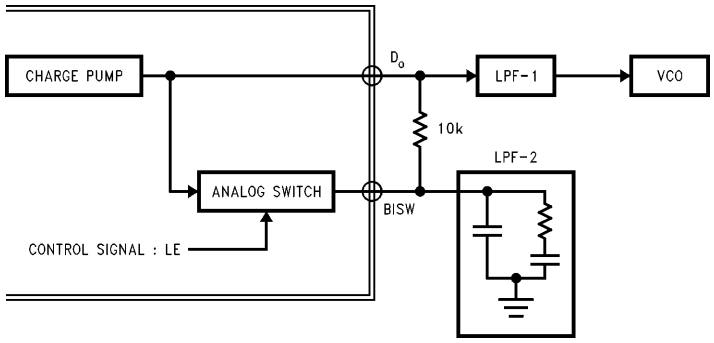

TL/W/12340–25

Typical Crystal Oscillator Circuit

A typical circuit which can be used to implement a crystal oscillator is shown below.



TL/W/12340–26

Typical Lock Detect Circuit

A lock detect circuit is needed in order to provide a steady LOW signal when the PLL is in the locked state. A typical circuit is shown below.

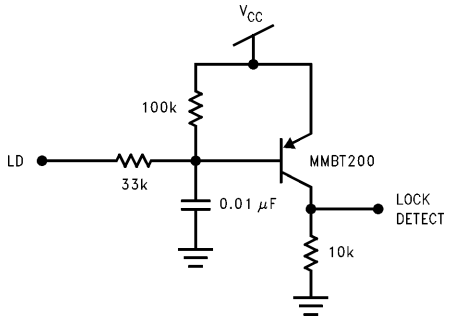

TL/W/12340–27

Typical Application Example

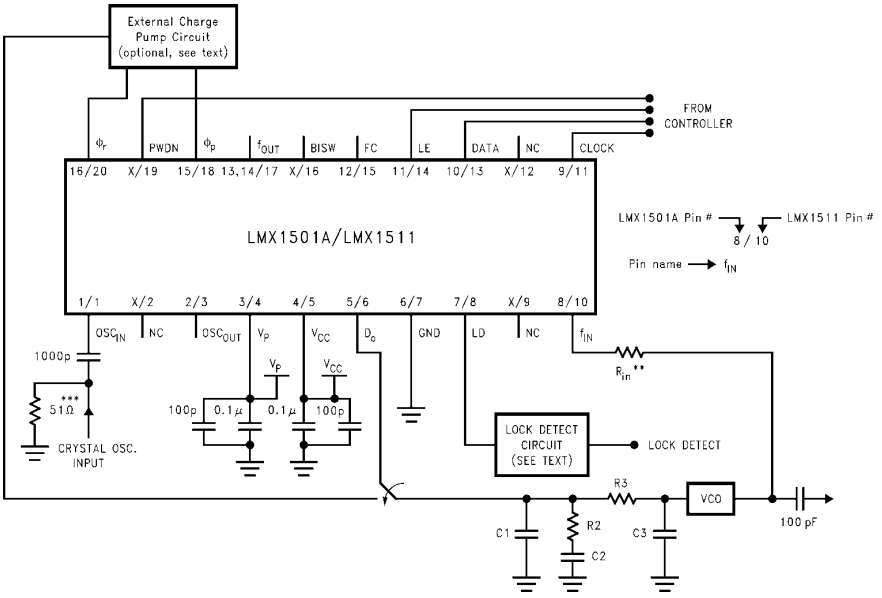

TL/W/12340–28

Operational Notes:

*VCO is assumed AC coupled.

**R_{IN} increases impedance so that VCO output power is provided to the load rather than the PLL. Typical values are 10Ω to 200Ω depending on the VCO power level. f_{IN} RF impedance ranges from 40Ω to 100Ω.

***50Ω termination is often used on test boards to allow use of external reference oscillator. For most typical products a CMOS clock is used and no terminating resistor is required. OSC_{IN} may be AC or DC coupled. AC coupling is recommended because the input circuit provides its own bias. (See *Figure* below)



TL/W/12340–29

Proper use of grounds and bypass capacitors is essential to achieve a high level of performance.

Crosstalk between pins can be reduced by careful board layout.

This is a static sensitive device. It should be handled only at static free work stations.

Application Information

LOOP FILTER DESIGN

A block diagram of the basic phase locked loop is shown.

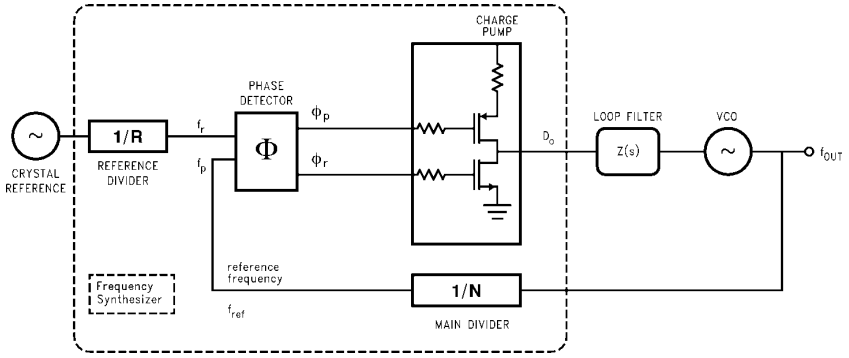

TL/W/12340–30

FIGURE 1. Basic Charge Pump Phase Locked Loop

An example of a passive loop filter configuration, including the transfer function of the loop filter, is shown in *Figure 2*.



TL/W/12340–31

$$Z(s) = \frac{s\,(C2 \bullet R2) + 1}{s^2\,(C1 \bullet C2 \bullet R2) + sC1 + sC2}$$

FIGURE 2. 2nd Order Passive Filter

Define the time constants which determine the pole and zero frequencies of the filter transfer function by letting

$$T2 = R2 \bullet C2 \tag{1a}$$

and

$$T1 = R2 \bullet \frac{C1 \bullet C2}{C1 + C2} \tag{1b}$$

The PLL linear model control circuit is shown along with the open loop transfer function in *Figure 3*. Using the phase detector and VCO gain constants [$K\phi$ and K_{VCO}] and the loop filter transfer function [Z(s)], the open loop Bode plot can be calculated. The loop bandwidth is shown on the Bode plot (ωp) as the point of unity gain. The phase margin is shown to be the difference between the phase at the unity gain point and $-180°$.

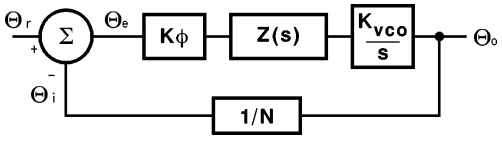

TL/W/12340–33

Open Loop Gain $= \theta_i/\theta_e = H(s)\,G(s)$
$= K_\phi\,Z(s)\,K_{VCO}/Ns$

Closed Loop Gain $= \theta_o/\theta_i = G(s)/[1 + H(s)\,G(s)]$

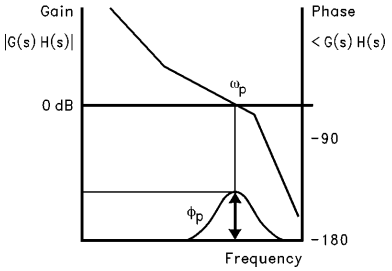

TL/W/12340–32

FIGURE 3. Open Loop Transfer Function

Thus we can calculate the 3rd order PLL Open Loop Gain in terms of frequency

$$G(s) \bullet H(s)\big|_{s\,=\,j \bullet \omega} = \frac{-K\phi \bullet K_{VCO}\,(1 + j\omega \bullet T2)}{\omega^2 C1 \bullet N(1 + j\omega \bullet T1)} \bullet \frac{T1}{T2} \tag{2}$$

From equation 2 we can see that the phase term will be dependent on the single pole and zero such that

$$\phi(\omega) = \tan^{-1}(\omega \bullet T2) - \tan^{-1}(\omega \bullet T1) + 180° \tag{3}$$

By setting

$$\frac{d\phi}{d\omega} = \frac{T2}{1 + (\omega \bullet T2)^2} - \frac{T1}{1 + (\omega \bullet T1)^2} = 0 \tag{4}$$

we find the frequency point corresponding to the phase inflection point in terms of the filter time constants T1 and T2. This relationship is given in equation 5.

$$\omega_p = 1/\sqrt{T2 \bullet T1} \tag{5}$$

For the loop to be stable the unity gain point must occur before the phase reaches -180 degrees. We therefore want the phase margin to be at a maximum when the magnitude of the open loop gain equals 1. Equation 2 then gives

$$C1 = \frac{K\phi \bullet K_{VCO} \bullet T1}{\omega_p^2 \bullet N \bullet T2}\left\|\frac{(1 + j\omega_p \bullet T2)}{(1 + j\omega_p \bullet T1)}\right\| \tag{6}$$

Application Information (Continued)

Therefore, if we specify the loop bandwidth, ω_p, and the phase margin, ϕ_p, Equations 1 through 6 allow us to calculate the two time constants, T1 and T2, as shown in equations 7 and 8. A common rule of thumb is to begin your design with a 45° phase margin.

$$T1 = \frac{\sec\phi_p - \tan\phi_p}{\omega_p} \tag{7}$$

$$T2 = \frac{1}{\omega_p^2 \bullet T1} \tag{8}$$

From the time constants T1, and T2, and the loop bandwidth, ω_p, the values for C1, R2, and C2 are obtained in equations 9 to 11.

$$C1 = \frac{T1}{T2} \bullet \frac{K\phi \bullet K_{VCO}}{\omega_p^2 \bullet N} \sqrt{\frac{1 + (\omega_p \bullet T2)^2}{1 + (\omega_p \bullet T1)^2}} \tag{9}$$

$$C2 = C1 \bullet \left(\frac{T2}{T1} - 1\right) \tag{10}$$

$$R2 = \frac{T2}{C2} \tag{11}$$

K_{VCO} (MHz/V) — Voltage Controlled Oscillator (VCO) Tuning Voltage constant. The frequency vs voltage tuning ratio.

$K\phi$ (mA) — Phase detector/charge pump gain constant. The ratio of the current output to the input phase differential.

N — Main divider ratio. Equal to RF_{opt}/f_{ref}

RF_{opt} (MHz) — Radio Frequency output of the VCO at which the loop filter is optimized.

f_{ref} (kHz) — Frequency of the phase detector inputs. Usually equivalent to the RF channel spacing.

In choosing the loop filter components a trade off must be made between lock time, noise, stability, and reference spurs. The greater the loop bandwidth the faster the lock time will be, but a large loop bandwidth could result in higher reference spurs. Wider loop bandwidths generally improve close in phase noise but may increase integrated phase noise depending on the reference input, VCO and division ratios used. The reference spurs can be reduced by reducing the loop bandwidth or by adding more low pass filter stages but the lock time will increase and stability will decrease as a result.

THIRD ORDER FILTER

A low pass filter section may be needed for some applications that require additional rejection of the reference sidebands, or spurs. This configuration is given in *Figure 4*. In order to compensate for the added low pass section, the component values are recalculated using the new open loop unity gain frequency. The degradation of phase margin caused by the added low pass is then mitigated by slightly increasing C1 and C2 while slightly decreasing R2.

The added attenuation from the low pass filter is:

$$ATTEN = 20 \log[(2\pi f_{ref} \bullet R3 \bullet C3)^2 + 1] \tag{12}$$

Defining the additional time constant as

$$T3 = R3 \bullet C3 \tag{13}$$

Then in terms of the attenuation of the reference spurs added by the low pass pole we have

$$T3 = \sqrt{\frac{10^{ATTEN/20} - 1}{(2\pi \bullet f_{ref})^2}} \tag{14}$$

We then use the calculated value for loop bandwidth ω_c in equation 11, to determine the loop filter component values in equations 15–17. ω_c is slightly less than ω_p, therefore the frequency jump lock time will increase.

$$T2 = \frac{1}{\omega_c^2 \bullet (T1 + T3)} \tag{15}$$

$$\omega_c = \frac{\tan\phi \bullet (T1 + T3)}{[(T1 + T3)^2 + T1 \bullet T3]} \bullet \left[\sqrt{1 + \frac{(T1 + T3)^2 + T1 \bullet T3}{[\tan\phi \bullet (T1 + T3)]^2}} - 1\right] \tag{16}$$

$$C1 = \frac{T1}{T2} \bullet \frac{K_\phi \bullet K_{VCO}}{\omega_c^2 \bullet N} \bullet \left[\frac{(1 + \omega_c^2 \bullet T2^2)}{(1 + \omega_c^2 \bullet T1^2)\,(1 + \omega_c^2 \bullet T3^2)}\right]^{1/2} \tag{17}$$

Application Information (Continued)

Example # 1

$K_{VCO} = 19.3$ MHz/V

$K_\phi = 5$ mA (Note 1)

$RF_{opt} = 886$ MHz

$F_{ref} = 25$ kHz

$N = RF_{opt}/f_{ref} = 35440$

$\omega_p = 2\pi * 5$ kHz $= 3.1415e4$

$\phi_p = 43°$

ATTEN $= 10$ dB

$$T1 = \frac{\sec\phi_p - \tan\phi_p}{\omega_p} = 1.38e-5$$

$$T3 = \sqrt{\frac{10^{(10/20)} - 1}{(2\pi \bullet 25e3)^2}} = 9.361e-6$$

$$\omega_c = \frac{(\tan 43°)\bullet(1.38e-5 + 9.361e-6)}{[(1.38e-5 + 9.361e-6)^2 + 1.38e-5 \bullet 9.361e-6]} \bullet \left[\sqrt{1 + \frac{(1.38e-5 + 9.361e-6)^2 + 1.38e-5 \bullet 9.361e-6}{[(\tan 43°)\bullet(1.38e-5 + 9.361e-6)]^2}} - 1\right] = 1.8101e4$$

$$T2 = \frac{1}{(1.8101e4)^2 \bullet (1.38e-5 + 9.361e-6)} = 1.318e-4$$

$$C1 = \frac{1.38e-5}{1.318e-4}\frac{(5e-3) \bullet 19.3e6}{(1.8101e4)^2 \bullet (35440)} \bullet \left[\frac{[1 + (1.8101e4)^2 \bullet (1.318e-4)^2]}{[1 + (1.8101e4)^2 \bullet (1.38e-5)^2]\,[1 + (1.8101e4)^2 \bullet (9.361e-6)^2]}\right]^{1/2} = 2.153 \text{ nF}$$

$$C2 = 2.153 \text{ nF}\left(\frac{1.318e-4}{1.384e-5} - 1\right) = 18.35 \text{ nF}$$

$$R2 = \frac{1.318e-4}{18.35e-9} = 7.18 \text{ k}\Omega$$

if we choose R3 $= 120$k; then $C3 = \frac{9.361e-6}{120e3} = 78$ pF.

Converting to standard component values gives the following filter values, which are shown in *Figure 4*.

C1 $= 2200$ pF
R2 $= 8.2$ kΩ
C2 $= 0.018$ μF
R3 $= 120$ kΩ
C3 $= 78$ pF

Note 1: See related equation for K_ϕ in Charge Pump Current Specification Definitions. For this example $V_P = 5.0$V. The value for K_ϕ can then be approximated using the curves in the Typical Performance Characteristics for Charge Pump Current vs D_o Voltage. The units for K_ϕ are in mA. You may also use $K_\phi = (5 \text{ mA}/2\pi \text{ rad})$, but in this case you must convert K_{VCO} to (rad/V) multiplying by 2π.



TL/W/12340–41

FIGURE 4. ~5 kHz Loop Filter

Application Information (Continued)

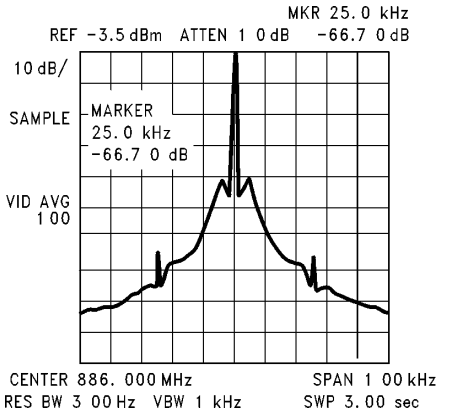

FIGURE 5. PLL Reference Spurs

The reference spurious level is < −66 dBc, due to the loop filter attenuation and the low spurious noise level of the LMX1511.

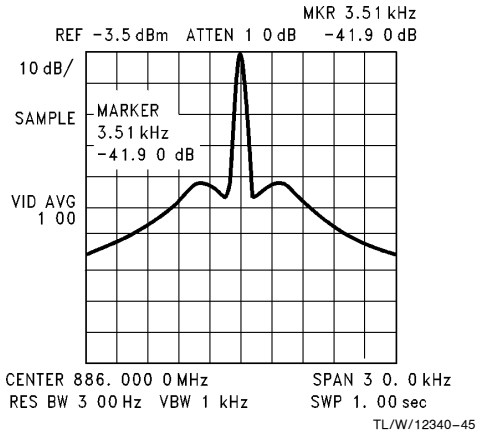

FIGURE 6. PLL Phase Noise 3.5 kHz Offset

The phase noise level at 3 kHz offset is −65 dBc/Hz.

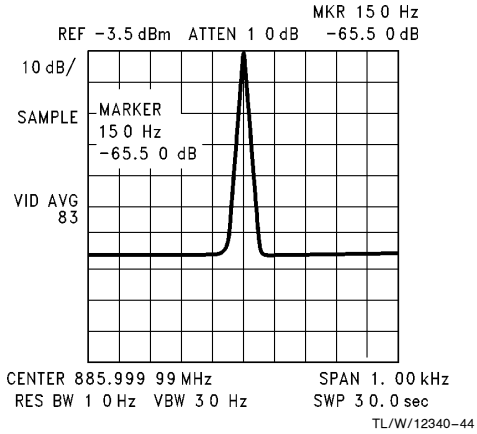

FIGURE 7. PLL Phase Noise @ 150 Hz Offset

The phase noise level at 150 Hz offset is −75.5 dBc/Hz.

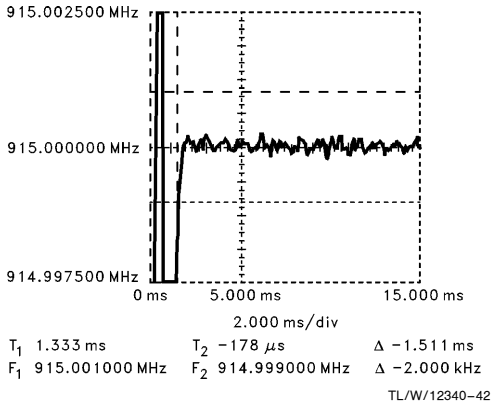

FIGURE 8. Frequency Jump Lock Time

Of concern in any PLL loop filter design is the time it takes to lock in to a new frequency when switching channels. *Figure 8* shows the switching waveforms for a frequency jump of 857 MHz–915 MHz. By narrowing the frequency span of the HP53310A Modulation Domain Analyzer enables evaluation of the frequency lock time to within ±1 kHz. The lock time is seen to be < 1.6 ms for a frequency jump of 58 MHz.

Application Information (Continued)

EXTERNAL CHARGE PUMP

The LMX PLLatimum series of frequency synthesizers are equipped with an internal balanced charge pump as well as outputs for driving an external charge pump. Although the superior performance of NSC's on board charge pump eliminates the need for an external charge pump in most applications, certain system requirements are more stringent. In these cases, using an external charge pump allows the designer to take direct control of such parameters as charge pump voltage swing, current magnitude, TRI-STATE leakage, and temperature compensation.

One possible architecture for an external charge pump current source is shown in *Figure 9*. The signals ϕ_p and ϕ_r in the diagram, correspond to the phase detector outputs of the LMX1501/1511 frequency synthesizers. These logic signals are converted into current pulses, using the circuitry shown in *Figure 9*, to enable either charging or discharging of the loop filter components to control the output frequency of the PLL.

Referring to *Figure 9*, the design goal is to generate a 5 mA current which is relatively constant to within 5V of the power supply rail. To accomplish this, it is important to establish as large of a voltage drop across R5, R8 as possible without saturating Q2, Q4. A voltage of approximately 300 mV provides a good compromise. This allows the current source reference being generated to be relatively repeatable in the absence of good Q1, Q2/Q3, Q4 matching. (Matched transistor pairs is recommended.) The ϕp and ϕr outputs are rated for a maximum output load current of 1 mA while 5 mA current sources are desired. The voltages developed across R4, 9 will consequently be approximately 258 mV, or 42 mV $<$ R8, 5, due to the current density differences {0.026*1n (5 mA/1 mA)} through the Q1, Q2/Q3, Q4 pairs.

In order to calculate the value of R7 it is necessary to first estimate the forward base to emitter voltage drop (Vfn,p) of the transistors used, the V_{OL} drop of ϕp, and the V_{OH} drop of ϕr's under 1 mA loads. (ϕp's $V_{OL} < 0.1V$ and ϕr;s $V_{OH} < 0.1V$.)

Knowing these parameters along with the desired current allow us to design a simple external charge pump. Separating the pump up and pump down circuits facilitates the nodal analysis and give the following equations.

$$R_4 = \frac{V_{R5} - V_T \bullet 1n\left(\frac{i_{source}}{i_{p\,max}}\right)}{i_{source}}$$

$$R_9 = \frac{V_{R8} - V_T \bullet 1n\left(\frac{i_{sink}}{i_{n\,max}}\right)}{i_{sink}}$$

$$R_5 = \frac{V_{R5} \bullet (\beta_p + 1)}{i_{p\,max} \bullet (\beta_p + 1) - i_{source}}$$

$$R_8 = \frac{V_{R8} \bullet (\beta_n + 1)}{i_{r\,max} \bullet (\beta_n + 1) - i_{sink}}$$

$$R_6 = \frac{(V_p - V_{OL\phi p}) - (V_{R5} + Vfp)}{i_{p\,max}}$$

$$R_7 = \frac{(V_P - V_{VOH\phi r}) - (V_{R8} + Vfn)}{i_{max}}$$

EXAMPLE

Typical Device Parameters	$\beta_n = 100$, $\beta_p = 50$
Typical System Parameters	$V_P = 5.0V$;
	$V_{cntl} = 0.5V - 4.5V$;
	$V_{\phi p} = 0.0V$, $V_{\phi r} = 5.0V$
Design Parameters	$I_{SINK} = I_{SOURCE} = 5.0$ mA;
	$V_{fn} = V_{fp} = 0.8V$
	$I_{rmax} = I_{pmax} = 1$ mA
	$V_{R8} = V_{R5} = 0.3V$
	$V_{OL\phi p} = V_{OH\phi r} = 100$ mV

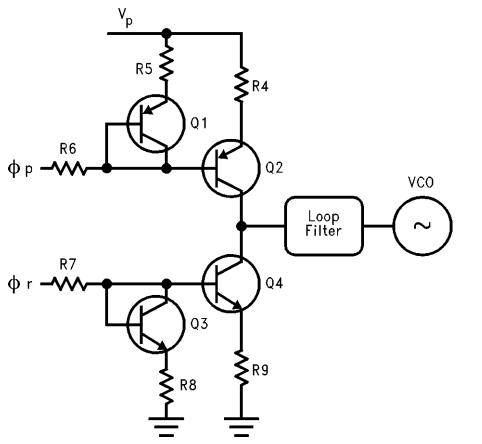

TL/W/12340–46

FIGURE 9

Therefore select

$$R_4 = R_9 = \frac{0.3V - 0.026 \bullet 1n(5.0\text{ mA}/1.0\text{ mA})}{5\text{ mA}} = 51.6\Omega$$

$$R_5 = \frac{0.3V \bullet (50 + 1)}{1.0\text{ mA} \bullet (50 + 1) - 5.0\text{ mA}} = 332\Omega$$

$$R_8 = \frac{0.3V \bullet (100 - 1)}{1.0\text{ mA} \bullet (100 + 1) - 5.0\text{ mA}} = 315.6\Omega$$

$$R_6 = R_7 = \frac{(5V - 0.1V) - (0.3V + 0.8V)}{1.0\text{ mA}} = 3.8\text{ k}\Omega$$



Physical Dimensions inches (millimeters)

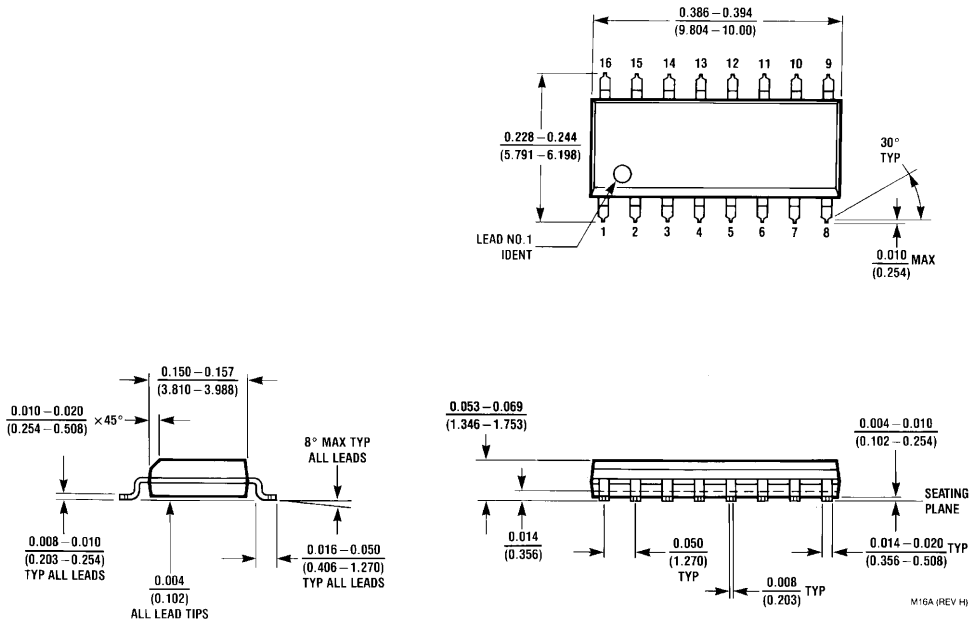

JEDEC 16-Lead (0.150″ Wide) Small Outline Molded Package (M)
Order Number LMX1501AM
For Tape and Reel Order Number LMX1501AMX (2500 Units per Reel)
NS Package Number M16A

Physical Dimensions (millimeters) (Continued)

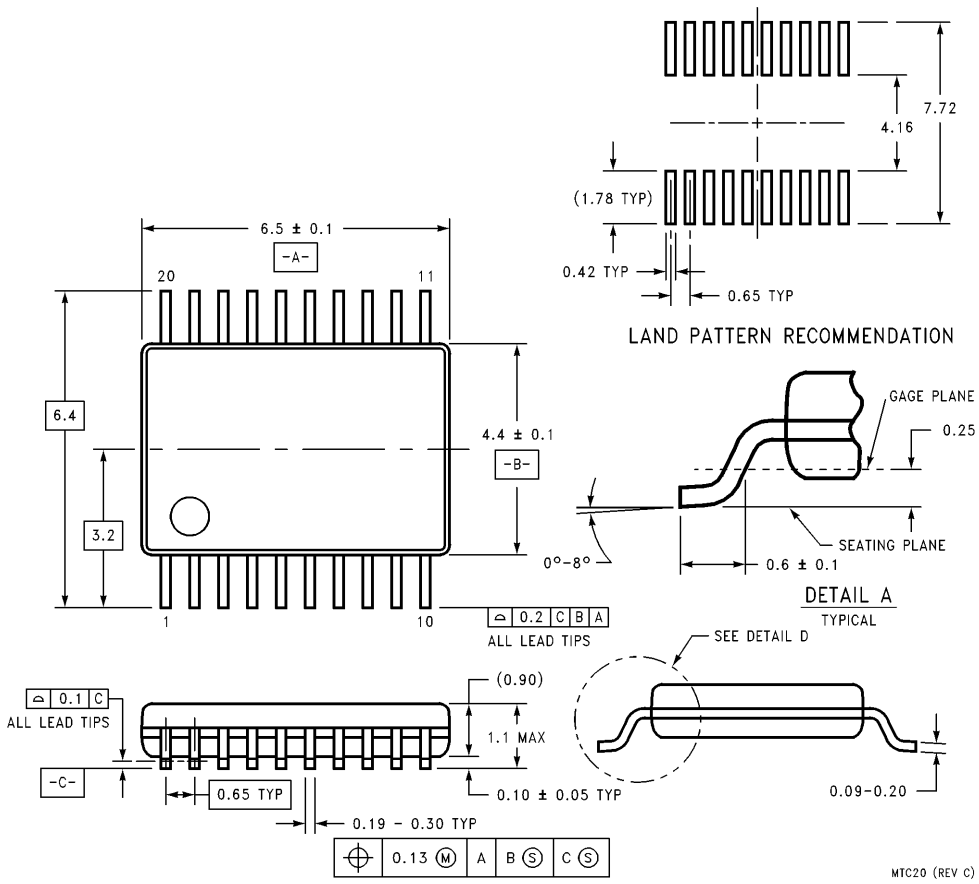

20-Lead (0.173″ Wide) Thin Shrink Small Outline Package (TM)
Order Number LMX1511TM
For Tape and Reel Order Number LMX1511TMX (2500 Units per Reel)
NS Package Number MTC20

LIFE SUPPORT POLICY

NATIONAL'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF THE PRESIDENT OF NATIONAL SEMICONDUCTOR CORPORATION. As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and whose failure to perform, when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury to the user.
2. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

National Semiconductor Corporation
1111 West Bardin Road
Arlington, TX 76017
Tel: 1(800) 272-9959
Fax: 1(800) 737-7018

National Semiconductor Europe
Fax: (+49) 0-180-530 85 86
Email: cnjwge@tevm2.nsc.com
Deutsch Tel: (+49) 0-180-530 85 85
English Tel: (+49) 0-180-532 78 32
Français Tel: (+49) 0-180-532 93 58
Italiano Tel: (+49) 0-180-534 16 80

National Semiconductor Hong Kong Ltd.
13th Floor, Straight Block,
Ocean Centre, 5 Canton Rd.
Tsimshatsui, Kowloon
Hong Kong
Tel: (852) 2737-1600
Fax: (852) 2736-9960

National Semiconductor Japan Ltd.
Tel: 81-043-299-2309
Fax: 81-043-299-2408

National does not assume any responsibility for use of any circuitry described, no circuit patent licenses are implied and National reserves the right at any time without notice to change said circuitry and specifications.

Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits,General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)
Факс: 8 (812) 320-02-42
Электронная почта: org@eplast1.ru
Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.