

PLCC4 Surface Mount LED

OVSA1xBC2R8 Series



Features:

- High intensity with low power consumption
- PLCC4 packaged in 8 mm tape on 7" diameter reel
- Compatible with automatic placement equipment
- Dimensions: 3.2 x 2.7 x 1.95 mm
- 120° viewing angle





Description:

The OVSA1xBC2R8 series is designed for wide angle, uniform light output. Its internal reflector and colorless clear lens optimize luminous intensity and make it ideal for backlighting applications and for coupling with light guides.


Applications:

- Traffic lights
- Signal and symbol luminaire
- Mono-color indicators
- Backlighting (LCD, switches, displays, illuminated advertising)
- Interior automotive lighting (instrumentation clusters)
- Safety marker lights (steps, exit ways)

| Part Number | Material | Emitted Color | Intensity Typ. mcd | Lens Color |
|-------------|----------|---------------|--------------------|-------------|
| OVSA1ABC2R8 | AllnGaP | Amber | 1500 | Water Clear |
| OVSA1BBC2R8 | InGaN | Blue | 650 | Water Clear |
| OVSA1GBC2R8 | InGaN | Green | 3200 | Water Clear |
| OVSA1SBC2R8 | AllnGaP | Red | 1600 | Water Clear |

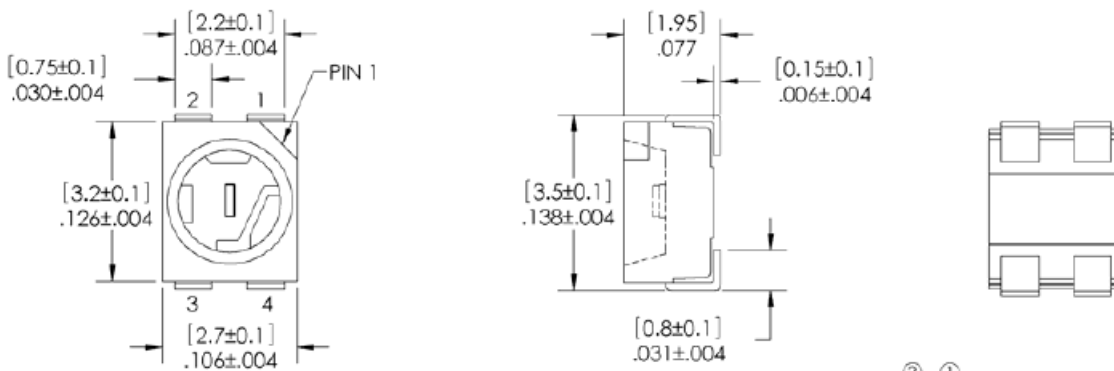

DIMENSIONS ARE IN INCHES AND [MM]



DO NOT LOOK DIRECTLY AT LED WITH UNSHIELDED EYES OR DAMAGE TO RETINA MAY

General Note

TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.

TT Electronics | Optek Technology, Inc.
1645 Wallace Drive, Ste. 130, Carrollton, TX USA 75006 | Ph: +1 972 323 2200
www.ttelectronics.com | sensors@ttelectronics.com

Electrical Specifications

| Absolute Maximum Ratings ($T_A = 25^\circ\text{C}$ unless otherwise noted) | | |
|---|-------------|---------------------|
| Storage Temperature Range | | -40 ~ +100 °C |
| Operating Temperature Range | | -40 ~ +100 °C |
| Reverse Voltage | | 5 V |
| Continuous Forward Current | Blue, Green | 30 mA |
| | Red, Amber | 70 mA |
| Peak Forward Current (Pulse width ≤ 10 msec, duty cycle $\leq 10\%$) | Blue, Green | 100 mA |
| | Red, Amber | 200 mA |
| Power Dissipation | Blue, Green | 130 mW |
| | Red, Amber | 210 mW |
| Thermal Resistance Junction to Solder ^{1.} | Blue, Green | 200° C/W |
| | Red, Amber | 150° C/W |
| Electrostatic Discharge Classification (MIL-STD-883E) | Blue, Green | Class 2 |
| | Red, Amber | |
| Moisture Sensitivity Level (IPC/JEDEC J-STD-020C) | | 5a / 24 hrs |
| LED Junction Temperature | | 110° C |
| Lead Soldering Temperature | | 250° C / 10 seconds |

Note:

1. R_{th} test condition: Mounted on PC board FR 4 (pad size $\geq 16\text{ mm}^2$)

Electrical Characteristics ($T_A = 25^\circ\text{C}$ unless otherwise noted)

| SYMBOL | PARAMETER | COLOR | MIN | TYP | MAX | UNITS | CONDITIONS |
|----------------------------|---------------------|--------------|------|------|------|---------------|----------------------|
| I_V | Luminous Intensity | Blue | 450 | 650 | ---- | mcd | $I_F = 30\text{ mA}$ |
| | | Green | 2240 | 3200 | ---- | | |
| | | Red | 1120 | 1600 | ---- | | $I_F = 50\text{ mA}$ |
| | | Amber | 1120 | 1500 | ---- | | |
| V_F | Forward Voltage | Blue | ---- | 3.6 | 4.2 | V | $I_F = 30\text{ mA}$ |
| | | Green | ---- | 3.6 | 4.2 | | |
| | | Red | ---- | 2.4 | 3.0 | | $I_F = 50\text{ mA}$ |
| | | Amber | ---- | 2.4 | 3.0 | | |
| I_R | Reverse Current | Blue | ---- | ---- | 10 | μA | $V_R = 5\text{ V}$ |
| | | Green | ---- | ---- | 10 | | |
| | | Red | ---- | ---- | 10 | | |
| | | Amber | ---- | ---- | 10 | | |
| λ_D | Dominant Wavelength | Blue | 460 | 470 | 475 | nm | $I_F = 30\text{ mA}$ |
| | | Green | 520 | 527 | 535 | | $I_F = 50\text{ mA}$ |
| | | Red | 618 | 624 | 630 | | |
| | | Amber | 584 | 591 | 599 | | |
| $2\theta_{\frac{1}{2}H-H}$ | 50% Power Angle | Blue & Green | | 120 | | deg | $I_F = 30\text{ mA}$ |
| | | Red & Amber | | | | | $I_F = 50\text{ mA}$ |

General Note

TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.

TT Electronics | Optek Technology, Inc.
1645 Wallace Drive, Ste. 130, Carrollton, TX USA 75006 | Ph: +1 972 323 2200
www.ttelectronics.com | sensors@ttelectronics.com

Luminous Intensity (I_v) @ 30mA

| BLUE: OVSA1BBC2R8 | | |
|-------------------|-----------|-----------|
| IV Code | Min (mcd) | Max (mcd) |
| Ua | 450 | 560 |
| Ub | 560 | 710 |
| Va | 710 | 900 |

Dominant Wavelength (nm)

| BLUE: OVSA1BBC2R8 | | |
|-------------------|-----|-----|
| nm Code | Min | Max |
| B3 | 460 | 465 |
| B4 | 465 | 470 |
| B5 | 470 | 475 |

| GREEN: OVSA1GBC2R8 | | |
|--------------------|-----------|-----------|
| IV Code | Min (mcd) | Max (mcd) |
| Xb | 2240 | 2800 |
| Ya | 2800 | 3550 |
| Yb | 3550 | 4500 |

| GREEN: OVSA1GBC2R8 | | |
|--------------------|-----|-----|
| nm Code | Min | Max |
| G7 | 520 | 525 |
| G8 | 525 | 530 |
| G9 | 530 | 535 |

Luminous Intensity (I_v) @ 50mA

| RED: OVSA1SBC2R8 | | |
|------------------|-----------|-----------|
| IV Code | Min (mcd) | Max (mcd) |
| Wa | 1120 | 1400 |
| Wb | 1400 | 1800 |
| Xa | 1800 | 2240 |
| Xb | 2240 | 2800 |

Dominant Wavelength (nm)

| RED: OVSA1SBC2R8 | | |
|------------------|-----|-----|
| nm Code | Min | Max |
| RA | 618 | 630 |

| AMBER: OVSA1ABC2R8 | | |
|--------------------|-----------|-----------|
| IV Code | Min (mcd) | Max (mcd) |
| Wa | 1120 | 1400 |
| Wb | 1400 | 1800 |
| Xa | 1800 | 2240 |
| Xb | 2240 | 2800 |


| AMBER: OVSA1ABC2R8 | | |
|--------------------|-----|-----|
| nm Code | Min | Max |
| A2 | 584 | 587 |
| A3 | 587 | 590 |
| A4 | 590 | 593 |
| A5 | 593 | 596 |
| A6 | 596 | 599 |

General Note


TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.

TT Electronics | Optek Technology, Inc.
 1645 Wallace Drive, Ste. 130, Carrollton, TX USA 75006 | Ph: +1 972 323 2200
www.ttelectronics.com | sensors@ttelectronics.com


Typical Electro-Optical Characteristics Curves OVSA1BBC2R8 (Blue) & OVSA1GBC2R8 (Green)

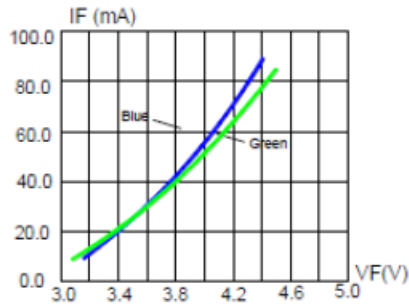


Forward Current vs. Forward Voltage

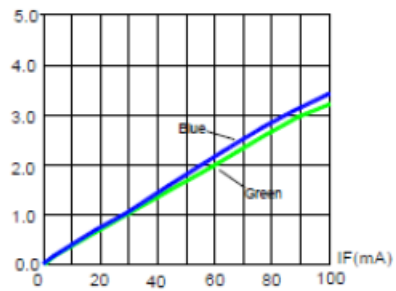


Relative Luminous Intensity vs. Forward Current

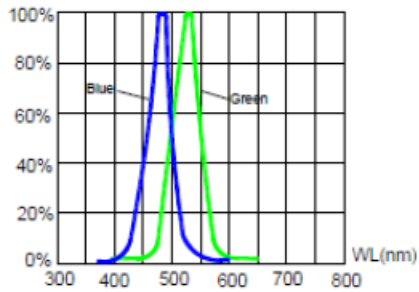


Relative Luminous Intensity vs. Wavelength

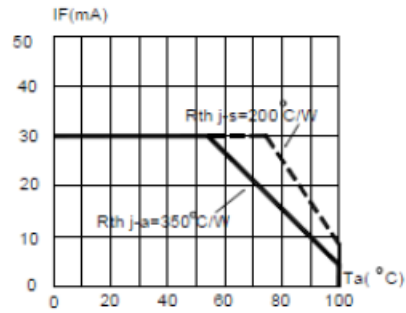

Blue & Green Maximum Forward DC Current vs. Ambient Temperature

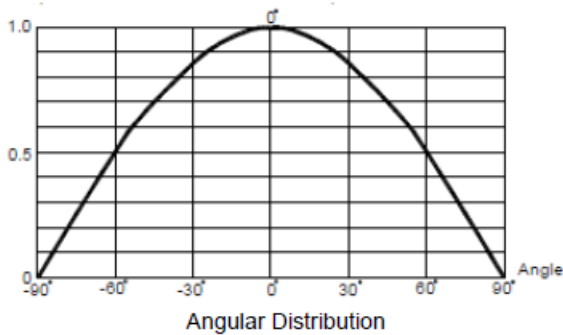


Angular Distribution

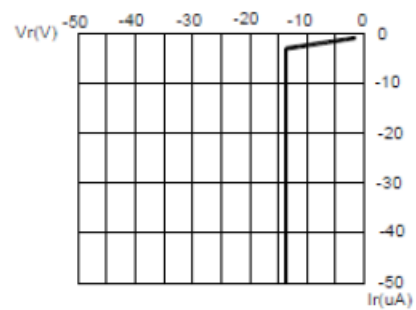


Blue & Green Reverse Current vs. Reverse Voltage

General Note
 TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.


Typical Electro-Optical Characteristics Curves for OVSA1SBC2R8 (Red) & OVSA1ABC2R8 (Amber)

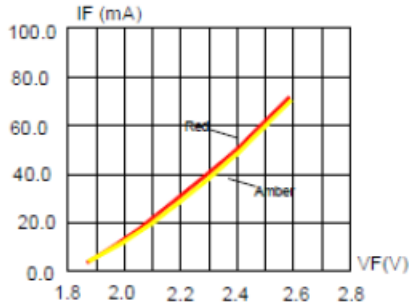


Forward Current vs. Forward Voltage

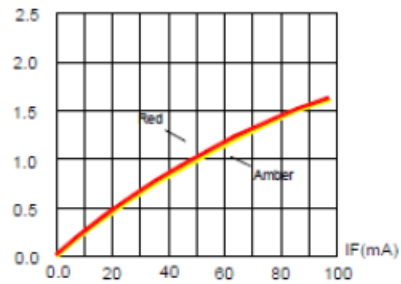

Relative Luminous Intensity vs. Forward Current

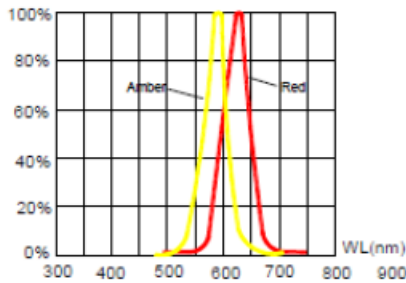


Relative Luminous Intensity vs. Wavelength

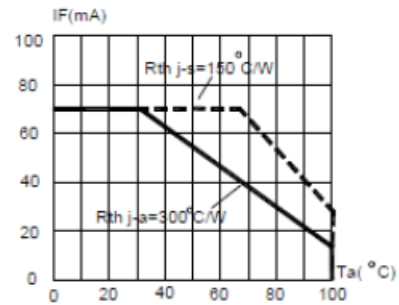

Red & Amber Maximum Forward DC Current vs. Ambient Temperature




Angular Distribution

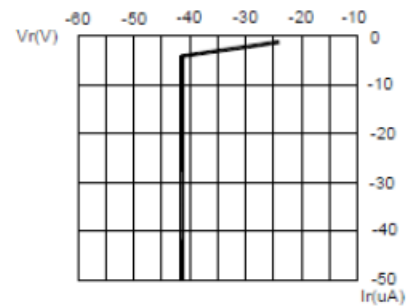


Red & Amber Reverse Current vs. Reverse Voltage

General Note
 TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.

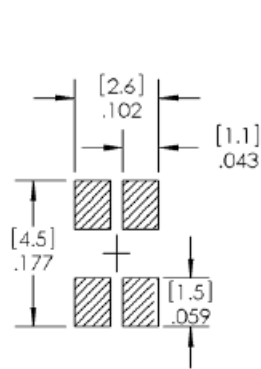


RECOMMENDED SOLDER PASTE PATTERN

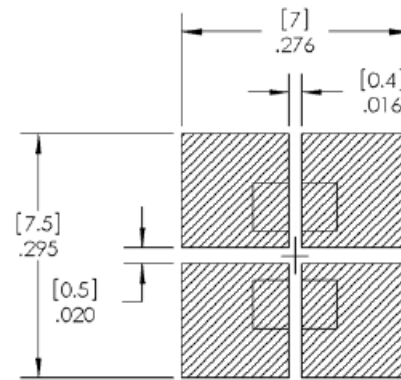


RECOMMENDED COPPER PATTERN

Reflow Solder Profile

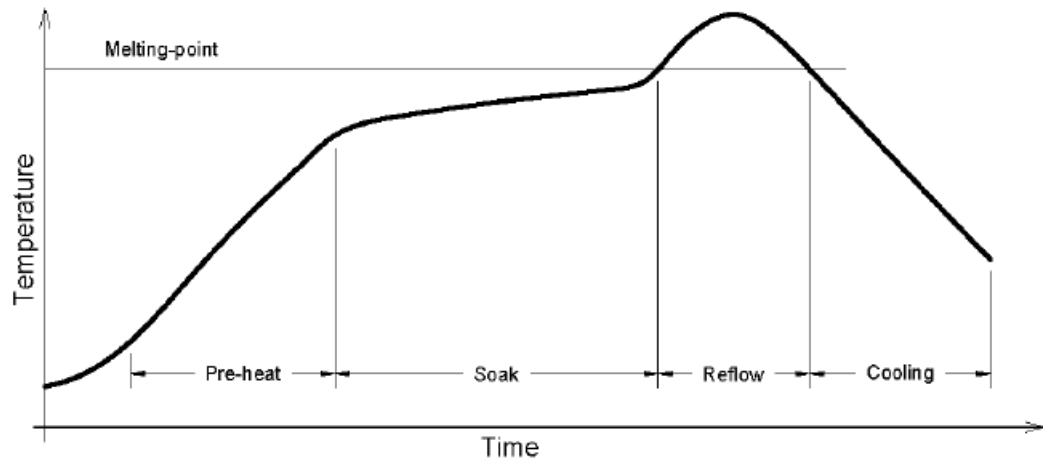


| Solder = Lead-Free | |
|---------------------------------------|--|
| Average ramp-up rate = 4°C / sec. max | Peak temperature = 250°C max. |
| Preheat temperature: 150 - 220°C | Time within 5°C of actual peak temperature = 10 sec. max |
| Preheat time: 120 sec. max. | |
| Ramp-down rate = 6°C / sec. max. | Duration above 217°C is 60 sec. max |


Reel Dimensions: 7-inch reel

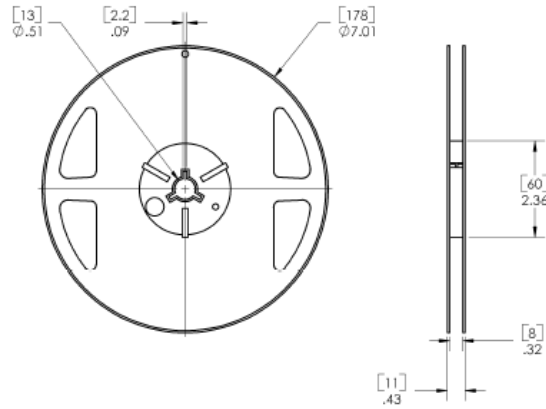

Carrier Tape Dimensions: Loaded Quantity 2000 pieces per reel

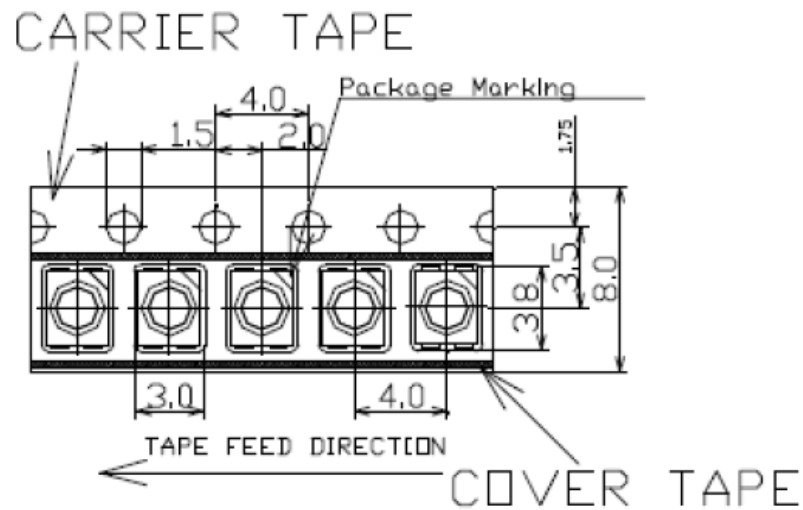

Moisture Resistant Packaging:

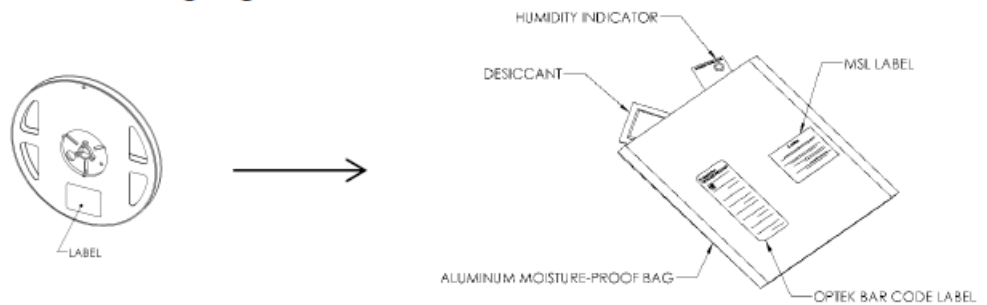

General Note
 TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.