

# Q14 series

Ø14 mm panel mount LED indicators



## DISTINCTIVE FEATURES

10 mm colored diffused epoxy lens or 10 mm water clear super bright LEDs

Prominent and flush bezel styles

(2.8 x 0.8) solder lug/faston terminals, pins or (200 mm long) wire terminations

Custom engraving available



## ENVIRONMENTAL SPECIFICATIONS

- IP67 sealing option (EN60529)
- Operating & Storage Temperature Range:  
Rear plastic body: -30 °C to +65° C ( -22 °F to +149 °F)  
Rear epoxy body: -40 °C to +85° C ( -40 °F to +185 °F)



## GENERAL SPECIFICATIONS

- Max Reverse Voltage: 5 V
- Viewing Angle: 30–100° (dependant on model)
- Life Expectancy: 100,000 hours
- Torque: 4 cNm (dependent on option)
- Maximum panel thickness 11 mm



## MATERIALS

- Plated brass bezel finished in bright chrome, black chrome or satin grey and moulded polycarbonate rear body



## MOUNTING



The company reserves the right to change specifications without notice.

All LED characteristics are dependent upon environmental conditions. Therefore published data should be considered nominal and subject to variations.



# Q14 series

Ø14 mm panel mount LED indicators



## ELECTRICAL SPECIFICATIONS

### STANDARD LED INTENSITY

| LED COMPONENT SPECIFICATIONS                                                                                                                                                  |                        |              |                   |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------|--------------|-------------------|
|                                                                                                                                                                               | Prominent and Recessed | Flush        | Forward Voltage   |
| HE Red                                                                                                                                                                        | 80 mcd                 | 10 mcd       | 2.0 V             |
| Green                                                                                                                                                                         | 60 mcd                 | 5 mcd        | 2.2 V             |
| Yellow                                                                                                                                                                        | 50 mcd                 | 4 mcd        | 2.1 V             |
| Blue                                                                                                                                                                          | 540 mcd                | 100 mcd      | 3.3 V             |
| White                                                                                                                                                                         | 1000 mcd               | 150 mcd      | 3.3 V             |
| Orange                                                                                                                                                                        | 80 mcd                 | 200 mcd      | 2.2 V             |
| Bi-color (Typical) (Red/Green)                                                                                                                                                | 15/15 mcd              | 14/10 mcd    | 2.0V/2.2 V        |
| Tri-color (Typical) (Red/Green/Yellow)                                                                                                                                        | 60/50/50mcd            | 15/10/30 mcd | 2.0 V/2.2 V/2.1 V |
| Bi-color - The color is changed by reversing the polarity of the supply voltage.<br>Tri-color - The indicator has red and green LEDs, when both connected yellow is produced. |                        |              |                   |

### SUPER BRIGHT LED INTENSITY

| LED COMPONENT SPECIFICATIONS |                        |           |                 |
|------------------------------|------------------------|-----------|-----------------|
|                              | Prominent and Recessed | Flush     | Forward Voltage |
| HE Red                       | 17,000 mcd             | 2,000 mcd | 2.2 V           |
| Green                        | 11,000 mcd             | 680 mcd   | 3.3 V           |
| Yellow                       | 4,000 mcd              | 350 mcd   | 2.0 V           |
| Blue                         | 2,500mcd               | 250 mcd   | 3.3 V           |
| White                        | 4,400 mcd              | 250 mcd   | 3.3 V           |
| Orange                       | 2,800 mcd              | 300 mcd   | 2.2 V           |

### HYPER BRIGHT LED INTENSITY

| LED COMPONENT SPECIFICATIONS |                        |         |                 |
|------------------------------|------------------------|---------|-----------------|
|                              | Prominent and Recessed | Flush   | Forward Voltage |
| HE Red                       | 2,800 mcd              | 800 mcd | 2.1 V           |
| Green                        | 2,200 mcd              | 250 mcd | 3.2 V           |
| Yellow                       | 1,300 mcd              | 250 mcd | 2.0 V           |
| Orange                       | 850 mcd                | 200 mcd | 2.1 V           |

- The operating voltage must not be exceeded by more than 10% as this will result in reduced life expectancy
- Luminous intensity is measured at 20 mA on a discrete led unless otherwise stated.
- Luminous intensities and color shades of white LEDs may vary within a batch.
- Luminous intensity will be reduced with lower operating current.

| Voltage          | Operating Voltage<br>(Min to Max) | Operating Current<br>(Typical All Types) |
|------------------|-----------------------------------|------------------------------------------|
| 02 (No Resistor) | 1.8 to 3.3 VDC                    | 20 mA max                                |
| 6 VDC            | 5.4 to 6.6 VDC                    | 20 mA                                    |
| 12 VDC           | 10.8 to 13.2 VDC                  | 20 mA                                    |
| 24 VDC           | 21.6 to 26.4 VDC                  | 20 mA                                    |
| 28 VDC           | 25.2 to 30.8 VDC                  | 20 mA                                    |
| 110 VAC          | 99 to 121 VAC                     | 6 mA                                     |
| 220 VAC          | 207 to 235 VAC                    | 3 mA                                     |

\* Customer to supply resistor for desired operating current.



### BUILD YOUR PART NUMBER

Q

SERIES

MOUNTING HOLE

BEZEL STYLE

P

Prominent

R

Recessed

F

Flush

1

Solder Lug/  
Fastons (2.8 x 0.8)

2

Pins

3

Wires

4

Rear epoxy Pins

5

Rear epoxy Wires

6

Short body Pins

7

Short body Wires

TERMINALS

ANODIZED  
FLUSH

AR

Red

AG

Green

AY

Yellow

AB

Blue

AN

Black

OTHERS

C

Bright Chrome

B

Black Chrome

G

Satin Grey

BEZEL FINISH

TYPE OF ILLUMINATION

XX

Fixed Light

KK

Flashing Light  
(12V – 28VDC)

YY

Bi-color

ZZ

Tri-color

R

Red

G

Green

Y

Yellow

B

Blue

W

White

O

Orange

HR

Hyper Bright  
Red

LED COLOR

HG

Hyper Bright  
Green

HY

Hyper Bright  
Yellow

HO

Hyper Bright  
Orange

SR

Super Bright  
Red

SG

Super Bright  
Green

SY

Super Bright  
Yellow

SB

Super Bright  
Blue

SW

Super Bright  
White

RG

Red/Green

RY

Red/Yellow

GY

Green/Yellow

RYG

Red/Yellow/  
Green

VOLTAGE

02

no resistor

06

6VDC

12

12VDC

12A

12VAC/DC

24

24VDC

24A

24VAC/DC

28

28VDC

28A

28VAC/DC

110

110VAC

220

220VAC

SEALING

(Blank)

Unsealed

E

IP67



### ABOUT THIS SERIES



**Notice:** please note that not all combinations of above numbers are available.

- Gold faston terminal denotes anode (+), silver terminal denotes cathode (-)
- Standard wire length is 200 mm, 22 AWG UL1061, red wire denotes anode (+), black wire denotes cathode (-) for other wire lengths consult APEM
- For LEDs with alternative voltages and multi-voltage options consult APEM
- 110 VAC and 220 VAC, short body terminal options, 5, 6 and 7 please consult the factory
- Bi-color leds, by connecting the gold faston (+) one color is produced, by reversing the supply voltage another color is produced – bi-colors are available up to 28 VDC

- Take care when soldering to the faston terminals (recommended solder temperature 300 °C - 3 sec)
- Short body pins and wires are only available up to 28 VDC
- The Tri-color LED has red and green LEDs when both are connected yellow is produced
- Standard tri-color faston terminals are two anodes (+) and one cathode (-)
- Tri-color wires are one red (+) and one green (+) anode and one black (-) cathode
- Tri-color pins are center (-) cathode, shortest (+) anode pin green, longest (+) anode pin red
- We recommend using Hyperbright or Superbright LEDs for use at 110 VAC and 220 VAC

# Q14 series

Ø14 mm panel mount LED indicators


## PROMINENT BEZEL




## WIRES




## REAR EPOXY WIRES

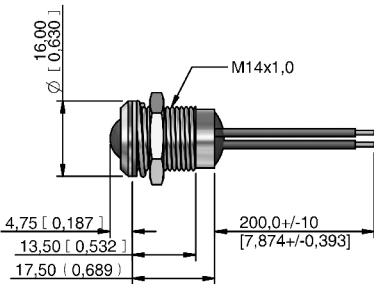


## SHORT BODY WIRES

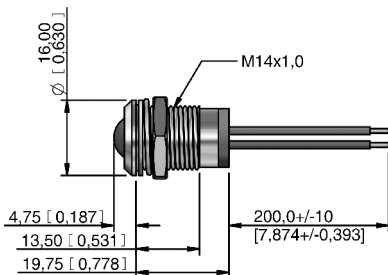


## SOLDER LUG/FASTON

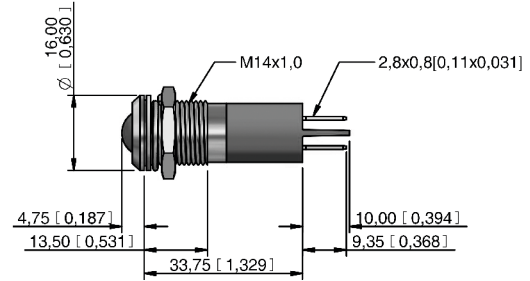


## PINS

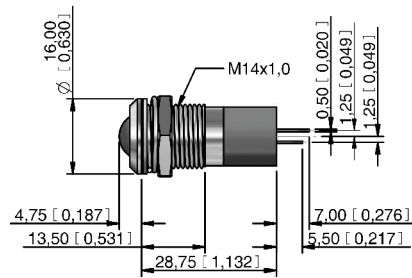

## REAR EPOXY PINS

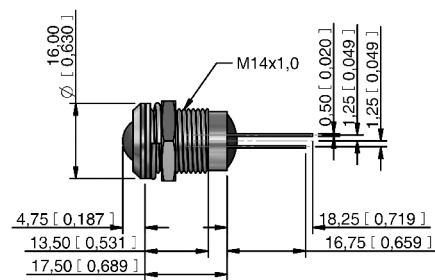


## SHORT BODY PINS

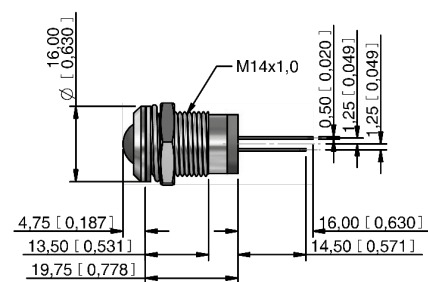


### FLUSH BEZEL




### WIRES

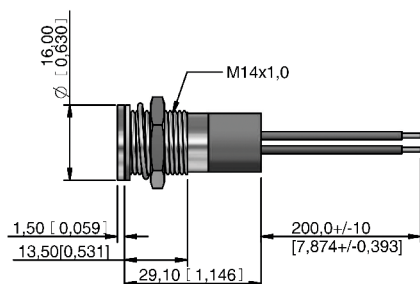


### REAR EPOXY WIRES

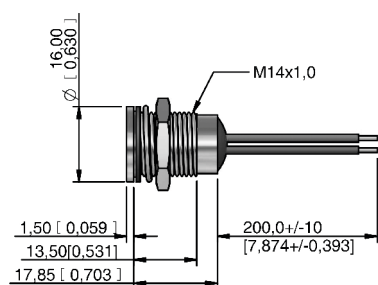


### SHORT BODY WIRES

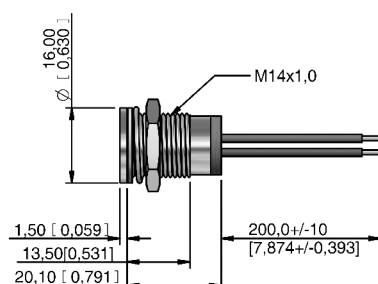


### SOLDER LUG/FASTON

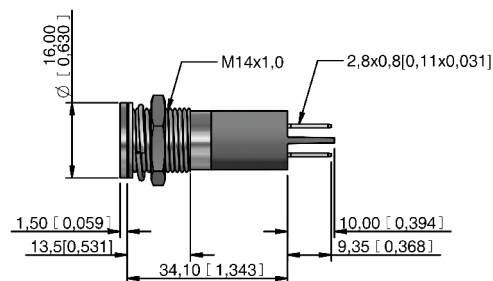


### PINS

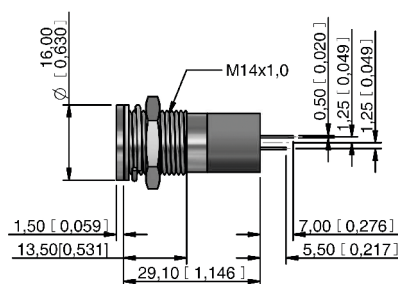

### REAR EPOXY PINS

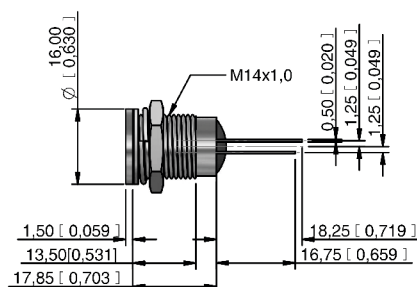

### SHORT BODY PINS

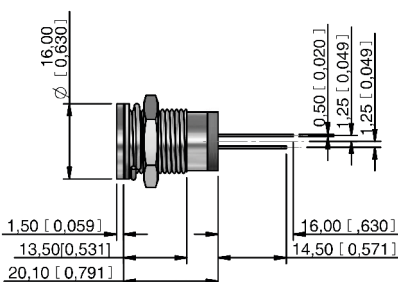

# Q14 series

Ø14 mm panel mount LED indicators

## RECESSED BEZEL




### WIRES



### REAR EPOXY WIRES



### SHORT BODY WIRES

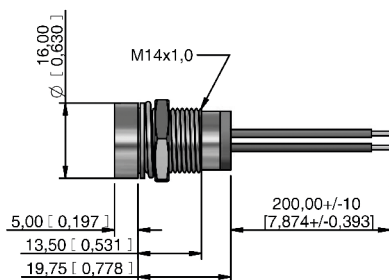

## SOLDER LUG/FASTON




### PINS



### REAR EPOXY PINS



### SHORT BODY PINS

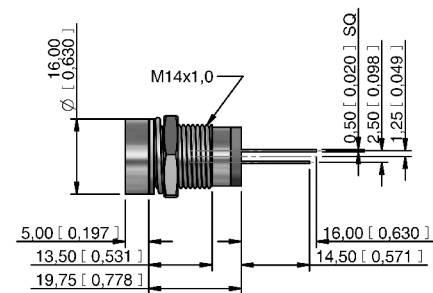

# Q14 series

Ø14 mm panel mount LED indicators



## CUSTOM ENGRAVING

Some common codes are listed above, for your custom requirements please contact APEM.  
Unless specified standard engraving with white infill will be supplied.  
Suffix the part number with legend code :



High beam  
-0AJ



Low beam  
-097



Rear fog  
-027



Front fog  
-026



Windscreen  
wiper  
-021



Windscreen  
washer  
-022



Ventilator  
fan  
-023



Turn Signal  
-0AH



Side lights  
-098



Horn  
-041



Hazard  
warning  
-013



Heating  
-018



Brake test  
-0BU



Arrow  
-0K6



Battery  
-0AG



Oil can  
-0GP



Windscreen  
heating  
-020



ABS  
-086



Engine coil  
-0EL



Seat belt  
-0SB



USB  
connection  
-0UB



Steam  
-0ST



ECU  
-0EU



Side step  
-0AD



Air con  
-012



Engine  
-040



Boot/Trunk  
Release  
-0BR



## CABLE LENGTH AND CONNECTOR



For custom cable length and connectors contact APEM.



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.