

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [0424108794](#)
Status: **Active**
Overview: [modular_plugs_jacks](#)
Description: Modular Jack, Vertical, 8/6

Documents:

3D Model	Product Specification PS-42410 (PDF)
Drawing (PDF)	RoHS Certificate of Compliance (PDF)

Agency Certification

CSA	LR19980
UL	E107635

General

Product Family	Modular Jacks/Plugs
Series	42410
Comments	Flush Mount Flangeless 2 PCB Thick
Component Type	PCB Jack
Magnetic	No
Overview	modular_plugs_jacks
Performance Category	3
Power over Ethernet (PoE)	N/A
Product Name	RJ45

Physical

Color - Resin	Black
Durability (mating cycles max)	500
Flammability	94V-0
Inverted / Top Latch	N/A
Lightpipes/LEDs	None
Material - Metal	Phosphor Bronze
Material - Plating Mating	Gold
Material - Plating Termination	Tin
Material - Resin	Polyester
Orientation	Vertical (Top Entry)
PCB Retention	Yes
PCB Thickness Recommended (in)	0.125 In
PCB Thickness Recommended (mm)	3.20 mm
Packaging Type	Tray
Pitch - Mating Interface (in)	0.050 In
Pitch - Mating Interface (mm)	1.27 mm
Ports	1
Positions / Loaded Contacts	8/6
Surface Mount Compatible (SMC)	No
Temperature Range - Operating	-40°C to +80°C
Termination Interface: Style	Through Hole
Wire/Cable Type	N/A

Electrical

Current - Maximum per Contact	1.5A
Shielded	No
Voltage - Maximum	125V

Solder Process Data

Duration at Max. Process Temperature (seconds)	5
Lead-free Process Capability	Wave Capable (TH only)
Max. Cycles at Max. Process Temperature	1




image - Reference only

Series

EU RoHS

**ELV and RoHS
Compliant**
REACH SVHC
Not Reviewed
**Halogen-Free
Status**
Not Reviewed

China RoHS



**Need more information on product
environmental compliance?**

Email productcompliance@molex.com
For a multiple part number RoHS Certificate of
Compliance, [click here](#)

Please visit the [Contact Us](#) section for any
non-product compliance questions.

Search Parts in this Series
[42410Series](#)

Mates With
FCC 68 Plugs

Process Temperature max. C	235
Material Info	
Reference - Drawing Numbers	
Packaging Specification	PK-42410-492
Product Specification	PS-42410
Sales Drawing	SDA-42410-****
Test Summary	TS-42878-001

This document was generated on 06/07/2010

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

20

19

18

17

16

15

14

13

12

11

42410

9

8

7

6

5

4

3

2



1

NOTES:


- 1) MATERIALS: HOUSING PARTS ARE MADE OF POLYESTER, RATED UL, 94 V-0, COLOR IS BLACK; TERMINALS ARE .015/(0.38) THICK PHOSPHOR BRONZE.
- 2) TERMINAL PLATING OPTIONS PER ES-88-***:
- A - SELECT GOLD IN CONTACT AREA; 50 MICROINCHES MIN.,
- *SELECT TIN IN PC TAIL AREA; 100 MICROINCHES MIN.,
- WITH OVERALL NICKEL UNDERPLATE; 50 MICROINCHES MIN.
- *THE PRIMARY SHIPPING CARTON WILL BE LABELED "COMPLIANT TO RoHS DIRECTIVE 2002/95/EC AND ELV ANNEX II OF DIRECTIVE 2000/53/EC". CARTONS WITHOUT THIS LABEL MAY CONTAIN PRODUCT WITH TIN-LEAD IN THE PC TAIL.
- 3) THESE MODULAR JACKS MEET THE PERFORMANCE REQUIREMENTS OF MOLEX PRODUCT SPECIFICATION PS-42410.
- 4) CONNECTORS ARE TO BE PACKED IN THERMOFORMED TRAYS, PER PACKAGING SPECIFICATION PK-42410-492.
- 5) ALL JACKS ARE DESIGNED TO BE USED WITH .062/(1.57) OR .125/(3.18) THICK P.C. BOARDS.
- 6) ALL JACKS CONFORM TO AND ACCEPT PLUGS WHICH CONFORM TO FCC RULES AND REGULATIONS PART 68, SUBPART F, WHEN PLATED WITH 50 MICROINCHES GOLD.
- 7) ALL JACKS MUST BE CAPABLE OF FITTING INTO MOLEX GAGE G-42410 (CONNECTOR SIZE 4).
- 8) SEE SHEETS 1 & 4 FOR CONNECTOR SIZE 4.
- 9) SEE SHEETS 2 & 4 FOR CONNECTOR SIZE 6.
- 10) SEE SHEET 4 FOR ASSEMBLY ITEM NUMBERS.
- 11) THIS MODULAR JACK ASSEMBLY IS ALSO AVAILABLE IN A UL 94V-0 RATED, GLASS-FILLED NYLON. (SEE MOLEX DRAWING SDA-43576)
- 12) ENGRAVED NUMBERS ON HOUSING BODY ARE FOR HOLDING IDENTIFICATION ONLY. THEY ARE NOT INTENDED FOR ASSEMBLY IDENTIFICATION PURPOSES.
- 13) ALL UNTOLERANCED DIMENSIONS ARE SHOWN FOR REFERENCE ONLY.

P.C. BOARD THICKNESS	DIM. "D" (MTG. PEGS)	DIM. "F" (P.C. TAILS)
.062/(1.57)	.128 (3.25)	.120 +.015/- .025 (3.05 +.38/- .63)
.125/(3.18)	.191 (4.85)	.205 +.015/- .025 (5.21 +.38/- .63)




CONNECTOR SIZE	CIRCUIT SIZE	DIM. "G"
8	8	.350 (8.89)
8	6	.250 (6.35)
8	4	.150 (3.81)
8	2	.050 (1.27)

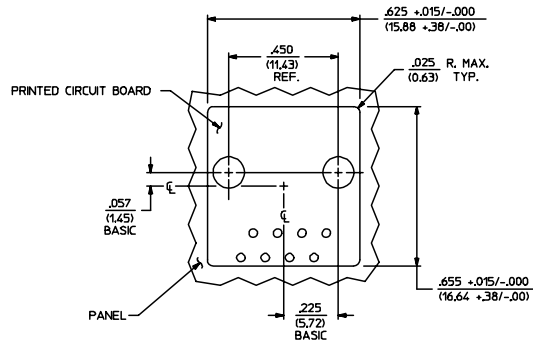

PANEL CUT-OUT FOR CONNECTOR SIZE 8

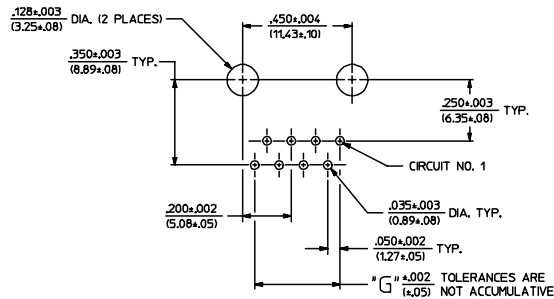

P.C. BOARD LAYOUT FOR CONNECTOR SIZE 8

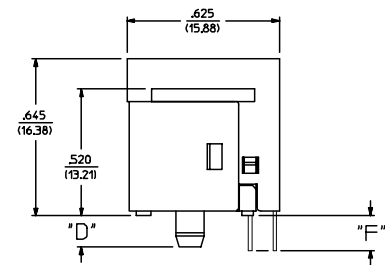

SIZE 8 MODULAR JACK LOADED WITH 8 TERMINALS SHOWN ABOVE

(SEE SHEET 4 FOR PART NUMBER AVAILABILITY)

SEE SHEET ONE EC NO. UFP2004-667 DRAWN: SCHMIDT 2004/03/03 CHKD: SCHMIDT 2004/03/03 APPR: F. SMITH 2004/03/03 REV	QUALITY SYMBOLS 0 0	GENERAL TOLERANCES (UNLESS SPECIFIED) 4 PLACES ± 3 PLACES ± 2 PLACES ± 1 PLACE ± ANGULAR ±1/2° DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	SCALE 4:1 DESIGN UNITS INCH DIMENSION STYLE IN/MM	THIRD ANGLE PROJECTION REVISE ON CAD ONLY	ASSEMBLY, VERTICAL MODULAR JACKS (CONNECTOR SIZE 8) MOLEX INCORPORATED MATERIAL NO. (DOCUMENT NO.) SEE SHEET 4 SDA-42410-**** 3 OF 4

	20	19	18	17	16	15	14	13	12	11	42410	9	8	7	6	5	4	3	2	1					
	SIZE 4 VERTICAL MODJACK ASSEMBLIES						SIZE 8 VERTICAL MODJACK ASSEMBLIES																		
	PART CHARACTERISTICS						PART CHARACTERISTICS																		
	ASSEMBLY ITEM NUMBER	EXTERNAL CONNECTOR SIZE	NUMBER OF POSITIONS	P.C. BOARD THICKNESS	MOUNTING EARS OPTION	TERMINAL PLATING OPTION	ASSEMBLY ITEM NUMBER	EXTERNAL CONNECTOR SIZE	NUMBER OF POSITIONS	P.C. BOARD THICKNESS	KEYING OPTION	MOUNTING EARS OPTION	TERMINAL PLATING OPTION												
	42410-4168	4 POS. BODY	4	.062/(1.57)	YES	A	42410-8312	8 POS. BODY	8	.062/(1.57)	NO	YES	A												
	42410-4170	↑	↑	.062/(1.57)	NO	A	42410-8314	↑	↑	.062/(1.57)	NO	NO	A												
	42410-4264	↓	↓	.125/(3.18)	YES	A	42410-8360	↑	↑	.062/(1.57)	YES	YES	A												
	42410-4266	4 POS. BODY	4	.125/(3.18)	NO	A	42410-8362	↑	↑	.062/(1.57)	YES	NO	A												
							42410-8504	↑	↑	.125/(3.18)	NO	YES	A												
	42410-4312	4 POS. BODY	2	.062/(1.57)	YES	A	42410-8506	↑	↑	.125/(3.18)	NO	NO	A												
	42410-4314	↑	↑	.062/(1.57)	NO	A	42410-8552	↓	↓	.125/(3.18)	YES	YES	A												
	42410-4408	↓	↓	.125/(3.18)	YES	A	42410-8554	8 POS. BODY	8	.125/(3.18)	YES	NO	A												
	42410-4410	4 POS. BODY	2	.125/(3.18)	NO	A																			
							42410-8600	8 POS. BODY	6	.062/(1.57)	NO	YES	A												
							42410-8602	↑	↑	.062/(1.57)	NO	NO	A												
							42410-8648	↑	↑	.062/(1.57)	YES	YES	A												
							42410-8650	↑	↑	.062/(1.57)	YES	NO	A												
							42410-8792	↑	↑	.125/(3.18)	NO	YES	A												
							42410-8794	↑	↑	.125/(3.18)	NO	NO	A												
							42410-8840	↓	↓	.125/(3.18)	YES	YES	A												
							42410-8842	8 POS. BODY	6	.125/(3.18)	YES	NO	A												
							42410-8888	8 POS. BODY	4	.062/(1.57)	NO	YES	A												
							42410-8890	↑	↑	.062/(1.57)	NO	NO	A												
							42410-8936	↑	↑	.062/(1.57)	YES	YES	A												
							42410-8938	↑	↑	.062/(1.57)	YES	NO	A												
							42410-9080	↑	↑	.125/(3.18)	NO	YES	A												
							42410-9082	↑	↑	.125/(3.18)	NO	NO	A												
							42410-9128	↓	↓	.125/(3.18)	YES	YES	A												
							42410-9130	8 POS. BODY	4	.125/(3.18)	YES	NO	A												
							42410-9176	8 POS. BODY	2	.062/(1.57)	NO	YES	A												
							42410-9178	↑	↑	.062/(1.57)	NO	NO	A												
							42410-9224	↑	↑	.062/(1.57)	YES	YES	A												
							42410-9226	↑	↑	.062/(1.57)	YES	NO	A												
							42410-9368	↑	↑	.125/(3.18)	NO	YES	A												
							42410-9370	↑	↑	.125/(3.18)	NO	NO	A												
							42410-9416	↓	↓	.125/(3.18)	YES	YES	A												
							42410-9418	8 POS. BODY	2	.125/(3.18)	YES	NO	A												

SEE SHEET ONE	EC NO. UCP2004-1617 DRAWN:LSCHMDT 2004/03/03 CHKD:LSCHMDT 2004/03/03 APPR:FSMTH 2004/03/03	DESCRIPTION	QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED)		SCALE ---	DESIGN UNITS INCH	THIRD ANGLE PROJECTION	REVISE ON CAD ONLY		
						DIMENSION STYLE IN/MM				TITLE ASSEMBLY, VERTICAL MODULAR JACKS	
				4 PLACES	± --- ± ---	DRAWN BY	DATE				
				3 PLACES	± --- ± ---	GLT	1990/10/12				
				2 PLACES	± --- ± ---	CHECKED BY	DATE	MOLEX INCORPORATED	MATERIAL NO. SEE CHART	DOCUMENT NO. SDA-42410-****	SHEET NO. 4 OF 4
				1 PLACE	± --- ± ---	BAP	1990/10/12				
				ANGULAR ±1/2°							
				DRAFT WHERE APPLICABLE							
				MUST REMAIN WITHIN DIMENSIONS							
				THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION							

1b_frame_D_P_ME.T Rev. C 2002/05/05	19	18	17	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1	
--	----	----	----	----	----	----	----	----	----	----	---	---	---	---	---	---	---	---	---	--

SEE SHEET ONE
EC NO: UFP2004-1617
DRAWN: SCHMIDT 2004/03/03
CHKD: SCHMIDT 2004/03/03
APPR: F. SMITH 2004/03/03
N

QUALITY SYMBOLS
▽ 0
▽ 0
DESCRIPTION
REV

GENERAL TOLERANCES (UNLESS SPECIFIED)
4 PLACES ± --- ± ---
3 PLACES ± --- ± ---
2 PLACES ± --- ± ---
1 PLACE ± --- ± ---
ANGULAR ±1/2°
DRAFT WHERE APPLICABLE
MUST REMAIN WITHIN DIMENSIONS

SCALE

INCH
DIMENSION STYLE
IN/MM
DRAWN BY DATE
GLT 1990/10/12
CHECKED BY DATE
BAP 1990/10/12
APPROVED BY DATE
RAS 1990/10/12

THIRD ANGLE PROJECTION
REVISE ON CAD ONLY
TITLE
ASSEMBLY, VERTICAL MODULAR JACKS
MATERIAL NO. MOLEX INCORPORATED
DOCUMENT NO. SDA-42410-****
SHEET NO. 4 OF 4
THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.