

\*RoHS COMPLIANT



**BOURNS®**

## Features

- Virtually infinite electrical circuit isolation
- Sealed for board wash
- Metal or plastic shaft options
- RoHS compliant\*

## Model 96 - 5/8 " Square Sealed Single-Turn Panel Control

| Initial Electrical Characteristics <sup>1</sup>                                   | Conductive Plastic Element                     | Cermet Element                        |
|---|--|---------------------------------------|
| Standard Resistance Range   |  |                                       |
| Linear Tapers (A, B, E, & H).....   | (B & E) 1 K ohms to 1 megohm.....              | (A & H) 100 ohms to 1 megohm          |
| Audio Tapers (C, D, F, G, S, & T).....  | (D,G,S, & T) 1 K ohms to 1 megohm.....         | (C & F) 1 K ohms to 1 megohm          |
| Total Resistance Tolerance.....   | 10 % or 20 %.....                              | 5% or 10%                             |
| Independent Linearity.....  | ±5 %.....                                      | ±5 %                                  |
| Absolute Minimum Resistance.....  | 2 ohms maximum.....                            | 2 ohms maximum                        |
| Effective Electrical Angle.....   | (Linear tapers) 240 ° ± 5 °.....               | (Linear tapers) 240 ° ± 6 °           |
|   | (Audio tapers) 225 ° ± 5 °.....                | (Audio tapers) 225 ° ± 6 °            |
| Contact Resistance Variation.....   | ±1 %.....                                      | ±1 % or 3 ohms (whichever is greater) |
| Dielectric Withstanding Voltage (MIL-STD-202, Method 301)                         |  |                                       |
| Sea Level.....  | 1,500 VAC minimum.....                         | 1,500 VAC minimum                     |
| 70,000 Feet.....  | 500 VAC minimum.....                           | 500 VAC minimum                       |
| Insulation Resistance (500 VDC).....  | 1,000 megohms minimum.....                     | 1,000 megohms minimum                 |
| Power Rating (Voltage Limited By Power Dissipation or 350 VAC, Whichever Is Less) |  |                                       |
| +70 °C Single Section Assembly.....   | (Linear tapers) 1 watt.....                    | (Linear tapers) 2 watts               |
|   | (Audio tapers) 0.5 watt.....                   | (Audio tapers) 1 watt                 |
| +125 °C.....  | 0 watt.....                                    | 0 watt                                |
| Theoretical Resolution.....   | Essentially infinite.....                      | Essentially infinite                  |
| <b>Environmental Characteristics<sup>1</sup></b>                                  |  |                                       |
| Operating Temperature Range.....  | -40 °C to +125 °C.....                         | -40 °C to +125 °C                     |
| Storage Temperature Range.....  | -55 °C to +125 °C.....                         | -55 °C to +125 °C                     |
| Temperature Coefficient Over Storage  |  |                                       |
| Temperature Range.....  | ±1,000 ppm/°C.....                             | ±150 ppm/°C                           |
| Vibration (Single Section).....   | 15 G.....                                      | 15 G                                  |
| Total Resistance Shift.....   | ±2 % maximum.....                              | ±2 % maximum                          |
| Voltage Ratio Shift.....  | ±5 % maximum.....                              | ±5 % maximum                          |
| Shock (Single Section).....   | 30 G.....                                      | 30 G                                  |
| Total Resistance Shift.....   | ±2 % maximum.....                              | ±2 % maximum                          |
| Voltage Ratio Shift.....  | ±5 % maximum.....                              | ±5 % maximum                          |
| Load Life.....  | 1,000 hours.....                               | 1,000 hours                           |
| Total Resistance Shift.....   | ±10 % maximum.....                             | ±5 % maximum                          |
| Rotational Life (No Load).....  | 100,000 cycles.....                            | 100,000 cycles                        |
| Total Resistance Shift.....   | (Linear tapers) 10 ohms or ±15 % TRS max. .... | (All tapers) ±5 % TRS max.            |
|   | (whichever is greater)                         |                                       |
|   | (Audio tapers) ±20 % maximum                   |                                       |
| Contact Resistance Variation  |  |                                       |
| @ 50,000 cycles.....  | (Linear tapers) ±2 %.....                      | ±2 %                                  |
|   | (Audio tapers) ±3 %.....                       | ±3 %                                  |
| Moisture Resistance (MIL-STD-202, Method 103, Condition B)                        |  |                                       |
| Total Resistance Shift.....   | (Linear tapers) ±10 % TRS maximum.....         | (All tapers) ±5 % TRS maximum         |
|   | (Audio tapers) ±20 % TRS maximum               |                                       |
| Insulation Resistance (500 VDC).....  | 100 megohms minimum.....                       | 100 megohms minimum                   |
| IP Rating.....  | IP 65.....                                     | IP 65                                 |

\*RoHS Directive 2002/95/EC Jan. 27, 2003 including annex and RoHS Recast 2011/65/EU June 8, 2011.  
 Specifications are subject to change without notice.  
 Customers should verify actual device performance in their specific applications.

# Model 96 - 5/8 " Square Sealed Single-Turn Panel Control

**BOURNS®**

## Mechanical Characteristics<sup>1</sup>


|   |  |
|---|--|
| Stop Strength (1/4 " D shaft) .....           | 45.19 N-cm (4 lb.-in.)   |
| (1/8 " D shaft) .....                         | 33.89 N-cm (3 lb.-in.)   |
| Mechanical Angle.....                         | 300 ° ±5 °   |
| Torque  |  |
| Starting .....                                | 0.3 max. above average running torque  |
| Running Torque                                |  |
| Single or Dual Section (A & R Bushings) ..... | 0.21 to 1.06 N-cm (0.3 to 1.5 oz.-in.)   |
| Single or Dual Section (C & U Bushings).....  | 0.14 to 1.06 N-cm (0.2 to 1.5 oz.-in.)   |
| Mounting .....                                | 1.7-2.0 N-m (15-18 lb.-in.) maximum  |
| Variation.....                                | 0.35 N-cm (0.5 oz.-in.) maximum in 45 ° shaft travel   |
| Weight (Single Section, Metal Bushing).....   | 12.7 grams nominal   |
| Terminals .....                               | Printed circuit terminals, J-Hooks or solder lugs  |
| Soldering Condition .....                     | Recommended hand soldering using Sn95/Ag5 no clean solder, 0.025 " wire diameter.<br>Maximum temperature 399 °C (750 °F) for 3 seconds. Immersion wash is not recommended. |
| Marking .....                                 | Manufacturer's trademark, date code, resistance, manufacturer's part number  |
| Hardware.....                                 | One lockwasher and one mounting nut is shipped with each potentiometer, except where noted in the part number.   |

NOTE: Performance specifications do not apply to units subjected to printed circuit board immersion cleaning processes.


<sup>1</sup>At room ambient: +25 °C nominal and 50 % relative humidity nominal, except as noted.

## Product Dimensions

### Model 96 PC Pin Terminals, In-Line

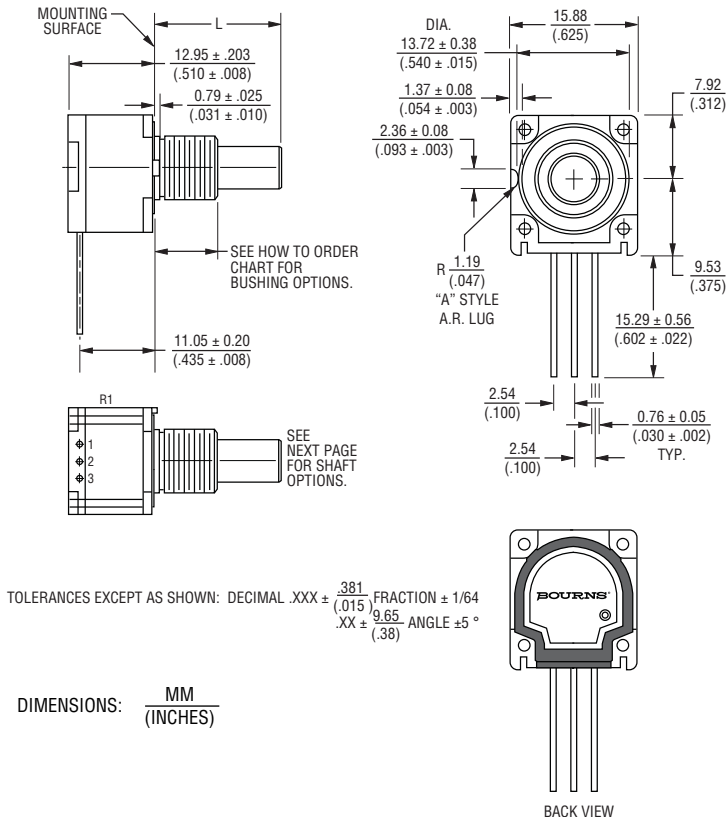

### Shaft Flat Orientation

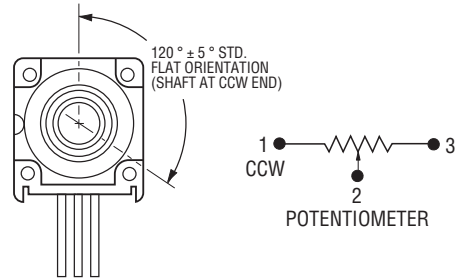


# Model 96 - 5/8" Square Sealed Single-Turn Panel Control

# BOURNS®

## Product Dimensions

### Plastic Shaft Styles


**SHAFT TYPE "B"** (USES BUSHING A)



STD. LENGTHS:

|                 |                 |                 |                 |
|-----------------|-----------------|-----------------|-----------------|
| 12.70<br>(.500) | 15.88<br>(.625) | 19.05<br>(.750) | 22.23<br>(.875) |
|-----------------|-----------------|-----------------|-----------------|


**SHAFT TYPE "D"** (USES BUSHING C)



STD. LENGTHS:

|                 |                 |                 |
|-----------------|-----------------|-----------------|
| 12.70<br>(.500) | 15.88<br>(.625) | 19.05<br>(.750) |
|-----------------|-----------------|-----------------|


**SHAFT TYPE "T"** (USES BUSHING U)



STD. LENGTHS:

|                |                |
|----------------|----------------|
| 16.0<br>(.630) | 22.0<br>(.866) |
|----------------|----------------|


**SHAFT TYPE "C"** (USES BUSHING A)



STD. LENGTHS:

|                 |                 |
|-----------------|-----------------|
| 19.05<br>(.750) | 22.23<br>(.875) |
|-----------------|-----------------|


**SHAFT TYPE "R"** (USES BUSHING R)



STD. LENGTHS:

|                |                |
|----------------|----------------|
| 16.0<br>(.630) | 22.0<br>(.866) |
|----------------|----------------|

**SHAFT TYPE "W"** (USES BUSHING A)




STD. LENGTHS:

|                 |
|-----------------|
| 25.40<br>(1.00) |
|-----------------|

### Metal Shaft Styles


**SHAFT TYPE "A"** (USES BUSHING A)



STD. LENGTHS:

|                 |                 |                 |                 |                 |
|-----------------|-----------------|-----------------|-----------------|-----------------|
| 12.70<br>(.500) | 15.88<br>(.625) | 19.05<br>(.750) | 22.23<br>(.875) | 25.4<br>(1.000) |
|-----------------|-----------------|-----------------|-----------------|-----------------|

**SHAFT TYPE "H"** (USES BUSHING A)




STD. LENGTHS:

|                 |                 |
|-----------------|-----------------|
| 19.05<br>(.750) | 22.23<br>(.875) |
|-----------------|-----------------|

FLAT LENGTH "F":

|                |                 |
|----------------|-----------------|
| 7.95<br>(.313) | 11.13<br>(.438) |
|----------------|-----------------|

**SHAFT TYPE "S"** (USES BUSHING R)

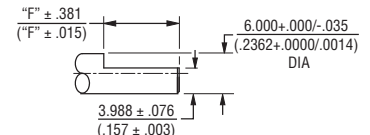


STD. LENGTHS:

|                 |                 |
|-----------------|-----------------|
| 19.05<br>(.750) | 22.23<br>(.875) |
|-----------------|-----------------|

FLAT LENGTH "F":

|                |                 |
|----------------|-----------------|
| 9.98<br>(.393) | 12.98<br>(.511) |
|----------------|-----------------|


**SHAFT TYPE "E"** (USES BUSHING C)



STD. LENGTHS:

|                |                |                |
|----------------|----------------|----------------|
| 12.0<br>(.500) | 16.0<br>(.625) | 19.0<br>(.750) |
|----------------|----------------|----------------|


**SHAFT TYPE "J"** (USES BUSHING R)



STD. LENGTHS:

|                |                |
|----------------|----------------|
| 16.0<br>(.630) | 22.0<br>(.866) |
|----------------|----------------|


**SHAFT TYPE "V"** (USES BUSHING U)



STD. LENGTHS:

|                 |                 |
|-----------------|-----------------|
| 19.05<br>(.750) | 22.23<br>(.875) |
|-----------------|-----------------|

**SHAFT TYPE "G"** (USES BUSHING A)

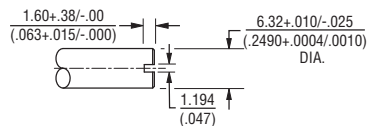

STD. LENGTHS:

|                 |                 |                 |                 |
|-----------------|-----------------|-----------------|-----------------|
| 12.70<br>(.500) | 15.88<br>(.625) | 19.05<br>(.750) | 22.23<br>(.875) |
|-----------------|-----------------|-----------------|-----------------|

TOLERANCES EXCEPT AS SHOWN: .XX = ± .02 (.050)  
 .XXX = ± .005 (.127)  
 .XXXX = ± .0005 (.0127)

DIMENSIONS:  $\frac{\text{MM}}{\text{(INCHES)}}$

# How to Order Model 96 Panel Controls

**BOURNS®**

96 A 1 A - A 28 - A 15 L

| ANTI-ROTATION LUG |                                 |
|-------------------|---------------------------------|
| A                 | Single .305" (7.8 mm) R, 90 °CW |
| D                 | No Lug                          |

| # SECTIONS |        |
|------------|--------|
| 1          | Single |

| BUSHING |   |
|---------|---|
| A       | Metal Plain 3/8" (9.53 mm) D x 3/8" (9.53 mm) L |
| C       | Metal Plain 1/4" (6.35 mm) D x 1/4" (6.35 mm) L |
| R       | Metal Plain 10 mm D x 9 mm L                    |
| U       | Metal Plain 7 mm D x 9 mm L                     |

| MODEL |                                      |
|-------|--------------------------------------|
| 96    | Single-Turn, In-Line PC Pins, Sealed |

| SHAFT LENGTH (FMS) |             | AVAILABLE ONLY IN BUSHING |
|--------------------|-------------|---------------------------|
| Code               | Description | Code                      |
| 16                 | 1/2" L      | A, C                      |
| 20                 | 5/8" L      | A, C                      |
| 24                 | 3/4" L      | A, C                      |
| 28                 | 7/8" L      | A                         |
| 32                 | 1" L        | A                         |
| METRIC             |             |                           |
| 16                 | 16 mm L     | R, U                      |
| 22                 | 22 mm L     | R, U                      |

| RoHS IDENTIFIER |           |
|-----------------|-----------|
| L               | Compliant |

| SHAFT TYPE                                       | AVAILABLE ONLY IN |                 |
|--|-------------------|-----------------|
|  | LENGTHS (CODE)    | BUSHINGS (CODE) |
| <b>B</b> Plastic Single Slotted 1/4" (6.35 mm) D | 16, 20, 24, 28    | <b>A</b>        |
| <b>C</b> Plastic Single Flatted 1/4" (6.35 mm) D | 24, 28            | <b>A</b>        |
| D Plastic Single Plain 1/8" (3.18 mm) D          | 16, 20, 24        | C               |
| <b>R</b> Plastic Single Slotted 6 mm D           | Metric 16, 22     | R               |
| <b>T</b> Plastic Single Slotted 4 mm D           | Metric 16, 22     | U               |
| W Plastic Single Knurled 1/4" (6.35 mm) D        | 32                | A               |
| <b>A</b> Metal Single Plain 1/4" (6.35 mm) D     | 16, 20, 24        | <b>A</b>        |
| <b>E</b> Metal Single Slotted 1/8" (3.18 mm) D   | 16, 20, 24        | <b>C</b>        |
| <b>G</b> Metal Single Slotted 1/4" (6.35 mm) D   | 16, 20, 24, 28    | <b>A</b>        |
| <b>H</b> Metal Single Flatted 1/4" (6.35 mm) D   | 24, 28            | <b>A</b>        |
| <b>J</b> Metal Single Slotted 6 mm D             | Metric 16, 22     | R               |
| <b>S</b> Metal Single Flatted 6 mm D             | Metric 16, 22     | R               |
| <b>V</b> Metal Single Slotted 4 mm D             | Metric 16, 22     | U               |

| ELEMENT TAPER TYPE/TOLERANCE |   | RESISTANCE CODE VALUE IN OHMS |                     |
|------------------------------|---|-------------------------------|---------------------|
| <b>(A)</b><br>(H)            | Linear Cermet ±10 %<br>Linear Cermet ±5 % | (05) - 100                    | (30) - 15 K         |
|                              |   | (28) - 150                    | (16) - 20 K         |
| <b>(B)</b><br>(E)            | Linear C-P ±20 %<br>Linear C-P ±10 %      | (06) - 200                    | (17) - 25 K         |
|                              |   | (07) - 250                    | <b>(18) - 50 K</b>  |
|                              |   | (08) - 500                    | <b>(20) - 100 K</b> |
|                              |   | <b>(10) - 1 K</b>             | (21) - 200 K        |
|                              |   | (11) - 2 K                    | (22) - 250 K        |
|                              |   | (12) - 2.5 K                  | (23) - 500 K        |
|                              |   | <b>(13) - 5 K</b>             | (25) - 1 M          |
|                              |   | <b>(15) - 10 K</b>            |                     |
|                              |   | <b>(10) - 1 K</b>             | <b>(18) - 50 K</b>  |
|                              |   | <b>(20) - 100 K</b>           | <b>(22) - 250 K</b> |
| <b>(13) - 5 K</b>            | <b>(23) - 500 K</b>                       |                               |                     |
| <b>(15) - 10 K</b>           | <b>(25) - 1 M</b>                         |                               |                     |
| (C)                          | CW Audio Cermet ±10 %                     | (10) - 1 K                    | (18) - 50 K         |
| (D)                          | CW Audio C-P ±20 %                        | (12) - 2.5 K                  | (20) - 100 K        |
| (F)                          | CCW Audio Cermet ±10 %                    | (13) - 5 K                    | (22) - 250 K        |
| (G)                          | CCW Audio C-P ±20 %                       | (15) - 10 K                   | (23) - 500 K        |
| (S)                          | CW Audio C-P ±10 %                        | (17) - 25 K                   | (25) - 1 M          |
| (T)                          | CCW Audio C-P ±10 %                       |                               |                     |

*Boldface features are Bourns standard options. All others are available with higher minimum order quantities.*



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



#### Как с нами связаться

**Телефон:** 8 (812) 309 58 32 (многоканальный)

**Факс:** 8 (812) 320-02-42

**Электронная почта:** [org@eplast1.ru](mailto:org@eplast1.ru)

**Адрес:** 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.