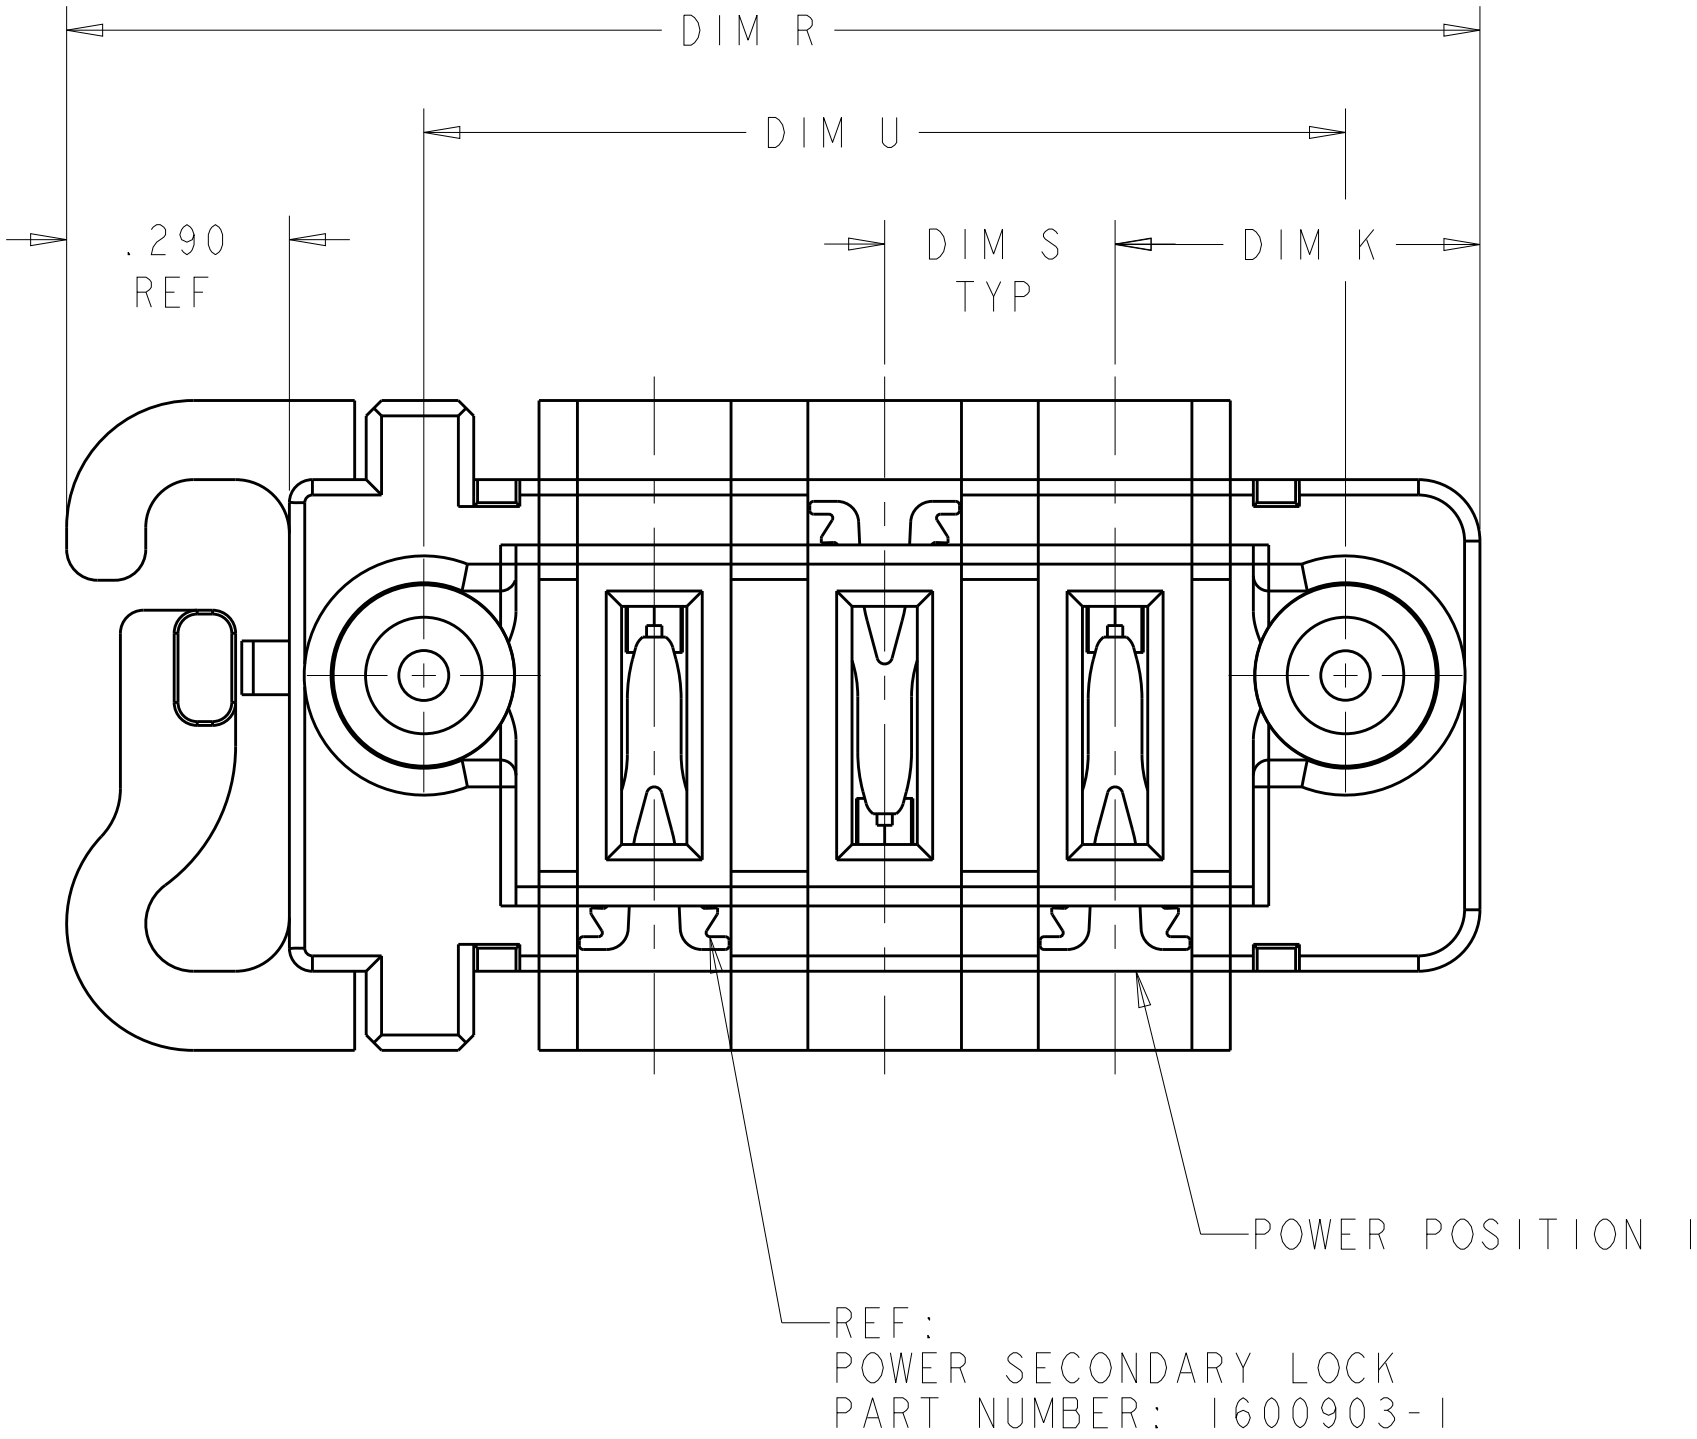
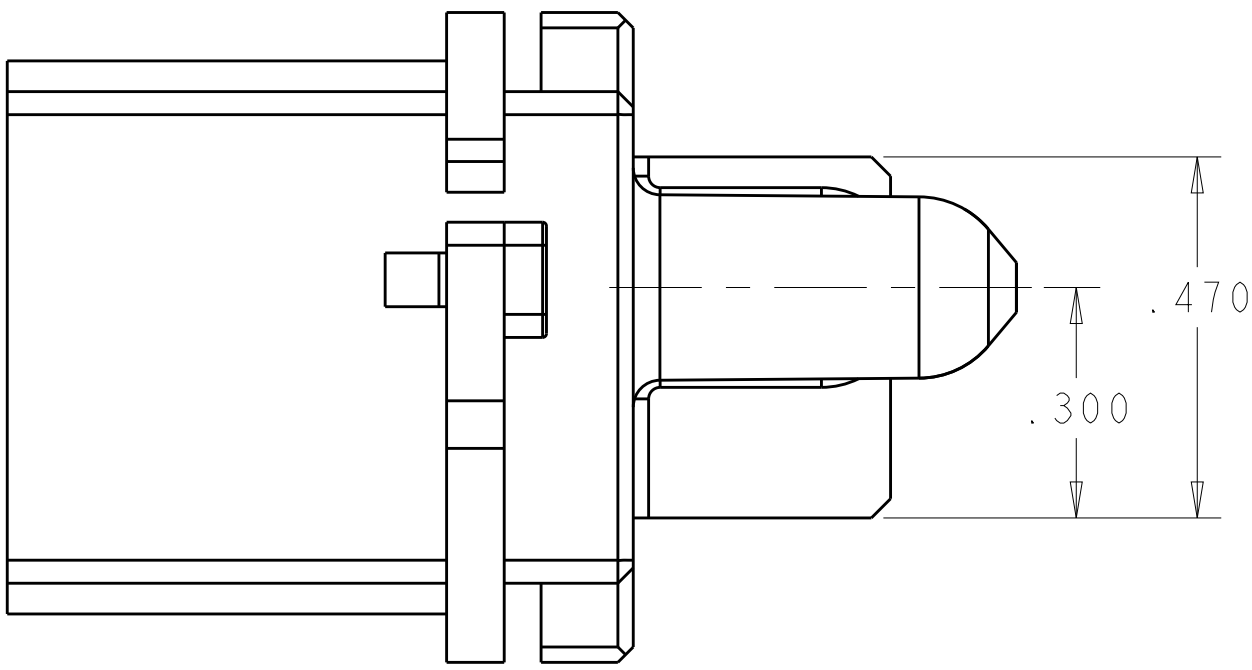
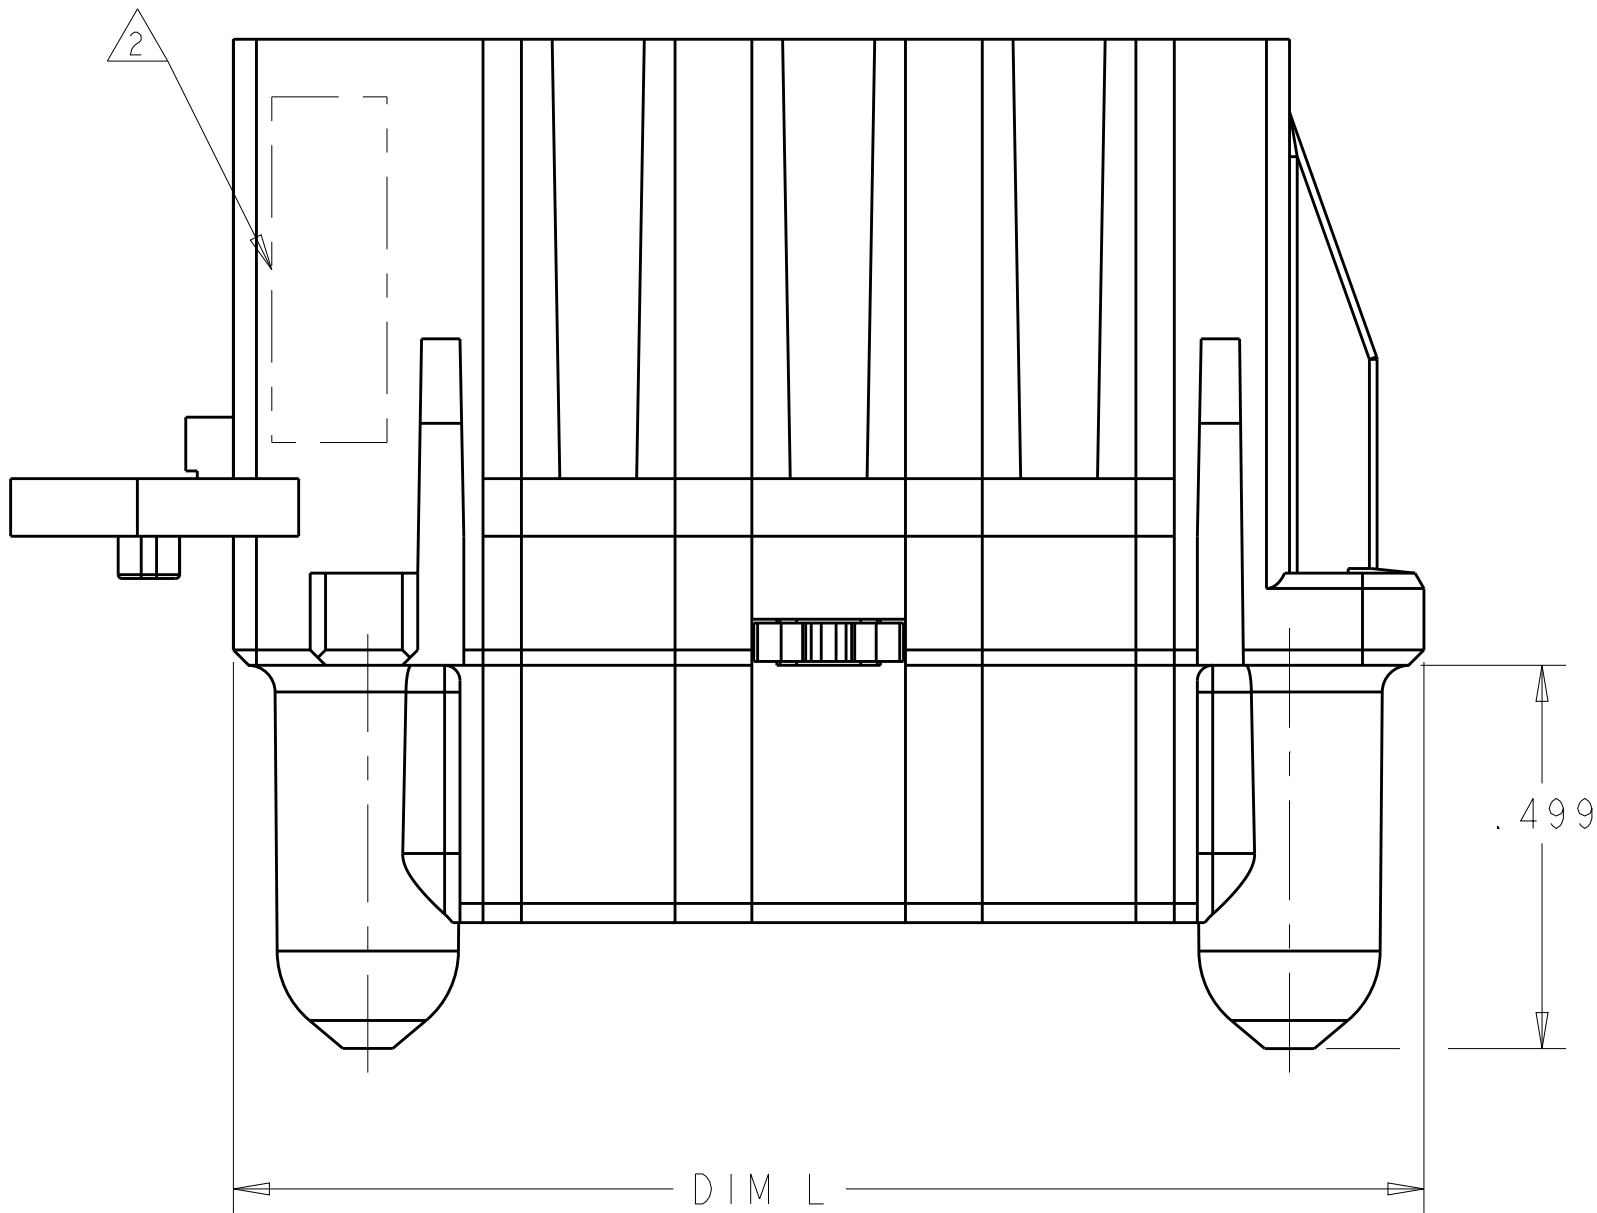


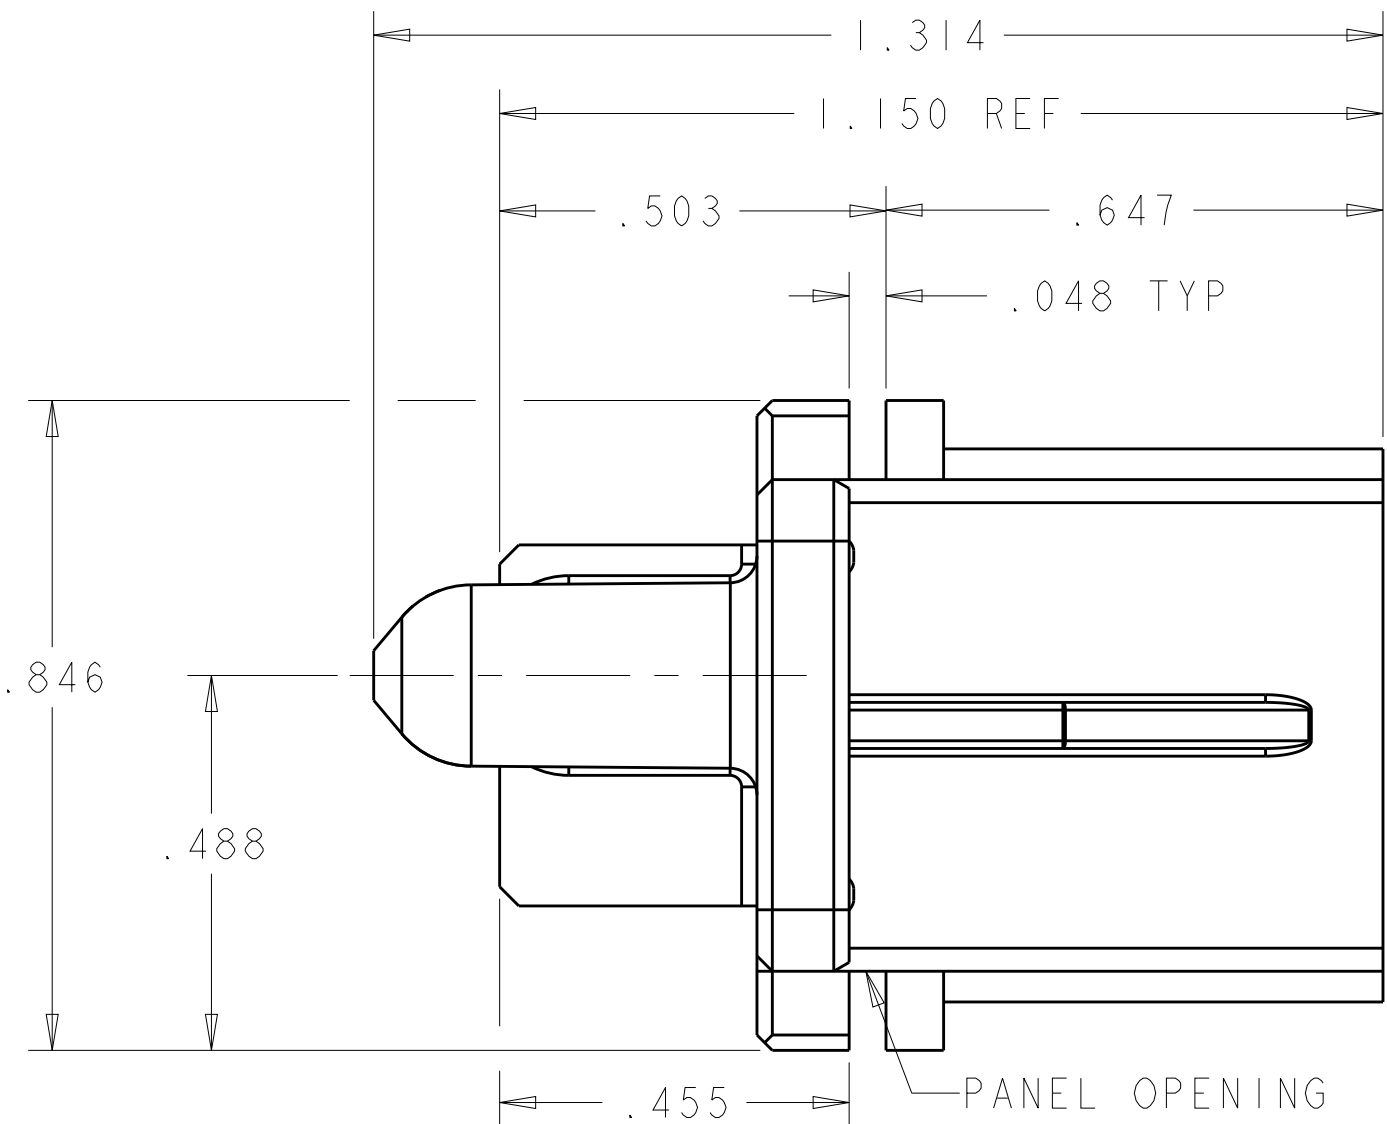
LOC		DIST		REVISIONS				
ES	00	P	LTR	DESCRIPTION	DATE	DWN	APVD	
		D9		ADD NEW DASH NUMBER -19	09AUG2012	ML	SZ	
		d9						

- 1 MATERIAL: THERMO PLASTIC, UL94 V-0.
- 2 COMPANY TRADEMARK, PART NUMBER, AND DATE CODE TO BE MARKED IN AREA SHOWN.
- 3 PANEL THICKNESS = .040±.005
- 4 CONNECTOR KEEP OUT ZONE.
- 5 POWER CONTACT REFERENCE:
PART NUMBER: 1600960 & 1600961
MATERIAL: COPPER ALLOY
FINISH (INTERFACE):.0000030 Au OVER .0000050 Ni
- 6 DASH NUMBERS INDICATED ARE NOT RELEASED FOR PRODUCTION.
- 7 VARIABLE DIMENSION SHOW ON THE TABLE.

ISOMETRIC VIEW



REF:
POWER SECONDARY LOCK
PART NUMBER: 1600903-1



D9	3.465	1	2.825	3.175	.525	6ACP(8AWG)	2-292499-0
D7	1.840	.300	1.200	1.550	.475	3ACP(8AWG)	1-292499-9
	2.365	.375	1.725	2.075	.475	4P(8AWG)	1-292499-8
	2.040	.375	1.400	1.750	.500	3ACP(8AWG)	1-292499-6
	2.190	.300	1.550	1.900	.500	4ACP(10AWG)	1-292499-5
	1.940	.200	1.300	1.650	.425	5HDP(12AWG)	1-292499-4
	3.465	1	2.825	3.175	.525	6ACP(10AWG)	1-292499-3
	2.340	.200	1.700	2.050	.425	7HDP(12AWG)	1-292499-2
6	2.440	.300	1.800	2.150	.475	5ACP(8AWG)	1-292499-1
	2.440	.250	1.800	2.150	.450	6P(12AWG)	292499-8
	2.940	.250	2.300	2.650	.450	8P(12AWG)	292499-7
	1.940	.250	1.300	1.650	.450	4P(12AWG)	292499-4
	2.140	.300	1.500	1.850	.475	4ACP(12AWG)	292499-3
	2.440	.300	1.800	2.150	.475	5ACP(12AWG)	292499-2
	1.840	.300	1.200	1.550	.475	3ACP(12AWG)	292499-1
	DIM R REF	DIM S	DIM U	DIM L	DIM K	DESCRIPTION	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN S. ZHAO 08AUG2006	TE Connectivity	
DIMENSIONS: INCHES		CHK S. ZHAO 08AUG2006		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD S. ZHAO	NAME SLIDE TO LOCK PANEL MOUNT CABLE RECEPTACLE HOUSING, WITH GUIDES, MULTI-BEAM XL	
0 PLC ±.01		PRODUCT SPEC		
1 PLC ±.01		108-2157	SIZE A100779	
2 PLC ±.005		APPLICATION SPEC		
3 PLC ±.002		114-13112	CAGE CODE 292499	
4 PLC ±.002		WEIGHT		
ANGLES		Customer Drawing	SCALE 1:1	
FINISH				
MATERIAL			SHEET 1 OF 3	
			REV E	

LOC		DIST		REVISIONS			
ES	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
		-		SEE SHEET 1	-	-	-

PART NUMBER	ROWS		POWER			
			P3	P2	P1	
292499-1	D C B A		 RM	 RA	 RM	
3ACP						

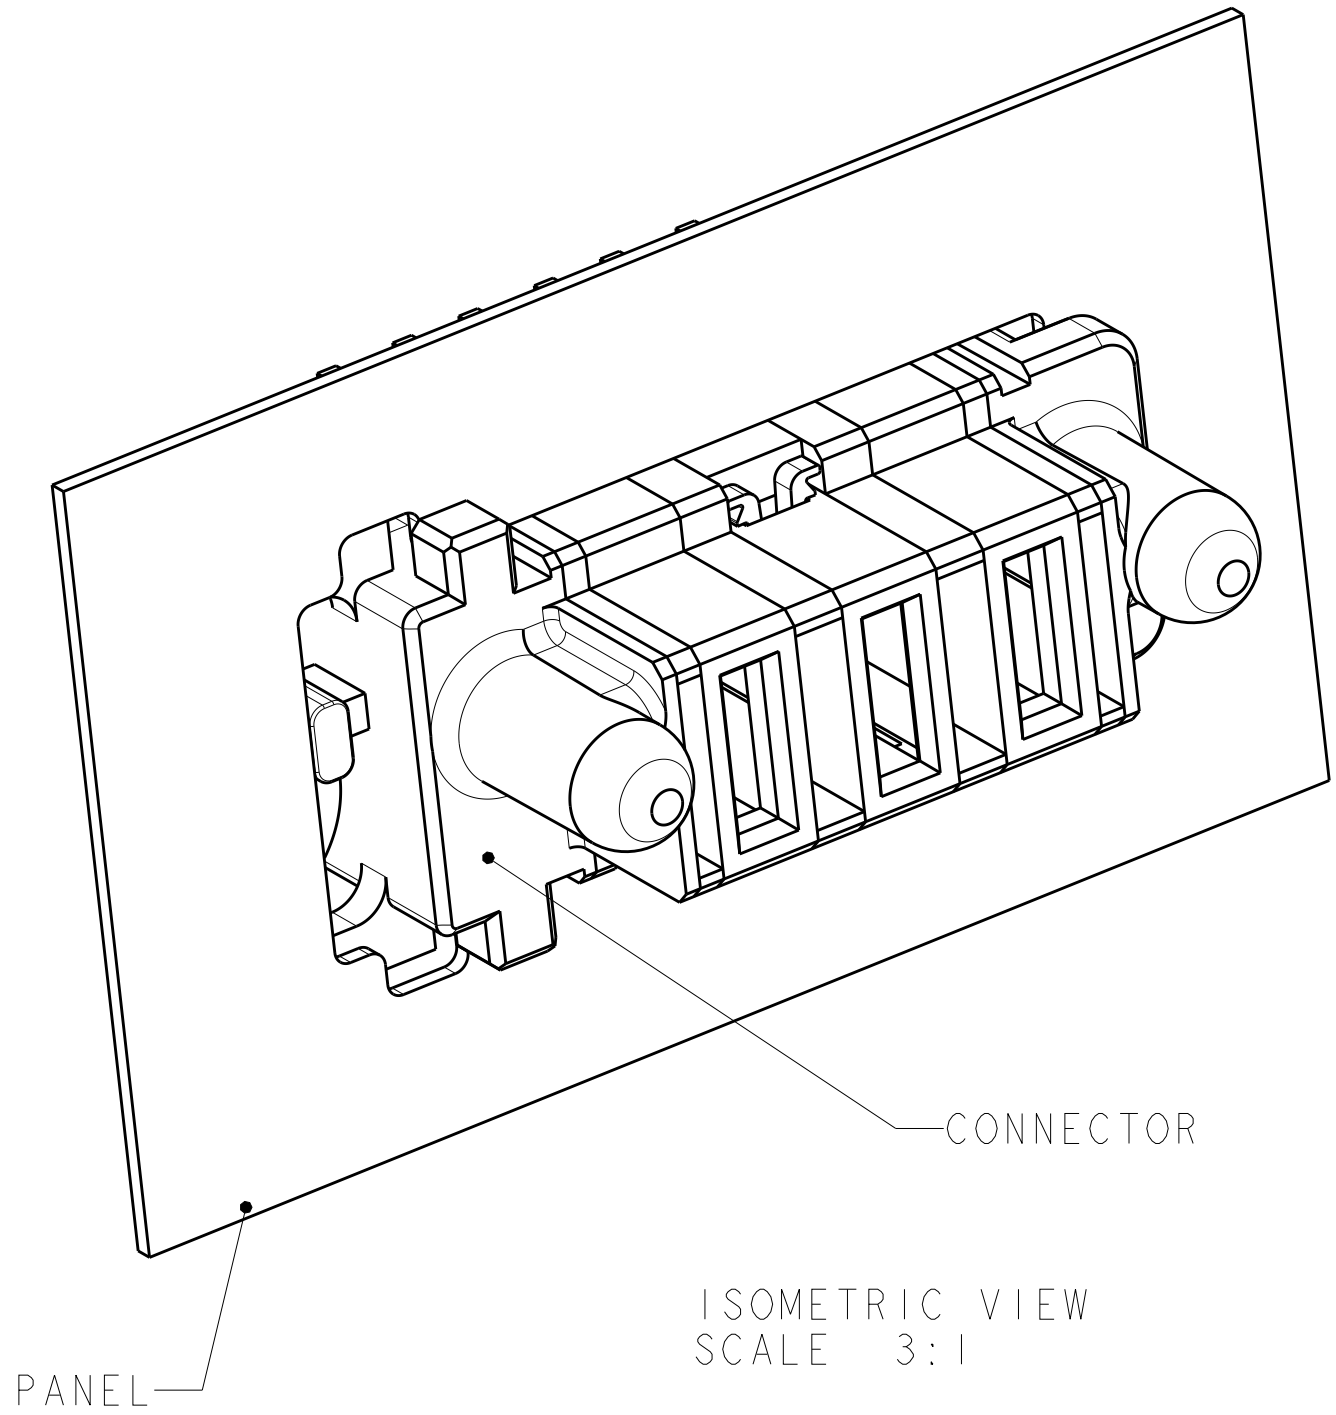
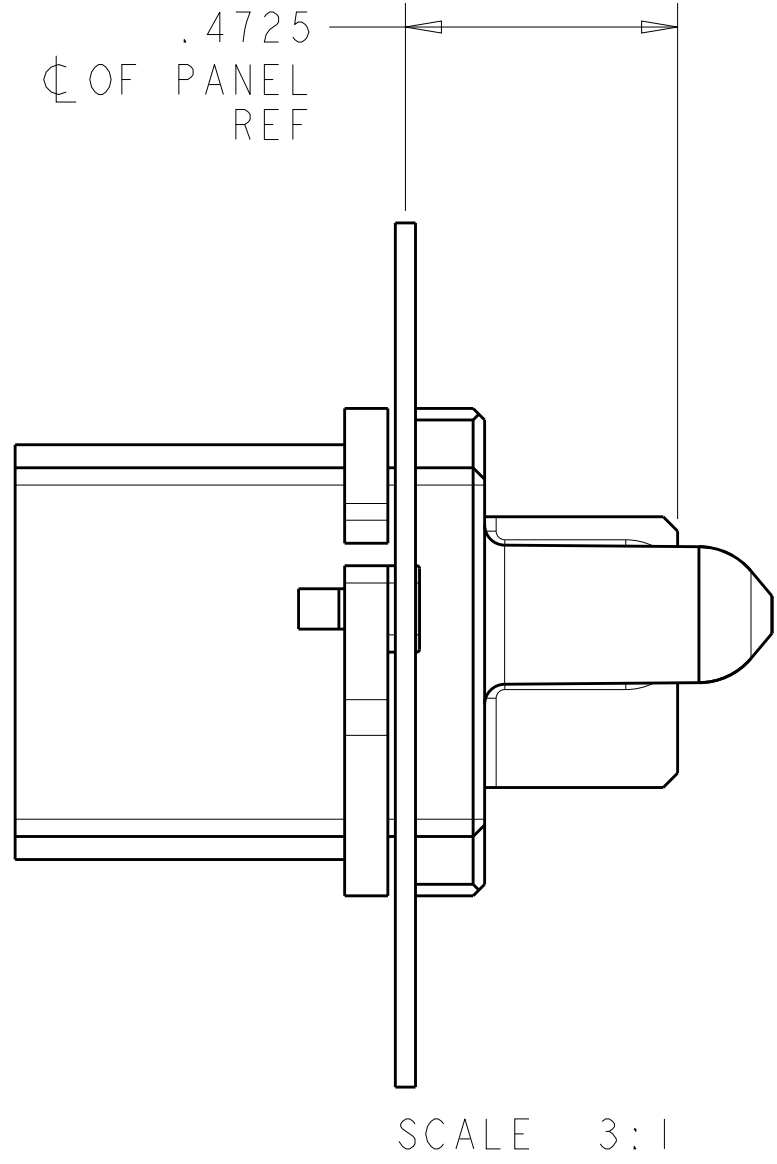
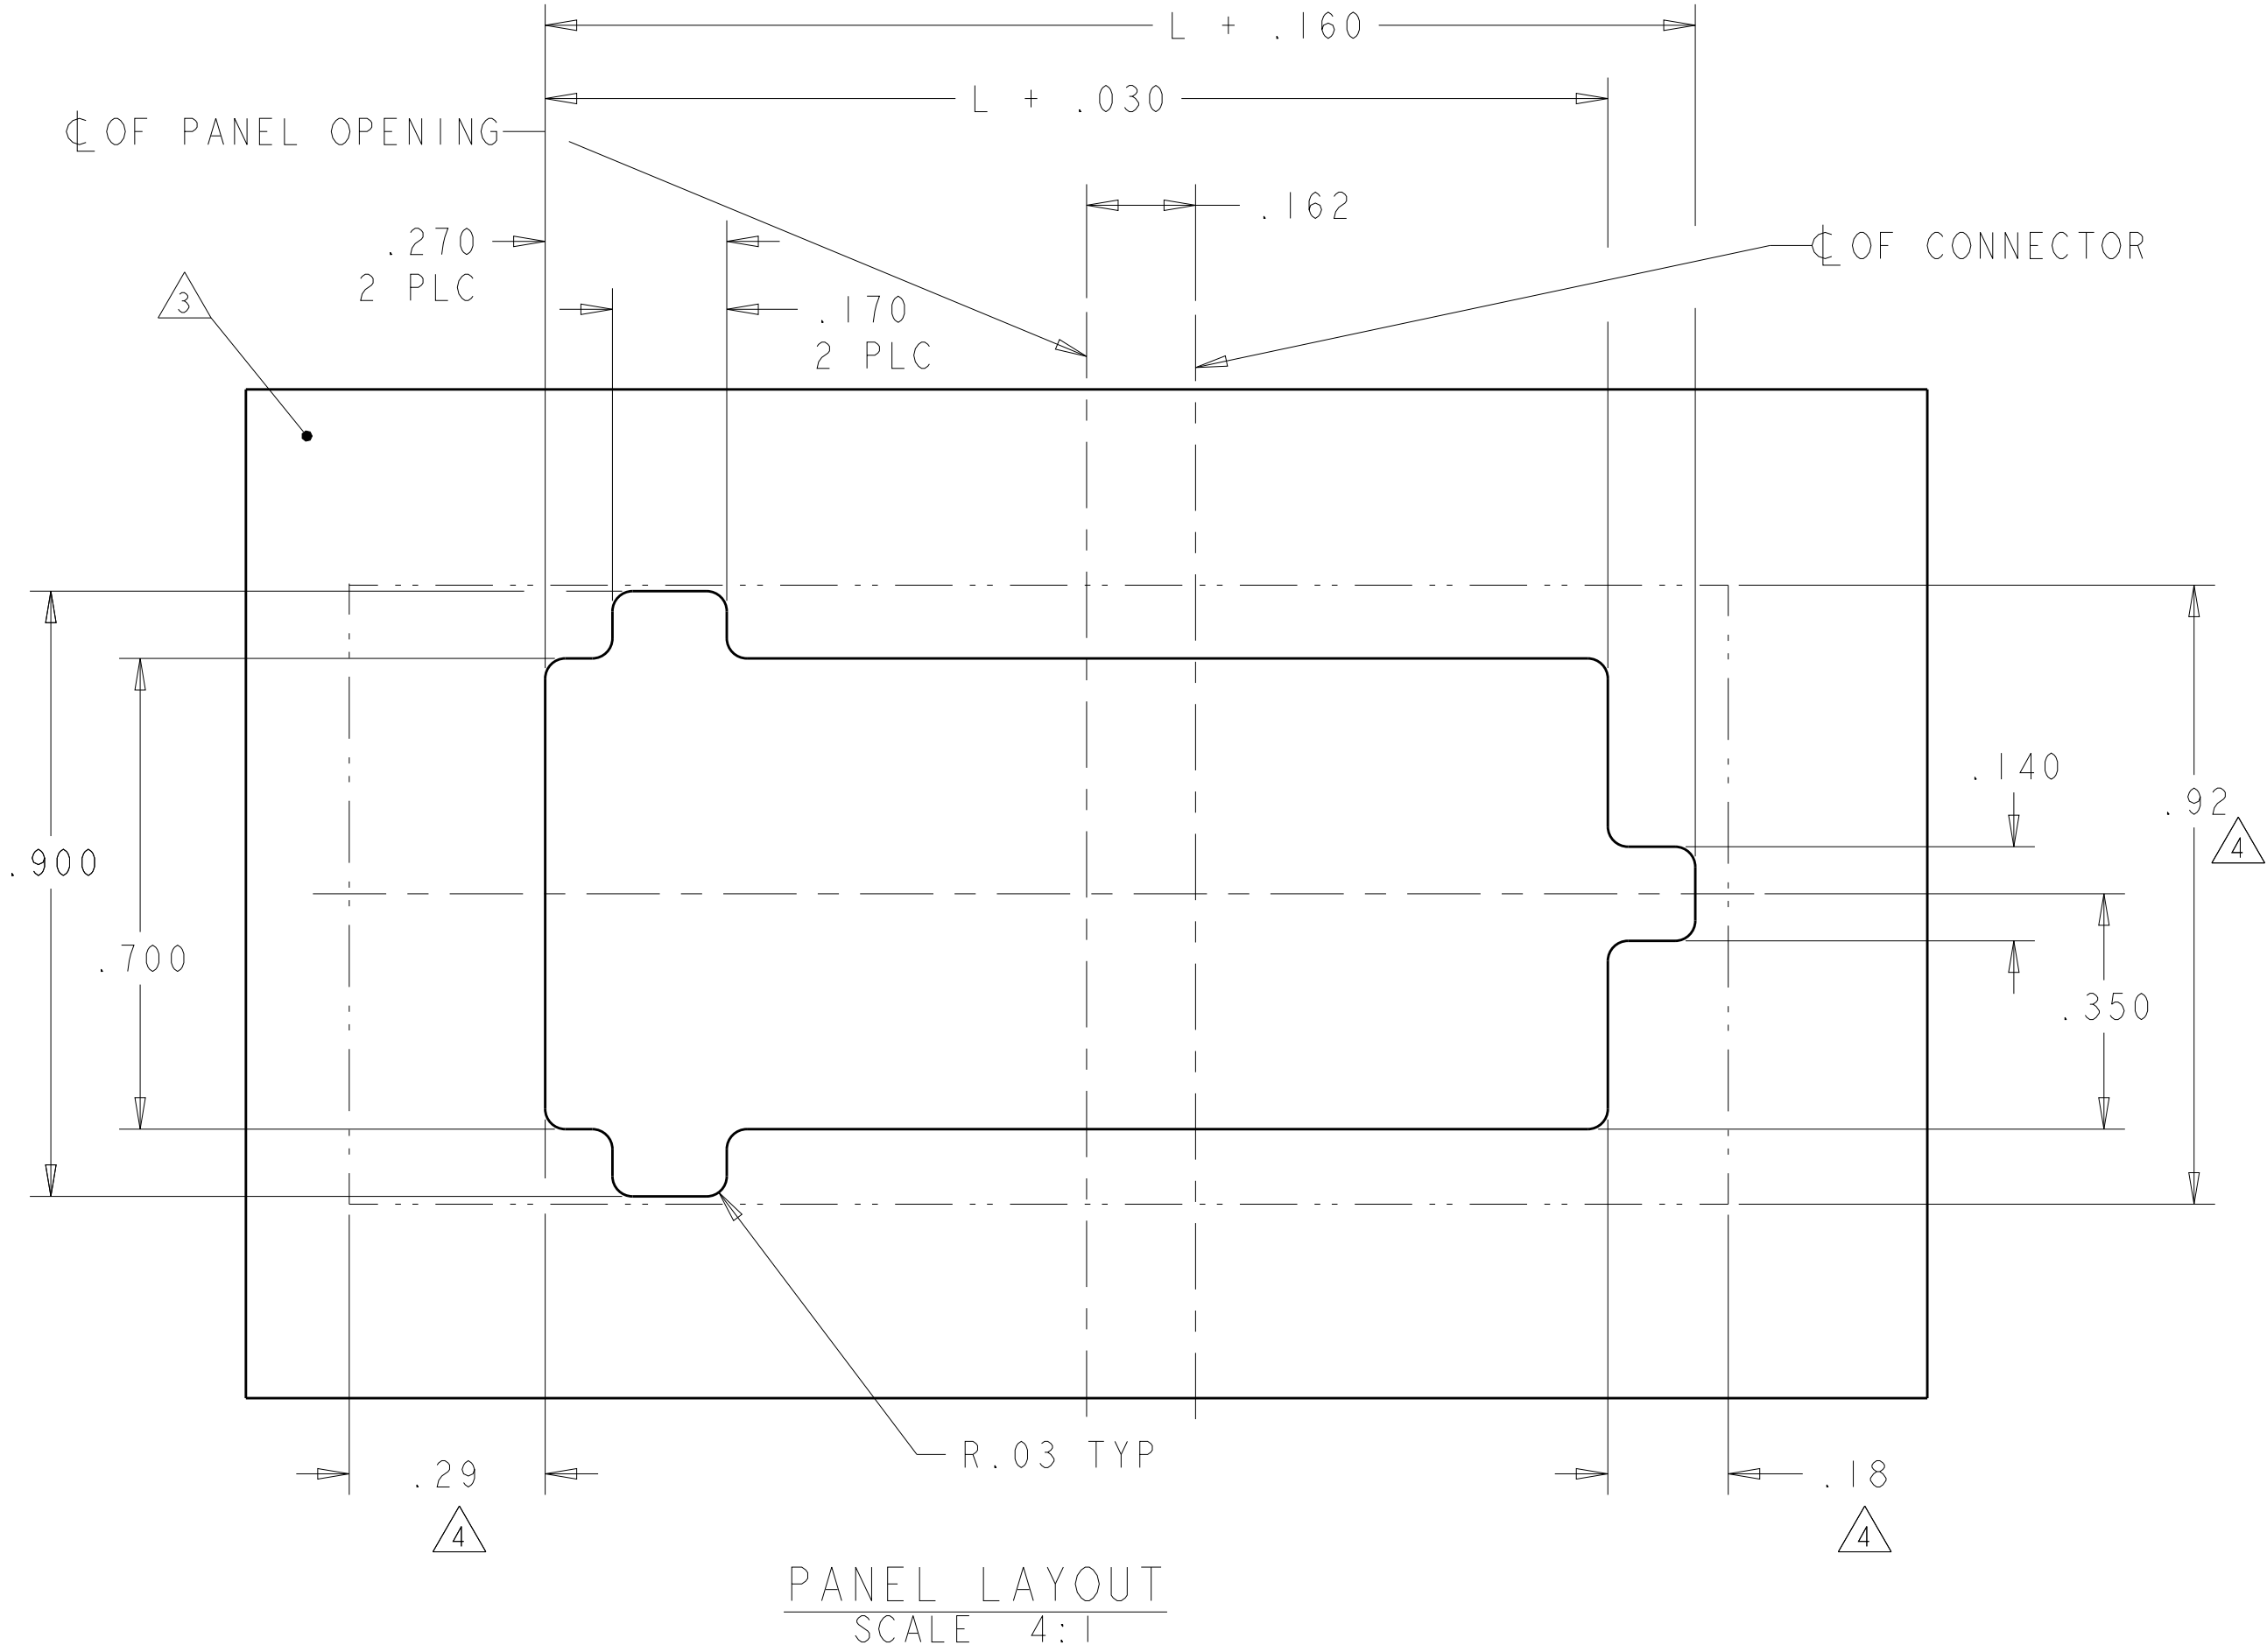
PART NUMBER	ROWS		POWER					
			P5	P4	P3	P2	P1	
292499-2	D							
	C							
	B							
	A							
5ACP								

PART NUMBER	ROWS		POWER				
			P4	P3	P2	P1	
292499-3	D						
	C						
	B						
	A						
4ACP							

PART NUMBER	ROWS		POWER				
			P4	P3	P2	P1	
292499-4	D						
	C						
	B						
	A						
4P							

PART NUMBER	ROWS		POWER								
			P8	P7	P6	P5	P4	P3	P2	P1	
292499-7	D										
	C										
	B										
	A										
8P											



PART NUMBER	ROWS		POWER						
			P6	P5	P4	P3	P2	P1	
292499-8	D C B A								
6P									







RM	STANDARD POWER CONTACT
RA	MFBL POWER CONTACT
CODE	DESCRIPTION
CONTACT TABLE	



THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	S. ZHAO	08AUG2006		TE Connectivity	
DIMENSIONS:		CHK	S. ZHAO	08AUG2006		NAME	
INCHES		APVD	S. YAO	-		SLIDE TO LOCK PANEL MOUNT CABLE RECEPTACLE HOUSING, WITH GUIDES, MULTI-BEAM XL	
		TOLERANCES UNLESS OTHERWISE SPECIFIED:		PRODUCT SPEC		SIZE	CAGE CODE
		0 PLC ±.01		APPLICATION SPEC		DRAWING NO	RESTRICTED TO
		1 PLC ±.01				A100779	292499
		2 PLC ±.005				Customer Drawing	SCALE 1:1
		3 PLC ±.002					SHEET 2 OF 3
		4 PLC ±.002					REV E
		ANGLES ±.002					
		FINISH ±.01					
MATERIAL				WEIGHT			

LOC	DIST	REVISIONS					
ES	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
		-	-	SEE SHEET 1	-	-	-



PART NUMBER	ROWS		POWER					
			P5	P4	P3	P2	P1	
I-292499-1	D C B A		RM	RA	RM	RA	RM	
5ACP								

PART NUMBER	ROWS		POWER			
			P3	P2	P1	
I-292499-6	D C B A		RM	RM	RM	
3ACP						



PART NUMBER	ROWS		POWER							
			P7	P6	P5	P4	P3	P2	P1	
I-292499-2	D C B A		RM		RM		RM		RM	
7HDP										

PART NUMBER	ROWS		POWER				
			P4	P3	P2	P1	
I-292499-8	D C B A		RA	RM	RM	RM	
4P							



D7



PART NUMBER	ROWS		POWER						
			P6	P5	P4	P3	P2	P1	
I-292499-3	D C B A		RM	RM	RM	RM	RM	RM	
6ACP									

 .425
5PLC



PART NUMBER	ROWS		POWER					
			P5	P4	P3	P2	P1	
I-292499-4	D C B A		RM		RM		RM	
5HDP								

NO LOACING CONTACT

PART NUMBER	ROWS		POWER			
			P3	P2	P1	
I-292499-9	D C B A		RM	RA	RM	
3ACP						

PART NUMBER	ROWS		POWER						
			P6	P5	P4	P3	P2	P1	
2-292499-0	D C B A		RM	RM	RM	RM	RM	RM	
6ACP									

 .425
5PLC

PART NUMBER	ROWS		POWER				
			P4	P3	P2	P1	
I-292499-5	D C B A		RA	RA	RM	RM	
4ACP							

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN

S.ZHAO

08AUG2006

CHK

S.ZHAO

08AUG2006


APVD

S.YAO

-

DIMENSIONS:

INCHES



TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC ±"

1 PLC ±.01

2 PLC ±.01

3 PLC ±.005

4 PLC ±.002

ANGLES ±1°

FINISH -

MATERIAL

-

TE Connectivity

NAME

SLIDE TO LOCK PANEL MOUNT CABLE RECEPTACLE HOUSING, WITH GUIDES, MULTI-BEAM XL

SIZE

A1

CAGE CODE

00779

DRAWING NO

C=292499

RESTRICTED TO

-

Customer Drawing

SCALE

1:1

SHEET

3

OF

3

REV

E



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.