


SPLFA30F

SPLF A 30 F - -

① ② ③ ④ ⑤ ⑥

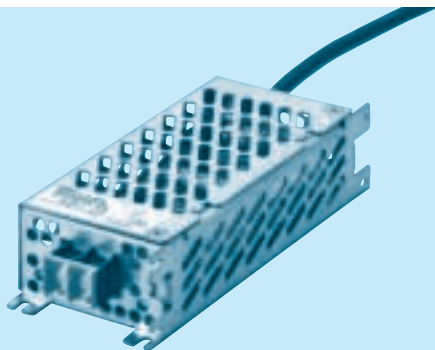

- ① Series name
 ② Single output
 ③ Output wattage
 ④ Universal input
 ⑤ Output voltage
 ⑥ Optional
 C : with Coating

MODEL	SPLFA30F-5	SPLFA30F-12	SPLFA30F-24
MAX OUTPUT WATTAGE[W]	30.0	30.0	31.2
DC OUTPUT	5V 6A	12V 2.5A	24V 1.3A

SPECIFICATIONS

	MODEL		SPLFA30F-5	SPLFA30F-12	SPLFA30F-24
INPUT	VOLTAGE[V]		AC85 - 264 1 φ (Refer to Instruction Manual 1.1 and 3.1) *3		
	CURRENT[A]	ACIN 100V	0.65typ (Io=100%)		
		ACIN 200V	0.35typ (Io=100%)		
	FREQUENCY[Hz]		50 / 60 (47 - 440)		
	EFFICIENCY[%]	ACIN 100V	75.0typ	78.0typ	81.0typ
		ACIN 200V	77.0typ	80.0typ	83.0typ
	INRUSH CURRENT[A]	ACIN 100V	15typ (Io=100%) (At cold start) (Ta=25℃)		
ACIN 200V		30typ (Io=100%) (At cold start) (Ta=25℃)			
LEAKAGE CURRENT[mA]		0.30 / 0.65max (ACIN 100V / 240V 60Hz, Io=100%, According to IEC60950-1 and DEN-AN)			
OUTPUT	VOLTAGE[V]		5	12	24
	CURRENT[A]		6.0	2.5	1.3
	LINE REGULATION[mV] *5		20max	48max	96max
	LOAD REGULATION[mV] *5		100max	100max	150max
	RIPPLE[mVp-p]	0 to +50℃ *1	100max	120max	120max
		-10 - 0℃ *1	140max	160max	160max
	RIPPLE NOISE[mVp-p]	0 to +50℃ *1	250max	250max	250max
		-10 - 0℃ *1	300max	300max	300max
	TEMPERATURE REGULATION[mV]	0 to +50℃	50max	120max	240max
		-10 to +50℃	60max	150max	290max
	DRIFT[mV] *2		20max	48max	96max
	START-UP TIME[ms]		150typ (ACIN 100V, Io=100%)		
	HOLD-UP TIME[ms]		20typ (ACIN 100V, Io=100%)		
OUTPUT VOLTAGE SETTING[V]		4.90 to 5.30	11.50 to 12.50	23.00 to 25.00	
PROTECTION CIRCUIT AND OTHERS	OVERCURRENT PROTECTION		Works over 105% of rating and recovers automatically		
	OVERVOLTAGE PROTECTION[V]		5.75 to 7.00	13.80 to 16.80	27.60 to 33.60
	OPERATING INDICATION		LED (Green)		
	REMOTE SENSING		Not provided		
	REMOTE ON/OFF		Not provided		
ISOLATION	INPUT-OUTPUT		AC3,000V 1minute, Cutoff current = 10mA, DC500V 50MΩ min (At Room Temperature)		
	INPUT-FG		AC2,000V 1minute, Cutoff current = 10mA, DC500V 50MΩ min (At Room Temperature)		
	OUTPUT-FG		AC500V 1minute, Cutoff current = 25mA, DC500V 50MΩ min (At Room Temperature)		
ENVIRONMENT	OPERATING TEMP., HUMID. AND ALTITUDE		-10 to +60℃, 20 - 90%RH (Non condensing) (Refer to DERATING CURVE), 3,000m (10,000feet) max *3		
	STORAGE TEMP., HUMID. AND ALTITUDE		-20 to +75℃, 20 - 90%RH (Non condensing), 9,000m (30,000feet) max		
	VIBRATION		10 - 55Hz, 19.6m/s² (2G), 3minutes period, 60minutes each along X, Y and Z axis		
	IMPACT		196.1m/s² (20G), 11ms, once each X, Y and Z axis		
SAFETY AND NOISE REGULATIONS	AGENCY APPROVALS		DEN-AN		
	CONDUCTED NOISE/POWER		Complies with DEN-AN		
	HARMONIC ATTENUATOR		Complies with IEC61000-3-2 class A (Not built-in to active filter *4. Please contact us for the details of class C.)		
OTHERS	CASE SIZE/WEIGHT		61×36×150mm [2.40×1.42×5.91 inches] (W×H×D) / 370g max		
	COOLING METHOD		Convection		

*1 Measured by 20MHz oscilloscope or Ripple-Noise meter (Equivalent to KEISOKU-GIKEN: RM103).

*2 Drift is the change in DC output for an eight hour period after a half-hour warm-up at 25°C, with the input voltage held constant at the rated input/output.

*3 Derating is required.

*4 When two or more units are operating it may not comply with the IEC61000-3-2. Please contact us for details.

*5 Please contact us about dynamic load and input response.


* To meet the specifications. Do not operate over-loaded condition.

* Parallel operation is not possible.


* Derating is required when operated with chassis and cover.

* Sound noise may be generated by power supply in case of pulse load.

Block diagram

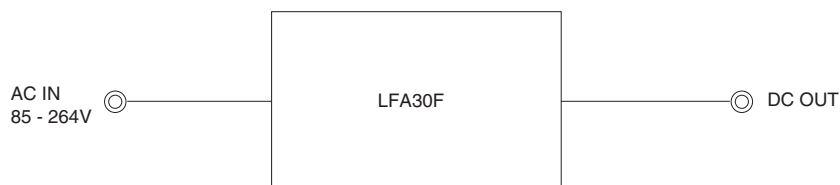

External view

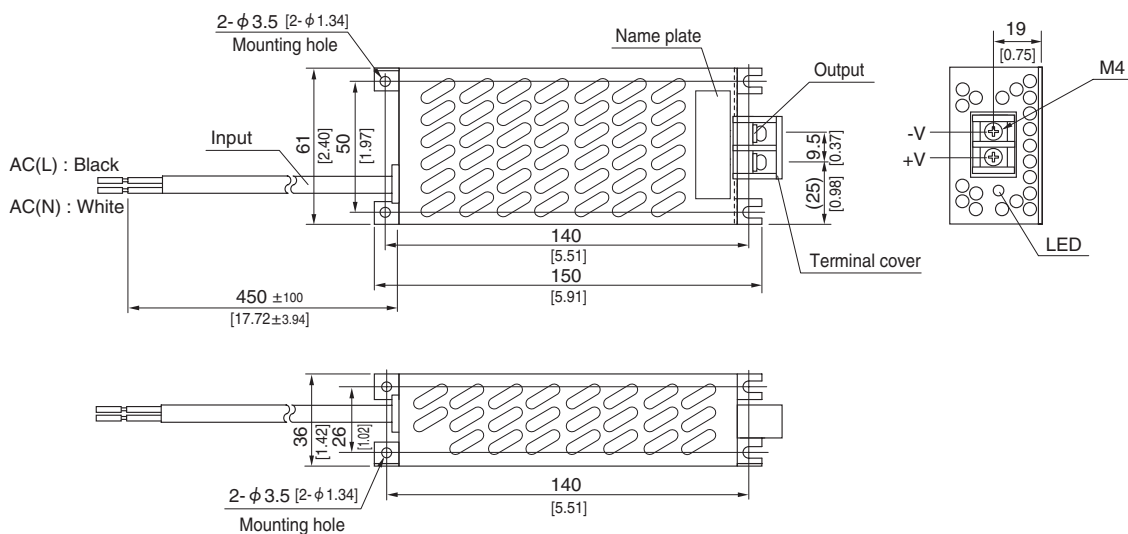


- ※ Tolerance : ± 1 [± 0.04]
- ※ Weight : 370g max
- ※ PCB material/thickness : CEM3 / 1.6mm [0.06]
- ※ Chassis and cover material : Electric galvanizing steel board
- ※ Dimensions in mm, []=inches
- ※ Mounting torque : M4 : 1.6N · m (16.9kgf · cm) max
- ※ Input wire : VCTF 0.75sq X2C

SPLFA50F

SPLF A 50 F - -

① ② ③ ④ ⑤ ⑥

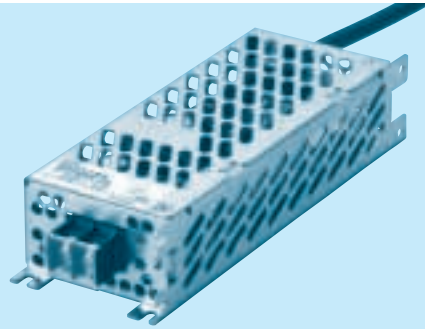

- ① Series name
② Single output
③ Output wattage
④ Universal input
⑤ Output voltage
⑥ Optional
C : with Coating

MODEL	SPLFA50F-5	SPLFA50F-12	SPLFA50F-24
MAX OUTPUT WATTAGE[W]	50	51.6	50.4
DC OUTPUT	5V 10A	12V 4.3A	24V 2.1A

SPECIFICATIONS


	MODEL		SPLFA50F-5	SPLFA50F-12	SPLFA50F-24
INPUT	VOLTAGE[V]		AC85 - 264 1 φ (Refer to Instruction Manual 1.1 and 3.1) *3		
	CURRENT[A]	ACIN 100V	0.67typ (Io=100%)		
		ACIN 200V	0.36typ (Io=100%)		
	FREQUENCY[Hz]		50 / 60 (47 - 63)		
	EFFICIENCY[%]	ACIN 100V	76.5typ	79.0typ	80.5typ
		ACIN 200V	78.0typ	80.5typ	82.0typ
	POWER FACTOR (Io=100%)	ACIN 100V	0.97typ		
		ACIN 200V	0.90typ		
	INRUSH CURRENT[A]	ACIN 100V	15typ (Io=100%) (At cold start) (Ta=25℃)		
ACIN 200V		30typ (Io=100%) (At cold start) (Ta=25℃)			
LEAKAGE CURRENT[ma]		0.40 / 0.75max (ACIN 100V / 240V 60Hz, Io=100%, According to IEC60950-1 and DEN-AN)			
OUTPUT	VOLTAGE[V]		5	12	24
	CURRENT[A]		10.0	4.3	2.1
	LINE REGULATION[mV] *4		20max	48max	96max
	LOAD REGULATION[mV] *4		150max	150max	150max
	RIPPLE[mVp-p]	0 to +50℃ *1	100max	120max	120max
		-10 - 0℃ *1	140max	160max	160max
	RIPPLE NOISE[mVp-p]	0 to +50℃ *1	250max	250max	250max
		-10 - 0℃ *1	300max	300max	300max
	TEMPERATURE REGULATION[mV]	0 to +50℃	50max	120max	240max
		-10 to +50℃	60max	150max	290max
	DRIFT[mV] *2		20max	48max	96max
	START-UP TIME[ms]		350typ (ACIN 100V, Io=100%)		
HOLD-UP TIME[ms]		20typ (ACIN 100V, Io=100%)			
OUTPUT VOLTAGE SETTING[V]		4.90 to 5.30	11.50 to 12.50	23.00 to 25.00	
PROTECTION CIRCUIT AND OTHERS	OVERCURRENT PROTECTION		Works over 105% of rating and recovers automatically		
	OVERVOLTAGE PROTECTION[V]		5.75 to 7.00	13.80 to 16.80	27.60 to 33.60
	OPERATING INDICATION		LED (Green)		
	REMOTE SENSING		Not provided		
	REMOTE ON/OFF		Not provided		
ISOLATION	INPUT-OUTPUT		AC3,000V 1minute, Cutoff current = 10mA, DC500V 50MΩ min (At Room Temperature)		
	INPUT-FG		AC2,000V 1minute, Cutoff current = 10mA, DC500V 50MΩ min (At Room Temperature)		
	OUTPUT-FG		AC500V 1minute, Cutoff current = 25mA, DC500V 50MΩ min (At Room Temperature)		
ENVIRONMENT	OPERATING TEMP.,HUMID.AND ALTITUDE		-10 to +50℃, 20 - 90%RH (Non condensing) (Refer to DERATING CURVE), 3,000m (10,000feet) max *3		
	STORAGE TEMP.,HUMID.AND ALTITUDE		-20 to +75℃, 20 - 90%RH (Non condensing), 9,000m (30,000feet) max		
	VIBRATION		10 - 55Hz, 19.6m/s² (2G), 3minutes period, 60minutes each along X, Y and Z axis		
	IMPACT		196.1m/s² (20G), 11ms, once each X, Y and Z axis		
SAFETY AND NOISE REGULATIONS	AGENCY APPROVALS		DEN-AN		
	CONDUCTED NOISE/POWER		Complies with DEN-AN		
	HARMONIC ATTENUATOR		Complies with IEC61000-3-2 (Please contact us for the details of class C.)		
OTHERS	CASE SIZE/WEIGHT		61×36×174mm [2.40×1.42×6.85 inches] (W×H×D) / 440g max		
	COOLING METHOD		Convection		

- *1 Measured by 20MHz oscilloscope or Ripple-Noise meter (Equivalent to KEISOKU-GIKEN: RM103).
*2 Drift is the change in DC output for an eight hour period after a half-hour warm-up at 25°C, with the input voltage held constant at the rated input/output.
*3 Derating is required.
*4 When two or more units are operating it may not comply with the IEC61000-3-2. Please contact us for details.
*5 Please contact us about dynamic load and input response.
* To meet the specifications. Do not operate over-loaded condition.
* Parallel operation is not possible.
* Derating is required when operated with chassis and cover.
* Sound noise may be generated by power supply in case of pulse load.

Block diagram



External view

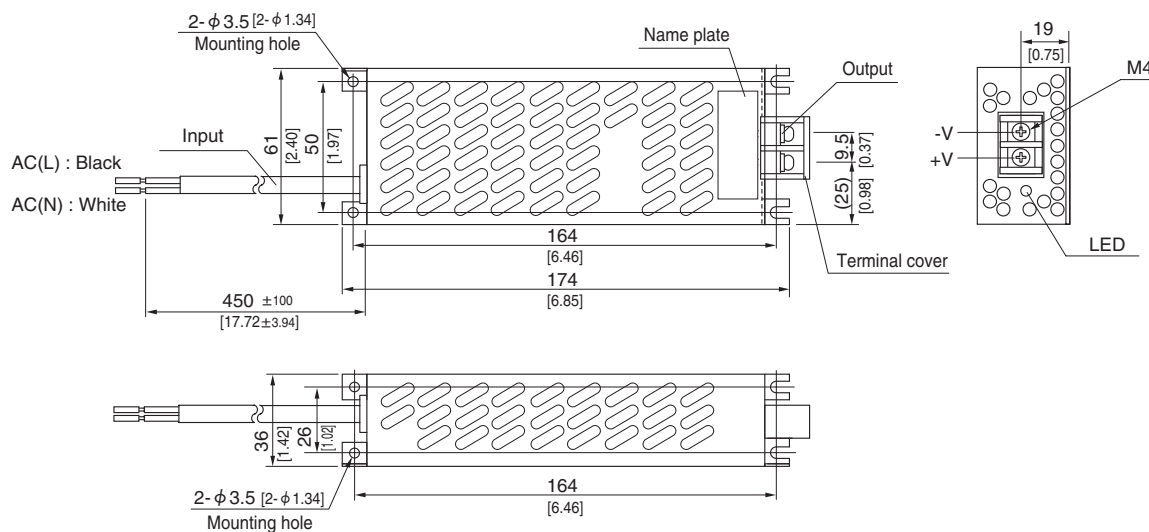


- ※ Tolerance : ± 1 [± 0.04]
- ※ Weight : 440g max
- ※ PCB material/thickness : CEM3 / 1.6mm [0.06]
- ※ Chassis and cover material : Electric galvanizing steel board
- ※ Dimensions in mm, []=inches
- ※ Mounting torque : M4 : 1.6N · m (16.9kgf · cm) max
- ※ Input wire : VCTF 0.75sq X 2C

SPLFA75F

SPLF A 75 F - -

① ② ③ ④ ⑤ ⑥

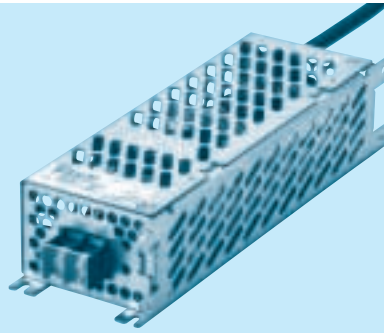

- ① Series name
② Single output
③ Output wattage
④ Universal input
⑤ Output voltage
⑥ Optional
C : with Coating

MODEL	SPLFA75F-5	SPLFA75F-12	SPLFA75F-24
MAX OUTPUT WATTAGE[W]	75	75.6	76.8
DC OUTPUT	5V 15A	12V 6.3A	24V 3.2A

SPECIFICATIONS


	MODEL		SPLFA75F-5	SPLFA75F-12	SPLFA75F-24
INPUT	VOLTAGE[V]		AC85 - 264 1 φ (Refer to Instruction Manual 1.1 and 3.1) *3		
	CURRENT[A]	ACIN 100V	1.00typ (Io=100%)		
		ACIN 200V	0.50typ (Io=100%)		
	FREQUENCY[Hz]		50 / 60 (47 - 63)		
	EFFICIENCY[%]	ACIN 100V	75.0typ	80.0typ	81.5typ
		ACIN 200V	77.0typ	82.0typ	83.5typ
	POWER FACTOR (Io=100%)	ACIN 100V	0.97typ		
		ACIN 200V	0.90typ		
	INRUSH CURRENT[A]	ACIN 100V	15typ (Io=100%) (At cold start) (Ta=25℃)		
ACIN 200V		30typ (Io=100%) (At cold start) (Ta=25℃)			
LEAKAGE CURRENT[ma]		0.40 / 0.75max (ACIN 100V / 240V 60Hz, Io=100%, According to IEC60950-1 and DEN-AN)			
OUTPUT	VOLTAGE[V]		5	12	24
	CURRENT[A]		15.0	6.3	3.2
	LINE REGULATION[mV] *4		20max	48max	96max
	LOAD REGULATION[mV] *4		150max	150max	150max
	RIPPLE[mVp-p]	0 to +50℃ *1	100max	120max	120max
		-10 - 0℃ *1	140max	160max	160max
	RIPPLE NOISE[mVp-p]	0 to +50℃ *1	250max	250max	250max
		-10 - 0℃ *1	300max	300max	300max
	TEMPERATURE REGULATION[mV]	0 to +50℃	50max	120max	240max
		-10 to +50℃	60max	150max	290max
	DRIFT[mV] *2		20max	48max	96max
	START-UP TIME[ms]		350typ (ACIN 100V, Io=100%)		
HOLD-UP TIME[ms]		20typ (ACIN 100V, Io=100%)			
OUTPUT VOLTAGE SETTING[V]		4.90 to 5.30	11.50 to 12.50	23.00 to 25.00	
PROTECTION CIRCUIT AND OTHERS	OVERCURRENT PROTECTION		Works over 105% of rating and recovers automatically		
	OVERVOLTAGE PROTECTION[V]		5.75 to 7.00	13.80 to 16.80	27.60 to 33.60
	OPERATING INDICATION		LED (Green)		
	REMOTE SENSING		Not provided		
	REMOTE ON/OFF		Not provided		
ISOLATION	INPUT-OUTPUT		AC3,000V 1minute, Cutoff current = 10mA, DC500V 50MΩ min (At Room Temperature)		
	INPUT-FG		AC2,000V 1minute, Cutoff current = 10mA, DC500V 50MΩ min (At Room Temperature)		
	OUTPUT-FG		AC500V 1minute, Cutoff current = 25mA, DC500V 50MΩ min (At Room Temperature)		
ENVIRONMENT	OPERATING TEMP., HUMID.AND ALTITUDE		-10 to +50℃, 20 - 90%RH (Non condensing) (Refer to DERATING CURVE), 3,000m (10,000feet) max *3		
	STORAGE TEMP., HUMID.AND ALTITUDE		-20 to +75℃, 20 - 90%RH (Non condensing), 9,000m (30,000feet) max		
	VIBRATION		10 - 55Hz, 19.6m/s² (2G), 3minutes period, 60minutes each along X, Y and Z axis		
	IMPACT		196.1m/s² (20G), 11ms, once each X, Y and Z axis		
SAFETY AND NOISE REGULATIONS	AGENCY APPROVALS		DEN-AN		
	CONDUCTED NOISE/POWER		Complies with DEN-AN		
	HARMONIC ATTENUATOR		Complies with IEC61000-3-2 (Please contact us for the details of class C.)		
OTHERS	CASE SIZE/WEIGHT		61×42×192mm [2.40×1.65×7.56 inches] (W×H×D) / 540g max		
	COOLING METHOD		Convection		

- *1 Measured by 20MHz oscilloscope or Ripple-Noise meter (Equivalent to KEISOKU-GIKEN: RM103).
*2 Drift is the change in DC output for an eight hour period after a half-hour warm-up at 25°C, with the input voltage held constant at the rated input/output.
*3 Derating is required.
*4 When two or more units are operating it may not comply with the IEC61000-3-2. Please contact us for details.
*5 Please contact us about dynamic load and input response.
* To meet the specifications. Do not operate over-loaded condition.
* Parallel operation is not possible.
* Derating is required when operated with chassis and cover.
* Sound noise may be generated by power supply in case of pulse load.

Block diagram



External view

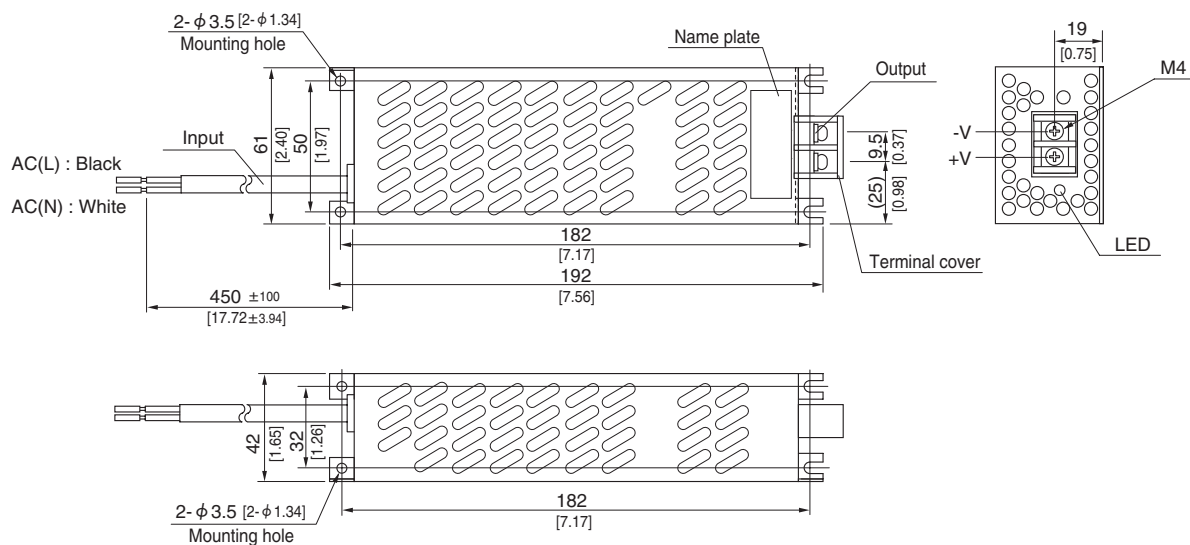


- ※ Tolerance : ± 1 [± 0.04]
- ※ Weight : 540g max
- ※ PCB material/thickness : CEM3 / 1.6mm [0.06]
- ※ Chassis and cover material : Electric galvanizing steel board
- ※ Dimensions in mm, []=inches
- ※ Mounting torque : M4 : 1.6N · m (16.9kgf · cm) max
- ※ Input wire : VCTF 0.75sq×2C

SPLFA100F

SPLF A 100 F -□ -□

① ② ③ ④ ⑤ ⑥

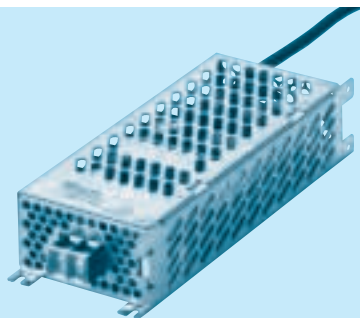

- ① Series name
 ② Single output
 ③ Output wattage
 ④ Universal input
 ⑤ Output voltage
 ⑥ Optional
 C : with Coating

MODEL	SPLFA100F-12	SPLFA100F-24
MAX OUTPUT WATTAGE[W]	102.0	103.2
DC OUTPUT	12V 8.5A	24V 4.3A

SPECIFICATIONS

	MODEL	SPLFA100F-12	SPLFA100F-24
INPUT	VOLTAGE[V]		AC85 - 264 1 φ (Refer to Instruction Manual 1.1 and 3.1) *3
	CURRENT[A]	ACIN 100V	1.3typ (Io=100%)
		ACIN 200V	0.7typ (Io=100%)
	FREQUENCY[Hz]		50 / 60 (47 - 63)
	EFFICIENCY[%]	ACIN 100V	80.5typ
		ACIN 200V	83.5typ
	POWER FACTOR (Io=100%)	ACIN 100V	83.0typ
		ACIN 200V	86.0typ
INRUSH CURRENT[A]	ACIN 100V	0.97typ	
	ACIN 200V	0.90typ	
LEAKAGE CURRENT[ma]	ACIN 100V	15typ (Io=100%) (At cold start) (Ta=25℃)	
	ACIN 200V	30typ (Io=100%) (At cold start) (Ta=25℃)	
0.40 / 0.75max (ACIN 100V / 240V 60Hz, Io=100%, According to IEC60950-1 and DEN-AN)			
OUTPUT	VOLTAGE[V]		12
	CURRENT[A]		24
	LINE REGULATION[mV] *4		8.5
	LOAD REGULATION[mV] *4		4.3
	RIPPLE[mVp-p]	0 to +50℃ *1	48max
		-10 - 0℃ *1	96max
	RIPPLE NOISE[mVp-p]	0 to +50℃ *1	150max
		-10 - 0℃ *1	150max
	TEMPERATURE REGULATION[mV]	0 to +50℃	120max
		-10 to +50℃	160max
	DRIFT[mV] *2	250max	250max
	START-UP TIME[ms]	0 to +50℃ *1	300max
	HOLD-UP TIME[ms]	-10 to +50℃	300max
OUTPUT VOLTAGE SETTING[V]	0 to +50℃	240max	
		-10 to +50℃	290max
		48max	96max
PROTECTION CIRCUIT AND OTHERS	START-UP TIME[ms]		350typ (ACIN 100V, Io=100%)
	HOLD-UP TIME[ms]		20typ (ACIN 100V, Io=100%)
	OUTPUT VOLTAGE SETTING[V]		11.50 to 12.50
			23.00 to 25.00
	OVERCURRENT PROTECTION		Works over 105% of rating and recovers automatically
ISOLATION	OVERVOLTAGE PROTECTION[V]		13.80 to 16.80
			27.60 to 33.60
	OPERATING INDICATION		LED (Green)
	REMOTE SENSING		Not provided
	REMOTE ON/OFF		Not provided
ENVIRONMENT	INPUT-OUTPUT		AC3,000V 1minute, Cutoff current = 10mA, DC500V 50MΩ min (At Room Temperature)
	INPUT-FG		AC2,000V 1minute, Cutoff current = 10mA, DC500V 50MΩ min (At Room Temperature)
	OUTPUT-FG		AC500V 1minute, Cutoff current = 25mA, DC500V 50MΩ min (At Room Temperature)
SAFETY AND NOISE REGULATIONS	OPERATING TEMP., HUMID.AND ALTITUDE		-10 to +50℃, 20 - 90%RH (Non condensing) (Refer to DERATING CURVE), 3,000m (10,000feet) max *3
	STORAGE TEMP., HUMID.AND ALTITUDE		-20 to +75℃, 20 - 90%RH (Non condensing), 9,000m (30,000feet) max
	VIBRATION		10 - 55Hz, 19.6m/s² (2G), 3minutes period, 60minutes each along X, Y and Z axis
	IMPACT		196.1m/s² (20G), 11ms, once each X, Y and Z axis
OTHERS	AGENCY APPROVALS		DEN-AN
	CONDUCTED NOISE/POWER		Complies with DEN-AN
	HARMONIC ATTENUATOR		Complies with IEC61000-3-2 (Please contact us for the details of class C.)
OTHERS	CASE SIZE/WEIGHT		73×42×197mm [2.87×1.65×7.76 inches] (W×H×D) / 670g max
	COOLING METHOD		Convection

*1 Measured by 20MHz oscilloscope or Ripple-Noise meter (Equivalent to KEISOKU-GIKEN: RM103).

*2 Drift is the change in DC output for an eight hour period after a half-hour warm-up at 25°C, with the input voltage held constant at the rated input/output.

*3 Derating is required.

*4 When two or more units are operating it may not comply with the IEC61000-3-2. Please contact us for details.

*5 Please contact us about dynamic load and input response.


* To meet the specifications. Do not operate over-loaded condition.

* Parallel operation is not possible.


* Derating is required when operated with chassis and cover.

* Sound noise may be generated by power supply in case of pulse load.

Block diagram

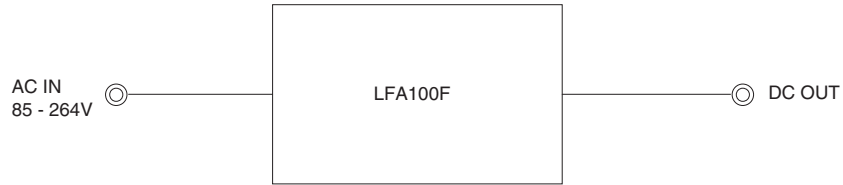

External view

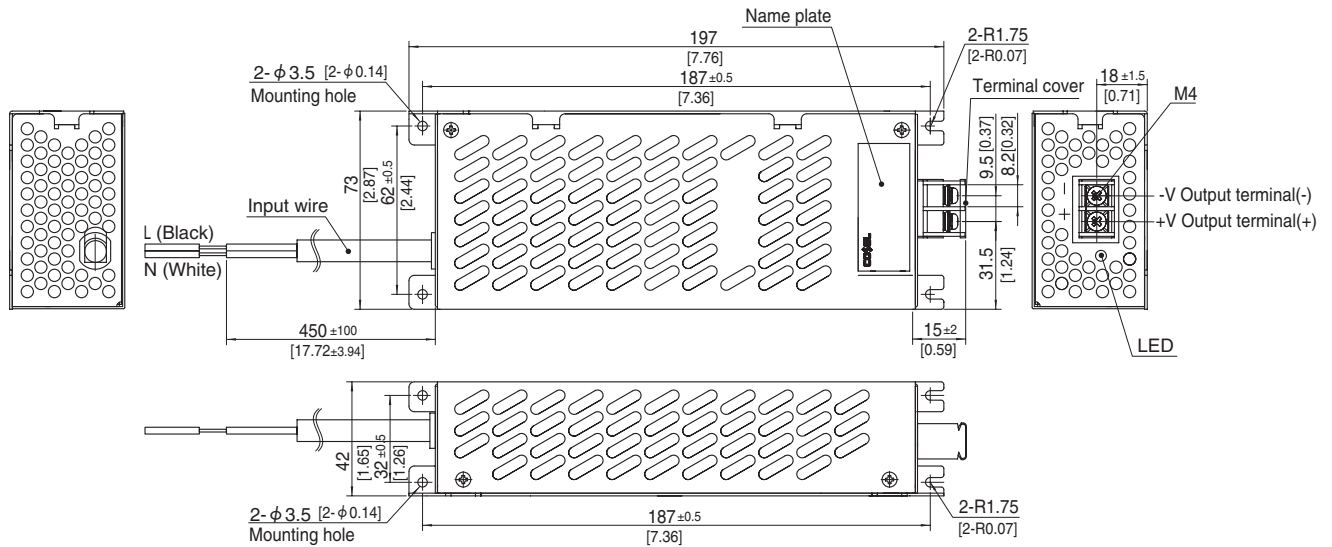


- ※ Tolerance : ± 1 [± 0.04]
- ※ Weight : 670g max
- ※ Dimensions in mm, []=inches
- ※ Chassis material : Galvanized Steel board
- ※ Screw tightening torque : M4 : 1.6N · m (16.9kgf · cm) max
- ※ Input wire : VCTF 0.75sq X 2C

SPLFA150F

SPLF A 150 F - -

① ② ③ ④ ⑤ ⑥

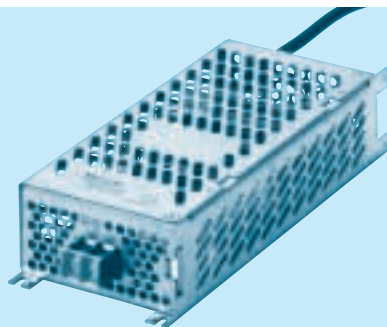

- ① Series name
 ② Single output
 ③ Output wattage
 ④ Universal input
 ⑤ Output voltage
 ⑥ Optional
 C : with Coating

MODEL	SPLFA150F-12	SPLFA150F-24
MAX OUTPUT WATTAGE[W]	150	151.2
DC OUTPUT	12V 12.5A	24V 6.3A

SPECIFICATIONS

	MODEL	SPLFA150F-12	SPLFA150F-24	
INPUT	VOLTAGE[V]	AC85 - 264 1 ϕ (Refer to Instruction Manual 1.1 and 3.1) *3		
	CURRENT[A]	ACIN 100V	2.0typ (Io=100%)	
		ACIN 200V	1.0typ (Io=100%)	
	FREQUENCY[Hz]	50 / 60 (47 - 63)		
	EFFICIENCY[%]	ACIN 100V	81.0typ	
		ACIN 200V	84.0typ	
	POWER FACTOR (Io=100%)	ACIN 100V	0.97typ	
		ACIN 200V	0.90typ	
INRUSH CURRENT[A]	ACIN 100V	15typ (Io=100%) (At cold start) (Ta=25℃)		
	ACIN 200V	30typ (Io=100%) (At cold start) (Ta=25℃)		
LEAKAGE CURRENT[ma]	0.40 / 0.75max (ACIN 100V / 240V 60Hz, Io=100%, According to IEC60950-1 and DEN-AN)			
OUTPUT	VOLTAGE[V]	12	24	
	CURRENT[A]	12.5	6.3	
	LINE REGULATION[mV] *4	48max	96max	
	LOAD REGULATION[mV] *4	150max	150max	
	RIPPLE[mVp-p]	0 to +50℃ *1	120max	120max
		-10 - 0℃ *1	160max	160max
	RIPPLE NOISE[mVp-p]	0 to +50℃ *1	250max	250max
		-10 - 0℃ *1	300max	300max
	TEMPERATURE REGULATION[mV]	0 to +50℃	120max	240max
		-10 to +50℃	150max	290max
	DRIFT[mV] *2	48max	96max	
	START-UP TIME[ms]	350typ (ACIN 100V, Io=100%)		
HOLD-UP TIME[ms]	20typ (ACIN 100V, Io=100%)			
OUTPUT VOLTAGE SETTING[V]	11.50 to 12.50	23.00 to 25.00		
PROTECTION CIRCUIT AND OTHERS	OVERCURRENT PROTECTION	Works over 105% of rating and recovers automatically		
	OVERVOLTAGE PROTECTION[V]	13.80 to 16.80	27.60 to 33.60	
	OPERATING INDICATION	LED (Green)		
	REMOTE SENSING	Not provided		
	REMOTE ON/OFF	Not provided		
ISOLATION	INPUT-OUTPUT	AC3,000V 1minute, Cutoff current = 10mA, DC500V 50M Ω min (At Room Temperature)		
	INPUT-FG	AC2,000V 1minute, Cutoff current = 10mA, DC500V 50M Ω min (At Room Temperature)		
	OUTPUT-FG	AC500V 1minute, Cutoff current = 25mA, DC500V 50M Ω min (At Room Temperature)		
ENVIRONMENT	OPERATING TEMP., HUMID. AND ALTITUDE	-10 to +50℃, 20 - 90%RH (Non condensing) (Refer to DERATING CURVE), 3,000m (10,000feet) max *3		
	STORAGE TEMP., HUMID. AND ALTITUDE	-20 to +75℃, 20 - 90%RH (Non condensing), 9,000m (30,000feet) max		
	VIBRATION	10 - 55Hz, 19.6m/s ² (2G), 3minutes period, 60minutes each along X, Y and Z axis		
	IMPACT	196.1m/s ² (20G), 11ms, once each X, Y and Z axis		
SAFETY AND NOISE REGULATIONS	AGENCY APPROVALS	DEN-AN		
	CONDUCTED NOISE/POWER	Complies with DEN-AN		
	HARMONIC ATTENUATOR	Complies with IEC61000-3-2 (Please contact us for the details of class C.)		
OTHERS	CASE SIZE/WEIGHT	86×47×202mm [3.39×1.85×7.95 inches] (W×H×D) / 850g max		
	COOLING METHOD	Convection		

*1 Measured by 20MHz oscilloscope or Ripple-Noise meter (Equivalent to KEISOKU-GIKEN: RM103).

*2 Drift is the change in DC output for an eight hour period after a half-hour warm-up at 25°C, with the input voltage held constant at the rated input/output.

*3 Derating is required.

*4 When two or more units are operating it may not comply with the IEC61000-3-2. Please contact us for details.

*5 Please contact us about dynamic load and input response.

* To meet the specifications. Do not operate over-loaded condition.

* Parallel operation is not possible.


* Derating is required when operated with chassis and cover.

* Sound noise may be generated by power supply in case of pulse load.

Block diagram



External view

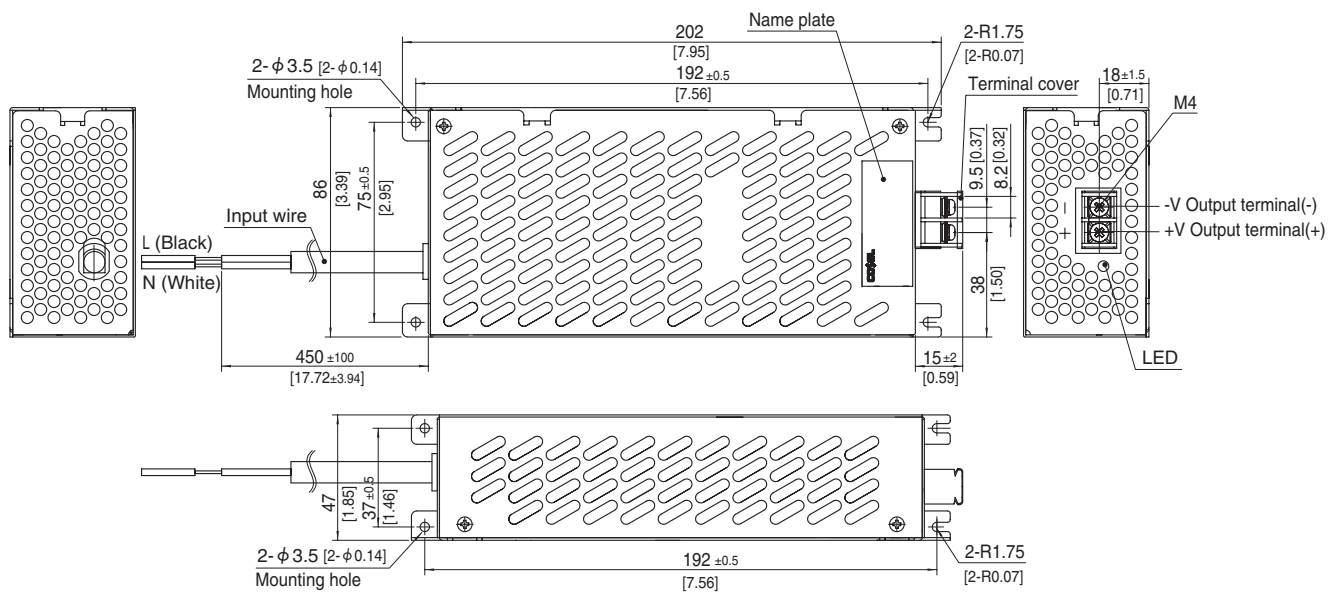

- ※ Tolerance : ±1 [±0.04]
- ※ Weight : 850g max
- ※ Dimensions in mm, []=inches
- ※ Chassis material : Galvanized Steel board
- ※ Screw tightening torque : M4 : 1.6N · m (16.9kgf · cm) max
- ※ Input wire : VCTF 0.75sq X 2C

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Cosel:

[SPLFA50F-24](#) [SPLFA75F-12](#) [SPLFA75F-24-C](#) [SPLFA30F-5-C](#) [SPLFA30F-24](#) [SPLFA75F-24](#) [SPLFA50F-5-C](#)
[SPLFA30F-12-C](#) [SPLFA30F-5](#) [SPLFA50F-12-C](#) [SPLFA30F-24-C](#) [SPLFA75F-5](#) [SPLFA50F-24-C](#) [SPLFA50F-12](#)
[SPLFA75F-5-C](#) [SPLFA50F-5](#) [SPLFA30F-12](#) [SPLFA75F-12-C](#)



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.