
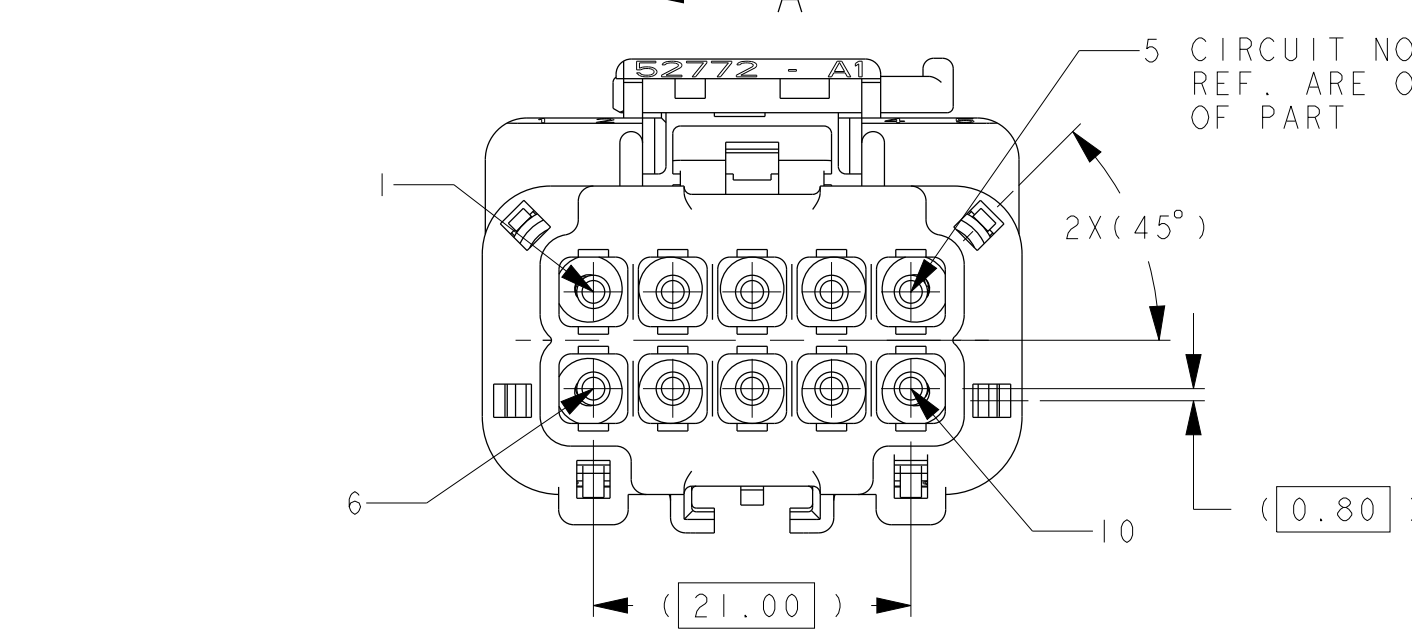
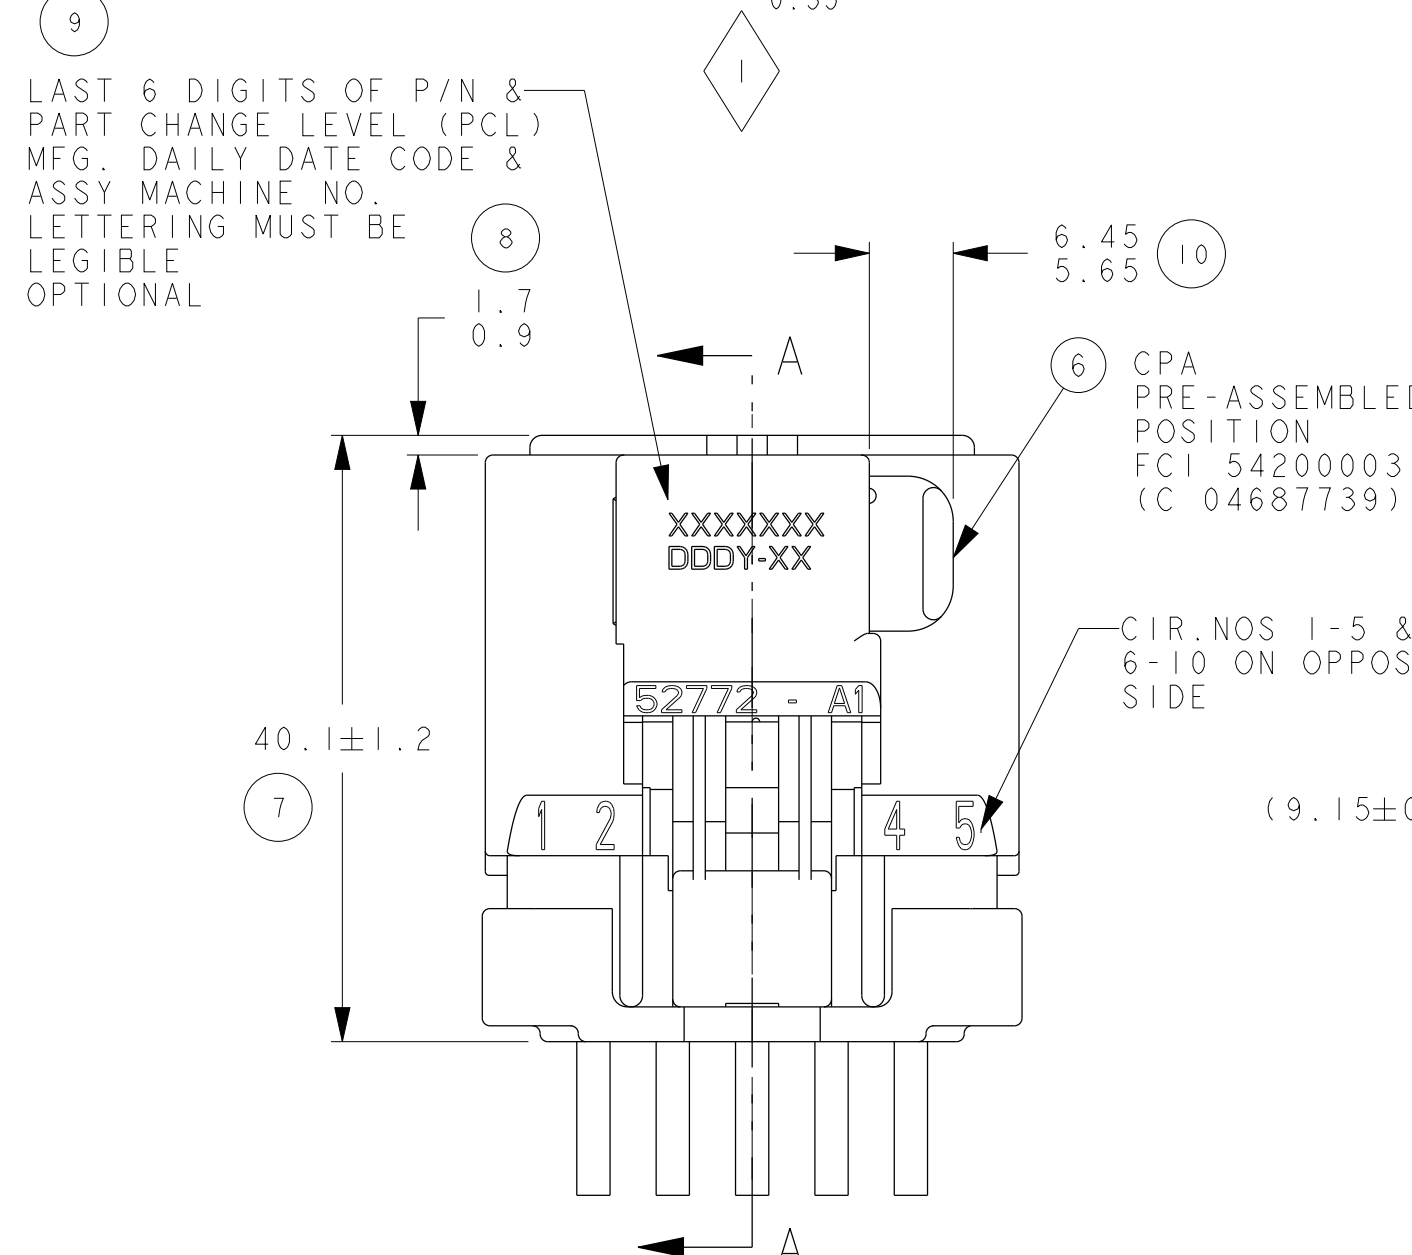
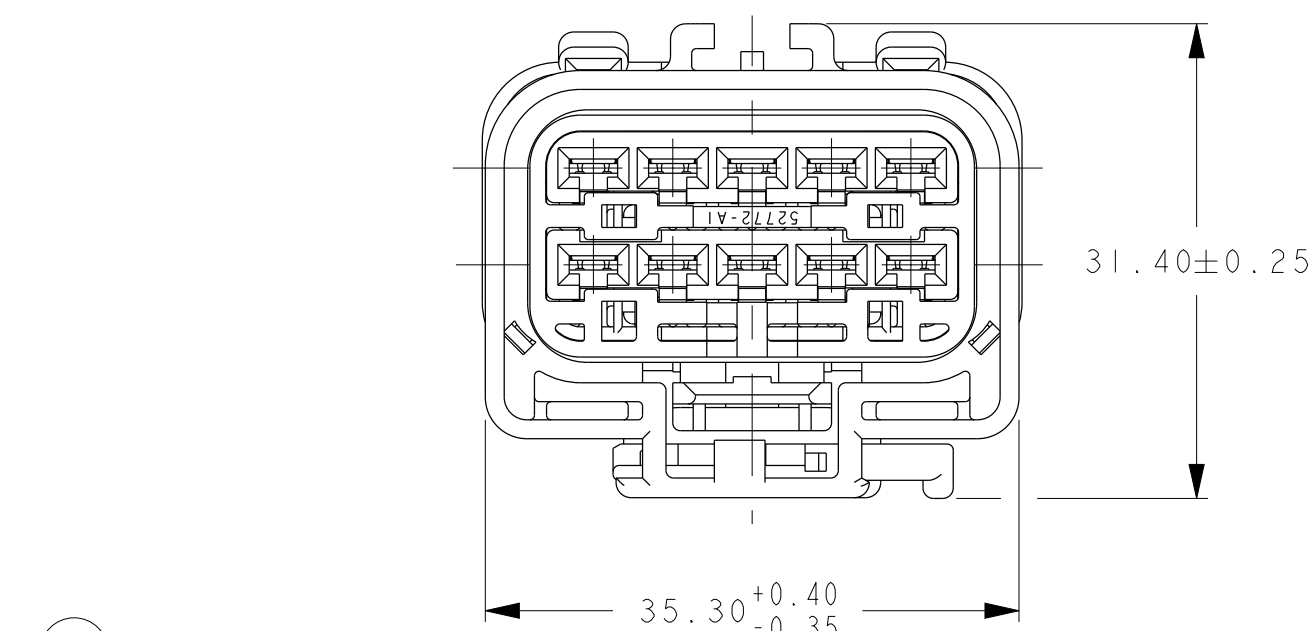
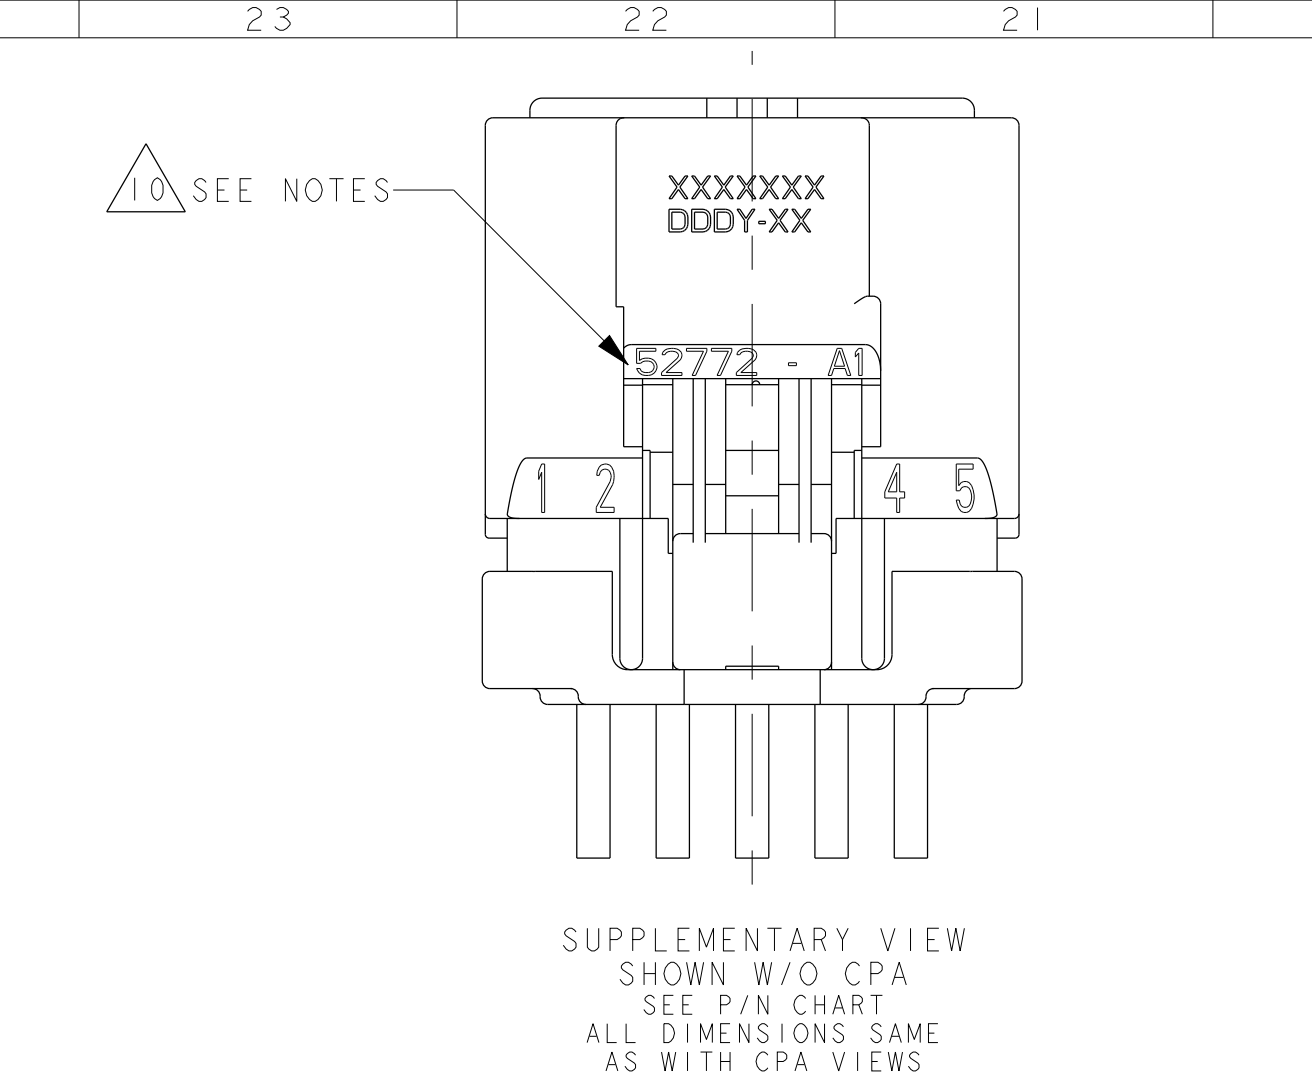
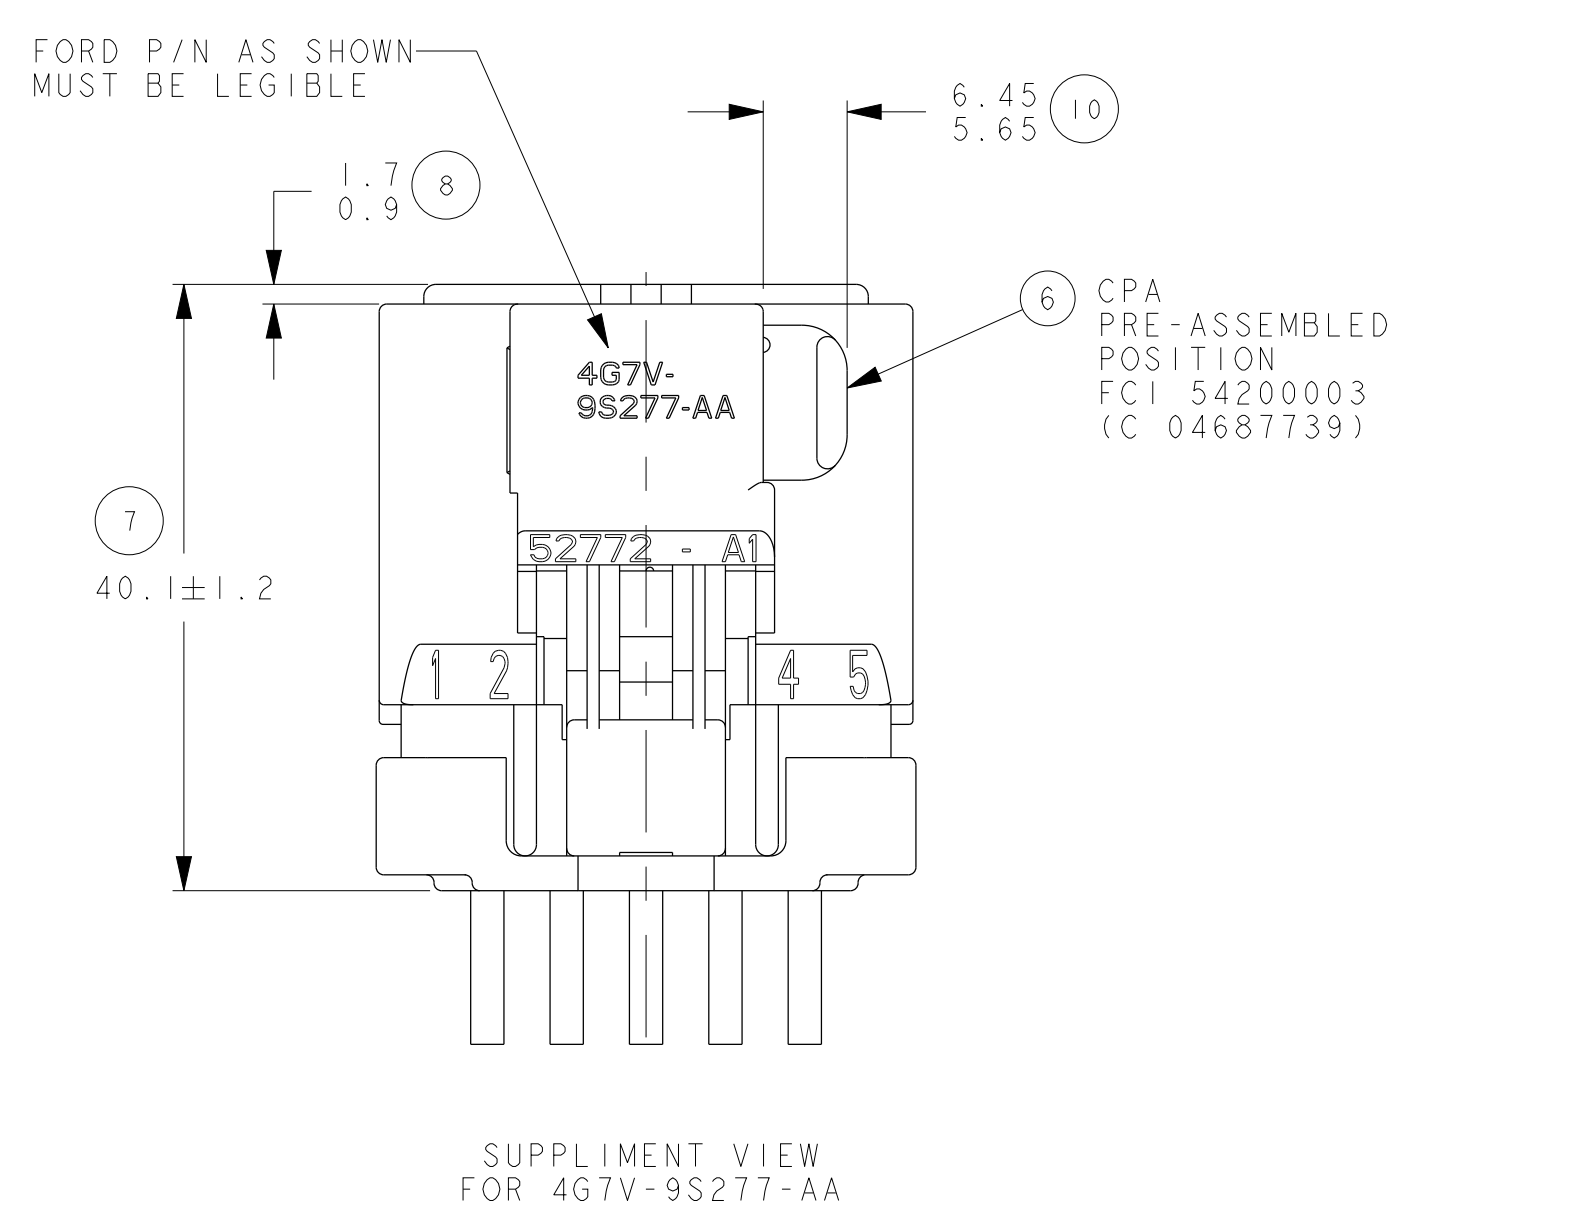
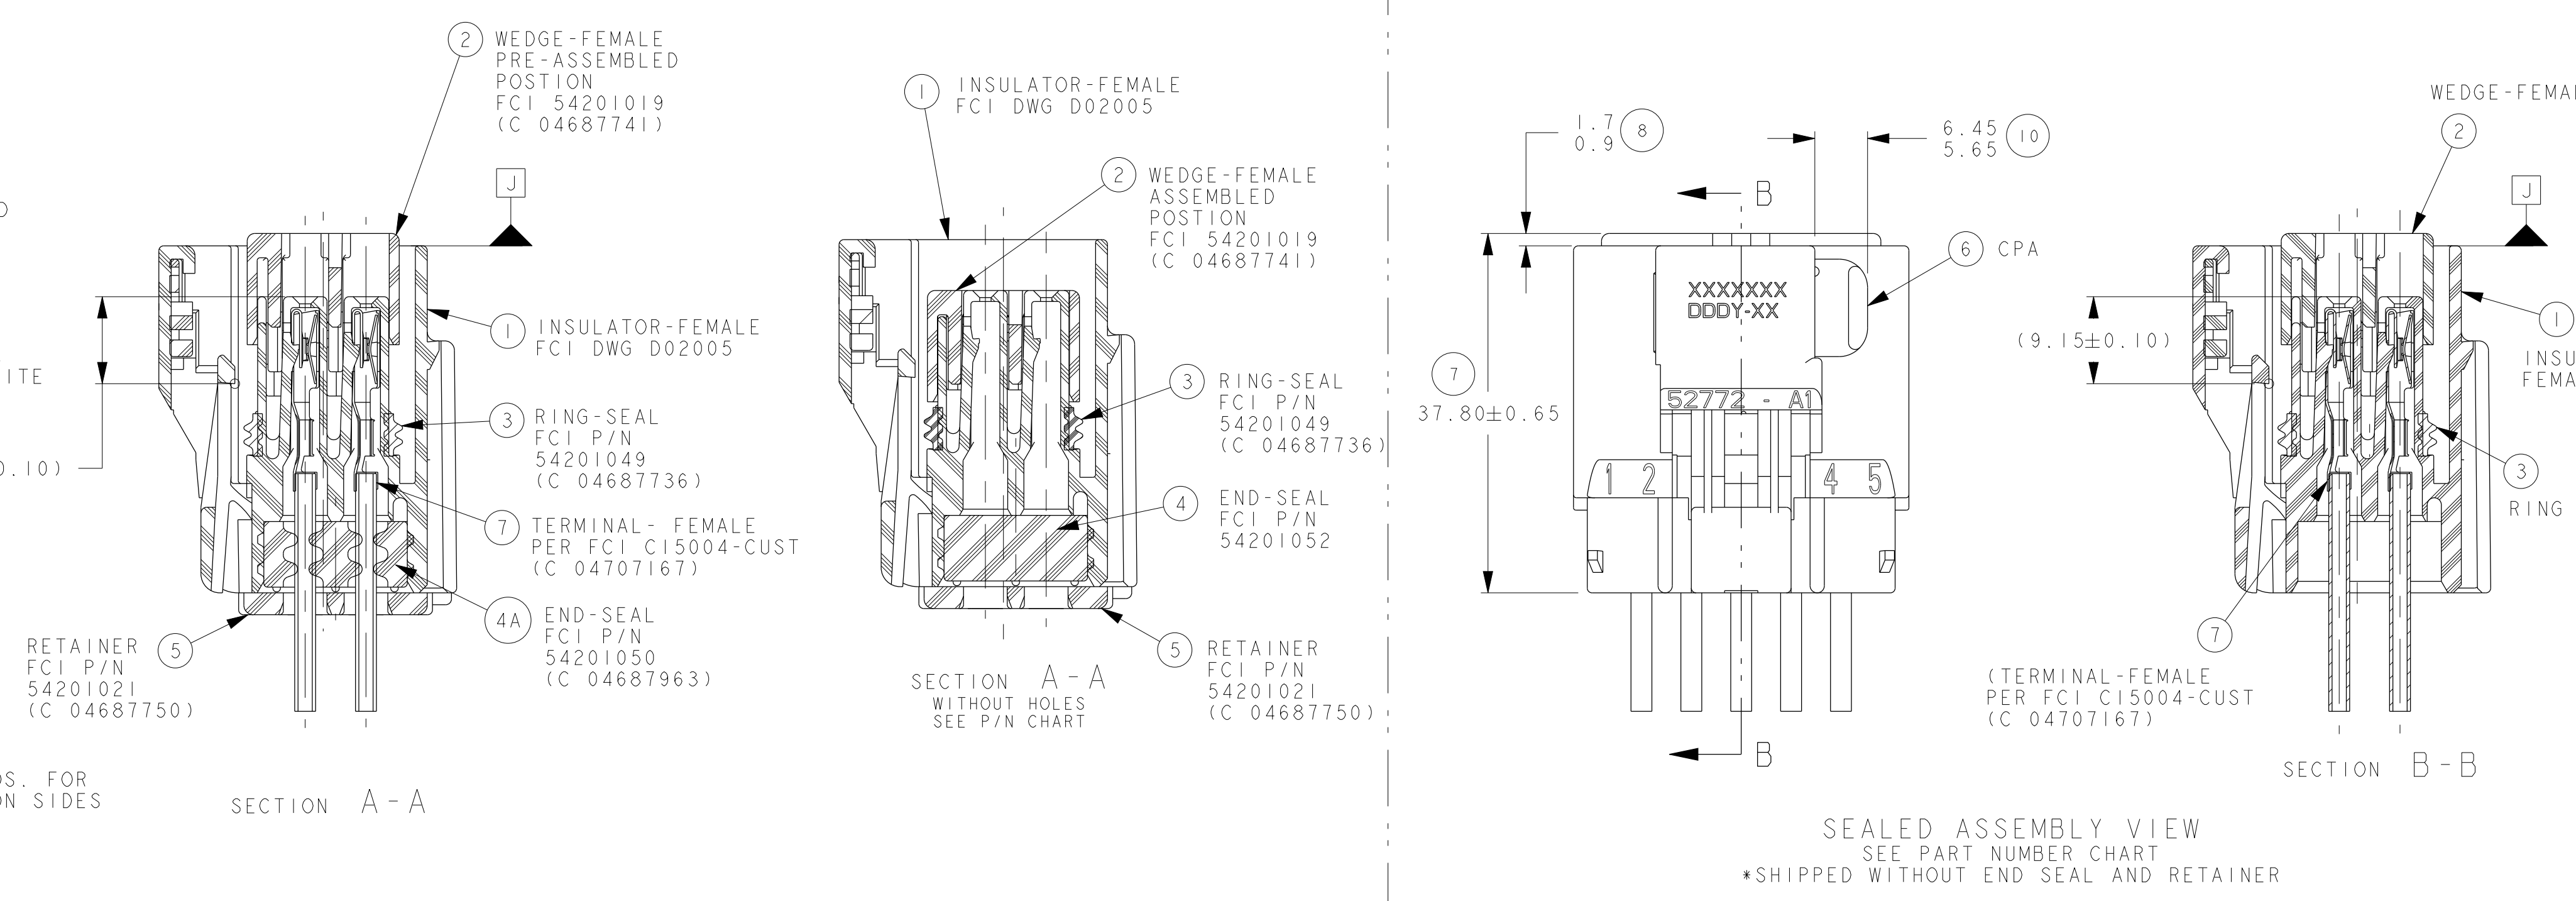


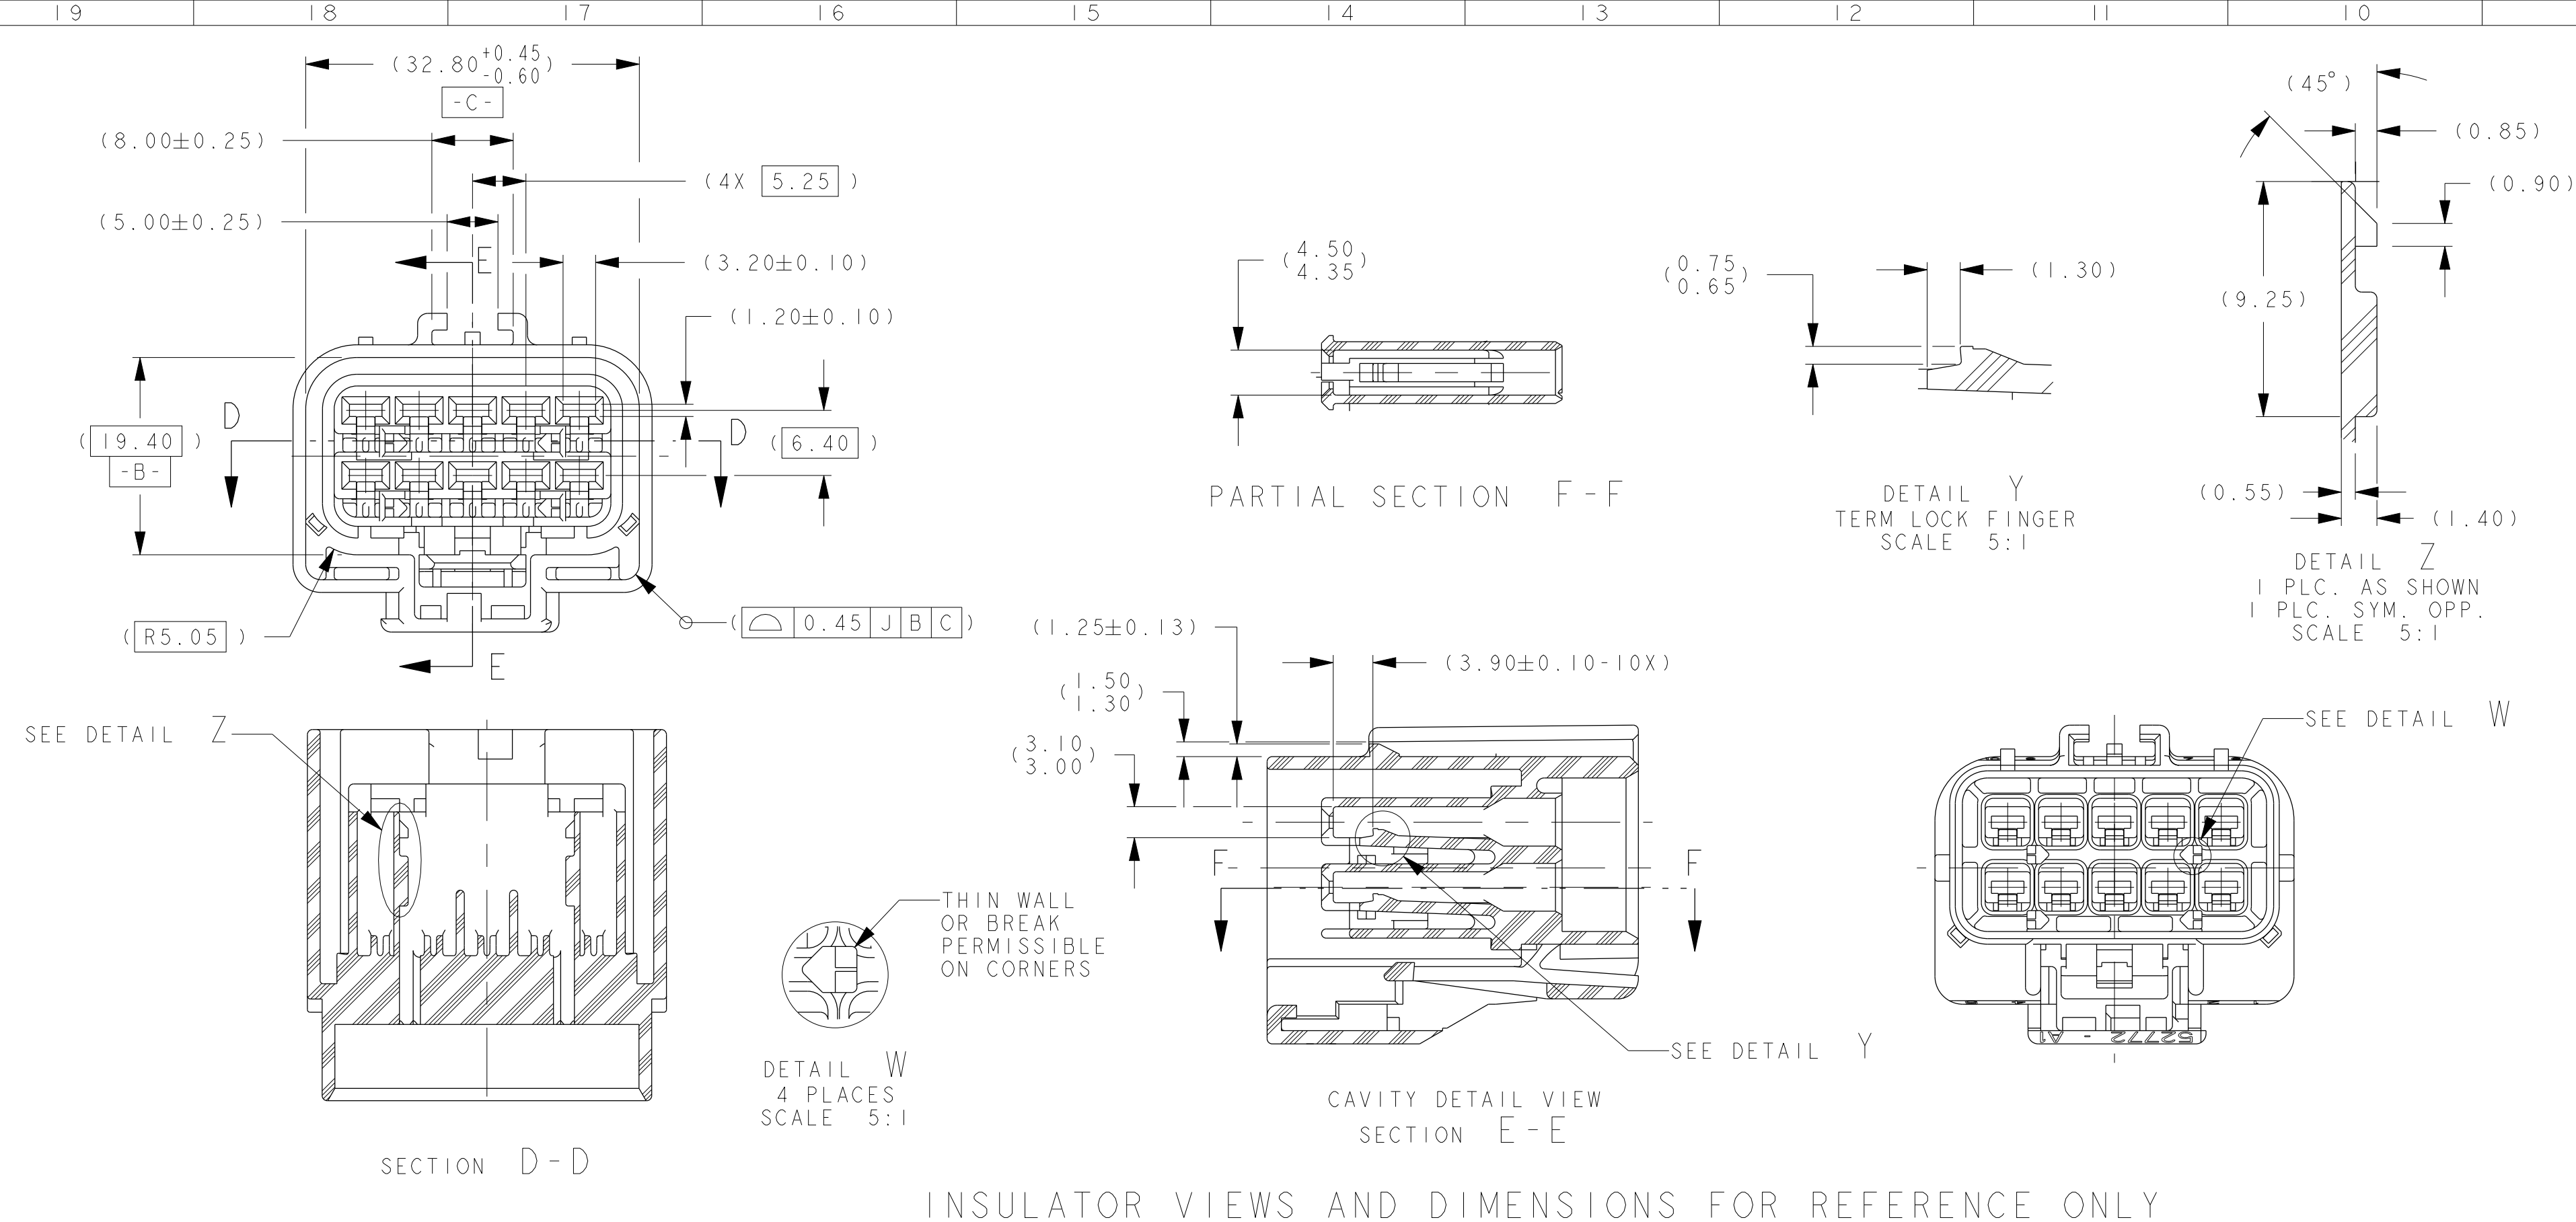

MATING PART NUMBER CHART									
G	LT BRN	SEALED	54201043N	N/A	N/A	54201042	N/A	N/A	
		SEALED	54201043	C 04686049AA	N/A	N/A	54201042	C 04686047AA	N/A
	F	AQUA	SEALED	*54201065N	N/A	N/A	DIRECT CONNECT APPLICATION INDEX G		
			SEALED	*54201065N	N/A	N/A	DIRECT CONNECT APPLICATION INDEX G		
UNSEALED			54201005N	N/A	N/A	DIRECT CONNECT APPLICATION INDEX F			
UNSEALED			54201005	C 04687905	7283-4809-90	DIRECT CONNECT APPLICATION INDEX F			
E	DK GRN	SEALED	54201015N	N/A	N/A	DIRECT CONNECT APPLICATION INDEX F			
		SEALED	54201015	C 04687899	7283-4806-90	DIRECT CONNECT APPLICATION INDEX F			
		UNSEALED	54201003N	N/A	N/A	DIRECT CONNECT APPLICATION INDEX E			
		UNSEALED	54201003	C 04687904	7283-4808-60	DIRECT CONNECT APPLICATION INDEX E			
D	ORANGE	SEALED	54201013N	N/A	N/A	DIRECT CONNECT APPLICATION INDEX E			
		SEALED	54201013	C 04687898	7283-4805-60	DIRECT CONNECT APPLICATION INDEX E			
		UNSEALED	54201004N	N/A	N/A	DIRECT CONNECT APPLICATION INDEX D			
		UNSEALED	54201004	C 04687903	7283-4807-50	DIRECT CONNECT APPLICATION INDEX D			
C	DK GREY	SEALED	54201014N	N/A	N/A	DIRECT CONNECT APPLICATION INDEX D			
		SEALED	54201014	C 04687897	7283-4804-50	DIRECT CONNECT APPLICATION INDEX D			
		SEALED	54201011N	N/A	N/A	DIRECT CONNECT APPLICATION INDEX C			
		SEALED	54201011	C 04801117	7229-2829-40	DIRECT CONNECT APPLICATION INDEX C			
	LT GRN	SEALED	*54201023N	N/A	N/A	DIRECT CONNECT APPLICATION INDEX C			
		SEALED	*54201023	C 04801112	7223-1609-40	DIRECT CONNECT APPLICATION INDEX C			
		SEALED	F066900	N/A	N/A	DIRECT CONNECT APPLICATION INDEX C			
		SEALED	△F071010	N/A	N/A	JOHN DEERE LITTLE FUSE LOAD CENTER			
B	LT GREY	UNSEALED	54201002N	N/A	N/A	54201008	N/A	N/A	
		UNSEALED	54201002	C 04687902	7223-1109-60	54201008	C 04687911	7222-1009-60	
		SEALED	54201012N	N/A	N/A	54201018	N/A	N/A	
		SEALED	54201012	C 04687896	7283-4803-60	54201018	C 04687908	N/A	
	A	BLACK	SEALED	*54201062	N/A	N/A	DIRECT CONNECT APPLICATION INDEX C		
			SEALED	*54201064N	N/A	N/A	DIRECT CONNECT APPLICATION INDEX C		
			SEALED	F671310	N/A	N/A	DIRECT CONNECT APPLICATION INDEX B		
			UNSEALED	54201001N	N/A	N/A	54201007	N/A	N/A
A	BLACK	UNSEALED	54201001	C 04687901	7283-4802-40	54201007	C 04687910	N/A	
		SEALED	F961010	N/A	N/A	JOHN DEERE LITTLE FUSE LOAD CENTER			
		SEALED	54201010N	N/A	N/A	54201017	N/A	N/A	
		SEALED	54201010	C 04687895	7283-4605-40	54201017	C 04687907	7282-4605-40	
		SEALED	54201010	C 04687895	7283-4605-40	54201024	C 04688875	7282-4605-40	
		SEALED	△F956900	N/A	N/A	DIRECT CONNECT APPLICATION INDEX B			
		UNSEALED	54201000N	N/A	N/A	54201006	N/A	N/A	
		UNSEALED	54201000	C 04687900	7283-4606-30	54201006	C 04687909	N/A	
A	BLACK	SEALED	54201009	C 04687894	7223-1605-30	54201016	C 04687906	7222-7406-30	
		SEALED	*54201022N	C 04707443	7283-4801-30	54201016	C 04687906	7222-7406-30	
		SEALED	*54201054	C 04759589AA	7283-4901-30	54201016	C 04687906	7222-7406-30	
		SEALED	54201054	C 04759589AA	7283-4901-30	54201058	C 56045040AA	N/A	
		SEALED	54201056N	N/A	7283-4608-30	54201016	C 04687906	7222-7406-30	
		SEALED	△F569600	N/A	N/A	DIRECT CONNECT APPLICATION INDEX A			
		SEALED	54201051N	C 04707404	N/A	DIRECT CONNECT APPLICATION INDEX A			
			FCI	CUSTOMER	YNA	FCI	CUSTOMER	YNA	
INDEX TYPE	COLOR	SEALED/ UNSEALED	FEMALE ASSEMBLY PART NUMBERS				MATING ASSEMBLY PART NUMBERS FOR REFERENCE ONLY		


C - CHRYSLER	F - FORD	
FCI - FRAMATOME	CONNECTORS INTERNATIONAL	
YNA - YAZAKI	NORTH AMERICA	
JD - JOHN DEERE	LF - LITTLE FUSE	
FCI	52772 OR 52772 H	SEE CHART
VENDOR	VENDOR CODE	CHRYSLER P/N

[illegible]


ITEM	CUSTOMER P/N	ICI P/N	PART NAME	MATERIAL
(1)	C 04687756	54201026	INSULATOR - FEMALE INDEX A; BLK	PA66 GF
(2)	C 04687957	54201027	INSULATOR - FEMALE INDEX B; LT GRN	PA66 GF
(3)	C 04687958	54201028	INSULATOR - FEMALE INDEX C; LT GRN	PA66 GF
(4)	C 04801111	54201029	INSULATOR - FEMALE INDEX D; GRN	PA66 GF
(5)	C 04687959	54201030	INSULATOR - FEMALE INDEX E; ORG	PA66 GF
(6)	C 04687960	54201031	INSULATOR - FEMALE INDEX E; DK GRN	PA66 GF
(7)	C 04687962	54201032	INSULATOR - FEMALE INDEX F; AQUA	PA66 GF
(8)	C 04858048AA	54201033	INSULATOR - FEMALE INDEX G; LT BROWN	PA66 GF
(9)	C 04687741	54201019	WEDGE FEMALE; ROYAL BLUE	PA66 GF
(10)	C 04687736	54201049	RING SEAL; RED	SILICONE
(11)	C 04687963	54201050	END SEAL; DK BLUE (INS. RANGE Ø 1.70 - Ø 3.35)	SILICONE
(12)	N/A	C755900	END SEAL; WHITE (INS. RANGE Ø 1.90 - Ø 3.70)	SILICONE
(13)	(1/C 30080013)	54201052	END SEAL; BRIGHT YELLOW (NO HOLES)	SILICONE
(14)	C 04687750	54201021	RETAINER; BLACK	PA66 GF
(15)	C 04687739	54200003	CPA LATCH; RED	PA66 GF

CONNECTOR ASSEMBLY TEMPERATURE CLASS PER SAE/USCAR-2 REV 5
PART CHANGE LEVEL (PCL)

△ INDICATES THIS PART AVAILABLE THROUGH TTI

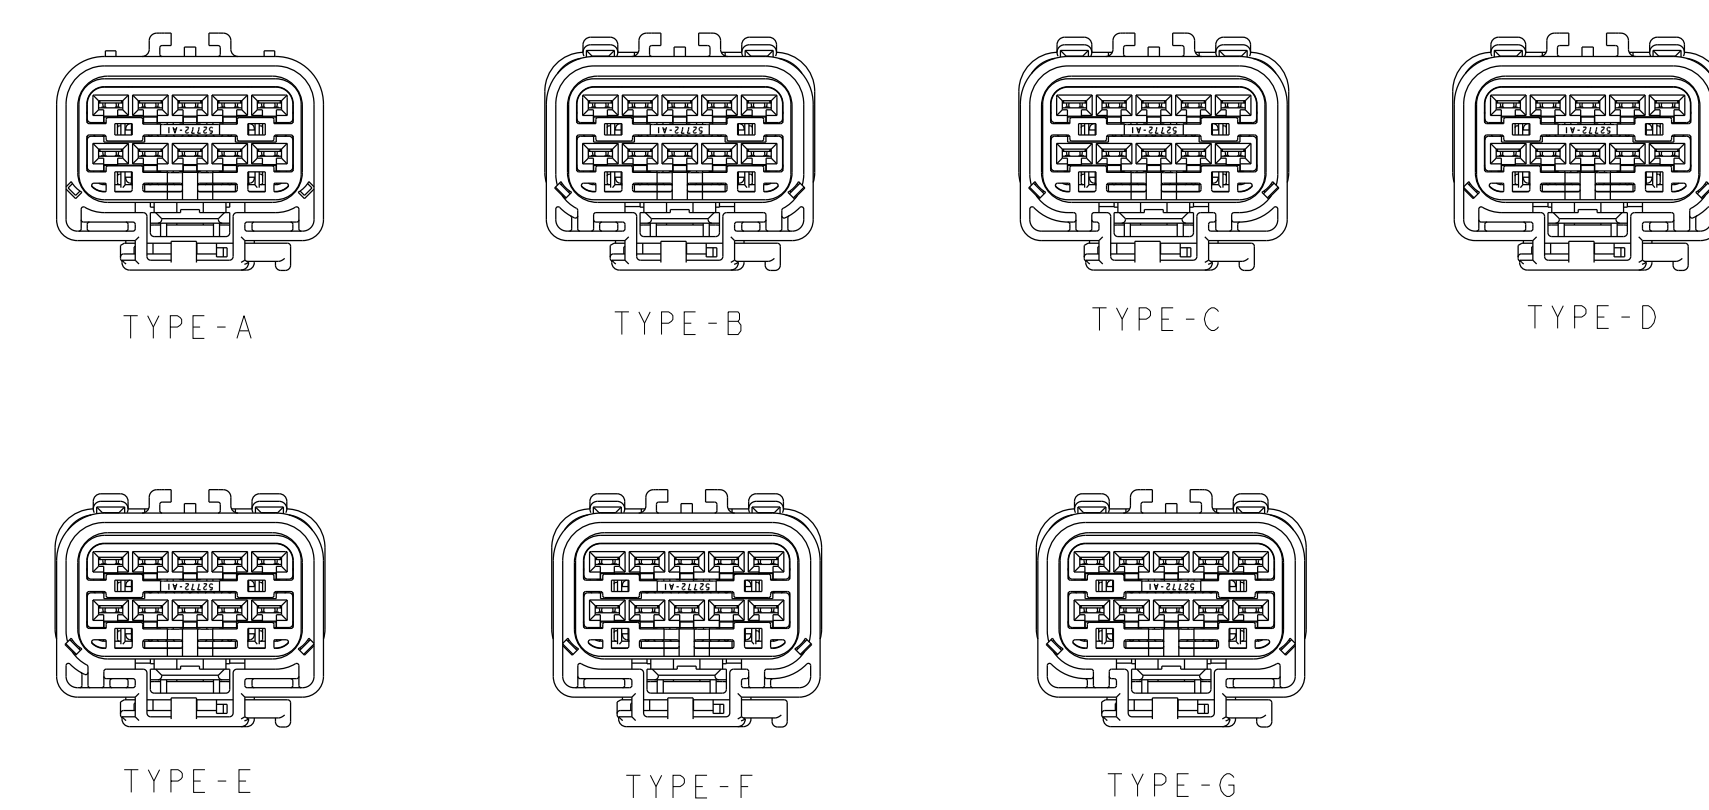

POLARIZATION OPTIONS
FULL SIZE
SHOWN WITH CPA

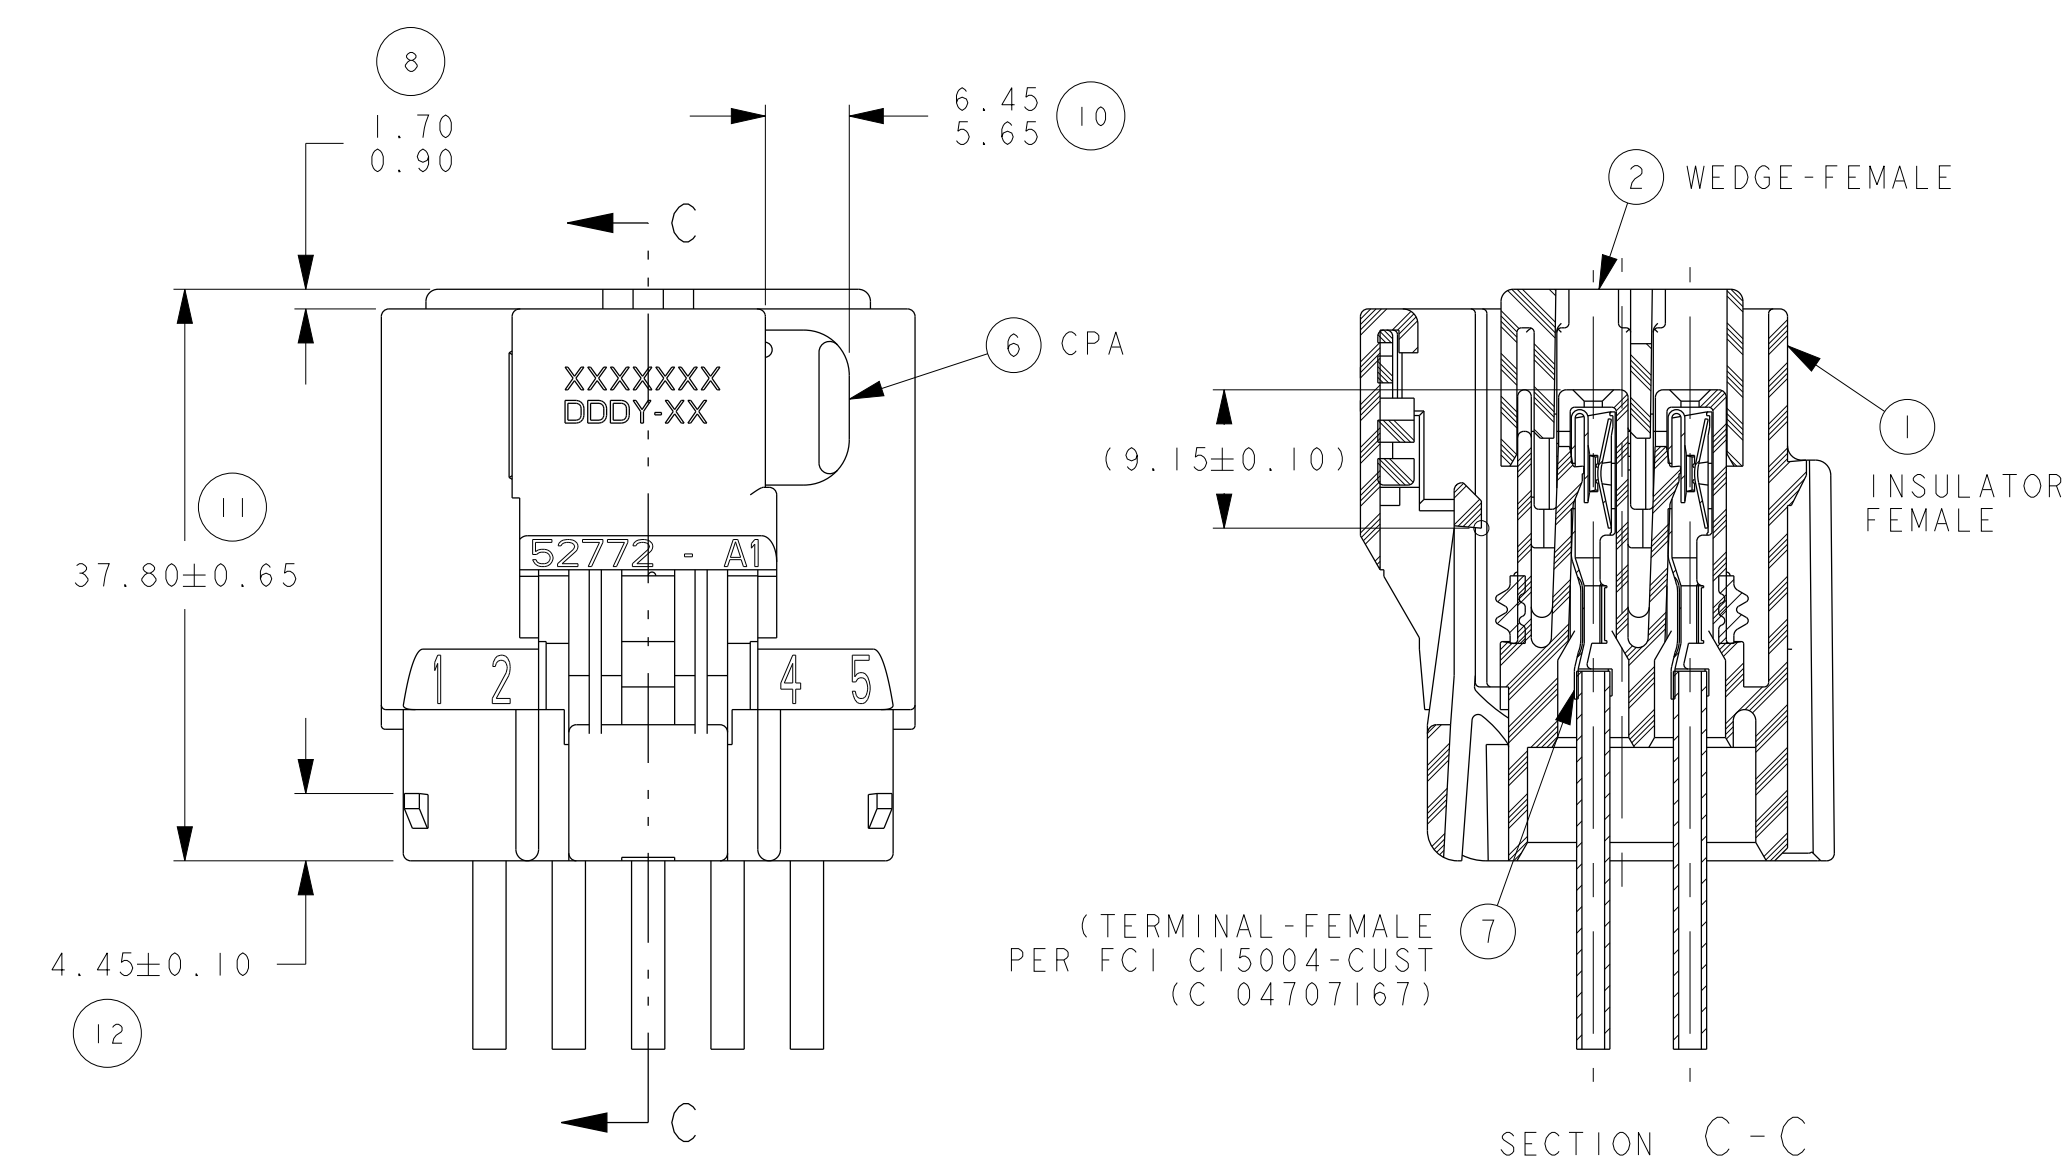

UNSEALED ASSEMBLY VIEW
SEE PART NUMBER CHART

NOTES:

- 1 QUALITY ASSURANCE REQUIREMENTS PER PS-7300: 1
SPC DATA REQUIRED
- 2 ENGINEERING APPROVAL OF SUPPLIER SAMPLES
IS REQUIRED PRIOR TO AUTHORIZATION OF PART
PRODUCTION
- 3 CHANGES IN DESIGN COMPOSITION OR PROCESSING
FROM THE PART PREVIOUSLY APPROVED FOR PART
PRODUCTION REQUIRES PRIOR ENGINEERING APPROVAL
- 4 WIRING FABRICATORS MUST PURCHASE FROM SOURCES SHOWN
- 5 ALL THE SEALED APPLICATIONS WITH 54201050 END SEAL MUST BE USED
WITH CHRYSLER WIRE SPEC. MS-8288 OR MS-9502 THIN WALL X-LINK
20.18, 16.14 & 12 GAGE WIRES ONLY UNLESS OTHERWISE SPECIFIED
(WIRE INSULATION RANGE Ø 1.90 MIN TO Ø 3.35 MAX)
ISO THIN WALL EQUIVALENTS ALLOWED
- 5A P/N WITH C755900 END SEAL MUST BE USED WITH WIRE INSULATION
RANGE FROM Ø 1.90 MIN TO Ø 3.70 MAX (16AWG TO 12AWG OR
1mm² TO 4mm² ISO THIN WALL)
- 6 ALL NON-SEALED APPLICATIONS MAY BE USED WITH ANY WIRE
INSULATION 22 GAGE THRU 10 GAGE & ISO THIN WALL EQUIVALENTS
PROVIDING THAT THE TERMINAL GRIP FOR THAT CORE/INSULATION
COMBINATION IS SHOWN ON THE FEMALE TERMINAL DRAWING:
FCI IS5004-CUST
MAX. INSULATION CRIMP WIDTH = 4.50
MAX. INSULATION CRIMP HEIGHT = 4.50
MAX. INSULATION DIA = 4.09 (10 GAW THIN WALL)

- 7 USE WITH CAVITY PLUG FCI P/N 54200005, ((C) 56038308 WHEN REQ'D) USE WITH DOUBLED X-MAS TREE CLIP ((C) 04707091 WHEN REQUIRED) USE WITH SINGLE X-MAS TREE CLIP ((C) 04625797 WHEN REQUIRED) THE 8MM APERTURE MUST BE METRICALLY SYMMETRICAL ABOUT CENTER LINE AND IT CAN BE INSERTED 180° INTO TERMINAL CAVITY
- 8 DIRECT CONNECT DRAWING NO. FCI G36010 (CHRYSLER 04707028)
- 9 TEST METHOD PER CHRYSLER PERFORMANCE SPEC # SAE/USCAR-2 REV 5, CONNECTOR TO ENGINE WITH LATCH DEPRESSED FORCE NOT TO EXCEED 120N FOR THIS SYSTEM
- CPA SEATING FORCES - 40N MAX
- WEDGE SEATING FORCES - 120N MAX
- X-MAS TREE CLIP INSERTION FORCES - 75N MAX
- 10 SUPPLIER I.D. SIGNIFIES TOOL OWNERSHIP FOR REFERENCE
- 11 ANNUAL QUALITY REQUIREMENTS:
A. ALL PARTS MUST BE SUBJECTIBLE TO PERFORM CONTINUOUS CONFORMANCE PER FCI SPECIFICATION #AQA-001 INSTEAD OF ANNUAL LAYOUT & ANNUAL PV REQUIREMENTS OF QS-9000 SECTION 2 & SAE/USCAR-2 REV 5

- ALL NON-REFERENCE DIMENSIONS ARE REQUIRED
- USE INDEX A, BLACK SEALED AND UNSEALED FOR ALL AFFECTED INSULATOR CAVITIES
 - CURRENT PRODUCTION TOOLING
 - POINT OF LAST RUN


- SERVICE TOOLING GUIDE INFORMATION PER APEX TRAINING MANUAL

12. MUST CONFORM TO THE FOLLOWING CHRYSLER/YNA STANDARDS:
SAE/J533-2 REV 5 FOR LATCH PERFORMANCE & AUDIBILITY

- SAE/USCAR-2/REV 5 EXCEPT AS NOTED ABOVE
PS-7300 QUALITY ASSURANCE (CHRYSLER)
PS-4480-CEK-4 (CHRYSLER) PART I.D., (G-009-2 YNA)
PS-9065 REGRIND (CHRYSLER), (G-009-3 YNA)
PS-9227 DATA EXCHANGE (CHRYSLER), (G-009-7 YNA)
PS-10052 INFORMATION SECURITY (CHRYSLER)

- THIS DRAWING (H59005) REPLACES CHRYSLER DRAWING
NUMBER 04687872 LEVEL "R"
CHRYSLER DRAWING IS FOR REFERENCE ONLY

- △ FCI P/N'S WITH SUFFIX "N" DESIGNATES
14 ASSEMBLIES W/O CPA

11-00153	B-C	MATERIAL PAGE 66 WAS PAGER635, TITLE BLOCK UPDATED PCI NOT AFFECTED, PIA F631030 UPDATED IN CHART										
11969	D14	RECORD CHANGE UPDATED FOR PIA'S F656909, F596900 & F669600 WERE ADDED TO KEY. "Y" WAS MISSED DURING CONVERSION, THE PCL OF PIA'S F691010 & F67010 WILL STAY AT GALLONS ADDED FOR INSULATION AND NOTES AND NOTES UPDATED										
11800	ALL	INSULATION PIA'S F691010, F67010 ADDED, NOTES AND CHARTS UPDATED, INSULATION RANGE ADDED, REVISED AND REBAR IN PDS										
PROJECT NO.	ZONE	CHANGE DESCRIPTION										
FORM NO.	PARAMETER	DESCRIPTION	THIS DRAWING AND ALL OTHER INFORMATION CONTAINED THEREIN IS PROPRIETARY AND THE PROPERTY OF FCJ. This drawing may not be copied, reproduced or distributed in any third party without the expressed written approval of FCJ. April 1999								DATE	BY
ADJ. 2.00M											DATE	BY
ISSUES	 1  2  3  4  5  6  7  8  9  10  11  12  13  14  15  16  17  18  19  20 21 22 23 24 25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52 53 54 55 56 57 58 59 60 61 62 63 64 65 66 67 68 69 70 71 72 73 74 75 76 77 78 79 80 81 82 83 84 85 86 87 88 89 90 91 92 93 94 95 96 97 98 99 100	DATE	BY									
ISSUES	 1  2  3  4  5  6  7  8  9  10  11  12  13  14  15  16  17  18  19  20 21 22 23 24 25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52 53 54 55 56 57 58 59 60 61 62 63 64 65 66 67 68 69 70 71 72 73 74 75 76 77 78 79 80 81 82 83 84 85 86 87 88 89 90 91 92 93 94 95 96 97 98 99 100	DATE	BY									
ISSUES	 1  2  3  4  5  6  7  8  9  10  11  12  13  14  15  16  17  18  19  20 21 22 23 24 25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52 53 54 55 56 57 58 59 60 61 62 63 64 65 66 67 68 69 70 71 72 73 74 75 76 77 78 79 80 81 82 83 84 85 86 87 88 89 90 91 92 93 94 95 96 97 98 99 100	DATE	BY									
ISSUES	 1  2  3  4  5  6  7  8  9  10  11  12  13  14  15  16  17  18  19  20 21 22 23 24 25 26 27 28 29 30 31 32 33 34 35											



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.