
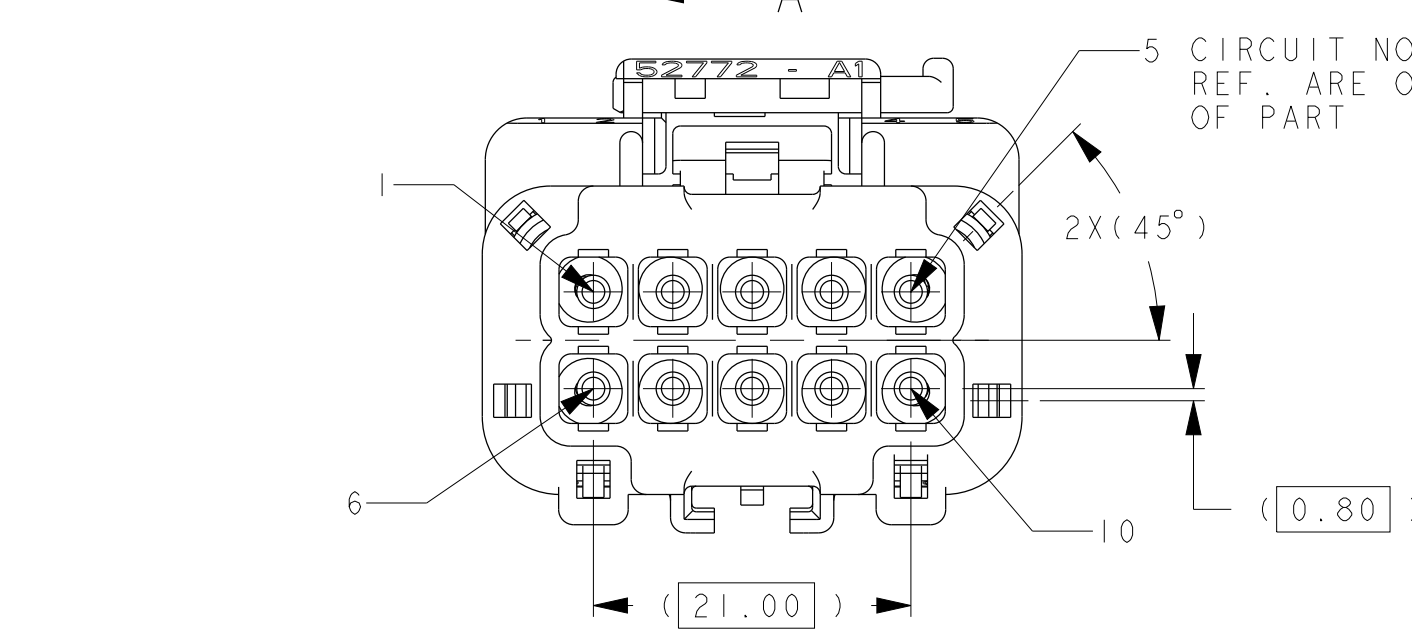
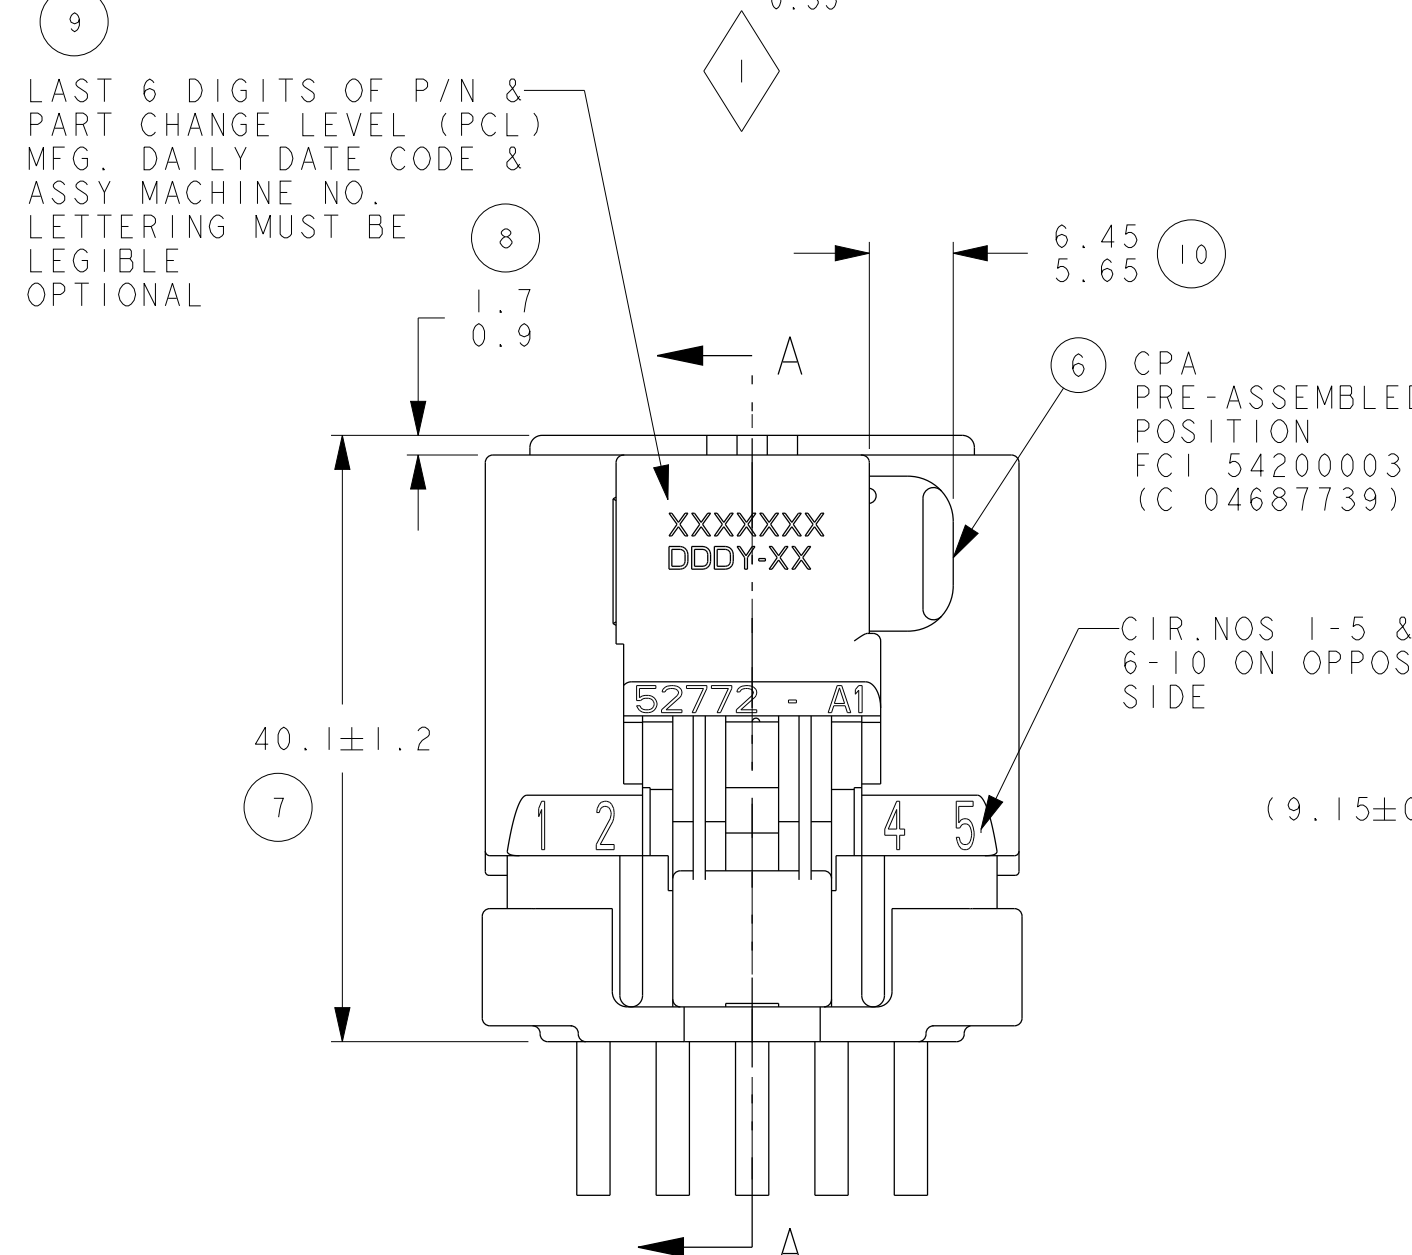
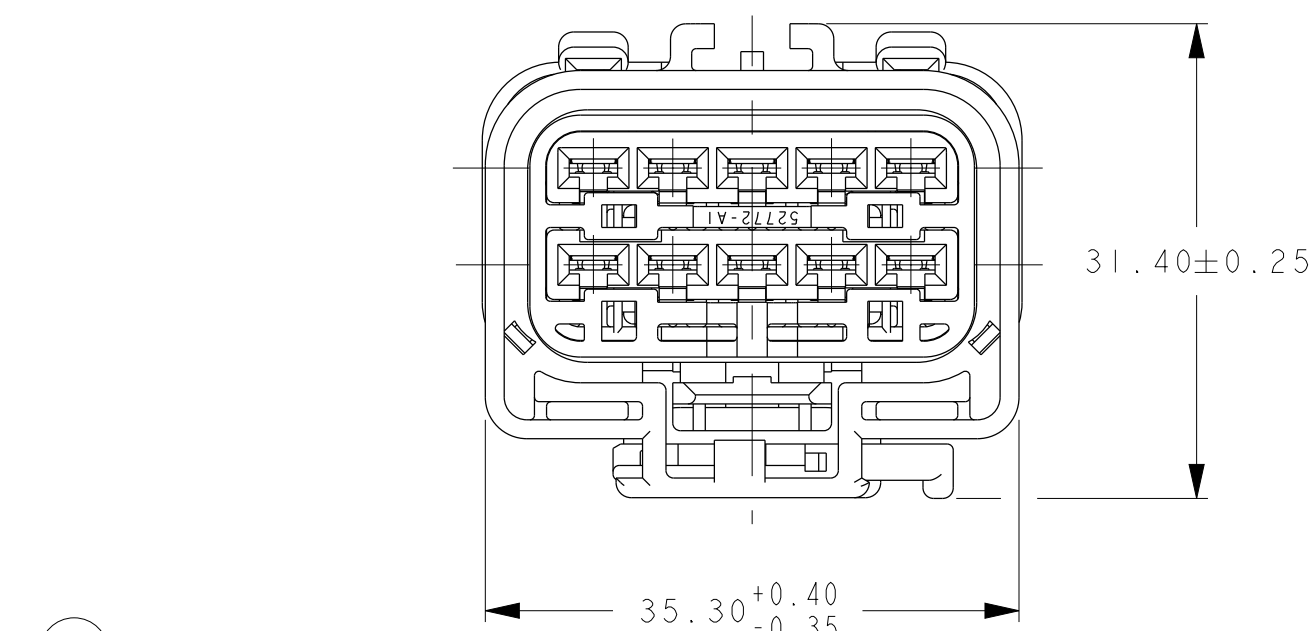
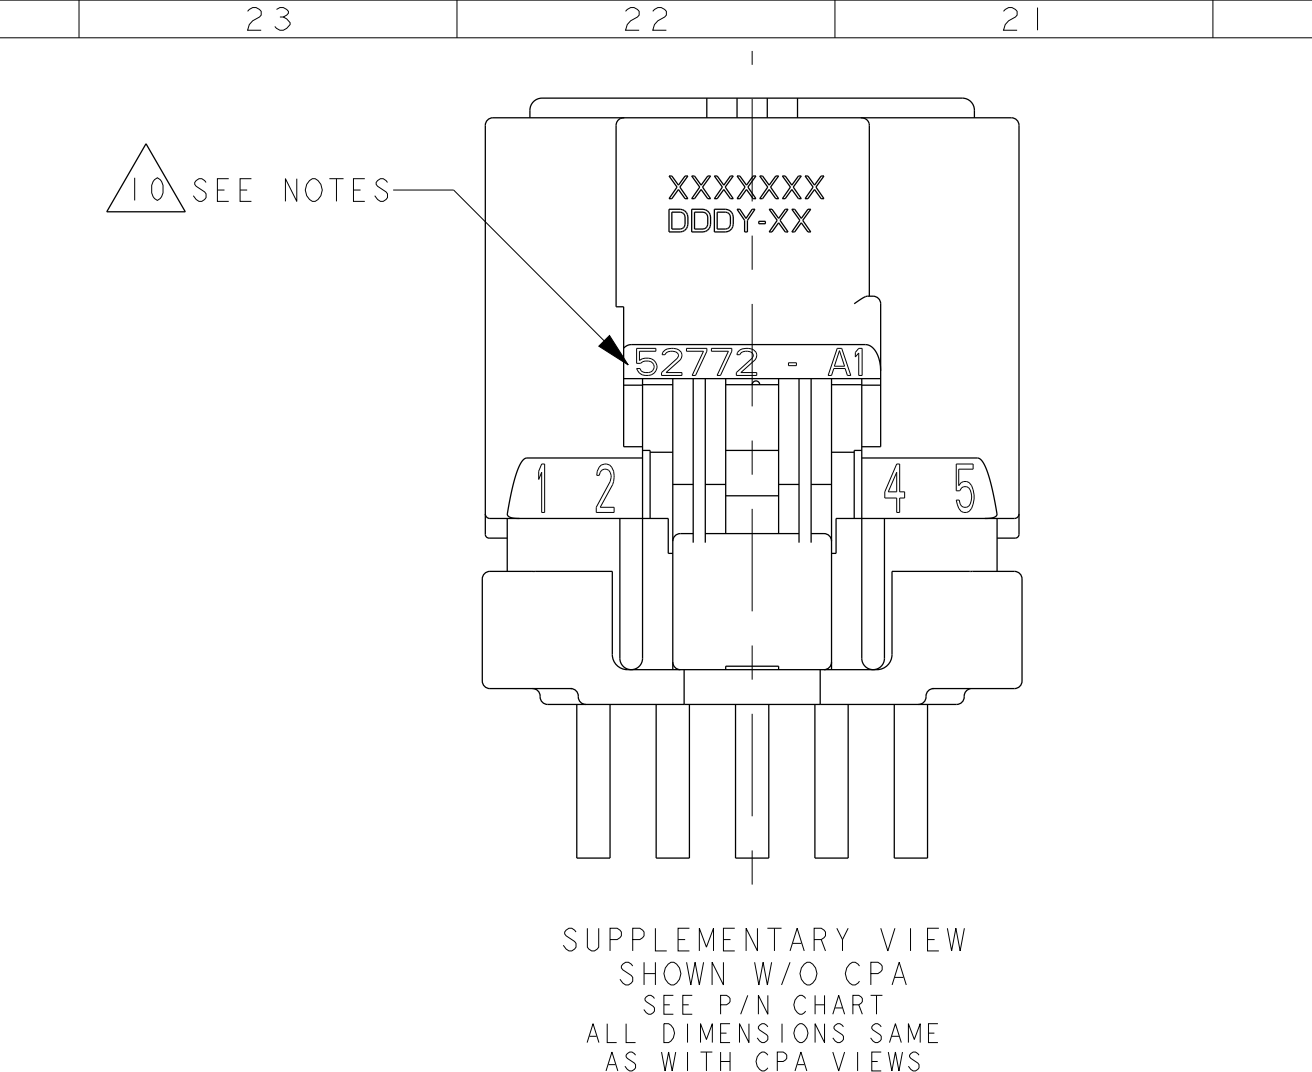
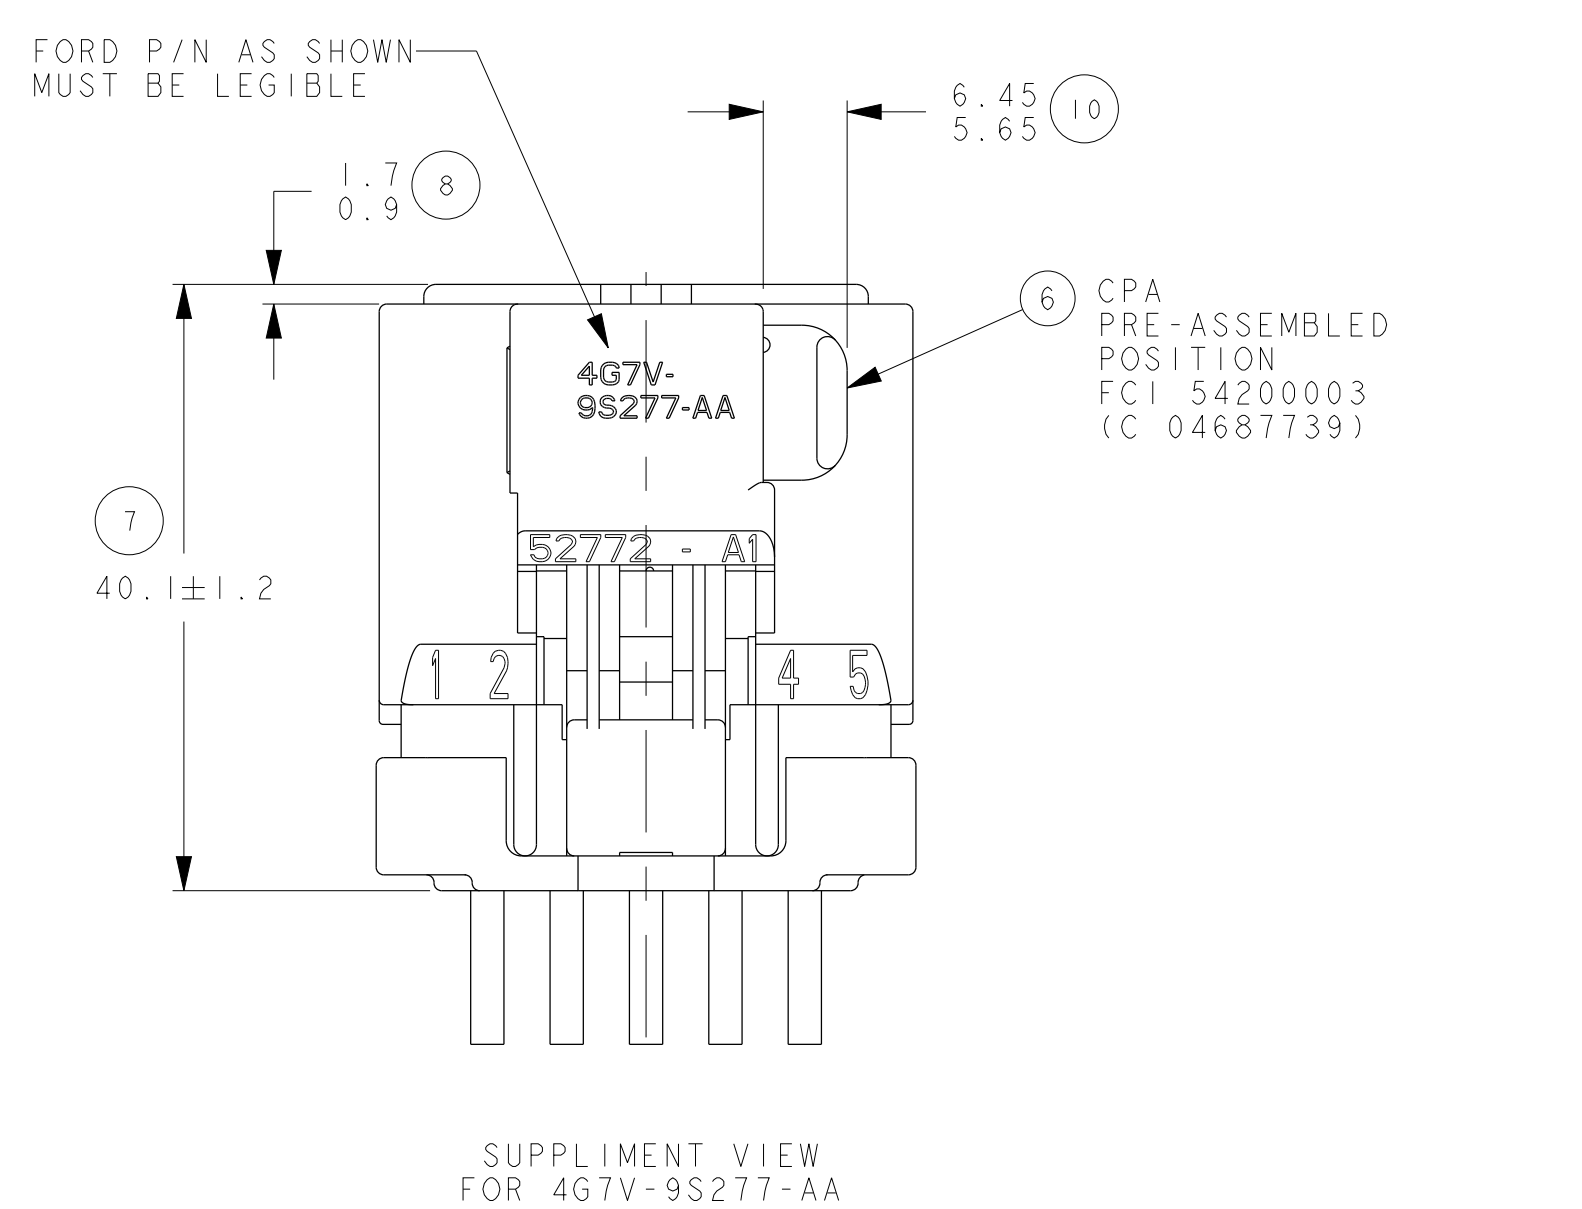
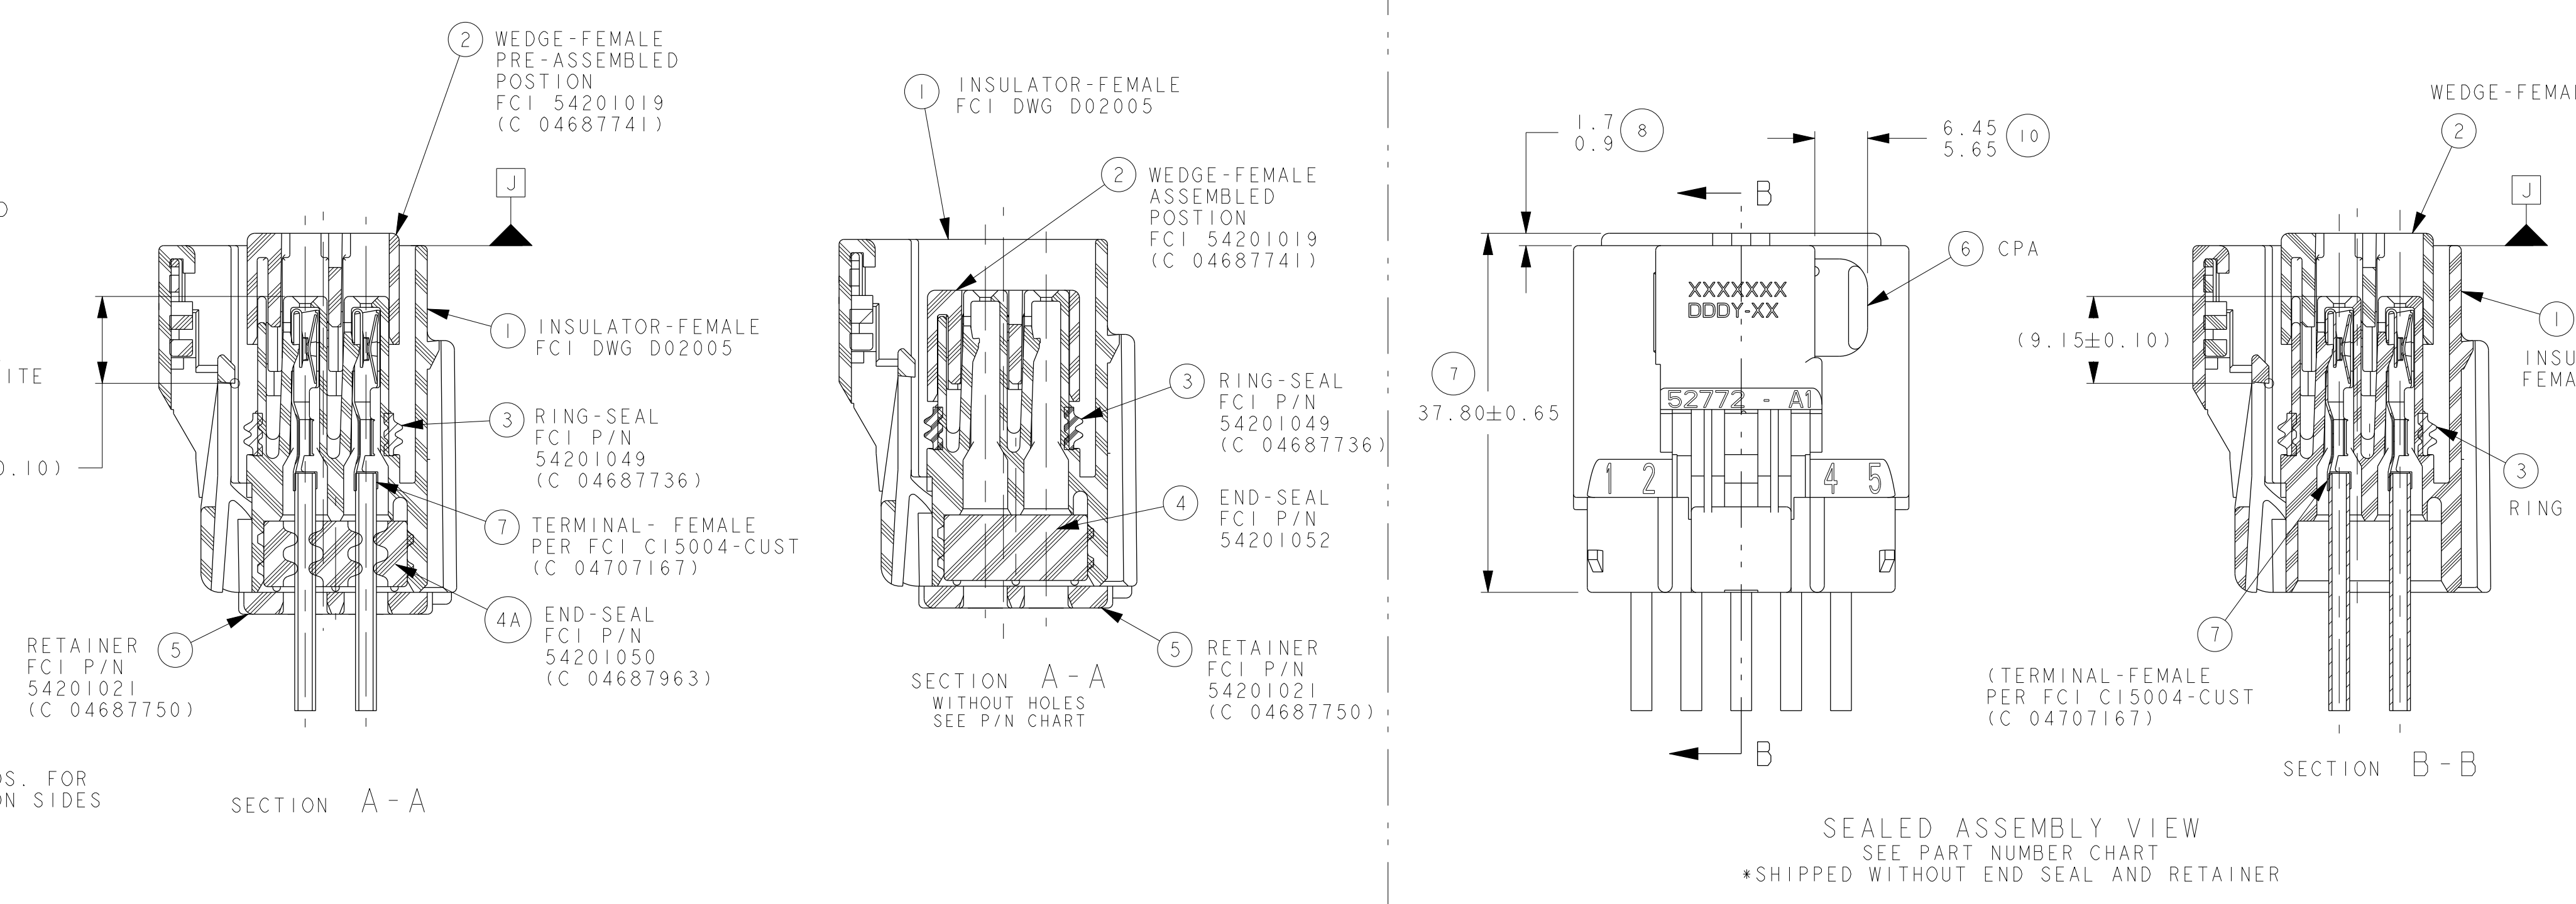


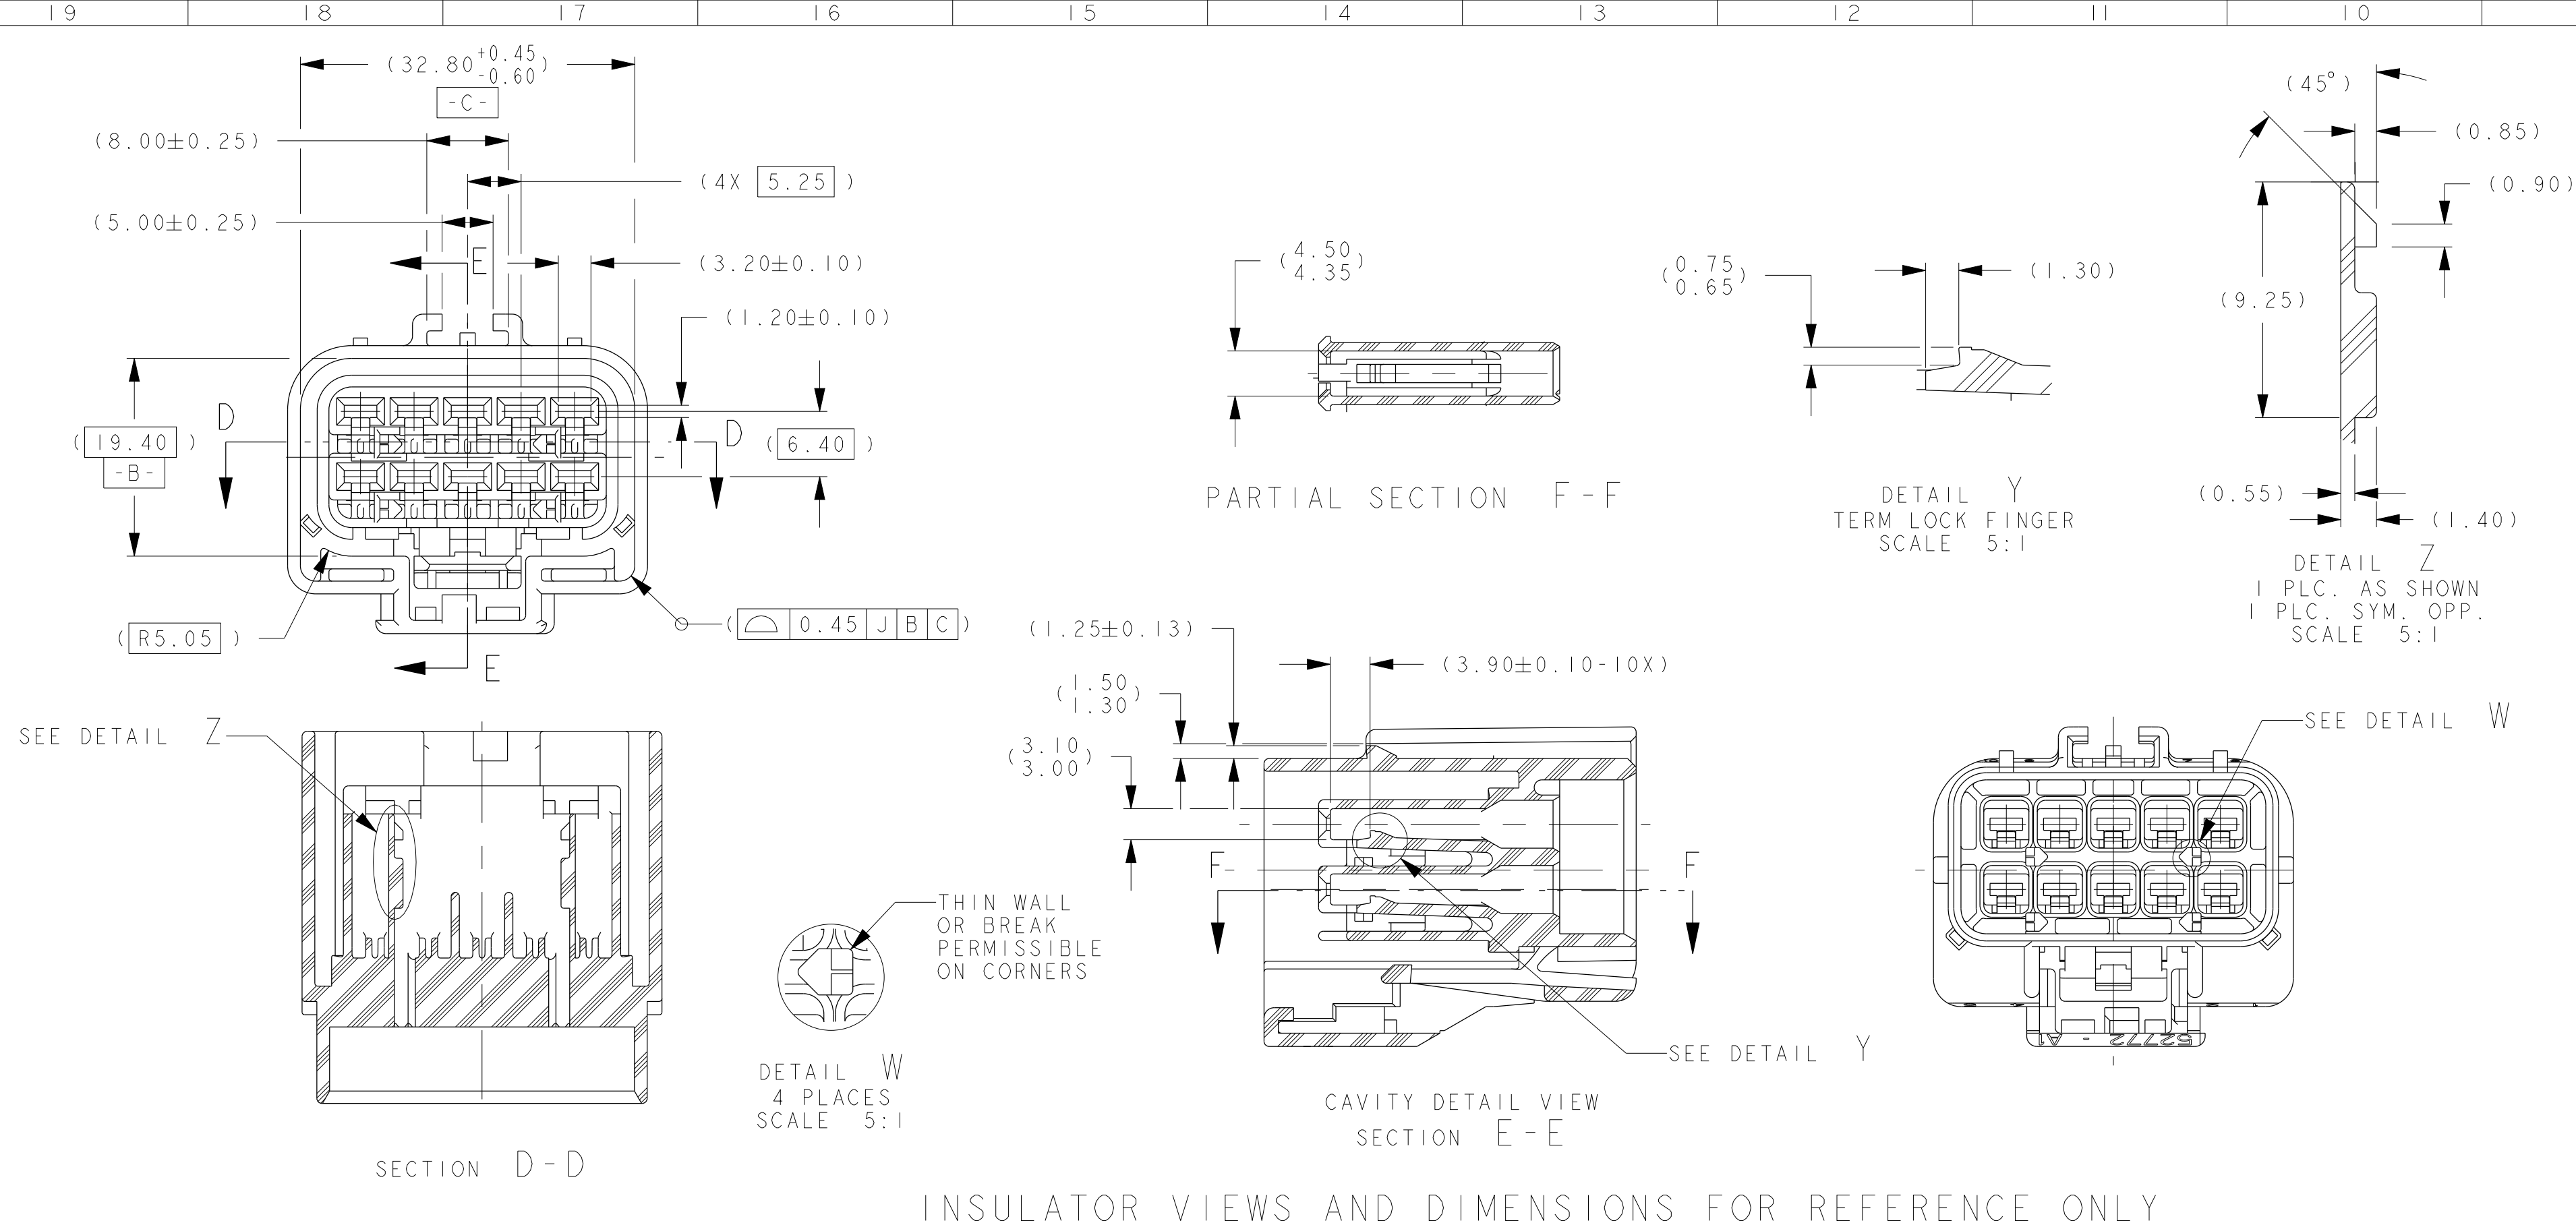


MATING PART NUMBER CHART									
G	LT BRN	SEALED	54201043N	N/A	N/A	54201042	N/A	N/A	
		SEALED	54201043N	C 04686049AA	N/A	54201042	C 04686047AA	N/A	
	F	AQUA	SEALED	*54201065N	N/A	N/A	DIRECT CONNECT APPLICATION INDEX	INDEX G	
			SEALED	*54201065N	N/A	N/A	DIRECT CONNECT APPLICATION INDEX	INDEX F	
			UNSEALED	54201005N	N/A	N/A	DIRECT CONNECT APPLICATION INDEX	INDEX F	
UNSEALED			54201005S	C 04687905	7283-4809-90	DIRECT CONNECT APPLICATION INDEX	INDEX F		
E	DK GRN	SEALED	54201015N	N/A	N/A	DIRECT CONNECT APPLICATION INDEX	INDEX F		
		SEALED	54201001S	C 04687899	7283-4806-90	DIRECT CONNECT APPLICATION INDEX	INDEX E		
		UNSEALED	54201003N	N/A	N/A	DIRECT CONNECT APPLICATION INDEX	INDEX E		
		UNSEALED	54201003S	C 04687904	7283-4808-60	DIRECT CONNECT APPLICATION INDEX	INDEX E		
D	ORANGE	SEALED	54201013N	N/A	N/A	DIRECT CONNECT APPLICATION INDEX	INDEX E		
		SEALED	54201001S	C 04687898	7283-4805-60	DIRECT CONNECT APPLICATION INDEX	INDEX E		
		UNSEALED	54201004N	N/A	N/A	DIRECT CONNECT APPLICATION INDEX	INDEX D		
		UNSEALED	54201004S	C 04687903	7283-4807-50	DIRECT CONNECT APPLICATION INDEX	INDEX D		
C	DK GREY	SEALED	54201014N	N/A	N/A	DIRECT CONNECT APPLICATION INDEX	INDEX D		
		SEALED	54201014S	C 04687897	7283-4804-50	DIRECT CONNECT APPLICATION INDEX	INDEX D		
		SEALED	54201011N	N/A	N/A	DIRECT CONNECT APPLICATION INDEX	INDEX C		
		SEALED	54201011S	C 04801117	7229-2829-40	DIRECT CONNECT APPLICATION INDEX	INDEX C		
B	LT GREY	SEALED	*54201023N	N/A	N/A	DIRECT CONNECT APPLICATION INDEX	INDEX C		
		SEALED	*54201023S	C 04801112	7223-1609-40	DIRECT CONNECT APPLICATION INDEX	INDEX C		
		SEALED	F066900	N/A	N/A	DIRECT CONNECT APPLICATION INDEX	INDEX C		
		SEALED	△F071010	N/A	N/A	JOHN DEERE LITTLE FUSE LOAD CENTER			
A	BLACK	UNSEALED	54201002N	N/A	N/A	54201008	N/A	N/A	
		UNSEALED	54201002S	C 04687902	7223-1109-60	54201008	C 04687911	7222-1009-60	
		SEALED	54201012N	N/A	N/A	54201018	N/A	N/A	
		SEALED	54201012S	C 04687896	7283-4803-60	54201018	C 04687908	N/A	
G	LT BRN	SEALED	*54201062N	N/A	N/A	DIRECT CONNECT APPLICATION INDEX	INDEX C		
		SEALED	*54201064N	N/A	N/A	DIRECT CONNECT APPLICATION INDEX	INDEX B		
		SEALED	F671310	N/A	N/A	DIRECT CONNECT APPLICATION INDEX	INDEX B		
		UNSEALED	54201001N	N/A	N/A	54201007	N/A	N/A	
F	AQUA	UNSEALED	54201001N	C 04687901	7283-4802-40	54201007	C 04687910	N/A	
		SEALED	F961010	N/A	N/A	JOHN DEERE LITTLE FUSE LOAD CENTER			
		SEALED	54201010N	N/A	N/A	54201017	N/A	N/A	
		SEALED	54201010S	C 04687895	7283-4605-40	54201017	C 04687907	7282-4605-40	
E	DK GRN	SEALED	54201010S	C 04687895	7283-4605-40	54201024	C 04688875	7282-4605-40	
		SEALED	△F956900	N/A	N/A	DIRECT CONNECT APPLICATION INDEX	INDEX B		
		UNSEALED	54201000N	N/A	N/A	54201006	N/A	N/A	
		UNSEALED	54201000S	C 04687900	7283-4606-30	54201006	C 04687909	N/A	
D	ORANGE	SEALED	54201009S	C 04687894	7223-1605-30	54201016	C 04687906	7222-7406-30	
		SEALED	*54201022N	C 04707443	7283-4801-30	54201016	C 04687906	7222-7406-30	
		SEALED	*54201054S	C 04759589AA	7283-4901-30	54201016	C 04687906	7222-7406-30	
		SEALED	54201054S	C 04759589AA	7283-4901-30	54201058	C 56045040AA	N/A	
C	DK GREY	SEALED	54201056N	N/A	N/A	54201016	C 04687906	7222-7406-30	
		SEALED	△F569600	N/A	N/A	DIRECT CONNECT APPLICATION INDEX	INDEX A		
		SEALED	54201051N	C 04707404	N/A	DIRECT CONNECT APPLICATION INDEX	INDEX A		
		UNSEALED	54201000N	N/A	N/A	54201006	N/A		
INDEX TYPE	COLOR	SEALED/UNSEALED	FCI	CUSTOMER	N/A	FCI	CUSTOMER	N/A	
FEMALE ASSEMBLY PART NUMBERS					MATING ASSEMBLY PART NUMBERS FOR REFERENCE ONLY				

[illegible]


ITEM	CUSTOMER P/N	ICI P/N	PART NAME	MATERIAL
(1)	C 04687756	54201026	INSULATOR - FEMALE INDEX A; BLK	PA66 GF
(2)	C 04687957	54201027	INSULATOR - FEMALE INDEX B; LT GRN	PA66 GF
(3)	C 04687958	54201028	INSULATOR - FEMALE INDEX C; LT GRN	PA66 GF
(4)	C 04801111	54201029	INSULATOR - FEMALE INDEX D; GRN	PA66 GF
(5)	C 04687959	54201030	INSULATOR - FEMALE INDEX E; ORG	PA66 GF
(6)	C 04687960	54201031	INSULATOR - FEMALE INDEX E; DK GRN	PA66 GF
(7)	C 04687962	54201032	INSULATOR - FEMALE INDEX F; AQUA	PA66 GF
(8)	C 04858048AA	54201033	INSULATOR - FEMALE INDEX G; LT BROWN	PA66 GF
(9)	C 04687741	54201019	WEDGE FEMALE; ROYAL BLUE	PA66 GF
(10)	C 04687736	54201049	RING SEAL; RED	SILICONE
(11)	C 04687963	54201050	END SEAL; DK BLUE (INS. RANGE Ø 1.70 - Ø 3.35)	SILICONE
(12)	N/A	C755900	END SEAL; WHITE (INS. RANGE Ø 1.90 - Ø 3.70)	SILICONE
(13)	(1/C 30080013)	54201052	END SEAL; BRIGHT YELLOW (NO HOLES)	SILICONE
(14)	C 04687750	54201021	RETAINER; BLACK	PA66 GF
(15)	C 04687739	54200003	CPA LATCH; RED	PA66 GF

CONNECTOR ASSEMBLY TEMPERATURE CLASS PER SAE/USCAR-2 REV 5
PART CHANGE LEVEL (PCL)

△ INDICATES THIS PART AVAILABLE THROUGH TTI

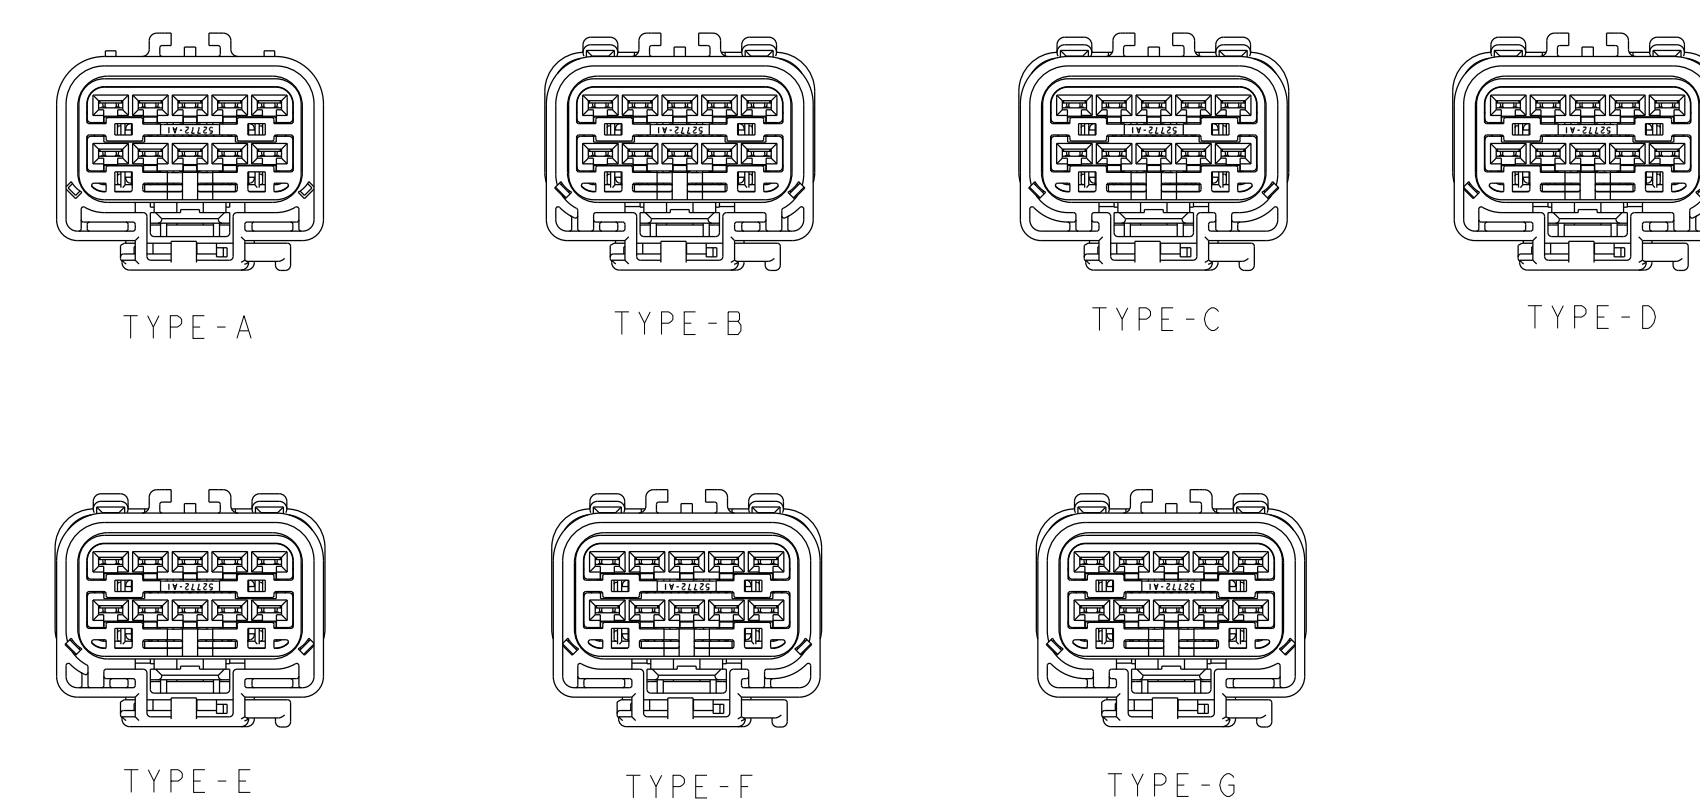

POLARIZATION OPTIONS
FULL SIZE
SHOWN WITH CPA

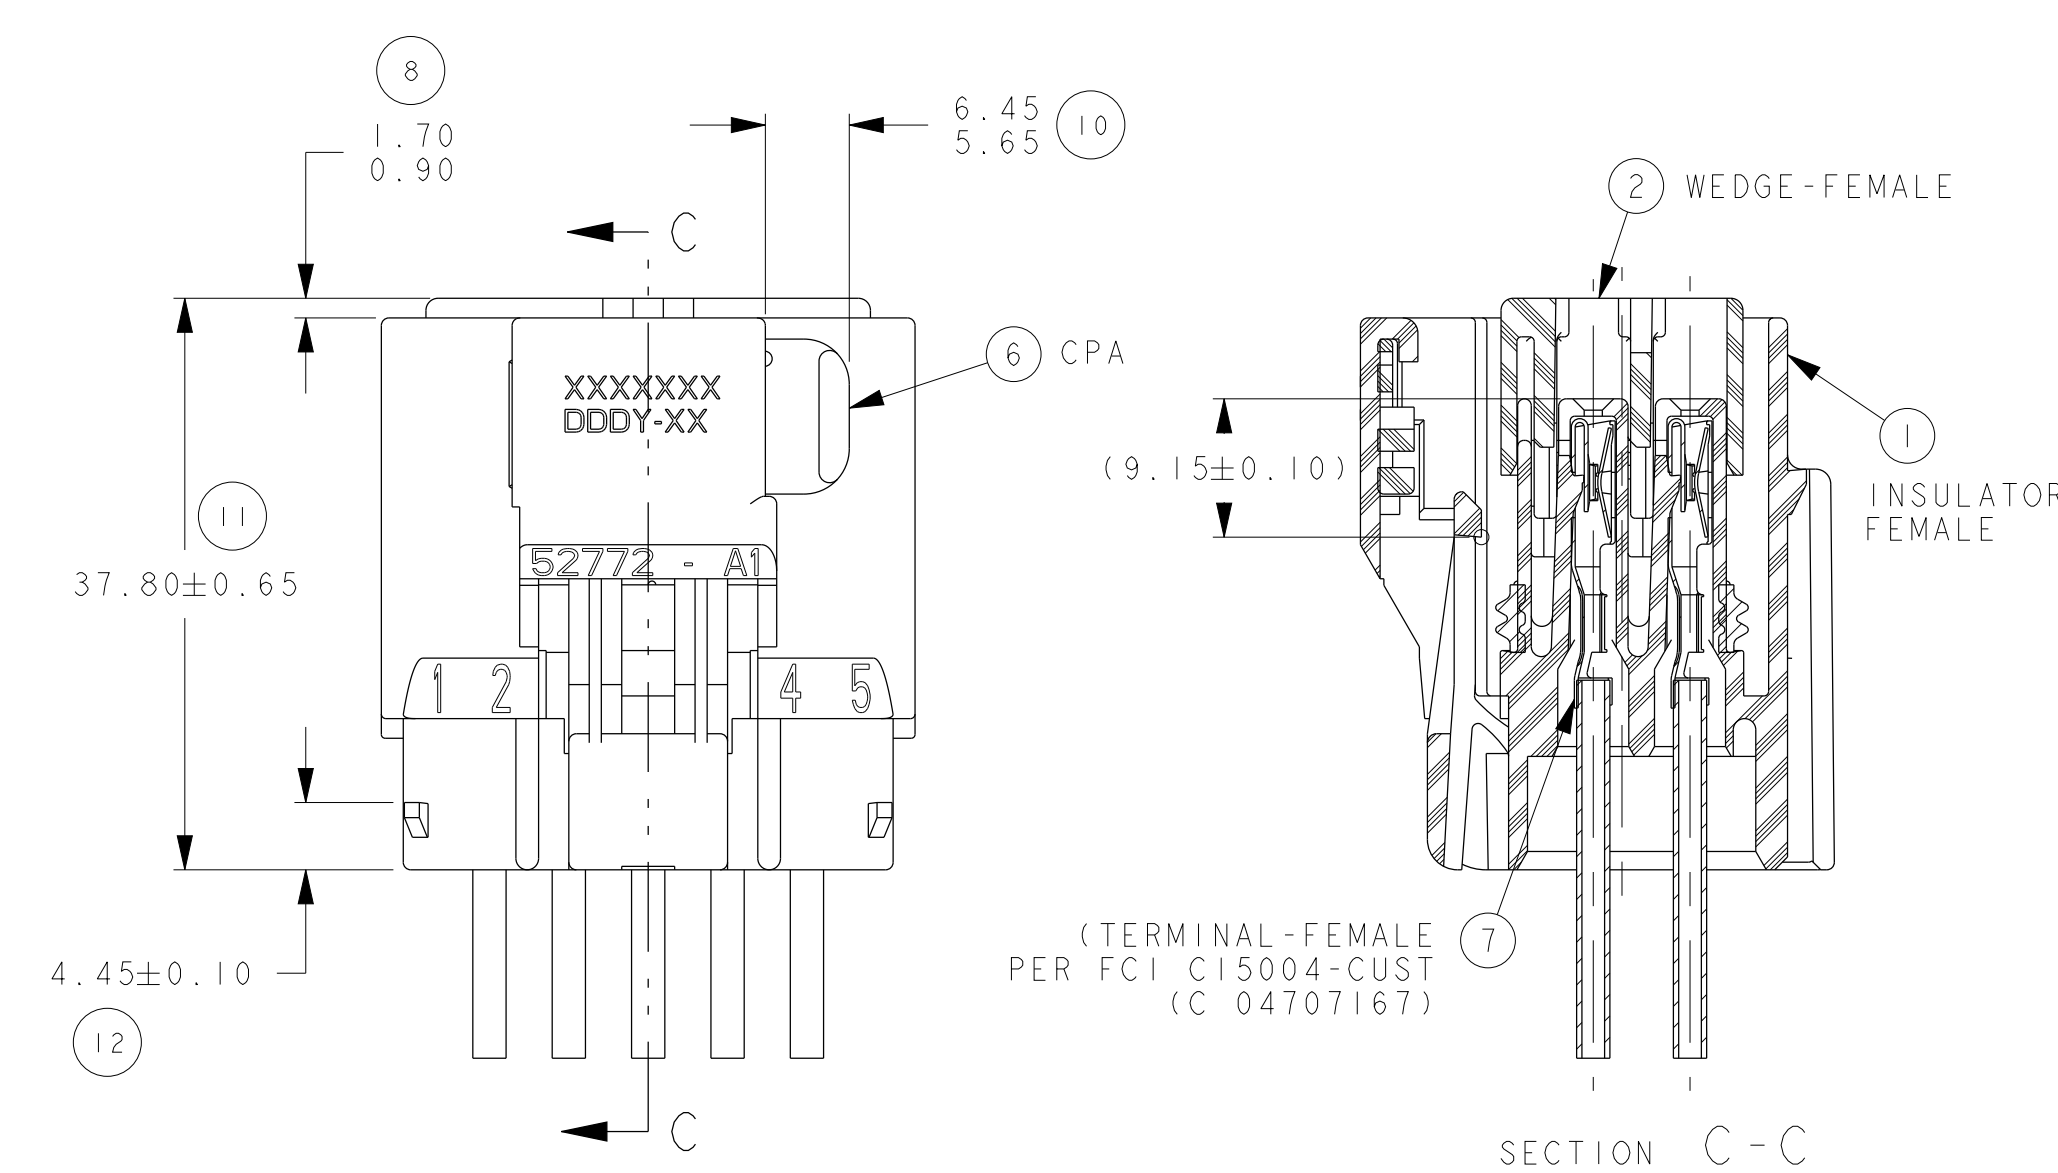

UNSEALED ASSEMBLY VIEW
SEE PART NUMBER CHART

NOTES:

- 1 QUALITY ASSURANCE REQUIREMENTS PER PS-7300: 1 SPC DATA REQUIRED
- 2 ENGINEERING APPROVAL OF SUPPLIER SAMPLES IS REQUIRED PRIOR TO AUTHORIZATION OF PART PRODUCTION
- 3 CHANGES IN DESIGN COMPOSITION OR PROCESSING FROM THE PART PREVIOUSLY APPROVED FOR PART PRODUCTION REQUIRES PRIOR ENGINEERING APPROVAL
- 4 WIRING FABRICATORS MUST PURCHASE FROM SOURCES SHOWN
- 5 ALL THE SEALED APPLICATIONS WITH 54201050 END SEAL MUST BE USED WITH CHRYSLER WIRE SPEC. MS-8288 OR MS-9502 THIN WALL X-LINK 20,18,16,14 & 12 GAGE WIRES ONLY UNLESS OTHERWISE SPECIFIED (WALL INSULATION RANGE Ø 1 TO Ø 3.35 MAX) ISO THIN WALL EQUIVALEANTS ALLOWED
- 5A P/N WITH CTS755900 END SEAL MUST BE USED WITH WIRE INSULATION RANGE FROM Ø 1.90 MIN TO Ø 3.70 MAX (18AWG TO 12AWG OR 1mm2 TO 4mm2 ISO THIN WALL)
- 6 ALL NON-SEALED APPLICATIONS MAY BE USED WITH ANY WIRE INSULATION 22 GAGE THRU 10 GAGE & ISO THIN WALL EQUIVALEENTS PROVIDING THAT THE TERMINAL GRIP FOR THAT CORE/INSULATION COMBINATION IS SHOWN ON THE FEMALE TERMINAL DRAWING:
FCI C15004-CUST
MAX. INSULATION CRIMP WIDTH = 4.50
MAX. INSULATION CRIMP HEIGHT = 4.50
MAX. INSULATION DIA = 4.09 (10 GAW THIN WALL)

- 7 USE WITH CAVITY PLUG FCI P/N 54200005, I(C) 56038308 WHEN REQ'D
 USE WITH DOUBLE X-MAS TREE CLIP (C) 04707091 WHEN REQUIRED
 USE WITH SINGLE X-MAS TREE CLIP (C) 04625797 WHEN REQUIRED
 THE 8MM APERTURE IS TERMINAL CLIP ABOUT CENTER LINE AND
 IT CAN BE INSERTED 180° INTO TERMINAL CAVITY
- 8 DIRECT CONNECT DRAWING NO. FCI G36010 (CHRYSLER 04707028)
- 9 TEST METHOD PER CHRYSLER PERFORMANCE SPEC # SAE/USCAR-2 REV 5,
 CONNECTOR ENDS OF PIN 40 AND 41 WITH LATCH DEPRESSED TOOL NOT
 TO EXCEED 120N FOR THIS SYSTEM
- CPA SEATING FORCES - 40N MAX
- WEDGE SEATING FORCES - 120N MAX
- X-MAS TREE CLIP INSERTION FORCES - 75N MAX
- 10 SUPPLIER I.D. SIGNIFIES TOOL OWNERSHIP
 FOR REFERENCE

- ANNUAL QUALITY REQUIREMENTS:
IT IS PERMISSIBLE TO PERFORM CONTINUOUS CONFORMANCE PER
FCI SPECIFICATION #QA0-001 INSTEAD OF ANNUAL LAYOUT &
ANNUAL PV REQUIREMENTS OF AS-9000 SECTION 2 & SAE/USCAR-2 REV 5
- ALL NON-REFERENCE DIMENSIONS ARE REQUIRED
- USE INDEX A, BLACK SEALED AND UNSEALED FOR ALL AFFECTED INSULATOR CAVITIES
 - CURRENT PRODUCTION TOOLING
 - POINT OF LAST RUN

- SERVICE TOOLING GUIDE INFORMATION PER APEX TRAINING MANUAL

- △2 MUST CONFORM TO THE FOLLOWING CHRYSLER/YNA STANDARDS:
SAE/JUSCAR-2 REV 5 FOR LATCH PERFORMANCE & AUDIBILITY
SAE/JUSCAR-2 REV 5 EXCEPT AS NOTED ABOVE
PS-7300 QUALITY ASSURANCE (CHRYSLER)
PS-4480-CEK-4 (CHRYSLER) PART I.D., (G-009-2 YNA)
PS-9065 REGRIND (CHRYSLER), (G-009-3 YNA)
PS-9227 DATA EXCHANGE (CHRYSLER), (G-009-7 YNA)
PS-10052 INFORMATION SECURITY (CHRYSLER)

- THIS DRAWING (H59005) REPLACES CHRYSLER DRAWING
NUMBER 04687872 LEVEL "R"
CHRYSLER DRAWING IS FOR REFERENCE ONLY
- FCI P/N'S WITH SUFFIX "N" DESIGNATES
ASSEMBLIES W/O CPA

[illegible]



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.