

4

3

2

1

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

AUG ,2006.

© COPYRIGHT 2009 BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC

DIST

REVISIONS

DW

P

LTR

DESCRIPTION

DATE

DWN

APVD


E5

REVISED (ECR-13-016508)





23JAN14

BW

SC

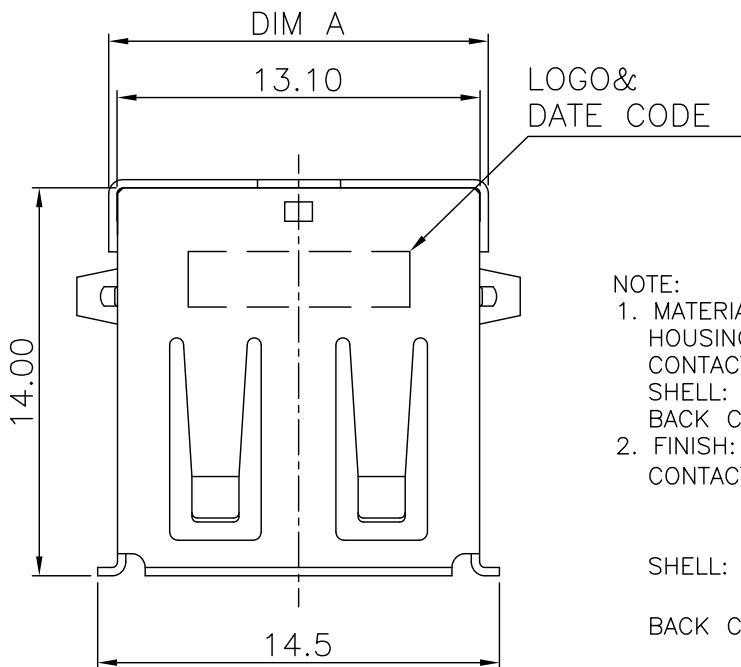

- NOTE:
- MATERIAL:
HOUSING: PA9T WITH 30%GF, UL94V-0, BLACK COLOR.
CONTACT: PHOSPHOR BRONZE.
SHELL: BRASS.
BACK COVER: BRASS.
 - FINISH:
CONTACT: 0.762μm [30μ"] MIN. GOLD PLATING ON CONTACT AREA.
3.048μm [120μ"] MIN. BRIGHT TIN PLATING ON SOLDER TAILS.
1.27μm [50μ"] MIN. NICKEL UNDERPLATING OVERALL.
SHELL: 0.762μm [30μ"] MIN. NICKEL PLATED OVER
0.762μm [30μ"] MIN. Cu UNDERPLATING OVERALL.
BACK COVER: 0.762μm [30μ"] MIN. NICKEL PLATED OVER
0.762μm [30μ"] MIN. Cu UNDERPLATING OVERALL.
 - REFLOW SOLDER CAPABLE TO 260°C PER TE SPEC 109-201, CONDITION B.

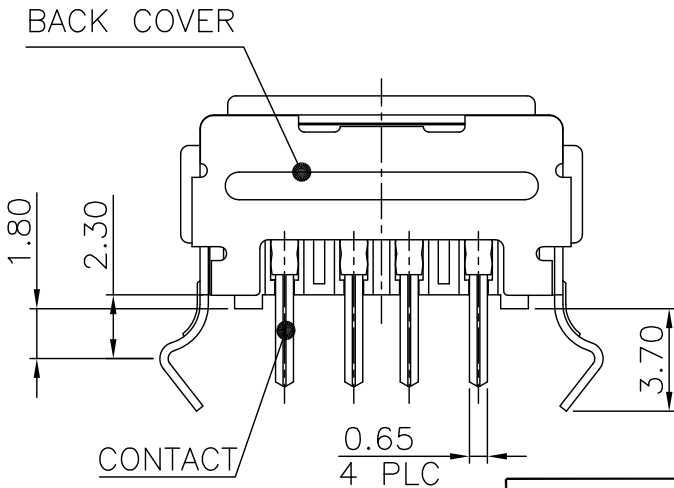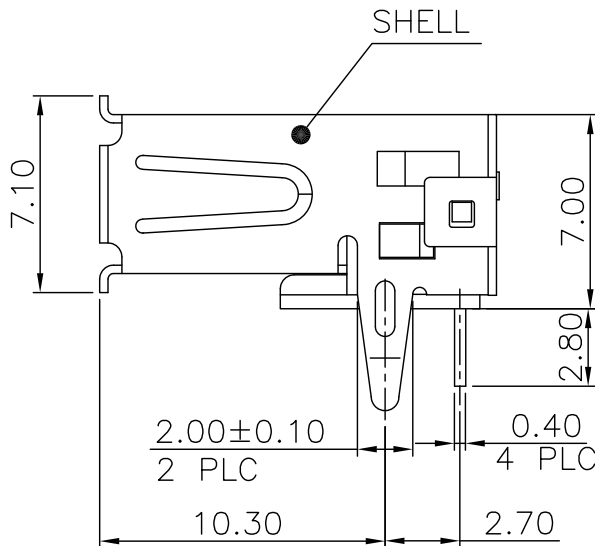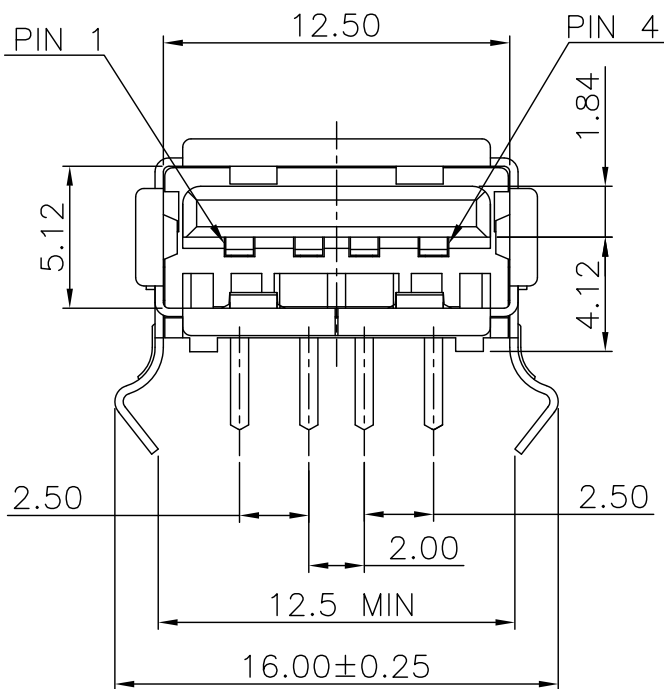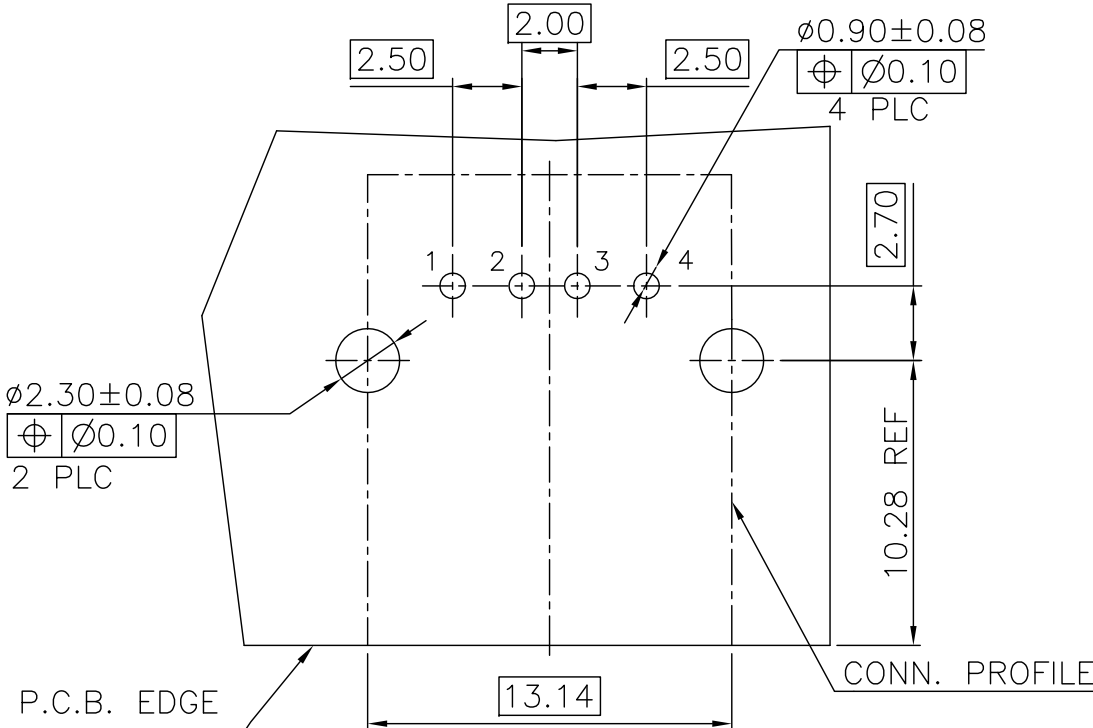

RECOMMEND P.C.B LAYOUT (THICKNESS=1.6mm)
(COMPONENT SIDE) TOLERANCE±0.05

OBSOLETE	NA	W/O	TRAY	1734081-2
	13.7	W/	TRAY	1734081-1
DIM.A	BACK COVER	PACKAGE	PART NUMBER	

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN O. HU 21SEP2004

CHK S. HSU 21SEP2004

APVD W.J. KE 21SEP2004

PRODUCT SPEC

108-57505

APPLICATION SPEC


501-57579

WEIGHT

2.01 GRAMS

CUSTOMER DRAWING

DIMENSIONS:
MM



MATERIAL

SEE NOTE

TOLERANCES UNLESS
OTHERWISE SPECIFIED:

0 PLC ± -
1 PLC ± 0.35
2 PLC ± 0.25
3 PLC ± 0.15
4 PLC ± -
ANGLES ± 3°

FINISH

SEE NOTE



TE Connectivity

NAME

USB CONNECTOR, RECEPTACLE
4 POSITION, SERIES A

SIZE

CAGE CODE

DRAWING NO

RESTRICTED TO

A3

00779

C=1734081

SCALE

SHEET

1 OF 19

REV E5

4

3

2

1

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

AUG ,2006.



COPYRIGHT 2009

BY TYCO ELECTRONICS CORPORATION.

ALL RIGHTS RESERVED.

LOC

DIST

REVISIONS

P

LTR




DESCRIPTION

DATE

DWN




APVD

SEE SHEET 1.

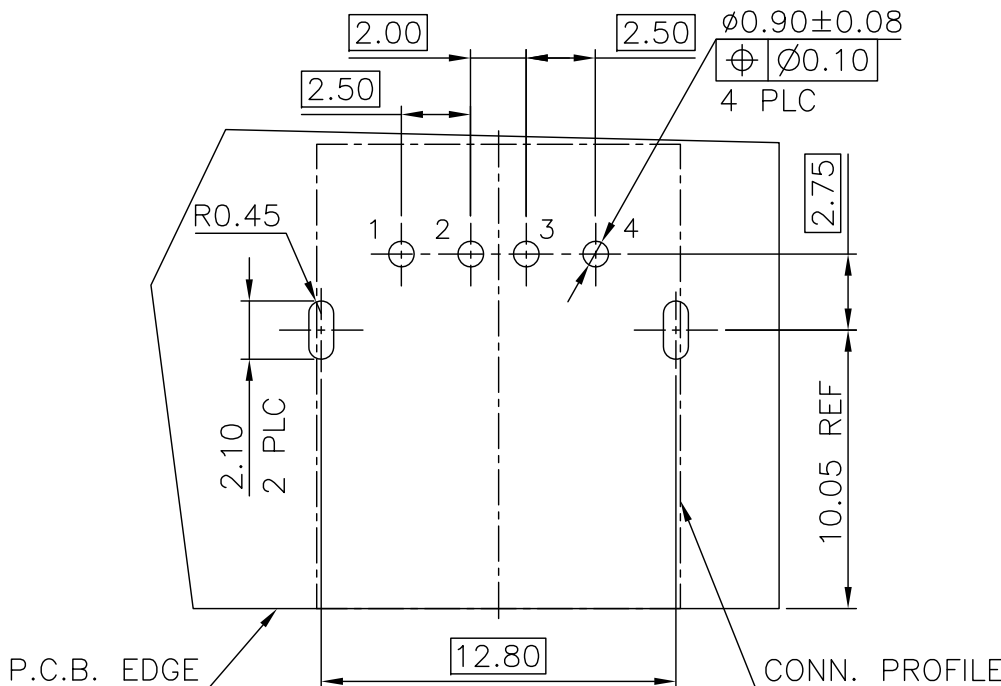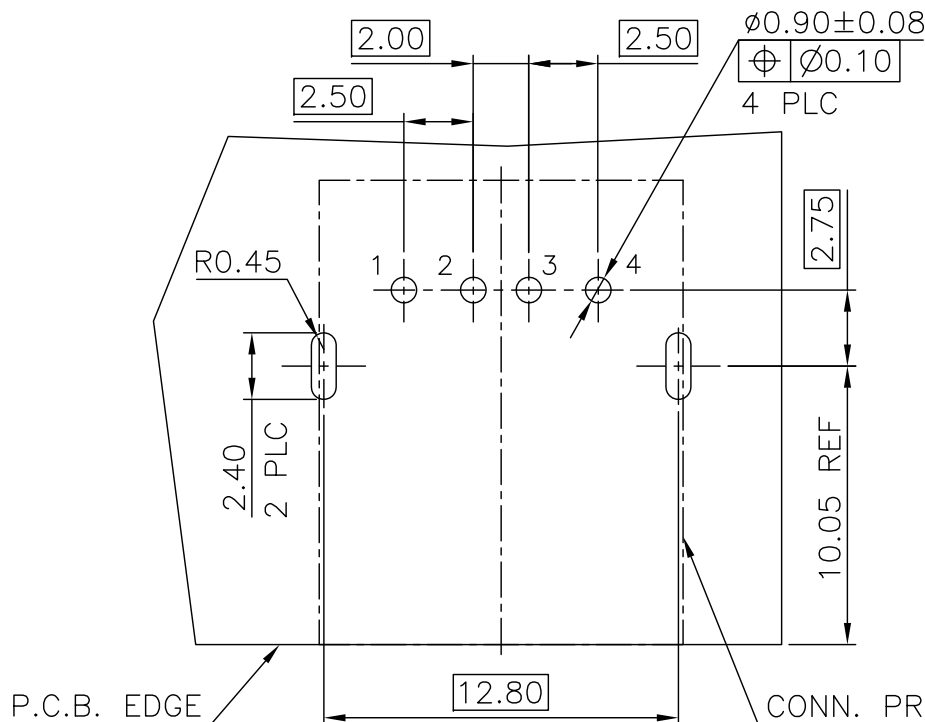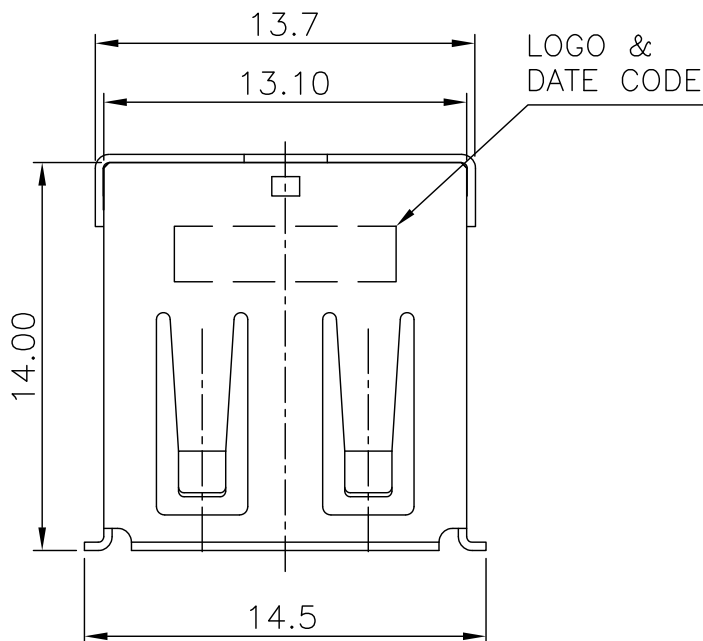

RECOMMEND P.C.B LAYOUT (THICKNESS=1.6mm)
(COMPONENT SIDE) TOLERANCE±0.05 FOR DIM.A=2.4

RECOMMEND P.C.B LAYOUT (THICKNESS=1.4~1.6mm)
(COMPONENT SIDE) TOLERANCE±0.05 FOR DIM.A=2.0

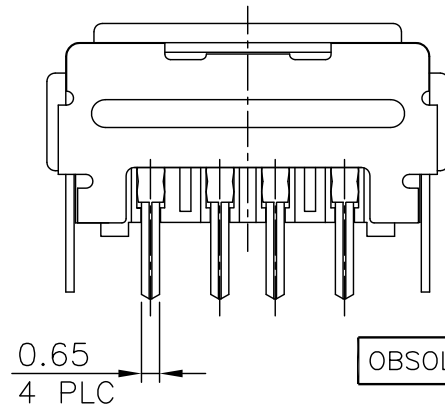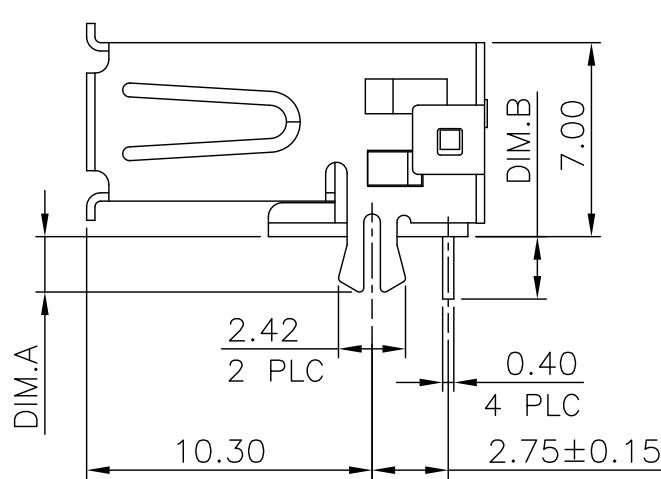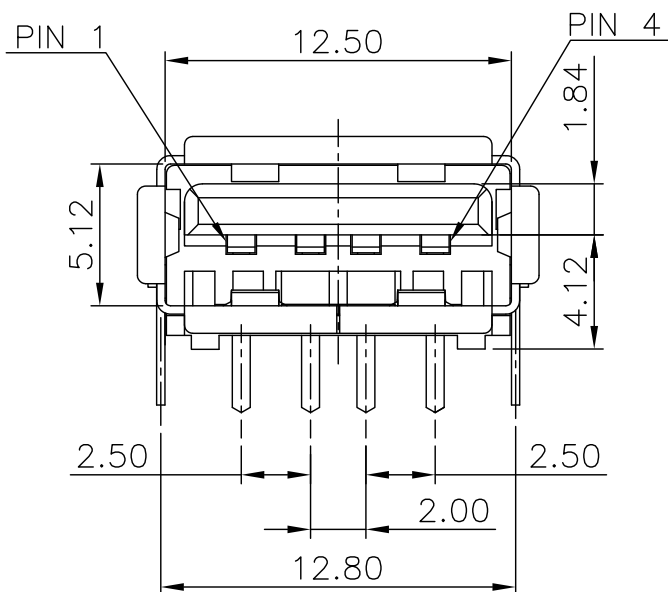

OBSOLETE	PA-46	MOON GRAY	2.0	2.25	T&R	1-1734081-4
			2.4	2.25	T&R	1-1734081-3
OBSOLETE	PA-9T	BLACK	2.0	1.5	T&R	1-1734081-5
				2.25	T&R	1-1734081-2
					TRAY	1-1734081-1
	HSG. MATERIAL	HSG. COLOR	DIM A	DIM B	PACKAGE	PART NUMBER

NOTE:

1. MATERIAL:

HOUSING: THERMOPLASTIC (SEE TABLE) WITH 30%GF, UL94V-0, BLACK COLOR.
CONTACT: PHOSPHOR BRONZE.
SHELL: BRASS.
BACK COVER: BRASS.

2. FINISH:

CONTACT: 0.762μm [30μ"] MIN. GOLD PLATING ON CONTACT AREA,
3.048μm [120μ"] MIN. BRIGHT TIN PLATING ON SOLDER TAILS.
1.27μm [50μ"] MIN. NICKEL UNDERPLATING OVERALL.
SHELL: 0.762μm [30μ"] MIN. NICKEL PLATED OVER
0.762μm [30μ"] MIN. Cu UNDERPLATING OVERALL.
BACK COVER: 0.762μm [30μ"] MIN. NICKEL PLATED OVER
0.762μm [30μ"] MIN. Cu UNDERPLATING OVERALL.

REFLOW SOLDER CAPABLE TO 245°C PER TE SPEC 109-201, CONDITION A.

REFLOW SOLDER CAPABLE TO 260°C PER TE SPEC 109-201, CONDITION B.

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN

DIMENSIONS:

MM

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC ± -
1 PLC ± 0.35
2 PLC ± 0.25
3 PLC ± 0.15
4 PLC ± -
ANGLES ± 3°

MATERIAL

SEE NOTE

FINISH

SEE NOTE

CHK

APVD

PRODUCT SPEC

APPLICATION SPEC

WEIGHT

2.01 GRAMS

CUSTOMER DRAWING



TE Connectivity

NAME

USB CONNECTOR, RECEPTACLE
4 POSITION, SERIES A

SIZE

CAGE CODE

DRAWING NO

RESTRICTED TO

A300779

C=1734081

SCALE

SHEET

2 of 19

REV

E5

4

3

2

1

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

AUG ,2006.



COPYRIGHT 2009

BY TYCO ELECTRONICS CORPORATION.

ALL RIGHTS RESERVED.

LOC

DIST

REVISIONS

P

LTR



DESCRIPTION

DATE





DWN

APVD

SEE SHEET 1.

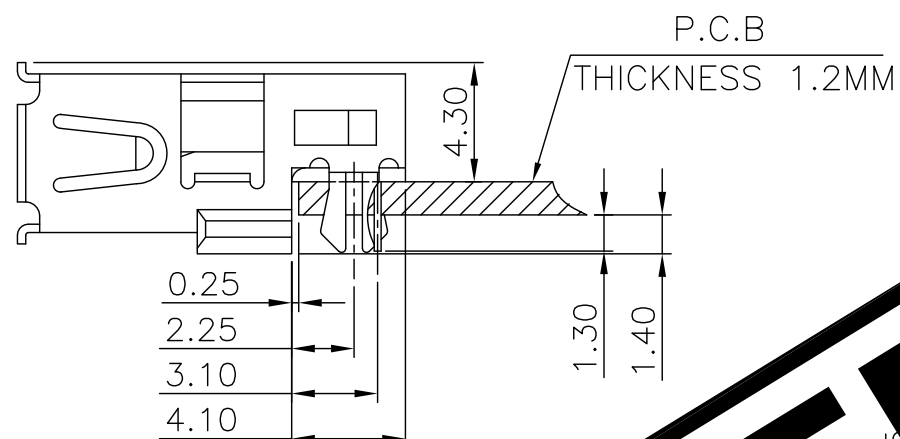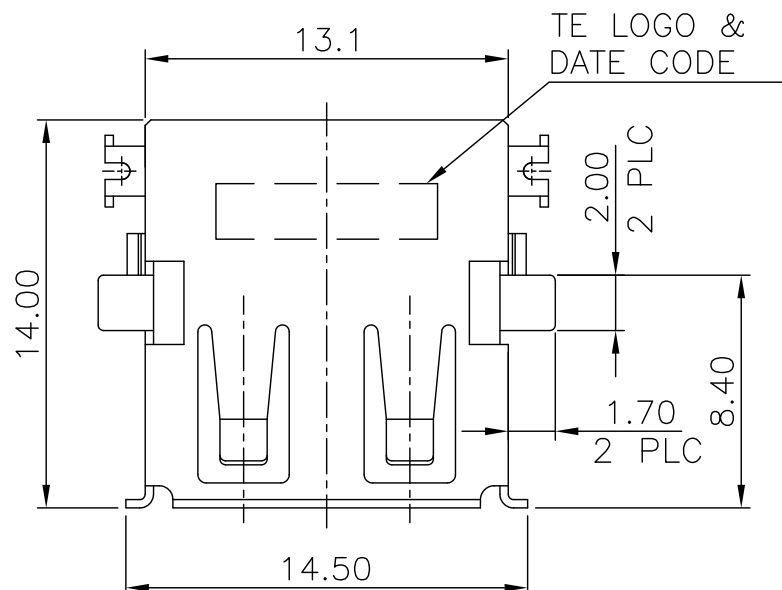

RECOMMENDED MOUNT DIMENSIONS

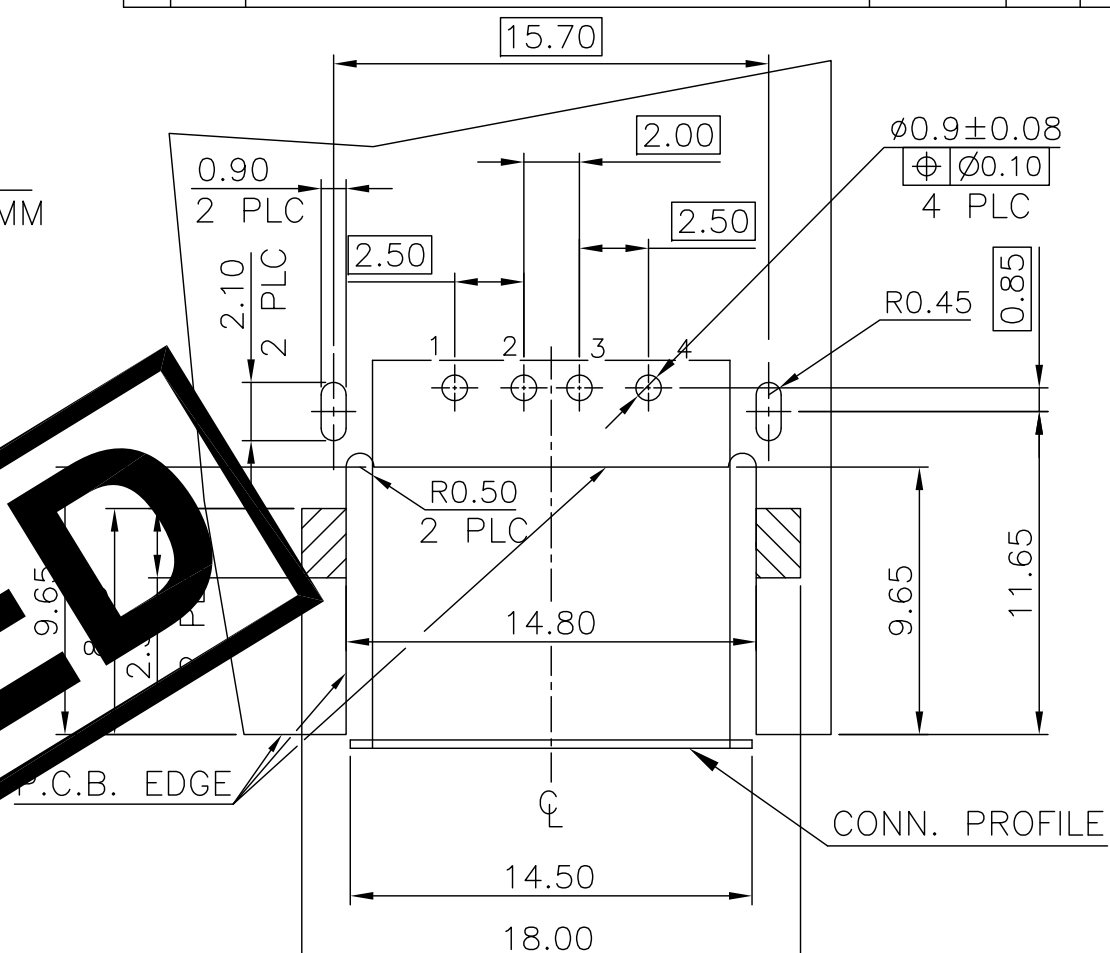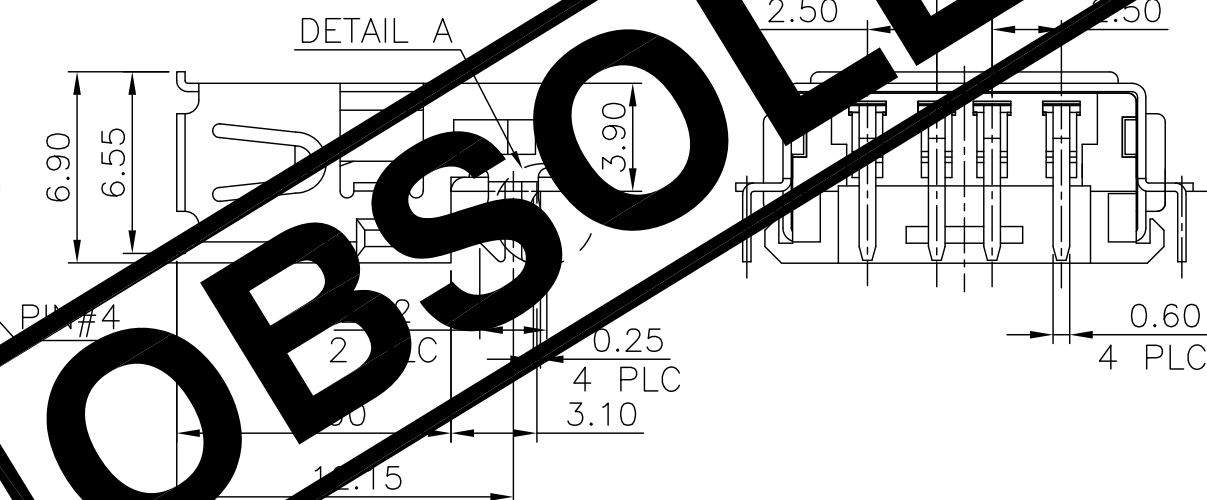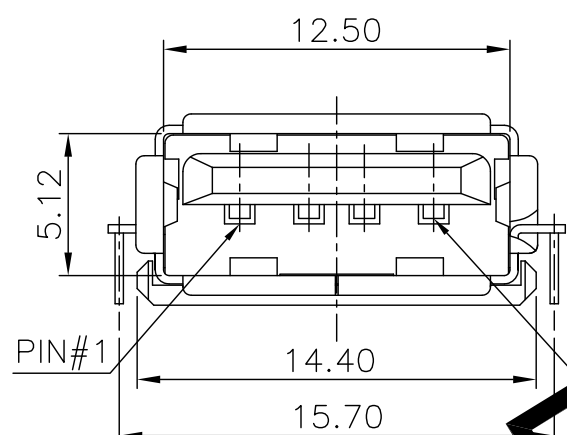RECOMMEND P.C.B LAYOUT (THICKNESS=1.2mm)
(COMPONENT SIDE) TOLERANCE±0.050.10
ALL PEGSDETAIL A
SCALE 2:1

NOTE:

1. MATERIAL:

HOUSING: PA9T WITH 30%GF, UL94V-0, BLACK COLOR.

CONTACT: PHOSPHOR BRONZE.

SHELL: BRASS.

2. FINISH:

CONTACT: 0.762μm [30μ"] MIN. GOLD PLATING ON CONTACT AREA,

3.048μm [120μ"] MIN. BRIGHT TIN PLATING ON SOLDER TAILS.

1.27μm [50μ"] MIN. NICKEL UNDERPLATING OVERALL.

SHELL: 0.762μm [30μ"] MIN. TIN PLATED OVER

0.762μm [30μ"] MIN. Cu UNDERPLATING OVERALL.

0.762μm [30μ"] MIN. NICKEL PLATED OVER

0.762μm [30μ"] MIN. Cu UNDERPLATING OVERALL.

3. REFLOW SOLDER CAPABLE TO 260°C PER TE SPEC 109-201, CONDITION B.

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN

CHK

APVD

PRODUCT SPEC

APPLICATION SPEC

WEIGHT

1.57 GRAMS

CUSTOMER DRAWING



TE Connectivity

NAME

USB CONNECTOR, RECEPTACLE
4 POSITION, SERIES A

SIZE

CAGE CODE

DRAWING NO

RESTRICTED TO

A300779C=1734081

SCALE

SHEET

3 of 19

REV E5

4

3

2

1

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

AUG ,2006.



COPYRIGHT 2009

BY TYCO ELECTRONICS CORPORATION.

ALL RIGHTS RESERVED.

LOC

DIST

REVISIONS

P

LTR



DESCRIPTION

DATE





DWN

APVD

SEE SHEET 1.

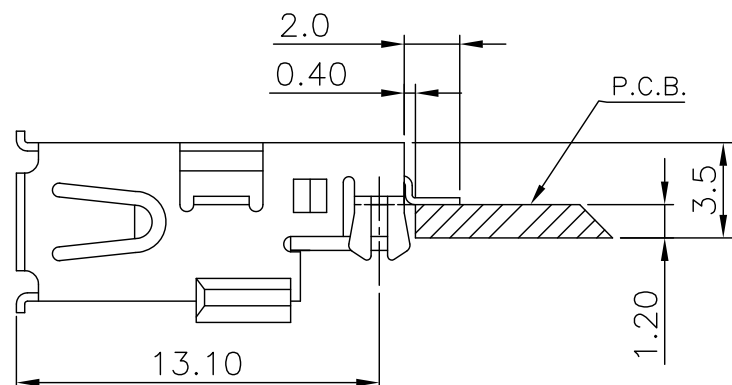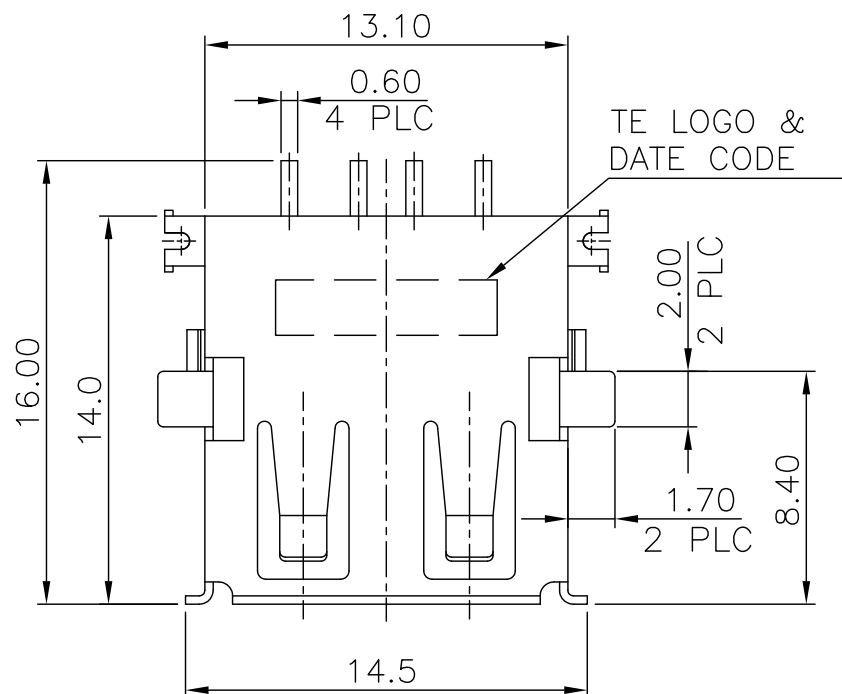

RECOMMENDED MOUNT DIMENSION

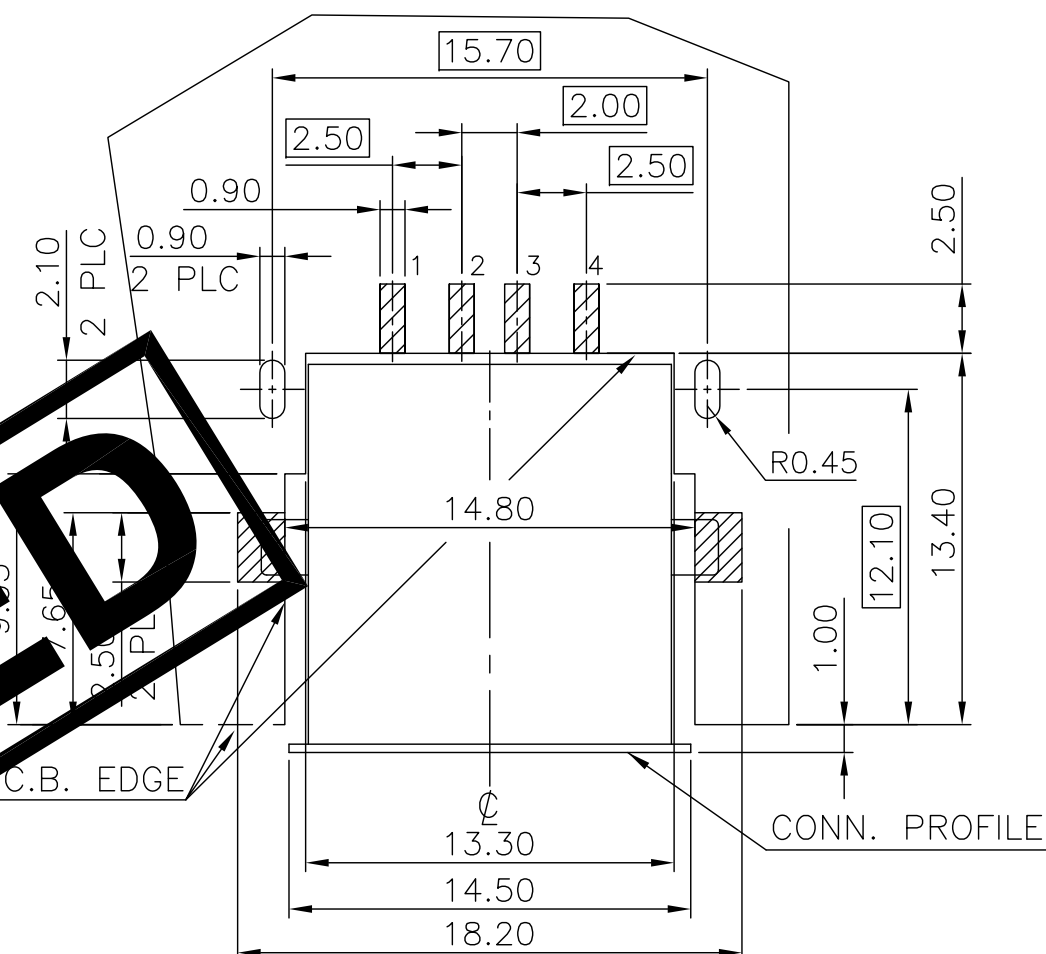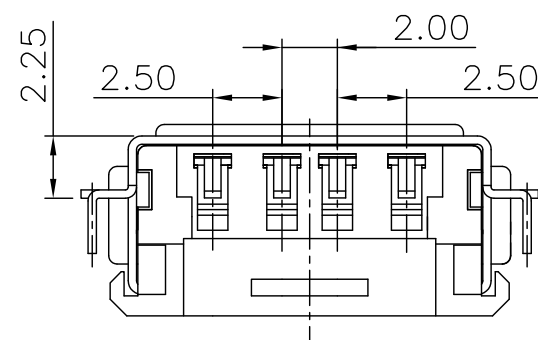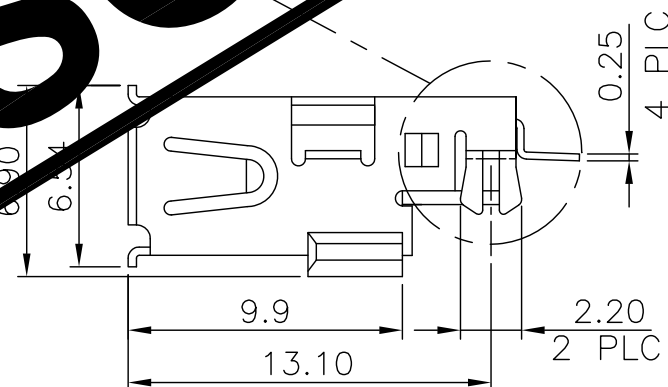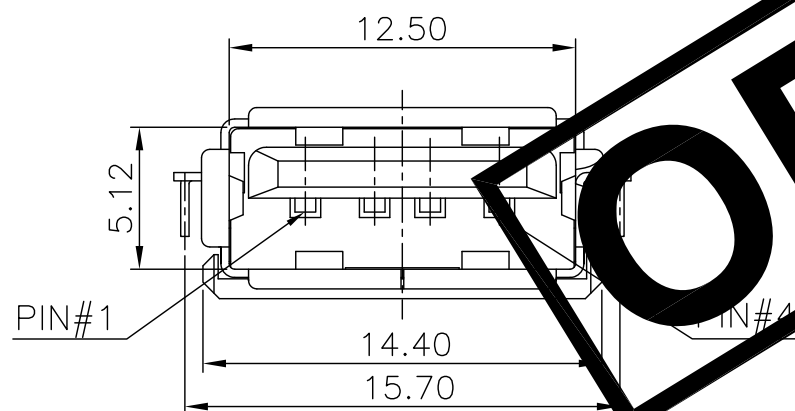RECOMMEND P.C.B LAYOUT (THICKNESS=1.2mm)
(COMPONENT SIDE) TOLERANCE±0.05

NOTE:

1. MATERIAL:

HOUSING: PA9T WITH 30%GF, UL94V-0, BLACK COLOR.

CONTACT: PHOSPHOR BRONZE.

SHELL: BRASS.

2. FINISH:

CONTACT: 0.762μm [30μ"] MIN. GOLD PLATING ON CONTACT AREA,

3.048μm [120μ"] MIN. BRIGHT TIN PLATING ON SOLDERTAILS.

1.27μm [50μ"] MIN. NICKEL UNDERPLATING OVERALL.

SHELL: 0.762μm [30μ"] MIN. NICKEL PLATED OVER


0.762μm [30μ"] MIN. Cu UNDERPLATING OVERALL.

3. REFLOW SOLDER CAPABLE TO 260°C PER TE SPEC 109-201, CONDITION B.

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:

MM



MATERIAL

SEE NOTE

TOLERANCES UNLESS
OTHERWISE SPECIFIED:

0 PLC	± -
1 PLC	± 0.35
2 PLC	± 0.25
3 PLC	± 0.15
4 PLC	± -
ANGLES	± 3°

FINISH

SEE NOTE

DWN

CHK

APVD

PRODUCT SPEC

APPLICATION SPEC

WEIGHT 1.54 GRAMS

CUSTOMER DRAWING



TE Connectivity

NAME

USB CONNECTOR, RECEPTACLE
4 POSITION, SERIES A

SIZE

CAGE CODE

DRAWING NO

RESTRICTED TO

A300779C=1734081

SCALE

SHEET

4 OF 19

REV E5

4

3

2

1

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

AUG ,2006.



COPYRIGHT 2009

BY TYCO ELECTRONICS CORPORATION.

ALL RIGHTS RESERVED.

LOC

DIST

REVISIONS

P

LTR


DESCRIPTION

DATE

DWN


APVD

SEE SHEET 1.



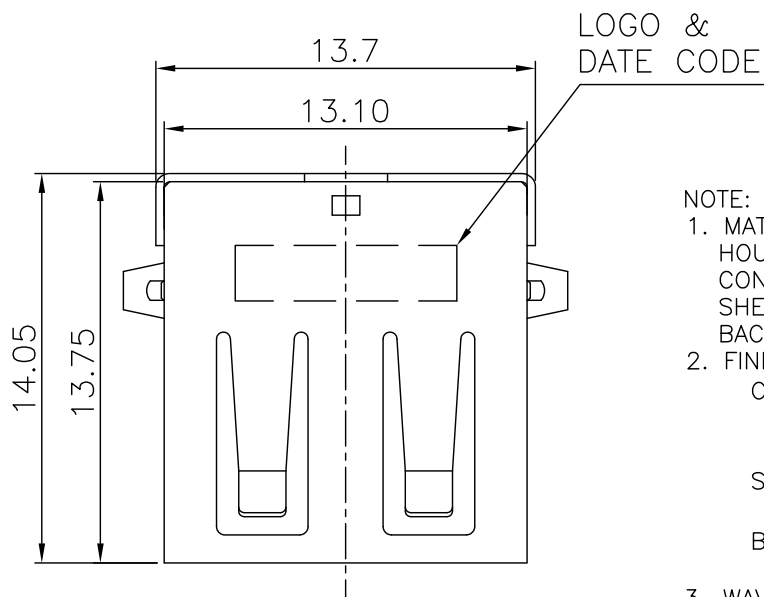


NOTE:

- MATERIAL:
HOUSING: PBT WITH 30%GF, UL94V-0, COLOR: SEE TABLE.
CONTACT: PHOSPHOR BRONZE.
SHELL: BRASS.
BACK COVER: BRASS.
- FINISH:
CONTACT: 0.762μm [30μ"] MIN. GOLD PLATING ON CONTACT AREA.
3.048μm [120μ"] MIN. BRIGHT TIN PLATING ON SOLDER TAILS.
1.27μm [50μ"] MIN. NICKEL UNDERPLATING OVER SOLDER TAIL.
SHELL: 0.762μm [30μ"] MIN. NICKEL PLATED OVER
0.762μm [30μ"] MIN. Cu UNDERPLATING OVER SOLDER TAIL.
BACK COVER: 0.762μm [30μ"] MIN. NICKEL PLATED OVER
0.762μm [30μ"] MIN. Cu UNDERPLATING OVER SOLDER TAIL.
- WAVE SOLDER CAPABLE TO 245°C PER TE SPEC 10-00002, CONDITION A.

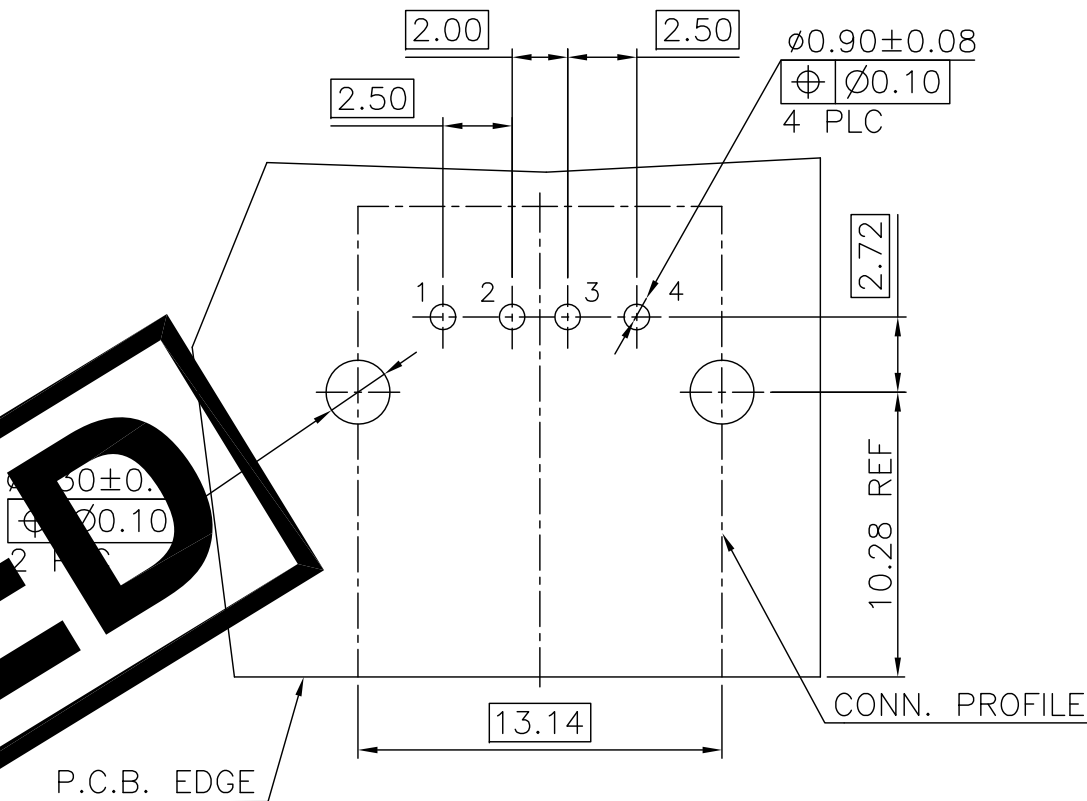

RECOMMEND P.C.B LAYOUT (THICKNESS=1.6mm)
(COMPONENT SIDE) TOLERANCE±0.05

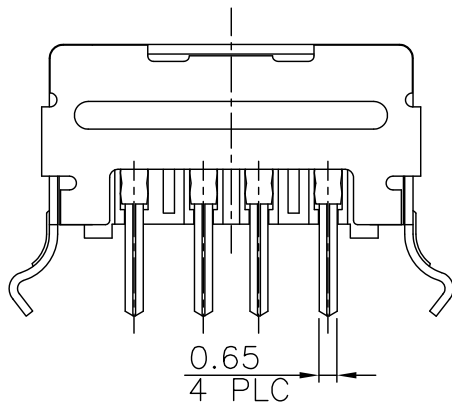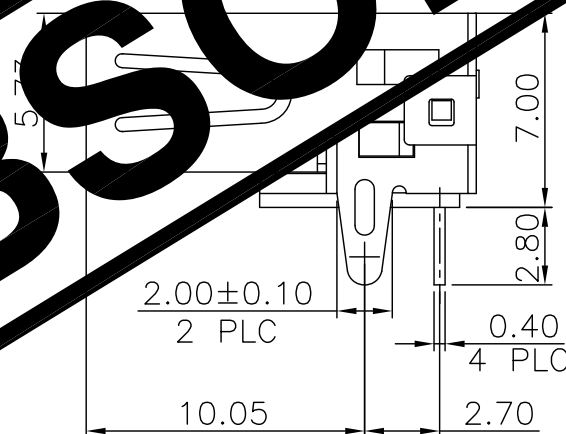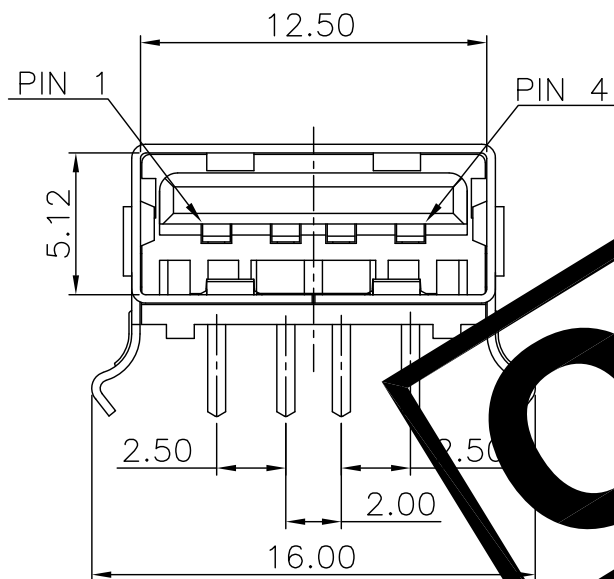


OBSOLETE	TRAY	MOON GRAY	4-1734081-2
		NONMETALLIC PEARL	4-1734081-1
	PACKAGE	HSG. COLOR	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN

DIMENSIONS:
MM

TOLERANCES UNLESS
OTHERWISE SPECIFIED:



0 PLC ± -
1 PLC ± 0.35
2 PLC ± 0.25
3 PLC ± 0.15
4 PLC ± -
ANGLES ± 3°

MATERIAL

SEE NOTE

FINISH

SEE NOTE

CHK

APVD

PRODUCT SPEC

APPLICATION SPEC

WEIGHT 2.03 GRAMS

CUSTOMER DRAWING



TE Connectivity

NAME

USB CONNECTOR, RECEPTACLE
4 POSITION, SERIES A

SIZE

CAGE CODE

DRAWING NO

RESTRICTED TO

A300779C-1734081

SCALE

SHEET

5 of 19

REV E5

4

3

2

1

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

AUG ,2006.



COPYRIGHT 2009

BY TYCO ELECTRONICS CORPORATION.

ALL RIGHTS RESERVED.

LOC

DIST

REVISIONS

P

LTR

DESCRIPTION




DATE

DWN

APVD

SEE SHEET 1.

TE LOGO &
DATE CODE

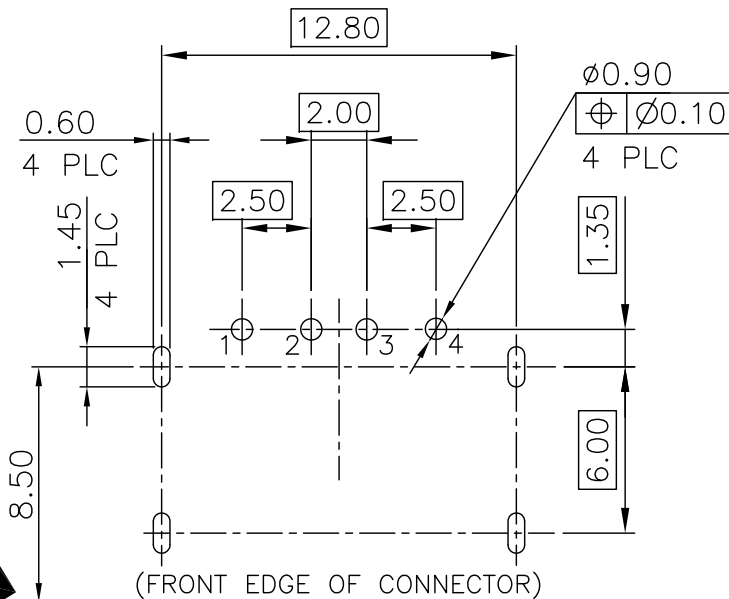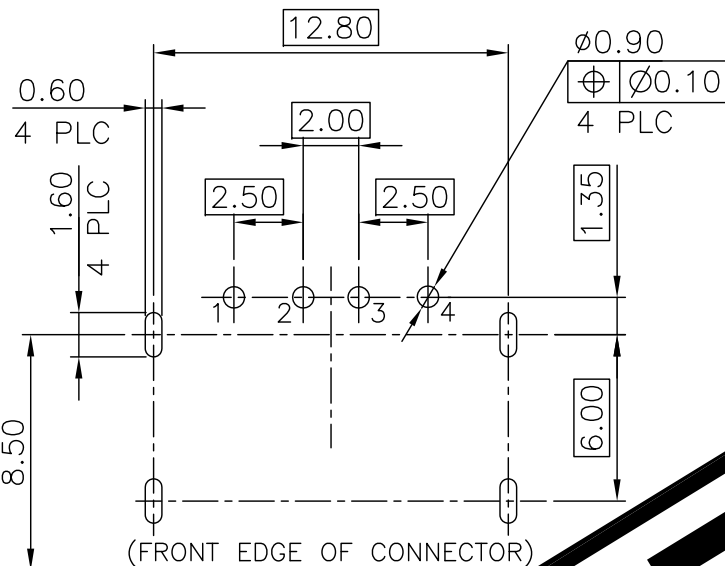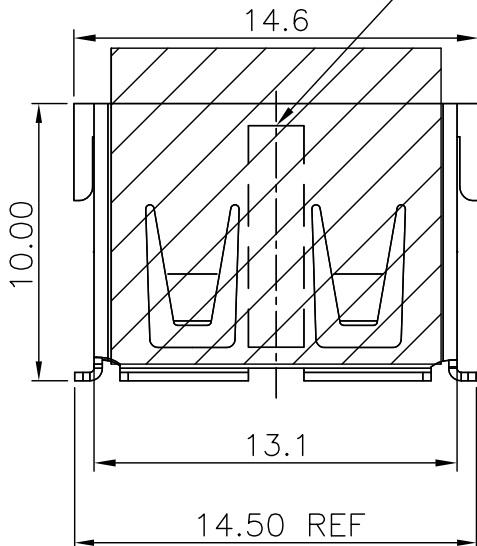

RECOMMEND P.C.B LAYOUT (THICKNESS=1.4mm)
(COMPONENT SIDE) TOLERANCE±0.05

RECOMMEND P.C.B LAYOUT (THICKNESS=1.4mm)
(COMPONENT SIDE) TOLERANCE±0.05

NOTE:

1. MATERIAL:

HOUSING: PA9T WITH 30%GF, UL94V-0, BLACK COLOR.

CONTACT: PHOSPHOR BRONZE.

SHELL: BRASS.

MYLAR: KAPTON, 0.06 THICKNESS

△ FINISH:



CONTACT: 0.762μm [30μ"] MIN. GOLD PLATING ON CONTACT AREA,
2.54μm [100μ"] MIN. MATTE-TIN PLATING ON SOLDER TAIL,
WITH ENTIRE CONTACT UNDERPLATED 1.27μm [50μ"] MIN. NICKEL
SHELL: 1.27μm [50μ"] MIN. NICKEL PLATING.

△ FINISH:

CONTACT: 0.254μm [10μ"] MIN. GOLD PLATING ON CONTACT AREA.
2.54μm [100μ"] MIN. MATTE-TIN PLATING ON SOLDER TAIL,
WITH ENTIRE CONTACT UNDERPLATED 1.27μm [50μ"] MIN. NICKEL
SHELL: 1.27μm [50μ"] MIN. NICKEL PLATING.
SPUTTERING/BLACK PLATING IN FRONT FLANGE.

4. REFLOW SOLDER CAPABLE TO 260°C PER TE TEST SPEC 109-201, CONDITION B.

△ CONNECTOR MOUNTING WITH ZERO INSERTION FORCE.

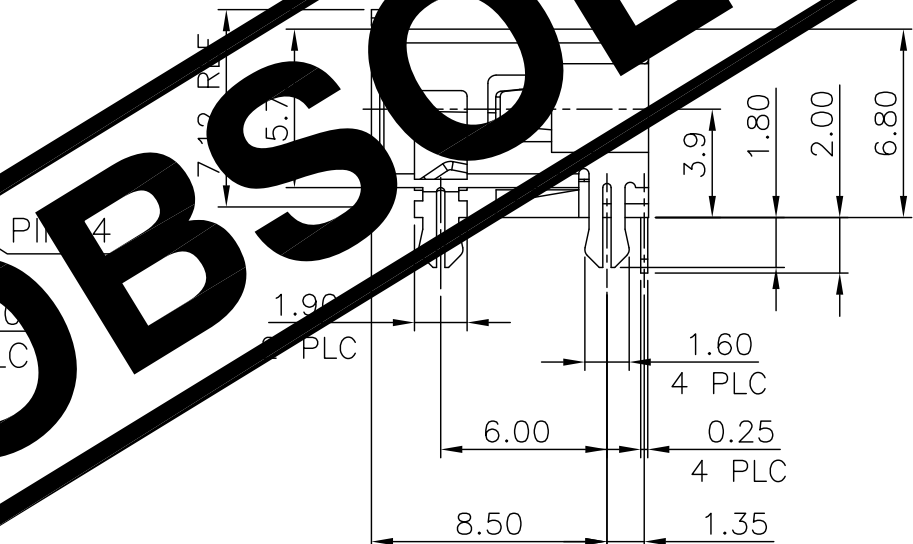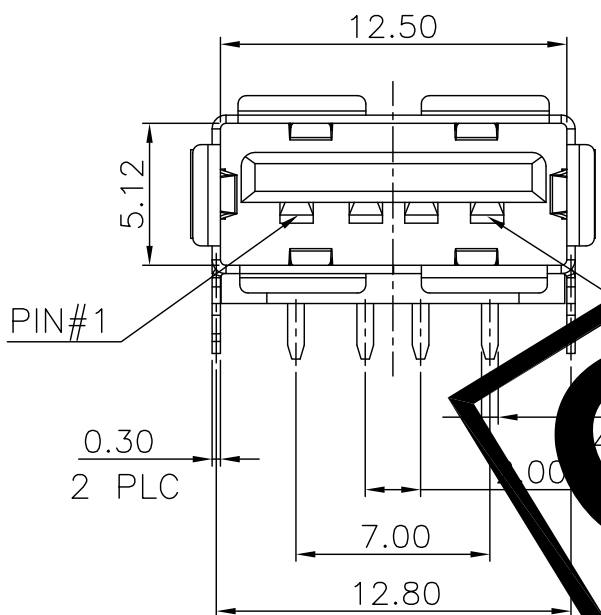

OBSOLETE	△	TAPE&REEL W/O MYLAR	5-1734081-3
	△	TAPE&REEL W/ MYLAR	5-1734081-2
	△	TAPE&REEL W/ MYLAR	5-1734081-1
	FINISH	PACKAGE	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN

CHK

APVD

PRODUCT SPEC

APPLICATION SPEC

WEIGHT 1.54 GRAMS

CUSTOMER DRAWING



TE Connectivity

NAME

USB CONNECTOR, RECEPTACLE
4 POSITION, SERIES A

SIZE

CAGE CODE

DRAWING NO

RESTRICTED TO

A300779C=1734081


SCALE

SHEET

6 of 19

REV E5

DIMENSIONS:
MM



MATERIAL

SEE NOTE

TOLERANCES UNLESS
OTHERWISE SPECIFIED:

0 PLC ± -
1 PLC ± 0.35
2 PLC ± 0.25
3 PLC ± 0.15
4 PLC ± -
ANGLES ± 3°

FINISH

SEE NOTE

4

3

2

1

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

AUG ,2006.



COPYRIGHT 2009

BY TYCO ELECTRONICS CORPORATION.

ALL RIGHTS RESERVED.

LOC

DIST

REVISIONS

P

LTR


DESCRIPTION

DATE

DWN


APVD

SEE SHEET 1.



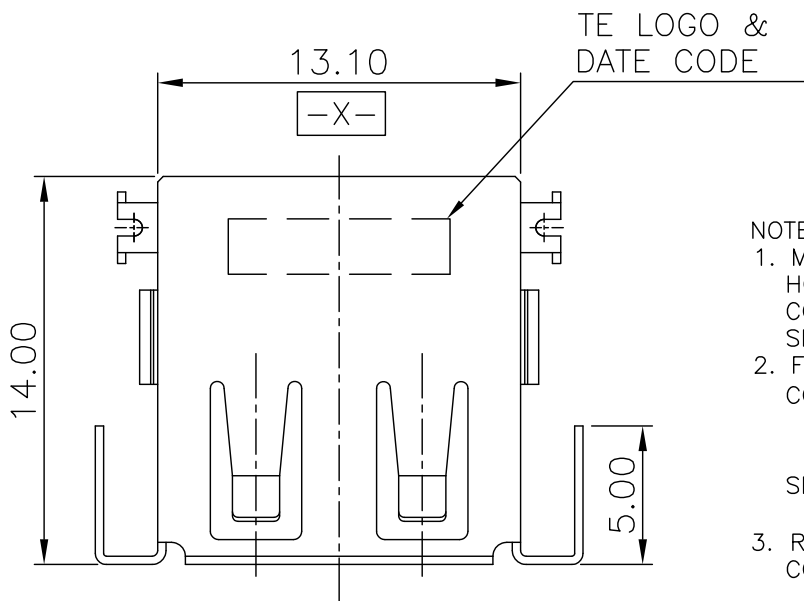


NOTE:

1. MATERIAL:
HOUSING: PA9T WITH 30%GF, UL94V-0, BLACK COLOR.
CONTACT: PHOSPHOR BRONZE.
SHELL: BRASS.
2. FINISH:
CONTACT: 0.762 μ m [30 μ "] MIN. GOLD PLATING ON CONTACT AREA,
3.048 μ m [120 μ "] MIN. BRIGHT TIN PLATING ON SOLDER TAILS
1.27 μ m [50 μ "] MIN. NICKEL UNDERPLATING OVERALL.
SHELL: 0.762 μ m [30 μ "] MIN. NICKEL PLATED OVER
0.762 μ m [30 μ "] MIN. Cu UNDERPLATING OVERALL.
3. REFLOW SOLDER CAPABLE TO 260°C PER TE SPEC 109-2
CONDITION B.

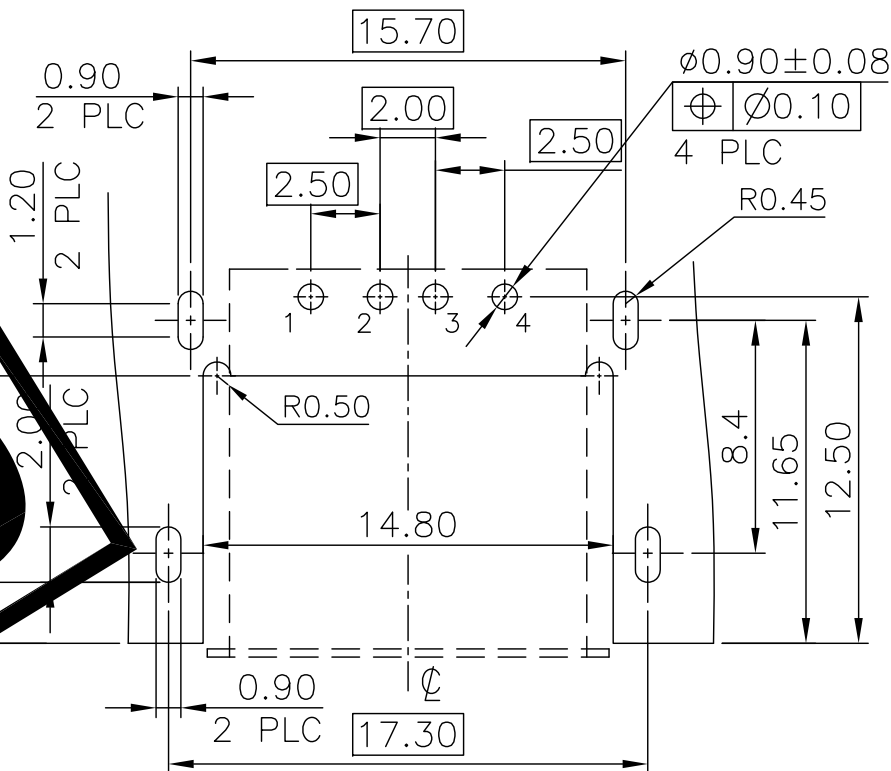

RECOMMEND P.C.B LAYOUT (THICKNESS=1.6mm)
(COMPONENT SIDE) TOLERANCE ± 0.05

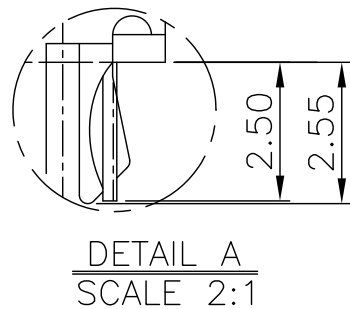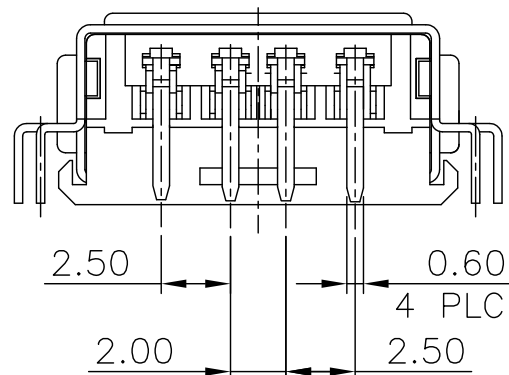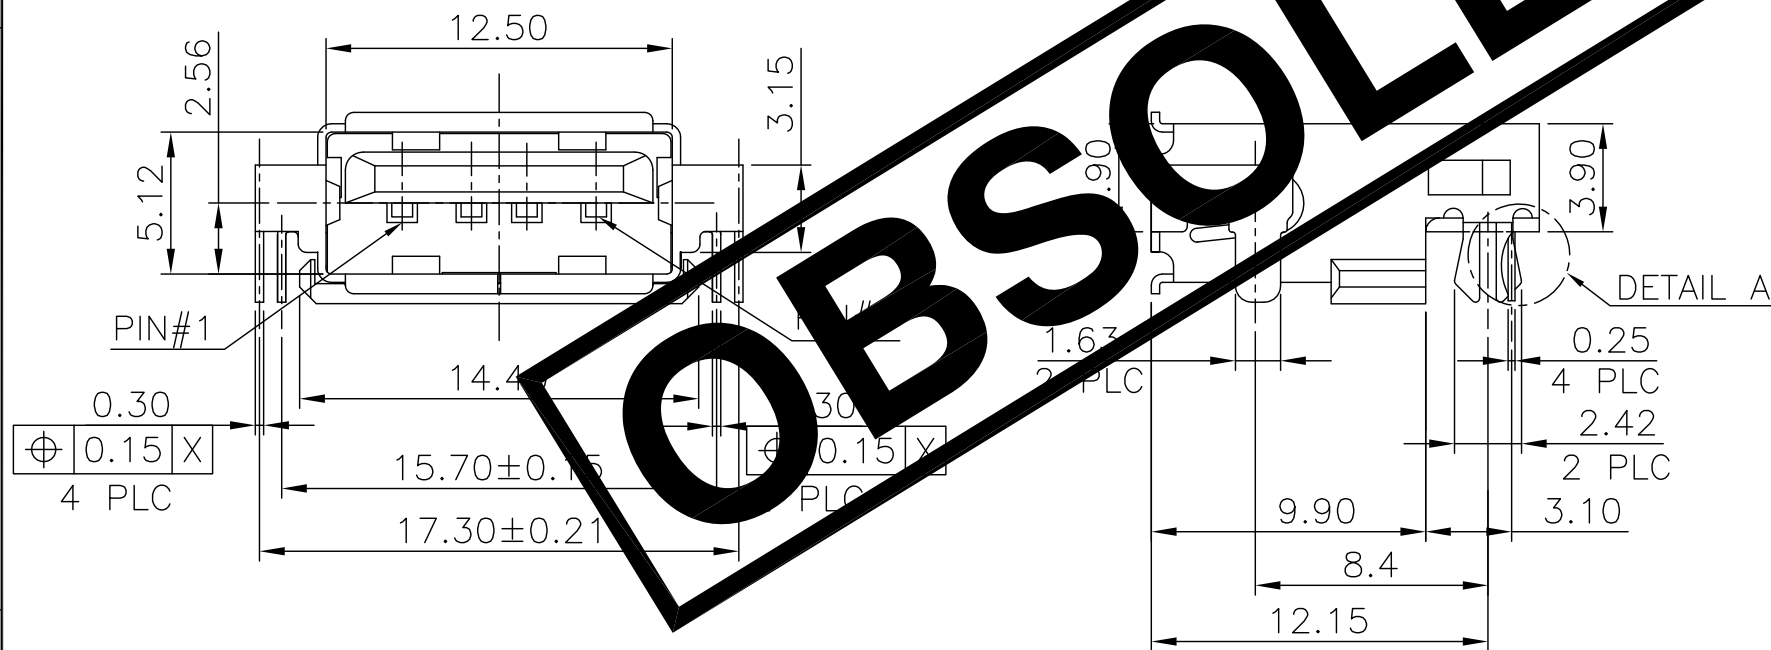

OBSOLETE	TAPE & REEL	6-1734081-2
	TUBE	6-1734081-1
	PACKAGE	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN

CHK

APVD

PRODUCT SPEC

APPLICATION SPEC

WEIGHT 1.47 GRAMS

CUSTOMER DRAWING



TE Connectivity

NAME

USB CONNECTOR, RECEPTACLE
4 POSITION, SERIES A

SIZE

CAGE CODE

DRAWING NO

RESTRICTED TO

A300779C-1734081


SCALE

SHEET

7 OF 19

REV E5

DIMENSIONS:
MM



MATERIAL




SEE NOTE

TOLERANCES UNLESS
OTHERWISE SPECIFIED:



0 PLC	$\pm -$
1 PLC	± 0.35
2 PLC	± 0.25
3 PLC	± 0.15
4 PLC	$\pm -$
ANGLES	$\pm 3^\circ$

FINISH

SEE NOTE

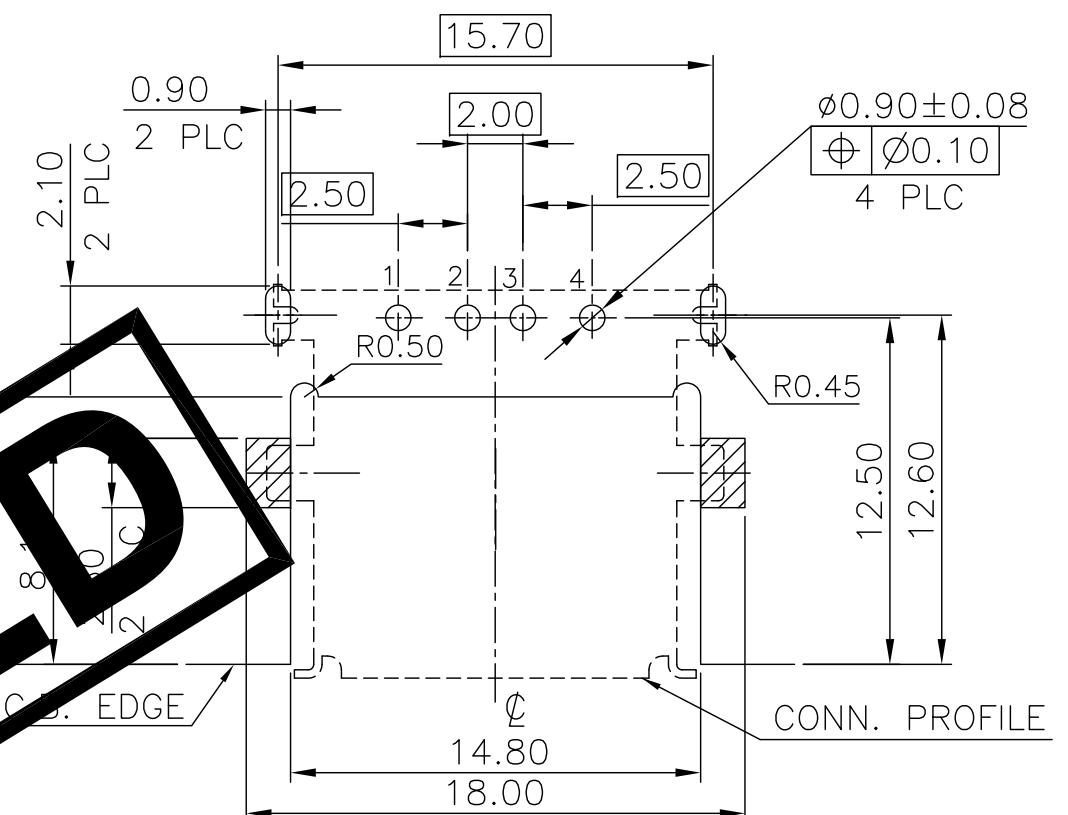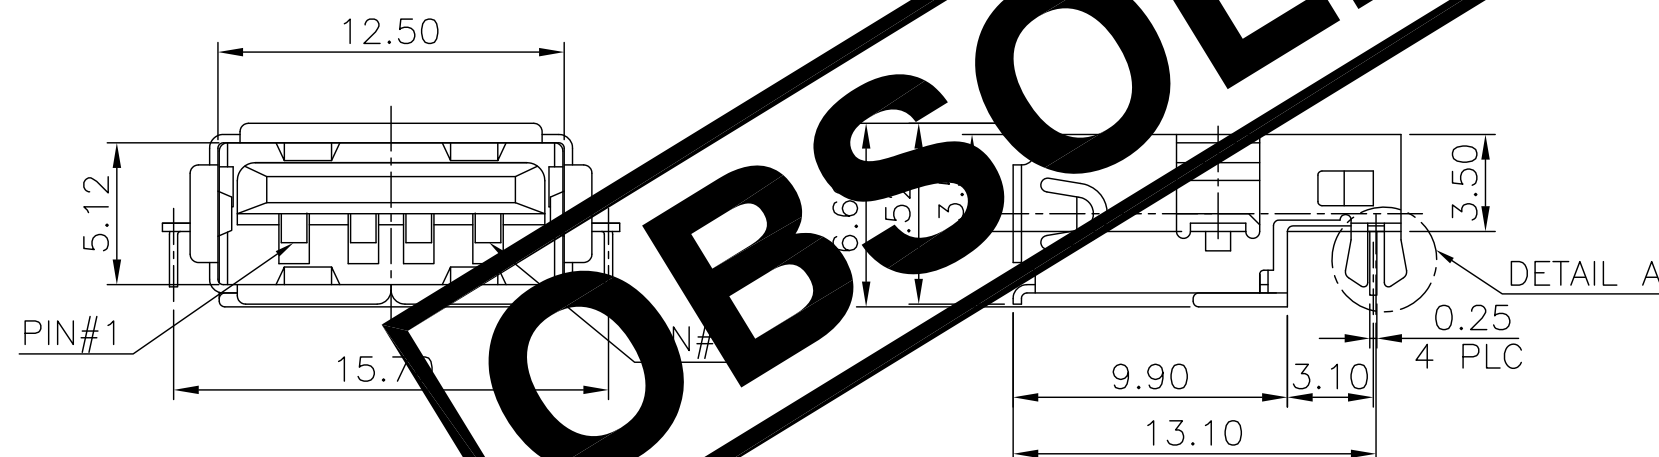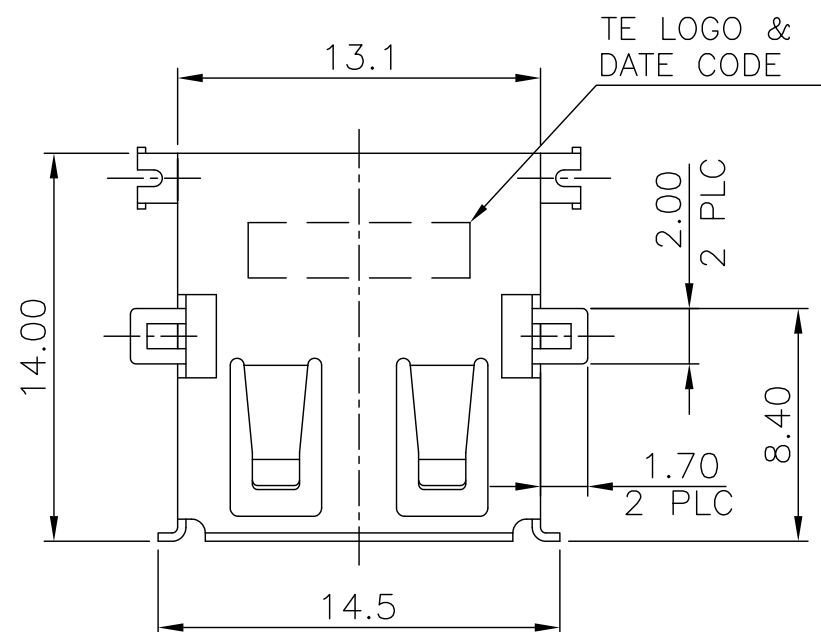


RECOMMEND P.C.B LAYOUT (THICKNESS=1.2mm)
(COMPONENT SIDE) TOLERANCE±0.05

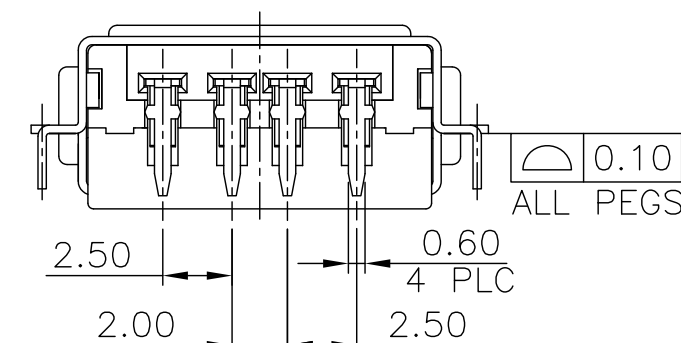

NOTE:

1. MATERIAL:
HOUSING: PA9T WITH 30%GF, UL 94V-0, BLACK COLOR.
CONTACT: PHOSPHOR BRONZE.
SHELL: BRASS.
2. FINISH:
CONTACT: $0.762\mu\text{m}$ [30μ "] MIN. GOLD PLATING ON CONTACT AREA,
 $3.048\mu\text{m}$ [120μ "] MIN. BRIGHT TIN PLATING ON SOLDER TAILS.
 $1.27\mu\text{m}$ [50μ "] MIN. NICKEL UNDERPLATING OVERALL.
SHELL: $0.762\mu\text{m}$ [30μ "] MIN. NICKEL PLATED OVER
 $0.762\mu\text{m}$ [30μ "] MIN. Cu UNDERPLATING OVERALL.
3. REFLOW SOLDER CAPABLE TO 260°C PER JE SPEC 109-201,
CONDITION B.

TAPE & REEL	7-1734081-1
PACKAGE	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		 TE Connectivity	
DIMENSIONS: MM 		TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± - 1 PLC ± 0.35 2 PLC ± 0.25 3 PLC ± 0.15 4 PLC ± - ANGLES ± 3°	
MATERIAL		FINISH SEE NOTE	
SEE NOTE		WEIGHT 1.57 GRAMS	
CUSTOMER DRAWING		NAME USB CONNECTOR, RECEPTACLE 4 POSITION, SERIES A	
SIZE A3		CAGE CODE 00779	
DRAWING NO C=1734081		RESTRICTED TO -	
SCALE -		SHEET 9 OF 19	
REV F5			

4

3

2

1

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

AUG ,2006.

© COPYRIGHT 2009 BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC

DIST

REVISIONS

DW

P

LTR

DESCRIPTION

DATE

DWN

APVD

SEE SHEET 1.



NOTES:

1. MATERIAL:

REEL: PS.
EMBOSSED CARRIER: PS.
COVER TAPE: PBT.

2. DIMENSION :

TAPE REEL: $\phi 330\text{mm} \times 37.1\text{mm}$
SHIPPING CARTON: L=350mm,W=350mm, H=350mm
QUANTITY :
PRIMARY PACKING: 300PCS/REEL
SECONDARY PACKING: 8 REELS/CARTON(2,400PCS).
WEIGHT :
NET WEIGHT: 0.44KG/REEL, 4.00 KG/CARTON.
GROSS WEIGHT: 1.81 KG/REEL, 9.05 KG/CARTON.
PEELING RESISTANCE: 20G TO 130G.
PEELING SPEED: 300MM/MIN.

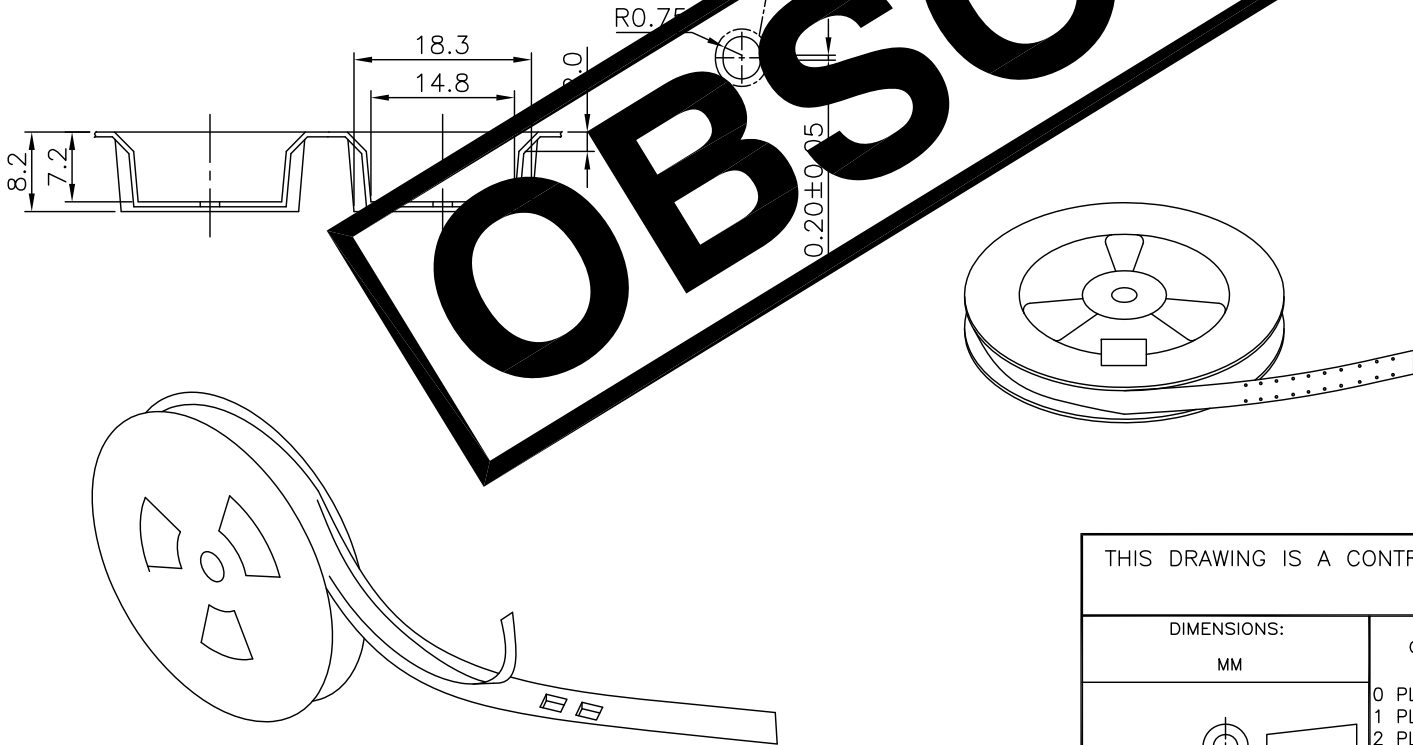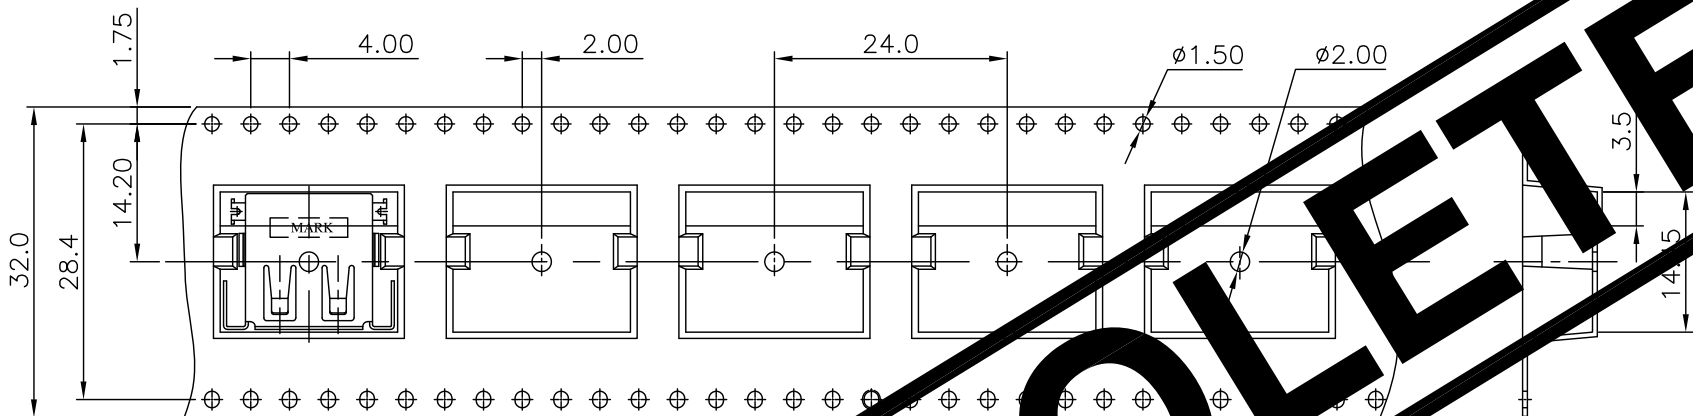

SHIPPING
CARTON

9.05 Kg	4.00 Kg	300	8	2400	6-1734081-2
GROSS WEIGHT	NET WEIGHT	PCS/REEL	REELS/CARTON	QUANTITY	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	 TE Connectivity			
DIMENSIONS: MM		CHK				
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD				
0 PLC $\pm$ -		PRODUCT SPEC				
1 PLC $\pm$ -		APPLICATION SPEC	NAME			
2 PLC $\pm$ -		WEIGHT				
3 PLC $\pm$ -		CUSTOMER DRAWING	SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
4 PLC $\pm$ -			A3	00779	C=1734081	
ANGLES $\pm$ -			SCALE			SHEET
FINISH			11 of 19			REV E5

4

3

2

1

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

AUG ,2006.



COPYRIGHT 2009

BY TYCO ELECTRONICS CORPORATION.

ALL RIGHTS RESERVED.

LOC

DIST

REVISIONS

P

LTR

DESCRIPTION

DATE

DWN

APVD

SEE SHEET 1.

NOTES:

1. MATERIAL:

REEL: PS.

EMBOSSED CARRIER: PS.

COVER TAPE: PBT.

2. DIMENSION :

TAPE REEL: $\phi 330\text{mm} \times 37.1\text{mm}$

SHIPPING CARTON: L=350mm,W=350mm, H=350mm

3. QUANTITY :

PRIMARY PACKING: 300PCS/REEL

SECONDARY PACKING: 8 REELS/CARTON(2,400PCS).


4. WEIGHT :

NET WEIGHT: 0.44KG/REEL, 4.00 KG/CARTON.

GROSS WEIGHT: 1.81 KG/REEL, 9.05 KG/CARTON.


PEELING RESISTANCE: 20G TO 130G.

6. PEELING SPEED: 300MM/MIN.

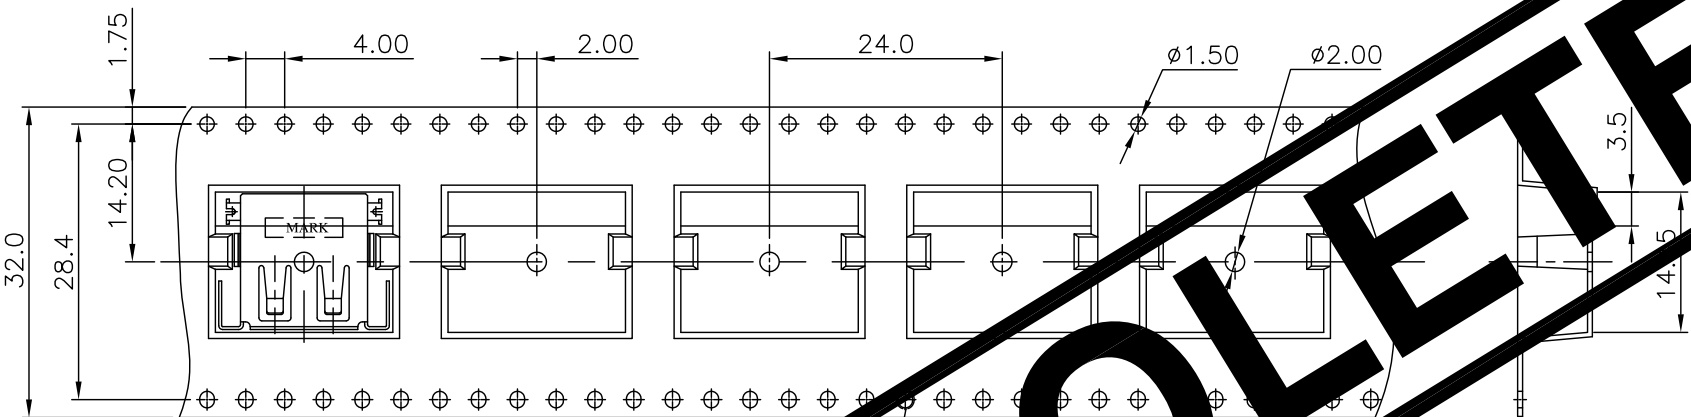

SHIPPING
CARTON

9.05 Kg	4.00 Kg	300	8	2400	6-1734081-3
GROSS WEIGHT	NET WEIGHT	PCS/REEL	REELS/CARTON	QUANTITY	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	 TE Connectivity			
DIMENSIONS: MM		CHK				
		APVD				
TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± - 1 PLC ± - 2 PLC ± - 3 PLC ± - 4 PLC ± - ANGLES ± - FINISH		PRODUCT SPEC				
MATERIAL		APPLICATION SPEC	NAME			
		WEIGHT	SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
		CUSTOMER DRAWING	A3	00779	C=1734081	
			SCALE	SHEET	REV	
				12 of 19	E5	

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

AUG ,2006.



COPYRIGHT 2009

BY TYCO ELECTRONICS CORPORATION.

ALL RIGHTS RESERVED.

LOC

DIST

REVISIONS

P

LTR

DESCRIPTION

DATE

DWN

APVD

SEE SHEET 1.

NOTES:

1. MATERIAL:

REEL: PS.

EMBOSSED CARRIER: PS.

COVER TAPE: PBT.

2. DIMENSION :

TAPE REEL: $\varnothing 330\text{mm} \times 29.5\text{mm}$

SHIPPING CARTON: L=350mm,W=350mm, H=400mm

3. QUANTITY :

PRIMARY PACKING: 300PCS/REEL

SECONDARY PACKING: 12 REELS/CARTON(3600PCS).




4. WEIGHT :

NET WEIGHT: 0.46 KG/REEL, 5.55 KG/CARTON.



GROSS WEIGHT: 0.89 KG/REEL, 10.65 KG/CARTON.

5. PEELING RESISTANCE: 20G TO 130G.

6. PEELING SPEED: 300MM/MIN.

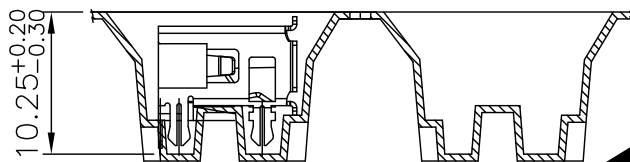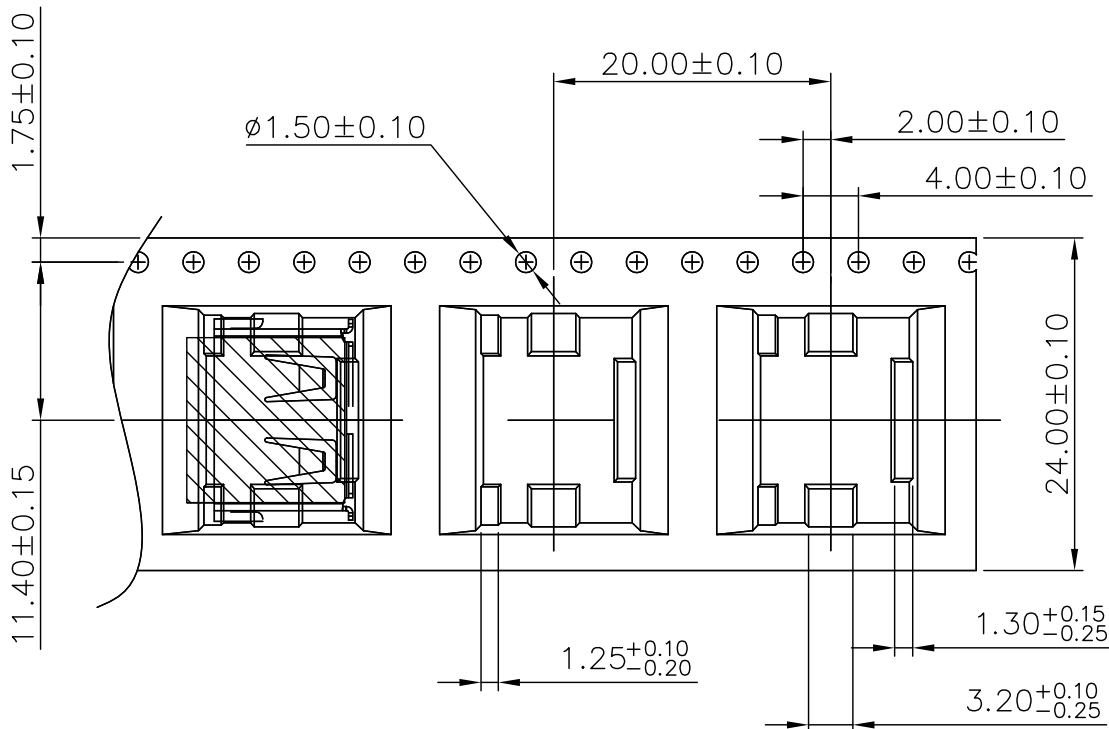


SHIPPING
CARTON

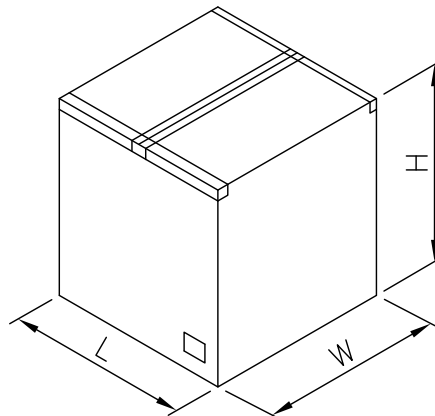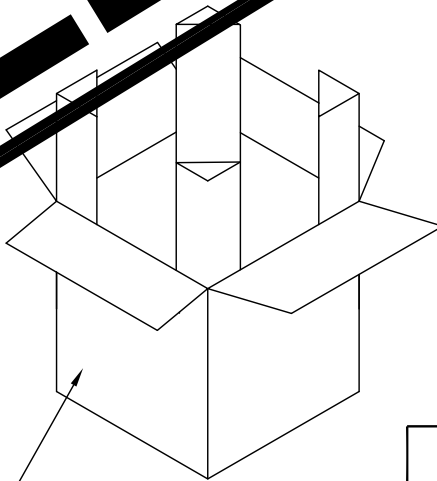

OBSOLETE	300	12	3600	10.65	5.55	5-1734081-3
						5-1734081-2
						5-1734081-1
	PCS/ REEL	REELS/ BOX	QUANTITY (PCS)	G/W (Kg)	N/W (Kg)	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
MM



MATERIAL

TOLERANCES UNLESS
OTHERWISE SPECIFIED:

0 PLC ± -
1 PLC ± -
2 PLC ± -
3 PLC ± -
4 PLC ± -
ANGLES ± -
FINISH

DWN

CHK

APVD

PRODUCT SPEC

APPLICATION SPEC

WEIGHT

CUSTOMER DRAWING



TE Connectivity

NAME

USB CONNECTOR, RECEPTACLE
4 POSITION, SERIES A

SIZE

CAGE CODE

DRAWING NO

RESTRICTED TO

A300779C=1734081

SCALE

SHEET

13 of 19

REV E5

4

3

2

1

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

AUG ,2006.

© COPYRIGHT 2009 BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC

DIST

REVISIONS

DW

P

LTR

DESCRIPTION

DATE






DWN

APVD


SEE SHEET 1.

NOTES:


1. MATERIAL:
REEL: PS.
EMBOSSED CARRIER: PS.
COVER TAPE: PBT.
2. DIMENSION :
TAPE REEL: $\phi 330\text{mm} \times 37.1\text{mm}$
SHIPPING CARTON: L=350mm,W=350mm, H=350mm
3. QUANTITY :
PRIMARY PACKING: 350PCS/REEL
SECONDARY PACKING: 9 REELS/CARTON.(3150 PCS)
4. WEIGHT :
NET WEIGHT: 4.85 kg .
GROSS WEIGHT: 9.85 kg .
5. REELING RESISTANCE: 20G TO 130G.
6. REELING SPEED: 300MM/MIN.

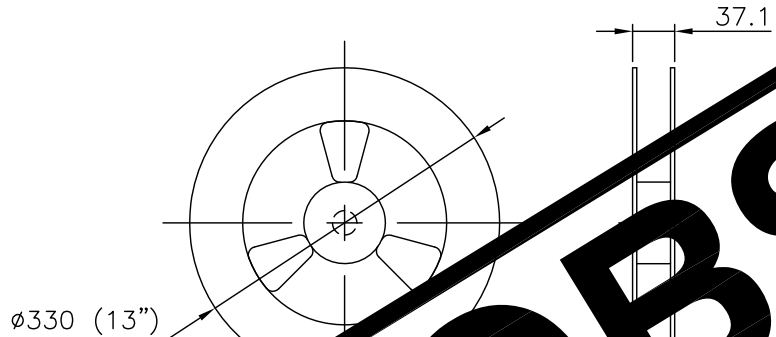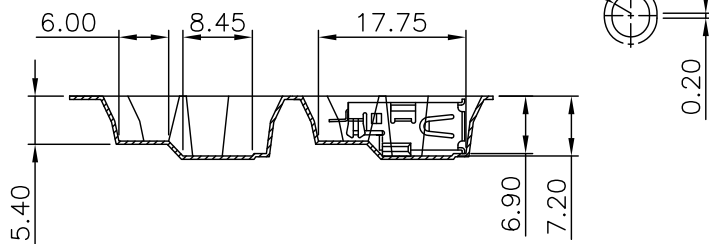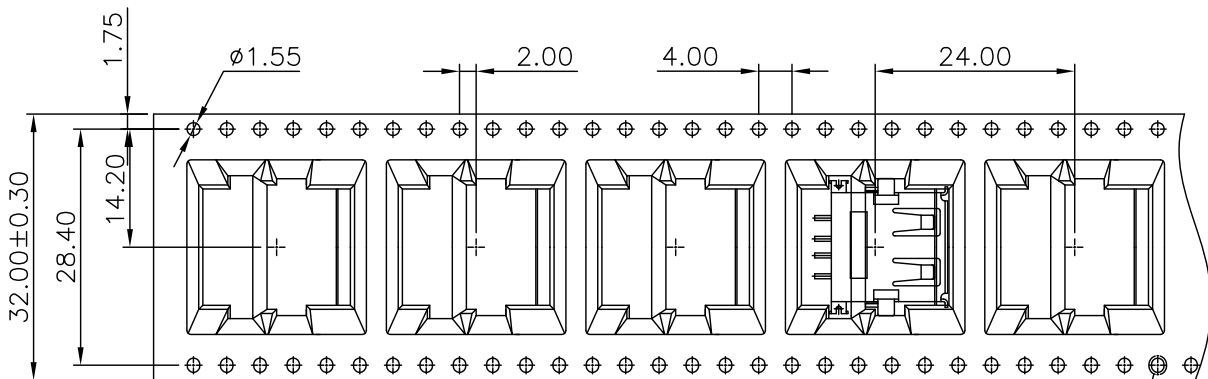

SHIPPING CARTON
9 TAPE-REEL/ CARTON

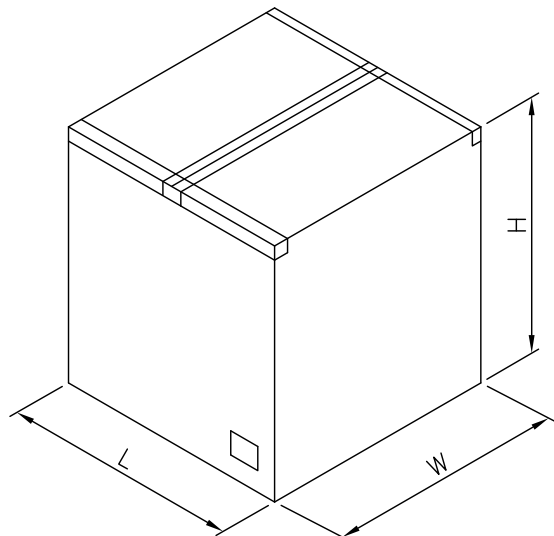

9.85 Kg	4.85 Kg	350	9	3150	3-1734081-1
GROSS WEIGHT	NET WEIGHT	PCS/REEL	REELS /CARTON	QUANTITY	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN		 TE Connectivity	
DIMENSIONS: MM		CHK			
		APVD			
		PRODUCT SPEC			
MATERIAL		APPLICATION SPEC		NAME	
FINISH		WEIGHT		SIZE	
		CUSTOMER DRAWING		CAGE CODE	
				DRAWING NO	
				RESTRICTED TO	
				SCALE	
				SHEET	
				REV	

4

3

2

1

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

AUG ,2006.



COPYRIGHT 2009

BY TYCO ELECTRONICS CORPORATION.

ALL RIGHTS RESERVED.

LOC

DIST

REVISIONS

DW

P

LTR

DESCRIPTION

DATE







DWN

APVD


SEE SHEET 1.

NOTES:

1. MATERIAL:
REEL: PS.
EMBOSSED CARRIER: PS.
COVER TAPE: PBT.
2. DIMENSION :
TAPE REEL: $\phi 330\text{mm} \times 37.1\text{mm}$
SHIPPING CARTON: L=350mm,W=350mm, H=350mm
3. QUANTITY :
PRIMARY PACKING: 350PCS/REEL
SECONDARY PACKING: 9 REELS/CARTON(3,150PCS).
4. WEIGHT :
NET WEIGHT: 0.55 KG/REEL, 4.85 KG/CARTON.
GROSS WEIGHT: 1.09 KG/REEL, 9.85 KG/CARTON.
5. PEELING RESISTANCE: 20G TO 130G.
PEELING SPEED: 100MM/MIN.

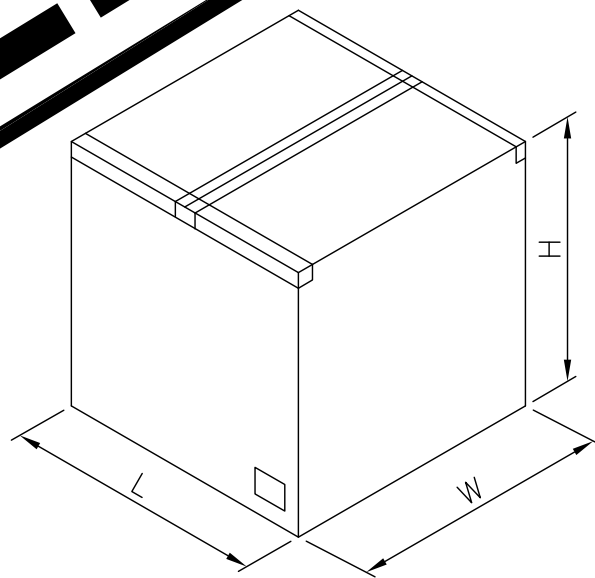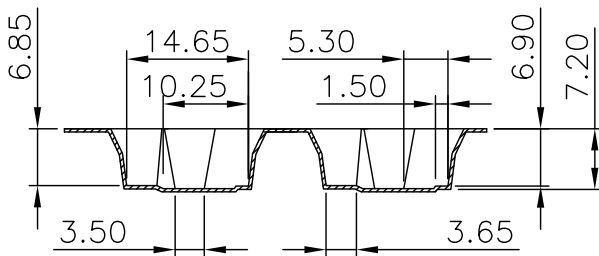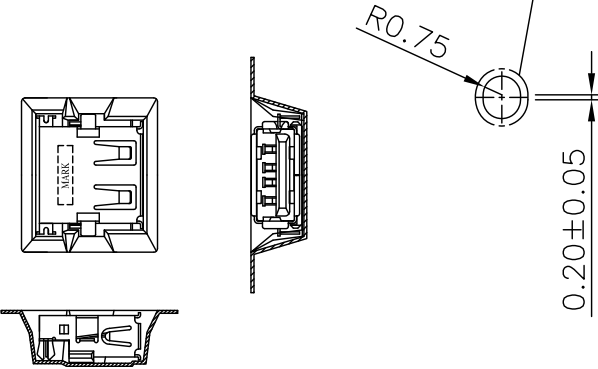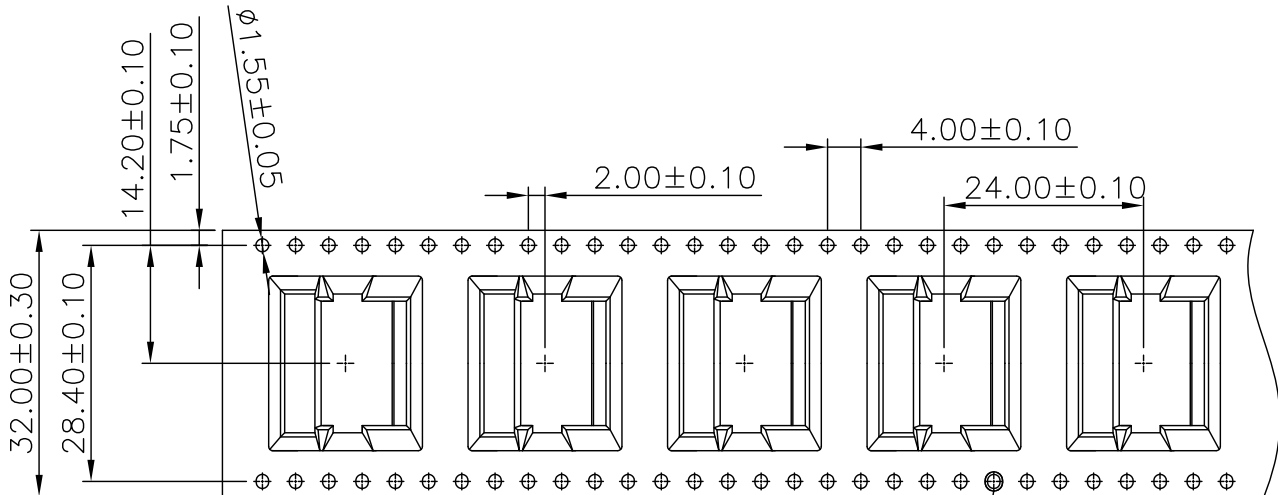

SHIPPING CARTON

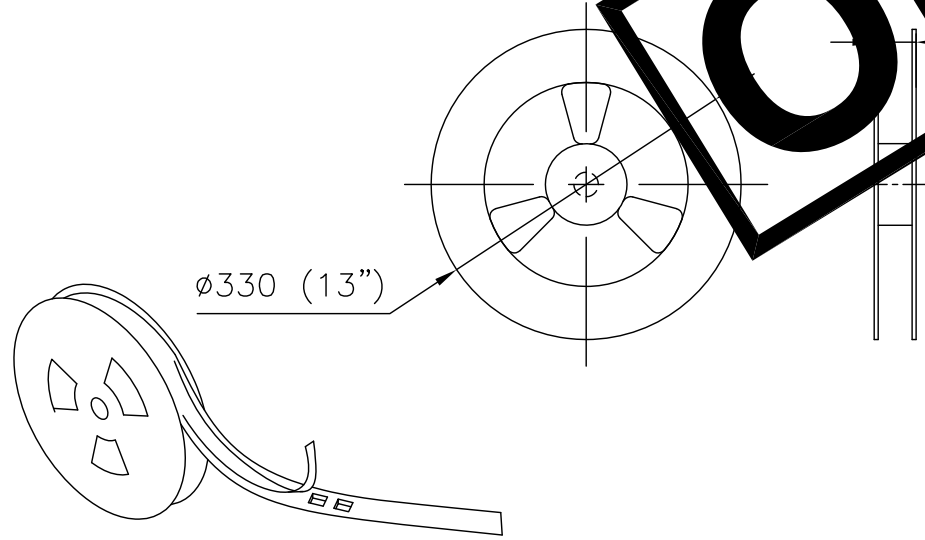

OBSOLETE

OBSOLETE	9.85 Kg	4.85 Kg	350	9	3150	7-1734081-1
						2-1734081-3
	GROSS WEIGHT	NET WEIGHT	PCS/REEL	REELS /CARTON	QUANTITY	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	TE Connectivity			
		CHK				
		APVD				
		PRODUCT SPEC				
DIMENSIONS: MM		APPLICATION SPEC		NAME		
		WEIGHT		SIZE		
MATERIAL		CUSTOMER DRAWING		CAGE CODE		
				DRAWING NO		
				RESTRICTED TO		
				SCALE		
				SHEET		
				REV		

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

AUG ,2006.



COPYRIGHT 2009

BY TYCO ELECTRONICS CORPORATION.

ALL RIGHTS RESERVED.

LOC

DIST

REVISIONS

DW

P

LTR

DESCRIPTION

DATE

DWN

APVD

SEE SHEET 1.

NOTES:

1. DIMENSION :

TRAY : L=295mm, W=252mm, H=14mm

SHIPPING CARTON: L=315mm, W=270mm, H=200mm

POLYSTYRENE : L=290mm, W=250mm, H=10mm

2. QUANTITY :


PRIMARY PACKING: 100 PCS/TRAY

SECONDARY PACKING: 10 TRAYS/CARTON
(1,000PCS)


3. WEIGHT :

NET WEIGHT: 2.03KG/CARTON.

GROSS WEIGHT: 3.10KG/CARTON.

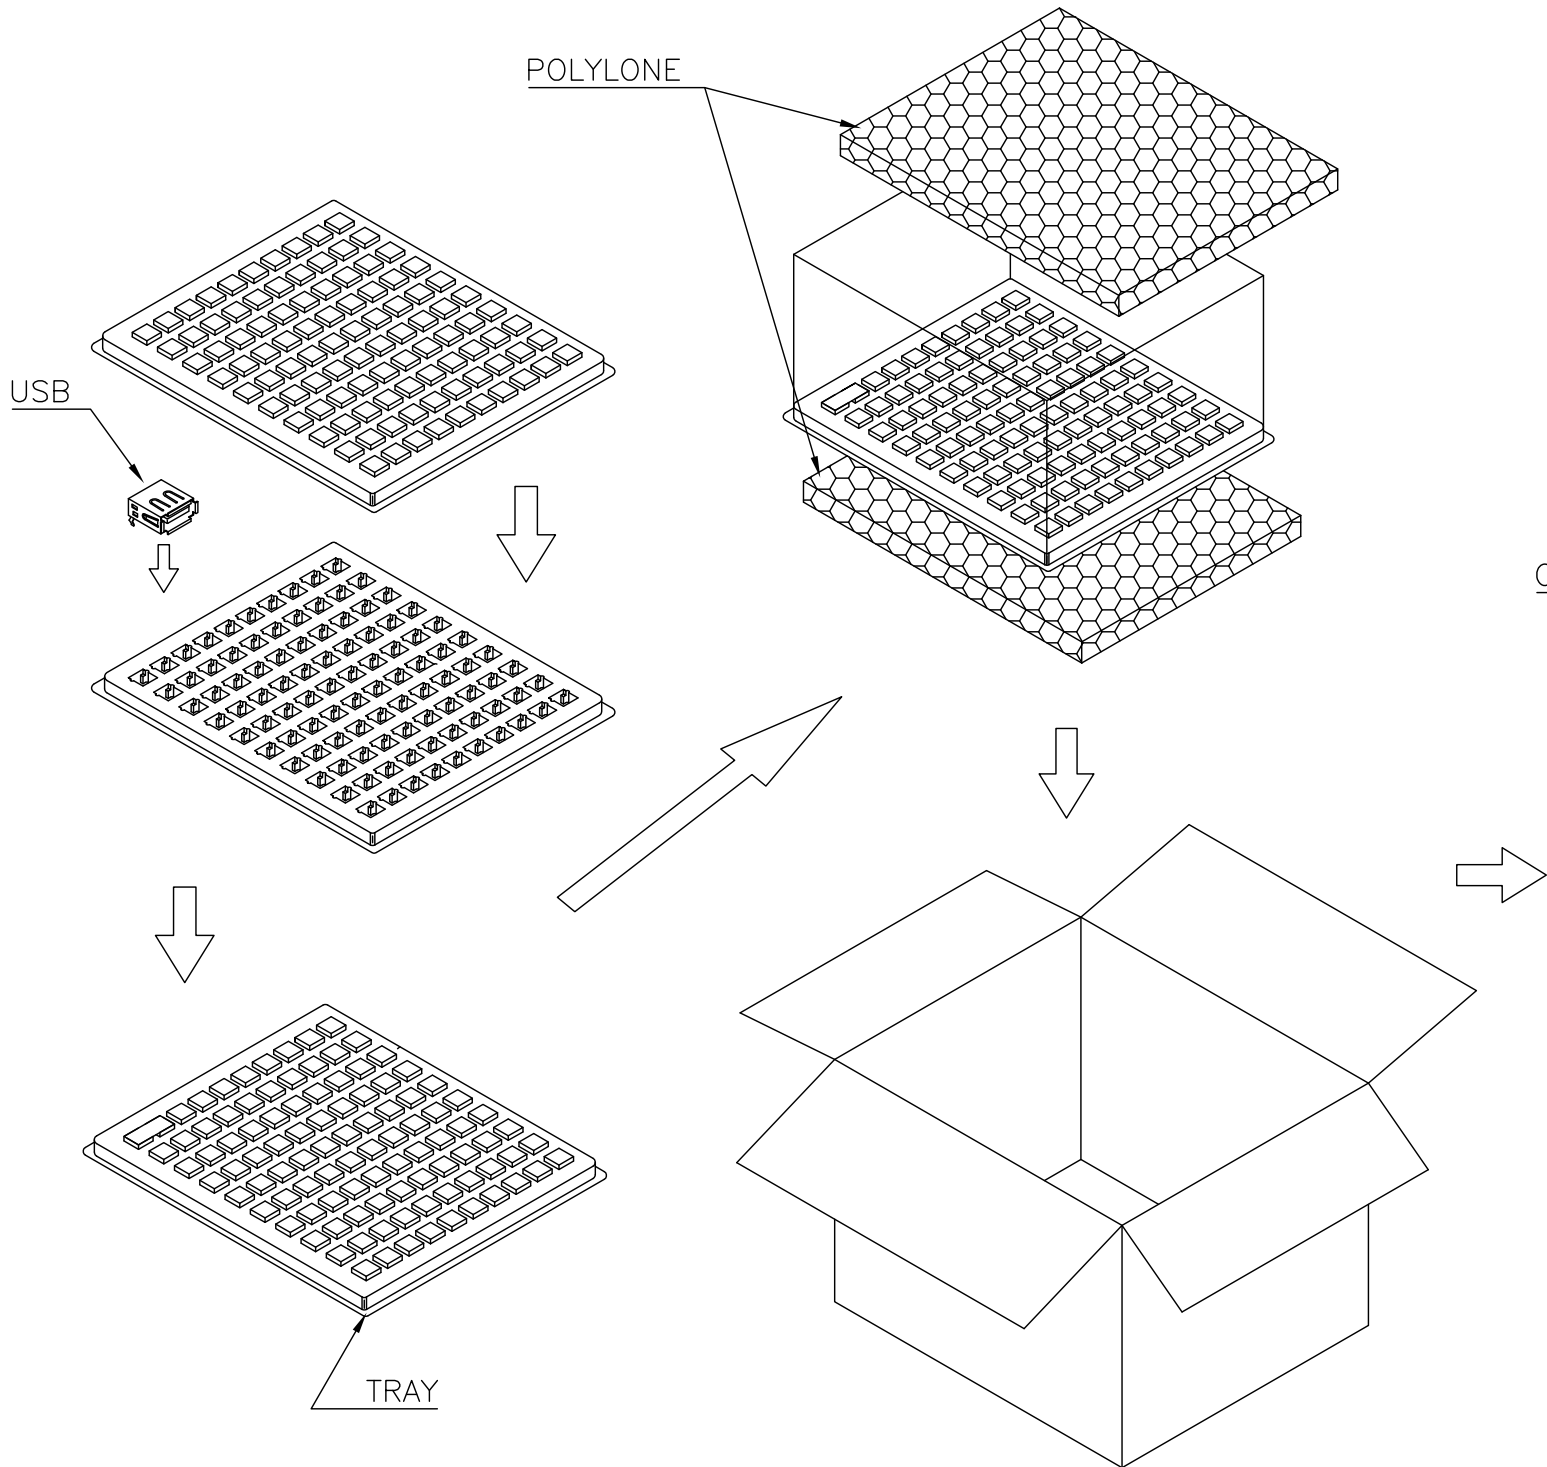


CARTON

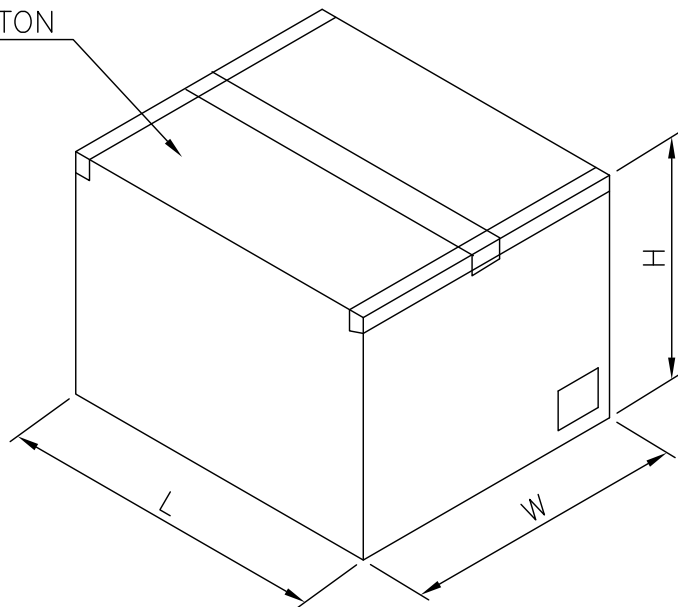

3.10 Kg	2.03 Kg	100	10	1000	4-1734081-2	OBSOLETE
					4-1734081-1	OBSOLETE
					1-1734081-1	
					1734081-2	OBSOLETE
					1734081-1	
GROSS WEIGHT	NET WEIGHT	PCS/TRAY	TRAY /CARTON	QUANTITY	PART NUMBER	

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
MM



MATERIAL

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC ± -
1 PLC ± -
2 PLC ± -
3 PLC ± -
4 PLC ± -
ANGLES ± -
FINISH

DWN

CHK

APVD

PRODUCT SPEC

APPLICATION SPEC

WEIGHT

CUSTOMER DRAWING



TE Connectivity

NAME

USB CONNECTOR, RECEPTACLE
4 POSITION, SERIES A

SIZE

CAGE CODE

DRAWING NO

RESTRICTED TO

A3

00779

C=1734081

SCALE

SHEET

16 of 19

REV E5

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

AUG ,2006.



COPYRIGHT 2009

BY TYCO ELECTRONICS CORPORATION.

ALL RIGHTS RESERVED.

LOC

DIST

REVISIONS

P

LTR

DESCRIPTION

DATE

DWN

APVD

SEE SHEET 1.

NOTES:

1. MATERIAL:

TRAY: PE.

POLYLONE:POLYLONE

SHIPPING CARTON: CORRUGATED FIBER.

2. DIMENSION :

TUBE : L=370mm, W=18.7mm, H=10.1mm

SHIPPING CARTON : L=390mm, W=165mm, H=90mm

3. QUANTITY :

25 PCS/TUBE

40 TUBES/INNER BOX(1,000PCS)

4. WEIGHT :

NET WEIGHT : 1.54 KG

GROSS WEIGHT : 2.45 KG

POLYONE

PLUG

TUBE

USB

PLUG

CARTON

OBSOLETE

OBSOLETE	2.45 Kg	1.54 Kg	25	40	1000	2-1734081-2
						2-1734081-1
GROSS WEIGHT	NET WEIGHT	PCS/TUBE	TUBES /CARTON	QUANTITY	PART NUMBER	

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN

CHK

APVD


PRODUCT SPEC

APPLICATION SPEC

WEIGHT

CUSTOMER DRAWING

DIMENSIONS:
MM



MATERIAL

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC ± -
1 PLC ± -
2 PLC ± -
3 PLC ± -
4 PLC ± -
ANGLES ± -
FINISH



TE Connectivity

NAME

USB CONNECTOR, RECEPTACLE
4 POSITION, SERIES A

SIZE

CAGE CODE

DRAWING NO

RESTRICTED TO

A3

00779

C=1734081

SCALE


SHEET

17 of 19

REV E5

LOC	DIST	REVISIONS				
DW		P	LTR	DESCRIPTION	DATE	APVD
				SEE SHEET 1.		

- NOTE:
- 1. MATERIAL:
TRAY: PE.
POLYLONE:POLYLONE
SHIPPING CARTON: CORRUGATED FIBER.
 - 2. DIMENSION :
TUBE : L=370mm, W=21.8mm, H=8.6mm
SHIPPING CARTON : L=390mm, W=165mm, H=90mm
 - 3. QUANTITY :
25 PCS/TUBE
49 TUBES/INNER BOX(1,225PCS)
 - 4. WEIGHT :
NET WEIGHT : 1.80 KG
GROSS WEIGHT : 3.70 KG

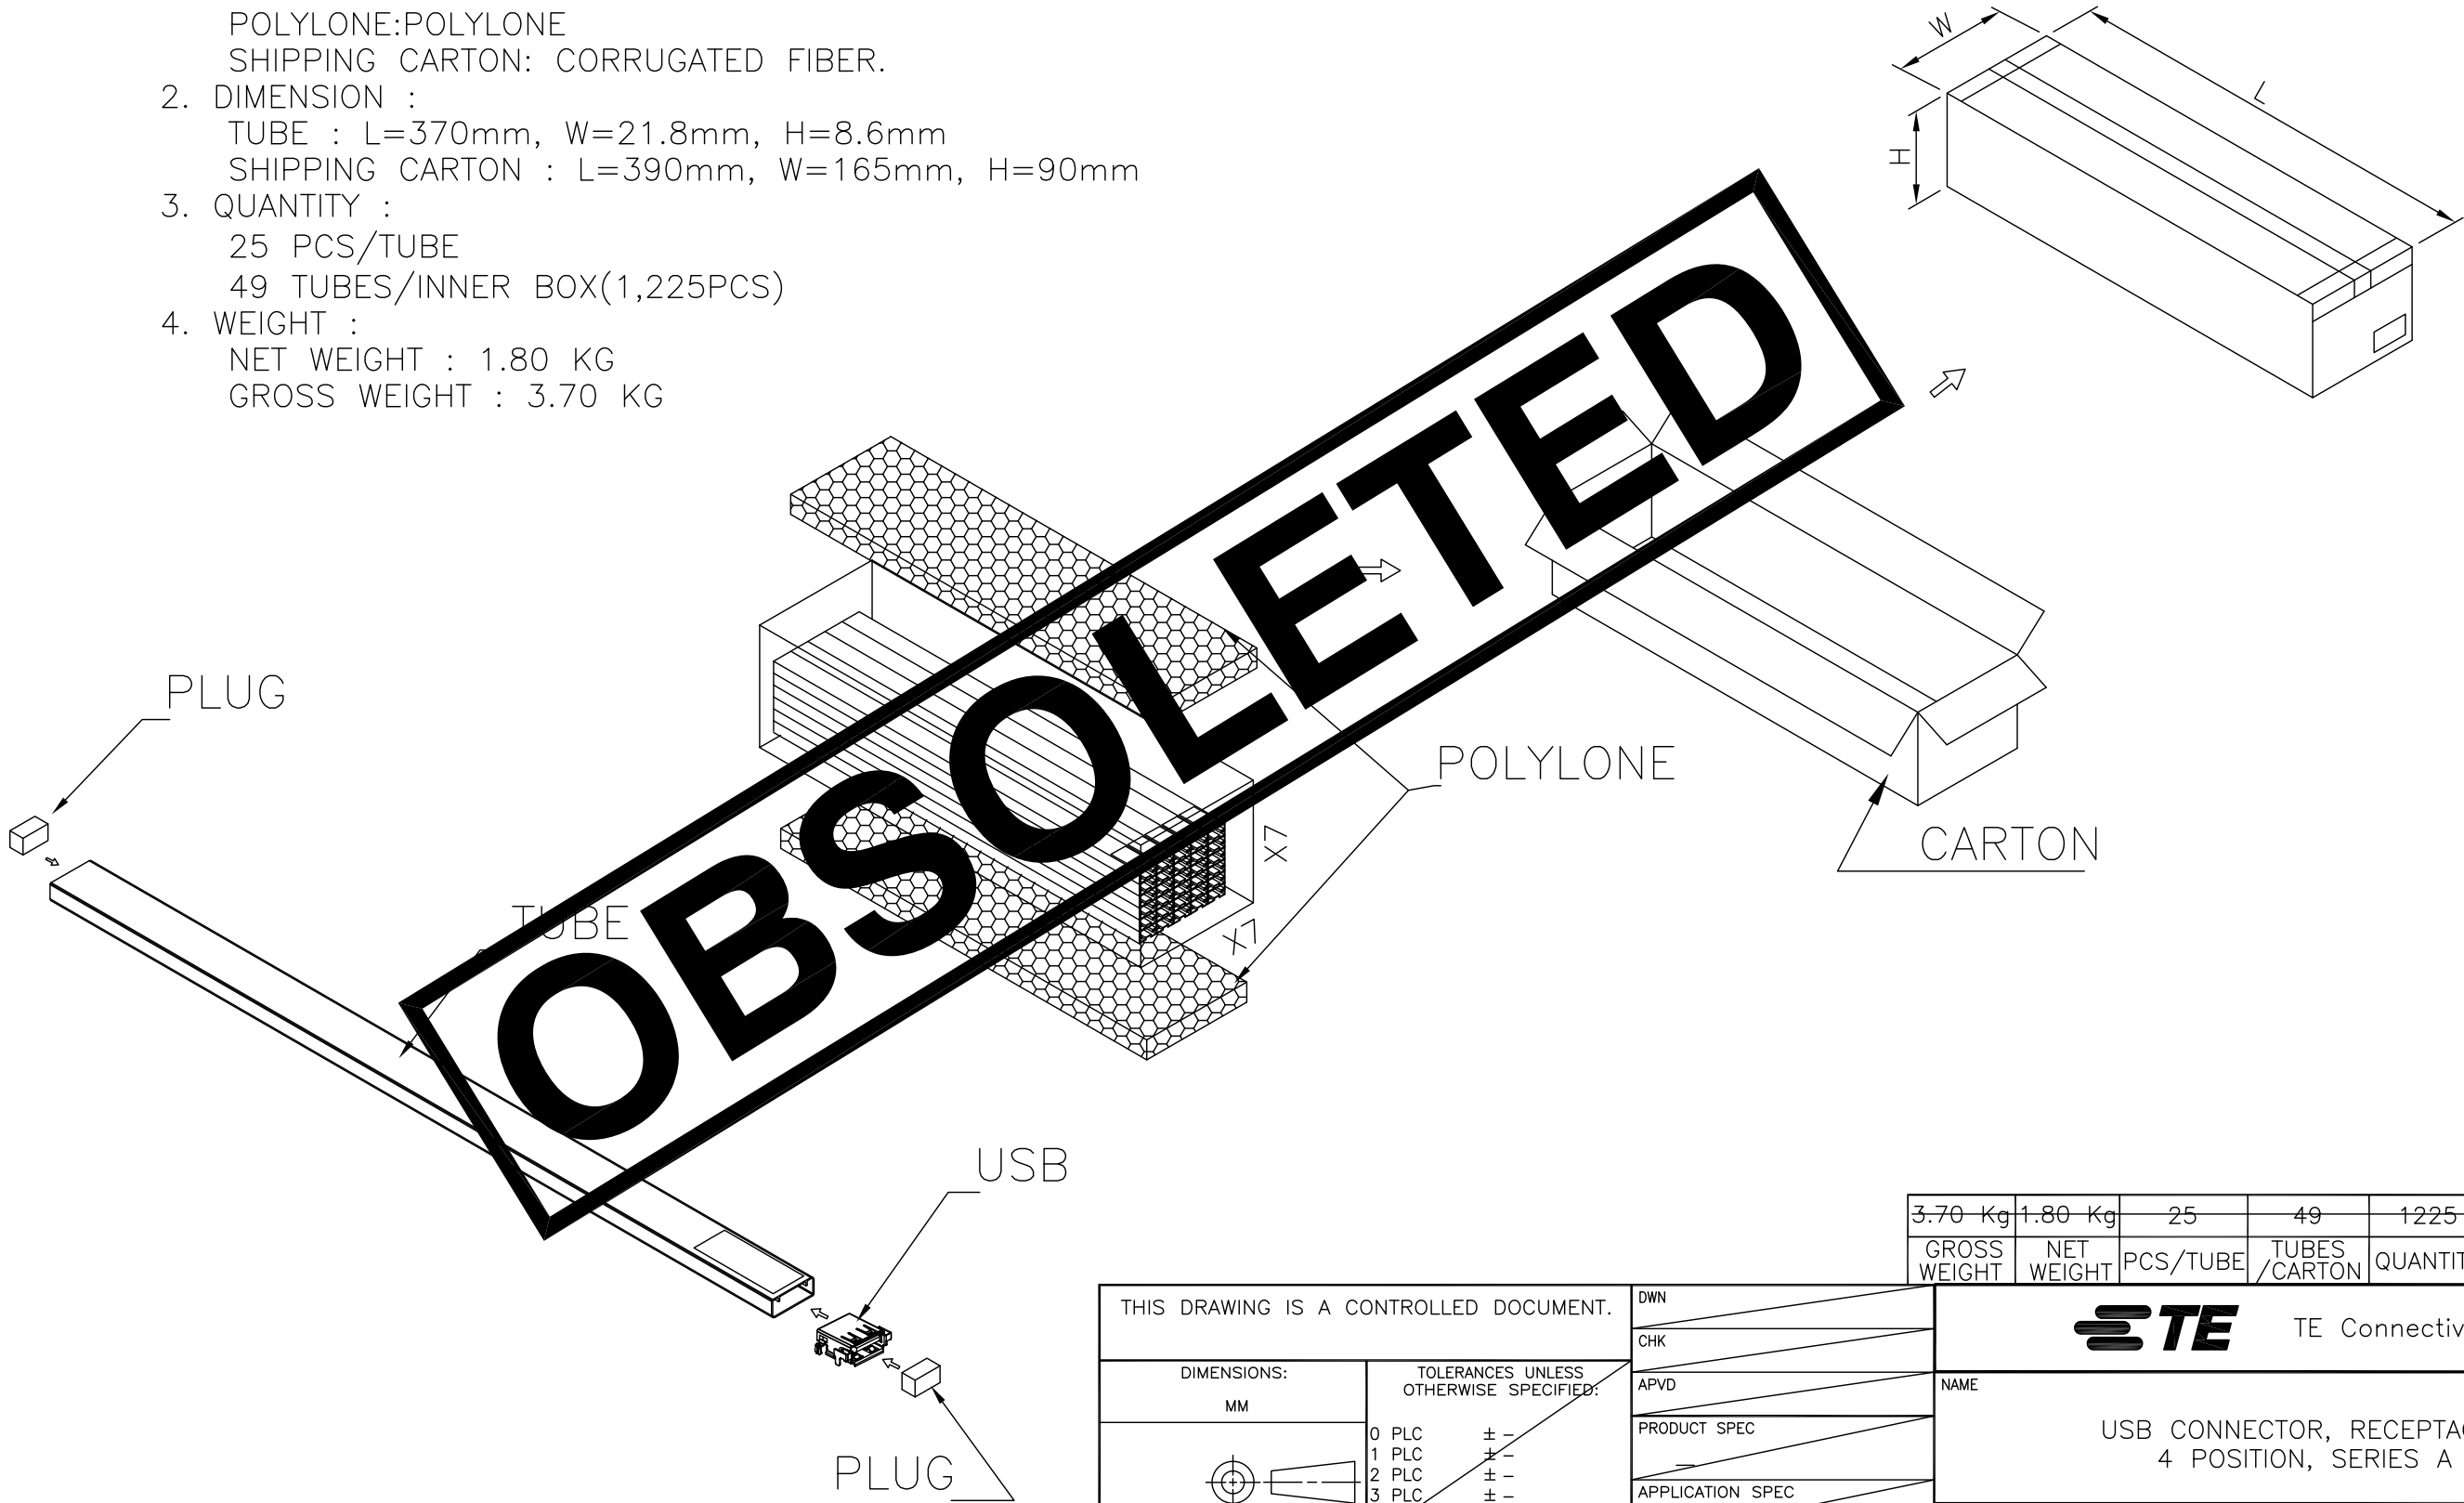

3.70 Kg	1.80 Kg	25	49	1225	6-1734081-1
GROSS WEIGHT	NET WEIGHT	PCS/TUBE	TUBES /CARTON	QUANTITY	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	TE Connectivity		
DIMENSIONS: MM		CHK			
		APVD	NAME USB CONNECTOR, RECEPTACLE 4 POSITION, SERIES A		
		PRODUCT SPEC			
		APPLICATION SPEC	SIZE A3		
		WEIGHT			
MATERIAL		CUSTOMER DRAWING	CAGE CODE 00779	DRAWING NO C=1734081	RESTRICTED TO —
TOLERANCES UNLESS OTHERWISE SPECIFIED:			SCALE —		
0 PLC ± —			SHEET 18 of 19		
1 PLC ± —			REV E5		
2 PLC ± —					
3 PLC ± —					
4 PLC ± —					
ANGLES ± —					
FINISH					



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.