

4

3

2

1

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

AUG ,2006.



COPYRIGHT 2009

BY TYCO ELECTRONICS CORPORATION.

ALL RIGHTS RESERVED.

LOC

DIST

REVISIONS

P

LTR

DESCRIPTION

DATE

DWN

APVD


E5

REVISED (ECR-13-016508)

23JAN14

BW

SC

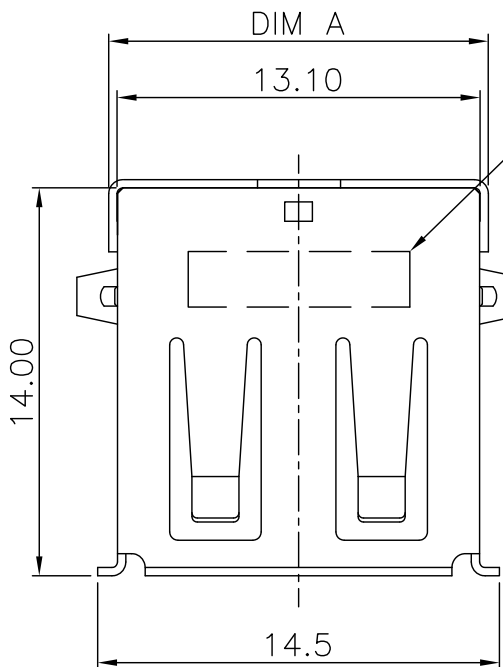

NOTE:

1. MATERIAL:

HOUSING: PA9T WITH 30%GF, UL94V-0, BLACK COLOR.

CONTACT: PHOSPHOR BRONZE.

SHELL: BRASS.

BACK COVER: BRASS.

2. FINISH:

CONTACT: 0.762μm [30μ"] MIN. GOLD PLATING ON CONTACT AREA.

3.048μm [120μ"] MIN. BRIGHT TIN PLATING ON SOLDER TAILS.

1.27μm [50μ"] MIN. NICKEL UNDERPLATING OVERALL.


SHELL: 0.762μm [30μ"] MIN. NICKEL PLATED OVER

0.762μm [30μ"] MIN. Cu UNDERPLATING OVERALL.




BACK COVER: 0.762μm [30μ"] MIN. NICKEL PLATED OVER

0.762μm [30μ"] MIN. Cu UNDERPLATING OVERALL.

3. REFLOW SOLDER CAPABLE TO 260°C PER TE SPEC 109-201, CONDITION B.

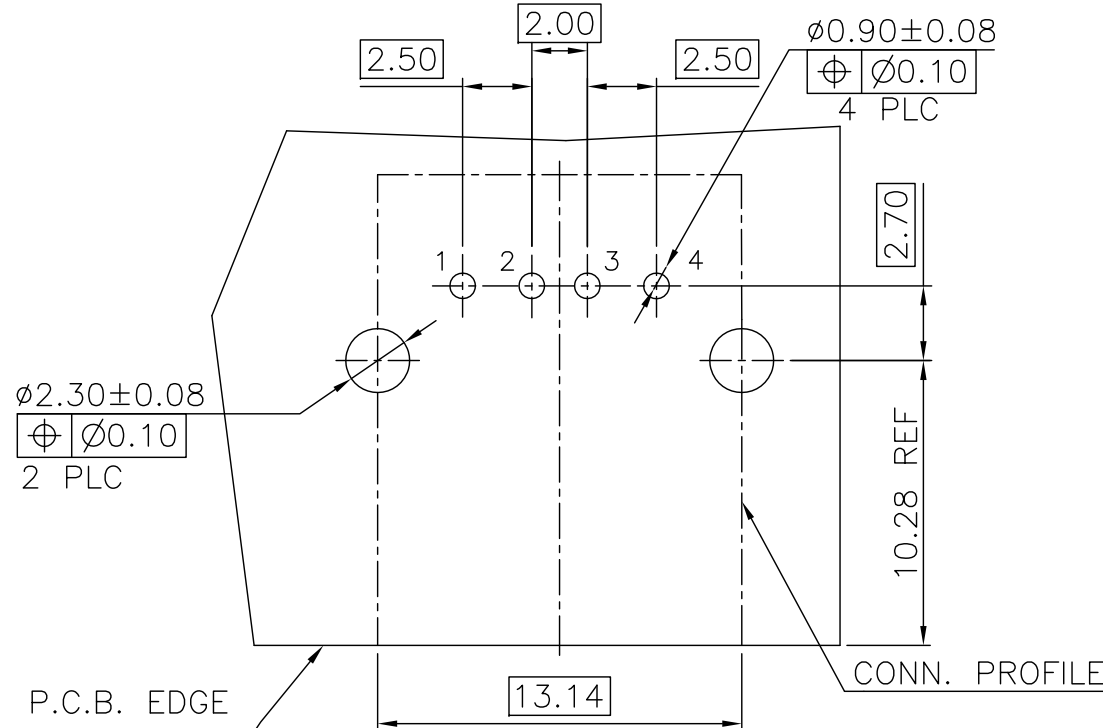

RECOMMEND P.C.B LAYOUT (THICKNESS=1.6mm)
(COMPONENT SIDE) TOLERANCE±0.05

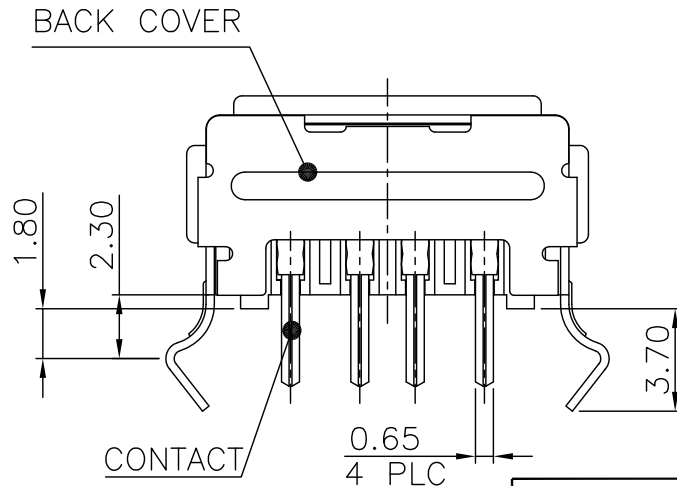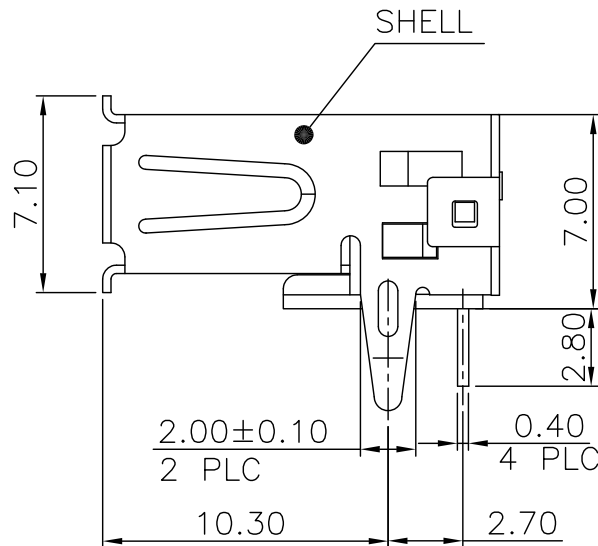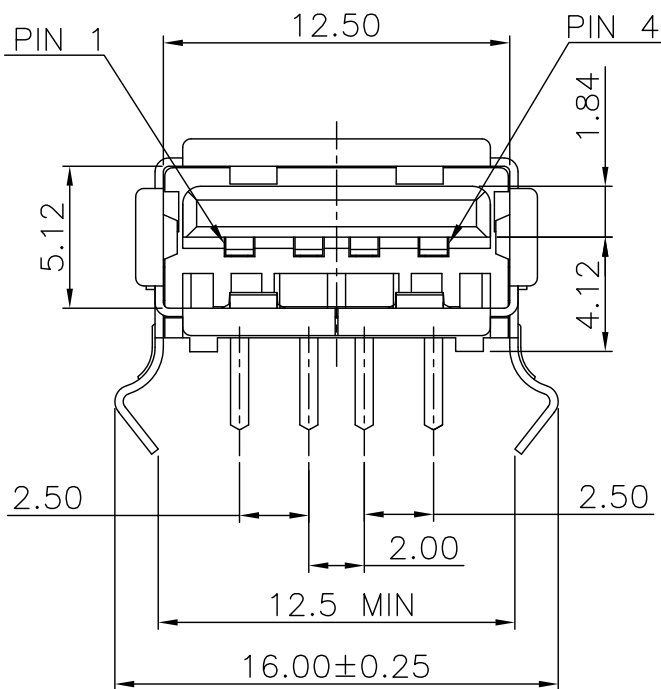

OBSOLETE	NA	W/O	TRAY	1734081-2
	13.7	W/	TRAY	1734081-1
	DIM.A	BACK COVER	PACKAGE	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN O. HU 21SEP2004

CHK S. HSU 21SEP2004

APVD W.J. KE 21SEP2004

PRODUCT SPEC

108-57505


APPLICATION SPEC

501-57579

WEIGHT 2.01 GRAMS

CUSTOMER DRAWING

DIMENSIONS:
MM



MATERIAL

SEE NOTE

TOLERANCES UNLESS
OTHERWISE SPECIFIED:

0 PLC ± -
1 PLC ± 0.35
2 PLC ± 0.25
3 PLC ± 0.15
4 PLC ± -
ANGLES ± 3°

FINISH

SEE NOTE



TE Connectivity

NAME

USB CONNECTOR, RECEPTACLE
4 POSITION, SERIES A

SIZE

CAGE CODE

DRAWING NO

RESTRICTED TO

A3 00779 C=1734081

SCALE

SHEET

1 OF 19

REV E5

4

3

2

1

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

AUG ,2006.



COPYRIGHT 2009

BY TYCO ELECTRONICS CORPORATION.

ALL RIGHTS RESERVED.

LOC

DIST

REVISIONS

P

LTR




DESCRIPTION

DATE

DWN




APVD

SEE SHEET 1.

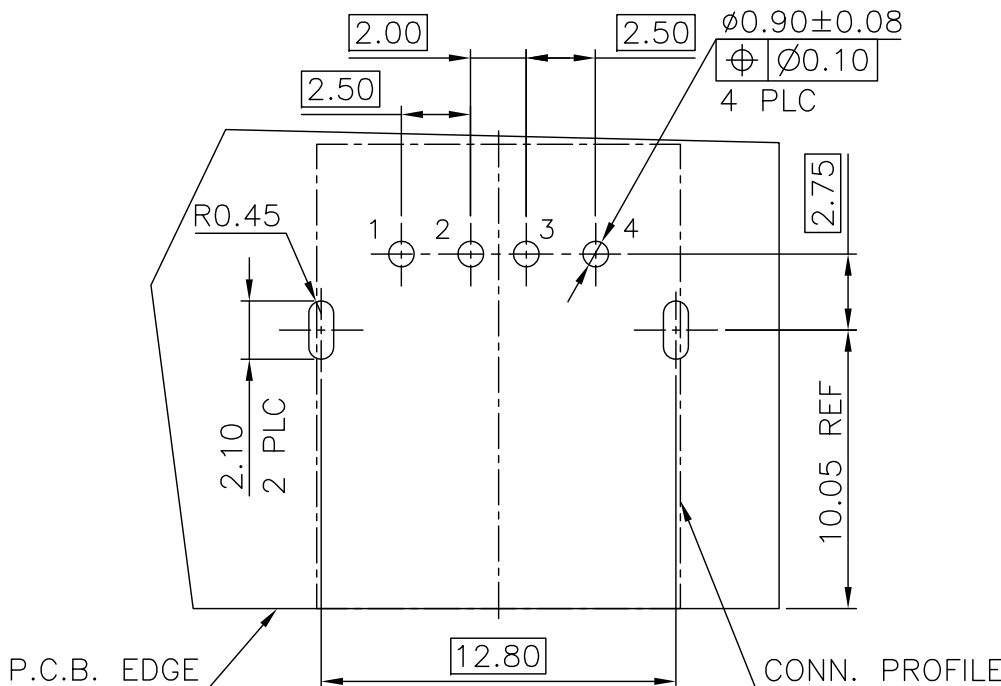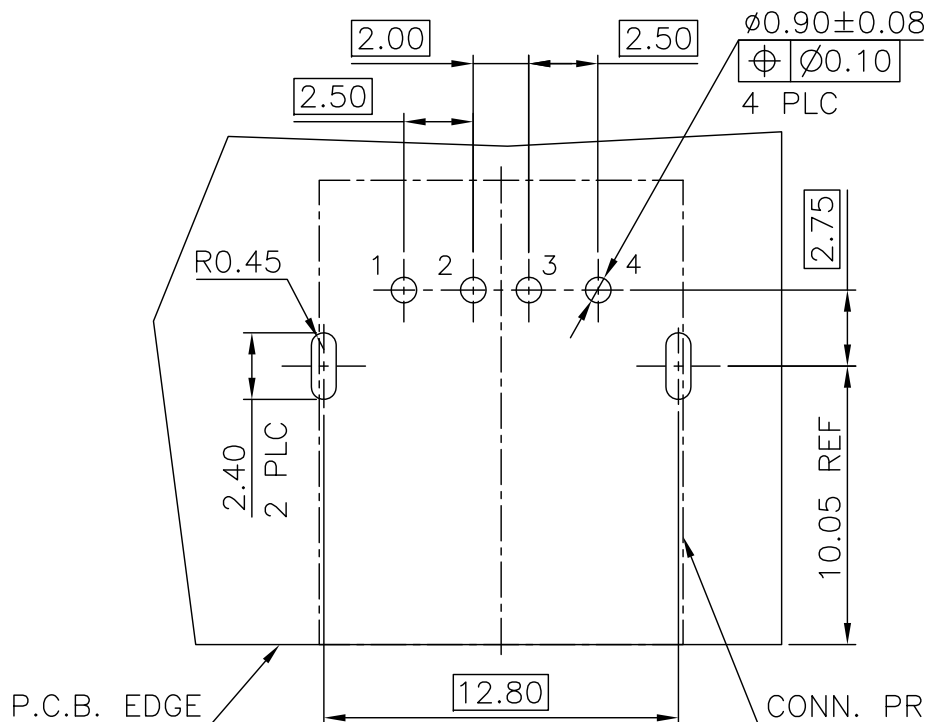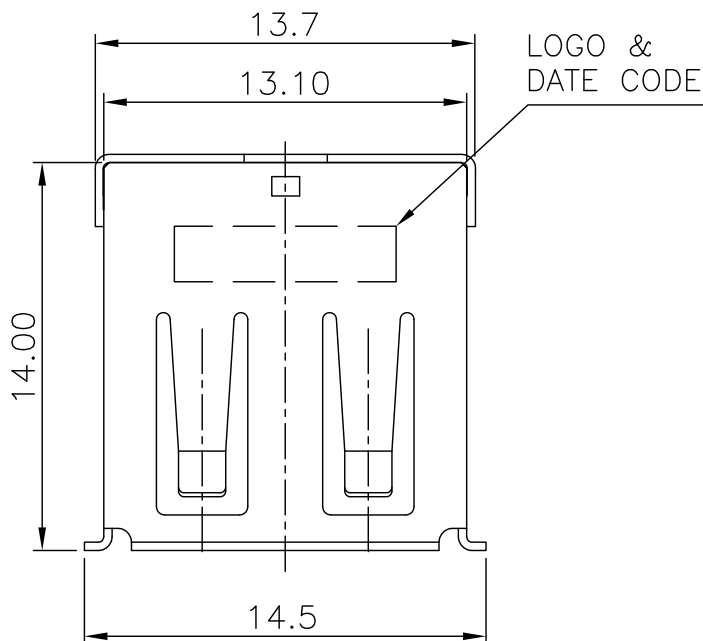

RECOMMEND P.C.B LAYOUT (THICKNESS=1.6mm)
(COMPONENT SIDE) TOLERANCE±0.05 FOR DIM.A=2.4

RECOMMEND P.C.B LAYOUT (THICKNESS=1.4~1.6mm)
(COMPONENT SIDE) TOLERANCE±0.05 FOR DIM.A=2.0

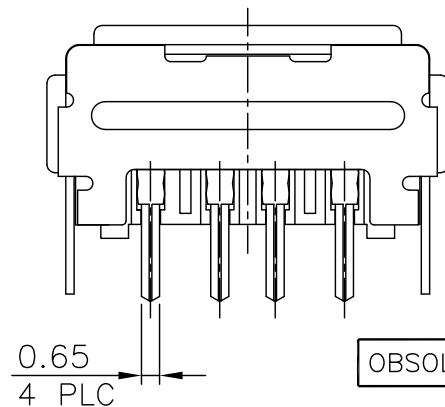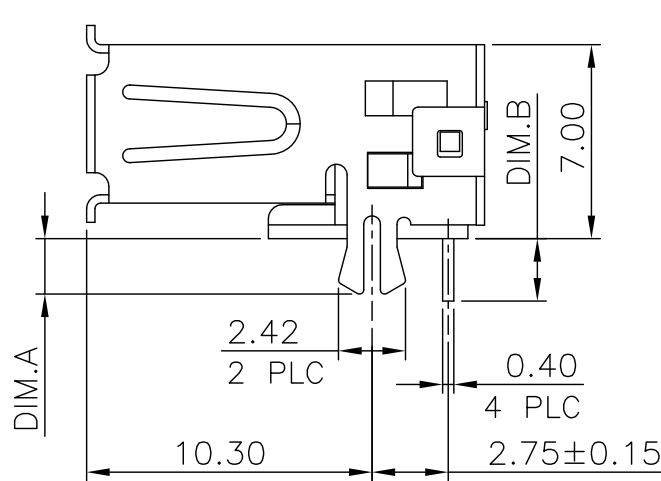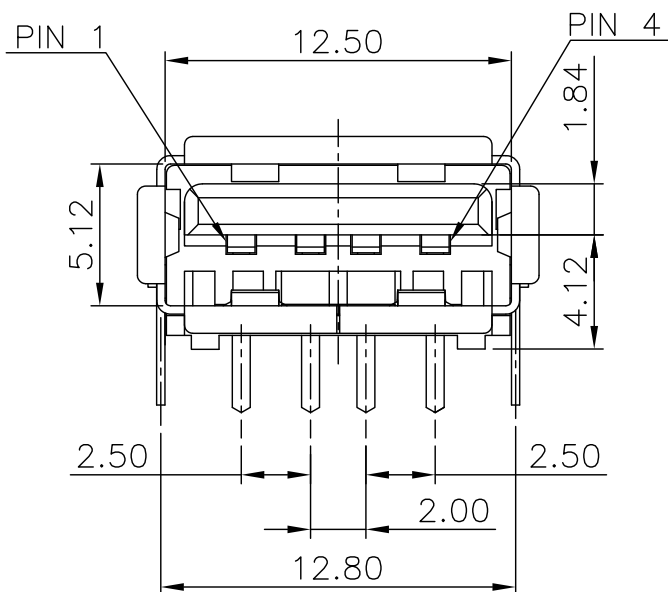

OBSOLETE	△PA-46	MOON GRAY	2.0	2.25	T&R	1-1734081-4
			2.4	2.25	T&R	1-1734081-3
OBSOLETE	△PA-9T	BLACK	2.0	1.5	T&R	1-1734081-5
				2.25	T&R	1-1734081-2
					TRAY	1-1734081-1
	HSG. MATERIAL	HSG. COLOR	DIM A	DIM B	PACKAGE	PART NUMBER

NOTE:

1. MATERIAL:

HOUSING: THERMOPLASTIC (SEE TABLE) WITH 30%GF, UL94V-0, BLACK COLOR.
CONTACT: PHOSPHOR BRONZE.
SHELL: BRASS.
BACK COVER: BRASS.

2. FINISH:

CONTACT: 0.762μm [30μ"] MIN. GOLD PLATING ON CONTACT AREA,
3.048μm [120μ"] MIN. BRIGHT TIN PLATING ON SOLDER TAILS.
1.27μm [50μ"] MIN. NICKEL UNDERPLATING OVERALL.
SHELL: 0.762μm [30μ"] MIN. NICKEL PLATED OVER
0.762μm [30μ"] MIN. Cu UNDERPLATING OVERALL.
BACK COVER: 0.762μm [30μ"] MIN. NICKEL PLATED OVER
0.762μm [30μ"] MIN. Cu UNDERPLATING OVERALL.

△ REFLOW SOLDER CAPABLE TO 245°C PER TE SPEC 109-201, CONDITION A.

△ REFLOW SOLDER CAPABLE TO 260°C PER TE SPEC 109-201, CONDITION B.

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN

DIMENSIONS:

MM

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC ± -
1 PLC ± 0.35
2 PLC ± 0.25
3 PLC ± 0.15
4 PLC ± -
ANGLES ± 3°

MATERIAL

SEE NOTE

FINISH

SEE NOTE

CHK

APVD

PRODUCT SPEC

APPLICATION SPEC

WEIGHT

2.01 GRAMS

CUSTOMER DRAWING



TE Connectivity

NAME

USB CONNECTOR, RECEPTACLE
4 POSITION, SERIES A

SIZE

CAGE CODE

DRAWING NO

RESTRICTED TO

A3

00779

C=

1734081

SCALE

SHEET

2 of 19

REV

E5

4

3

2

1

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

AUG ,2006.

©

COPYRIGHT 2009

BY TYCO ELECTRONICS CORPORATION.

ALL RIGHTS RESERVED.

LOC

DIST

REVISIONS

DW

P

LTR



DESCRIPTION

DATE





DWN

APVD

SEE SHEET 1.

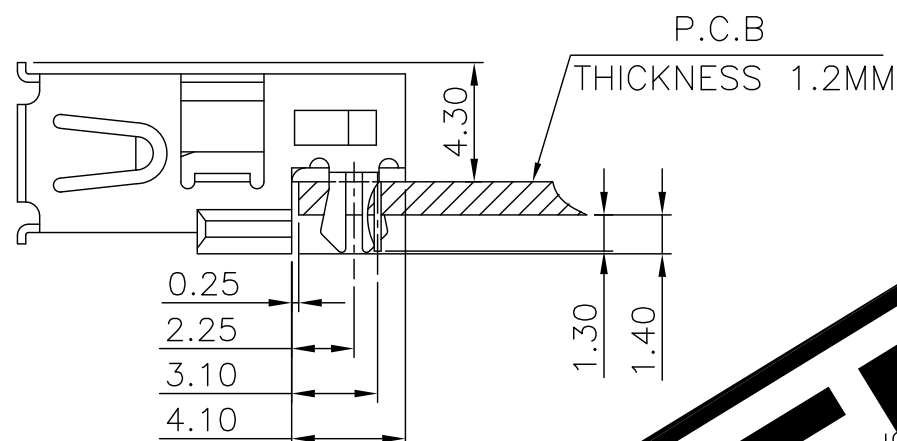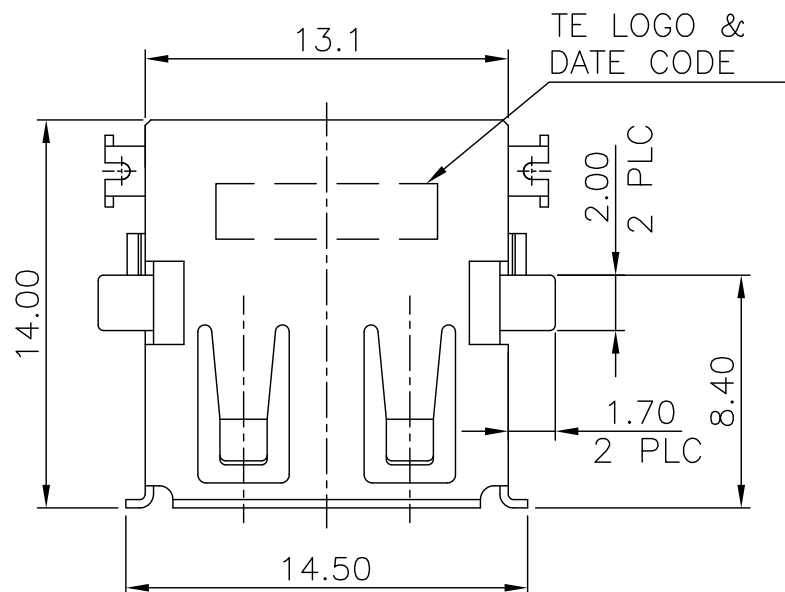

RECOMMENDED MOUNT DIMENSIONS

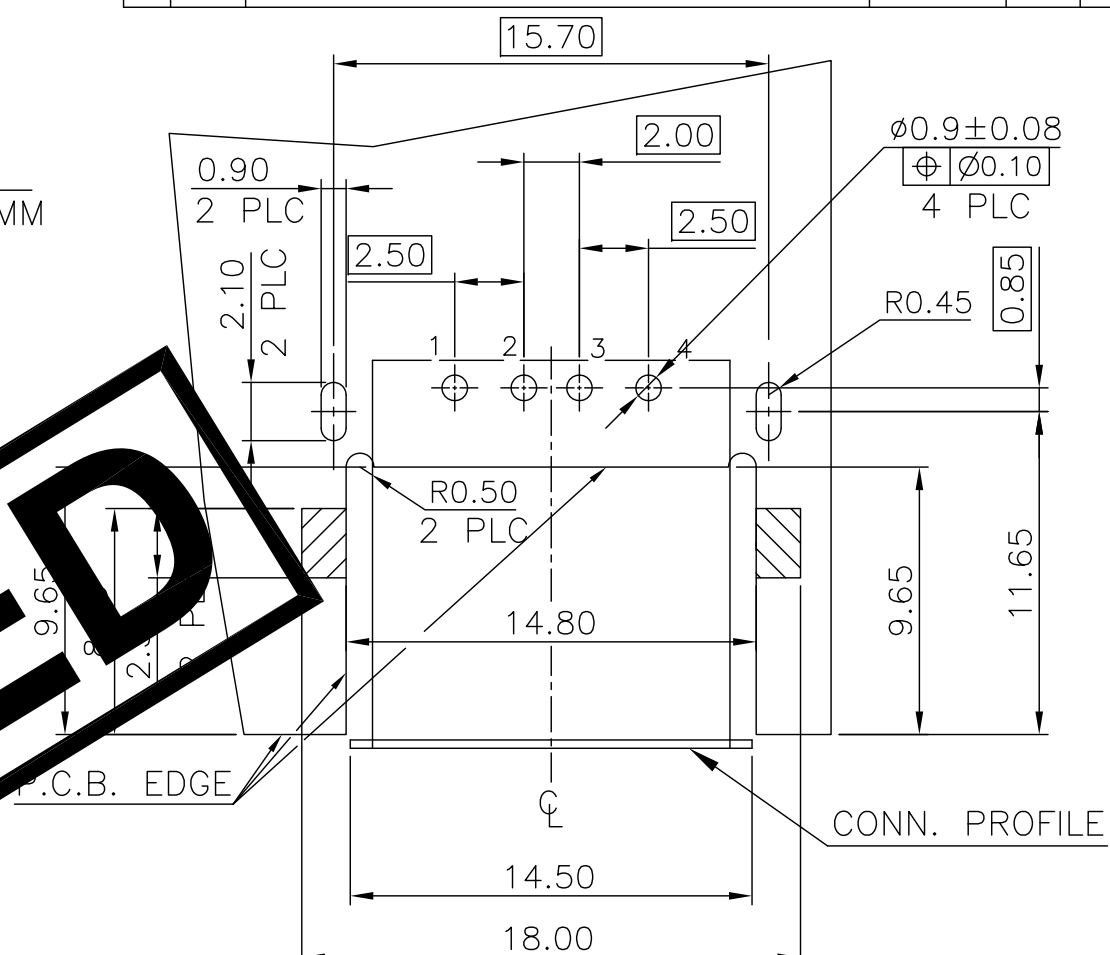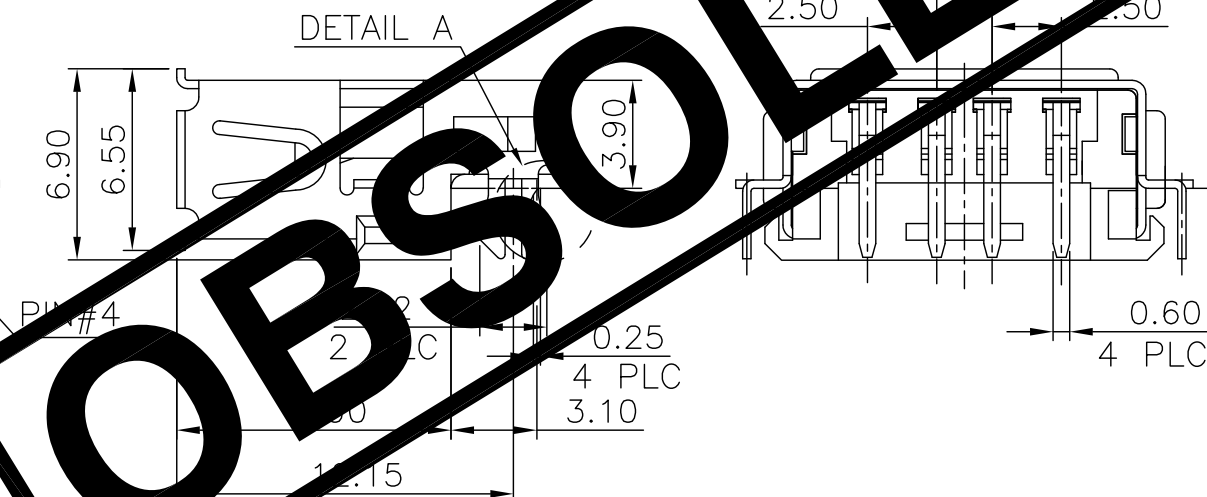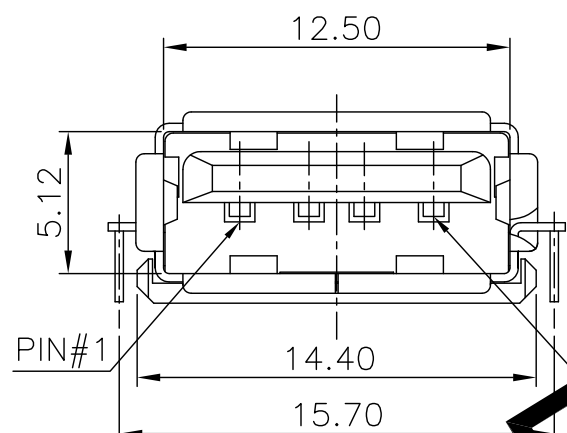RECOMMEND P.C.B LAYOUT (THICKNESS=1.2mm)
(COMPONENT SIDE) TOLERANCE±0.050.10
ALL PEGSDETAIL A
SCALE 2:1

NOTE:

1. MATERIAL:

HOUSING: PA9T WITH 30%GF, UL94V-0, BLACK COLOR.

CONTACT: PHOSPHOR BRONZE.

SHELL: BRASS.

2. FINISH:

CONTACT: 0.762μm [30μ"] MIN. GOLD PLATING ON CONTACT AREA,

3.048μm [120μ"] MIN. BRIGHT TIN PLATING ON SOLDER TAILS.

1.27μm [50μ"] MIN. NICKEL UNDERPLATING OVERALL.

SHELL: Δ0.762μm [30μ"] MIN. TIN PLATED OVER

0.762μm [30μ"] MIN. Cu UNDERPLATING OVERALL.

Δ0.762μm [30μ"] MIN. NICKEL PLATED OVER

0.762μm [30μ"] MIN. Cu UNDERPLATING OVERALL.

3. REFLOW SOLDER CAPABLE TO 260°C PER TE SPEC 109-201, CONDITION B.

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN

CHK


APVD

PRODUCT SPEC

APPLICATION SPEC

WEIGHT 1.57 GRAMS

CUSTOMER DRAWING

DIMENSIONS:
MM

MATERIAL

SEE NOTE

TOLERANCES UNLESS
OTHERWISE SPECIFIED:0 PLC ± -
1 PLC ± 0.35
2 PLC ± 0.25
3 PLC ± 0.15
4 PLC ± -
ANGLES ± 3°

FINISH

SEE NOTE

NAME

TE

TE Connectivity

USB CONNECTOR, RECEPTACLE
4 POSITION, SERIES A

SIZE

CAGE CODE

DRAWING NO

RESTRICTED TO

A300779C=1734081

SCALE

SHEET

3 of 19

REV E5

4

3

2

1

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

AUG ,2006.



COPYRIGHT 2009

BY TYCO ELECTRONICS CORPORATION.

ALL RIGHTS RESERVED.

LOC

DIST

REVISIONS

P

LTR


DESCRIPTION

DATE


DWN

APVD




SEE SHEET 1.

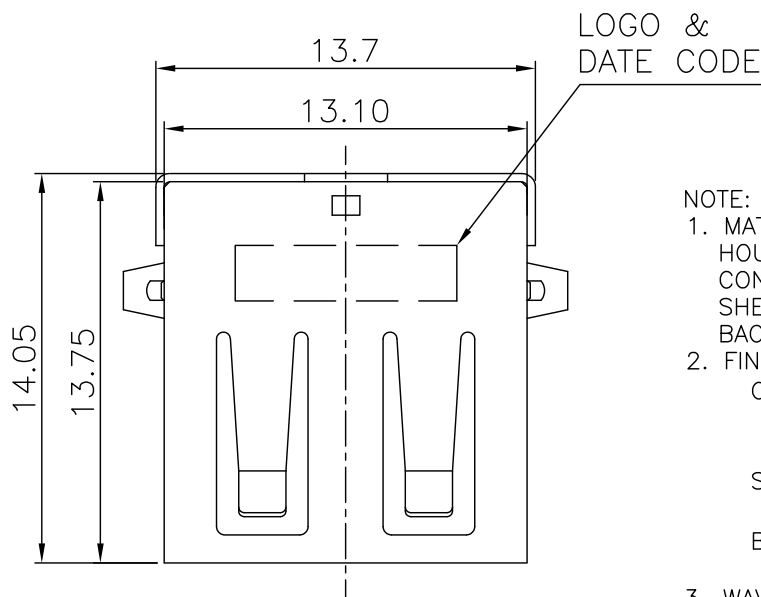

- NOTE:
- MATERIAL:
HOUSING: PBT WITH 30%GF, UL94V-0, COLOR: SEE TABLE.
CONTACT: PHOSPHOR BRONZE.
SHELL: BRASS.
BACK COVER: BRASS.
 - FINISH:
CONTACT: 0.762μm [30μ"] MIN. GOLD PLATING ON CONTACT AREA.
3.048μm [120μ"] MIN. BRIGHT TIN PLATING ON SOLDER TAILS.
1.27μm [50μ"] MIN. NICKEL UNDERPLATING OVER SOLDER TAIL.
SHELL: 0.762μm [30μ"] MIN. NICKEL PLATED OVER
0.762μm [30μ"] MIN. Cu UNDERPLATING OVER SOLDER TAIL.
BACK COVER: 0.762μm [30μ"] MIN. NICKEL PLATED OVER
0.762μm [30μ"] MIN. Cu UNDERPLATING OVER SOLDER TAIL.
 - WAVE SOLDER CAPABLE TO 245°C PER TE SPEC 10-00002, CONDITION A.

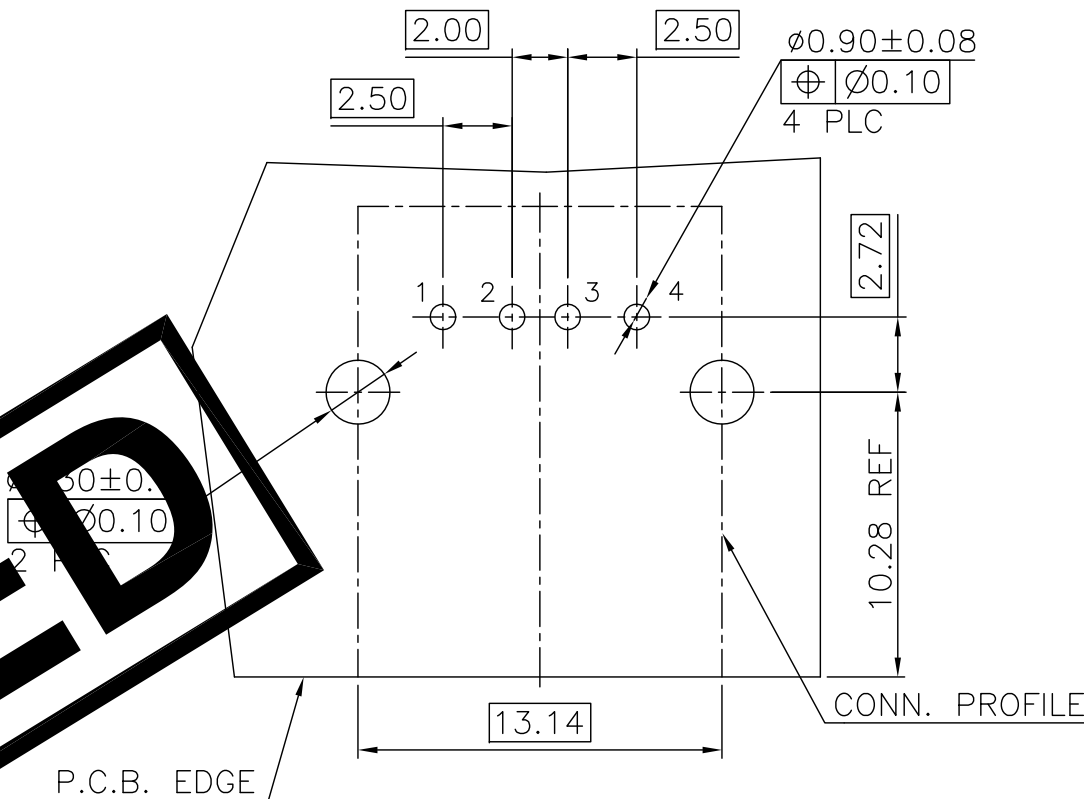

RECOMMEND P.C.B LAYOUT (THICKNESS=1.6mm)
(COMPONENT SIDE) TOLERANCE±0.05

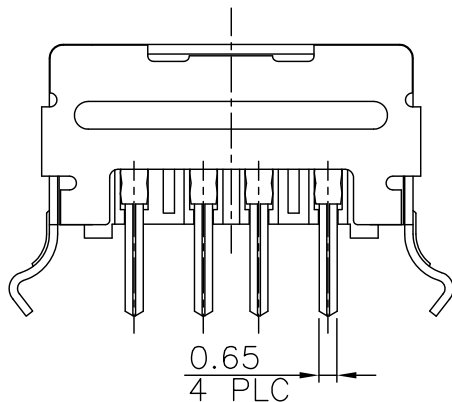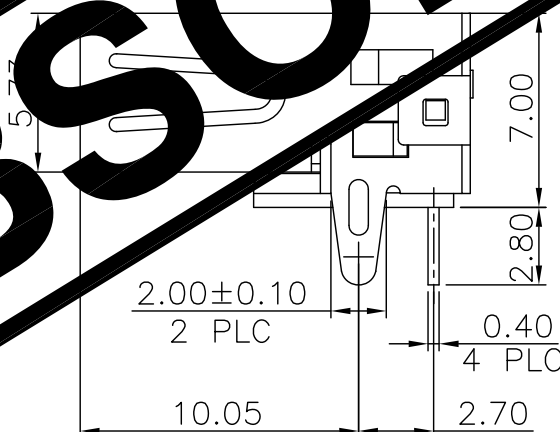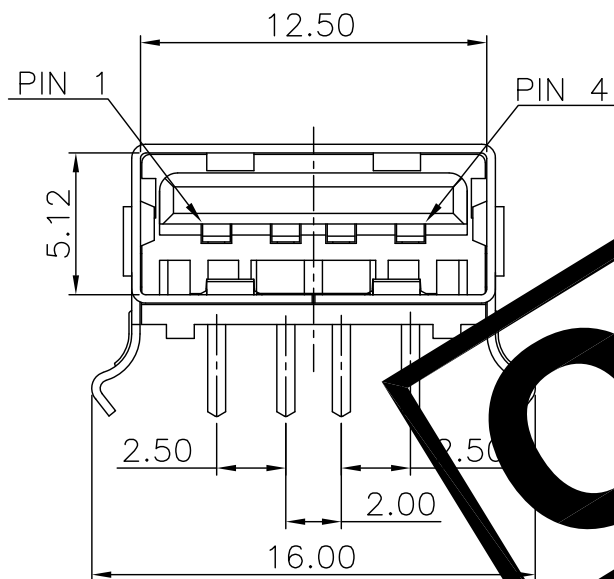

OBSOLETE	TRAY	MOON GRAY	4-1734081-2
		NONMETALLIC PEARL	4-1734081-1
	PACKAGE	HSG. COLOR	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN

CHK

APVD

PRODUCT SPEC

APPLICATION SPEC

WEIGHT 2.03 GRAMS

CUSTOMER DRAWING



TE Connectivity

NAME

USB CONNECTOR, RECEPTACLE
4 POSITION, SERIES A

SIZE

CAGE CODE

DRAWING NO

RESTRICTED TO

A300779C-1734081


SCALE

SHEET

5 of 19

REV E5

DIMENSIONS:
MM



MATERIAL

SEE NOTE

TOLERANCES UNLESS
OTHERWISE SPECIFIED:

0 PLC	± -
1 PLC	± 0.35
2 PLC	± 0.25
3 PLC	± 0.15
4 PLC	± -
ANGLES	± 3°

FINISH

SEE NOTE

4

3

2

1

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

AUG ,2006.



COPYRIGHT 2009

BY TYCO ELECTRONICS CORPORATION.

ALL RIGHTS RESERVED.

LOC

DIST

REVISIONS

P

LTR

DESCRIPTION




DATE

DWN

APVD

SEE SHEET 1.

TE LOGO &
DATE CODE

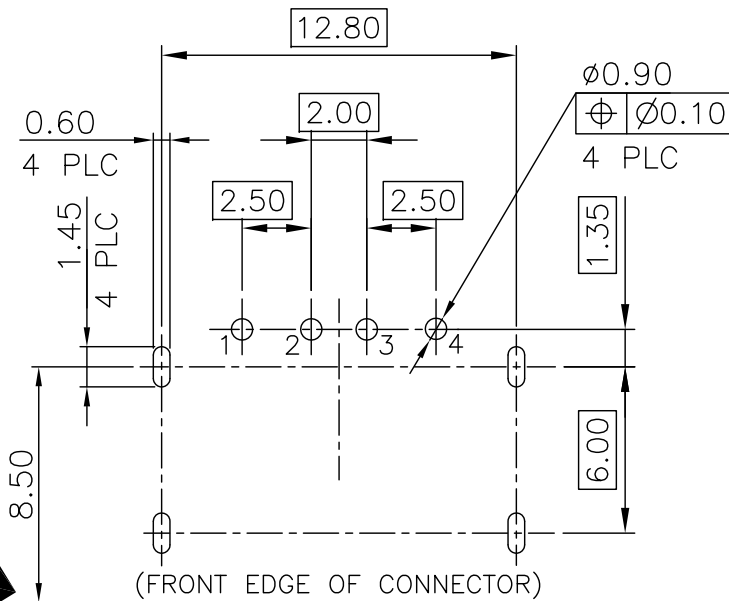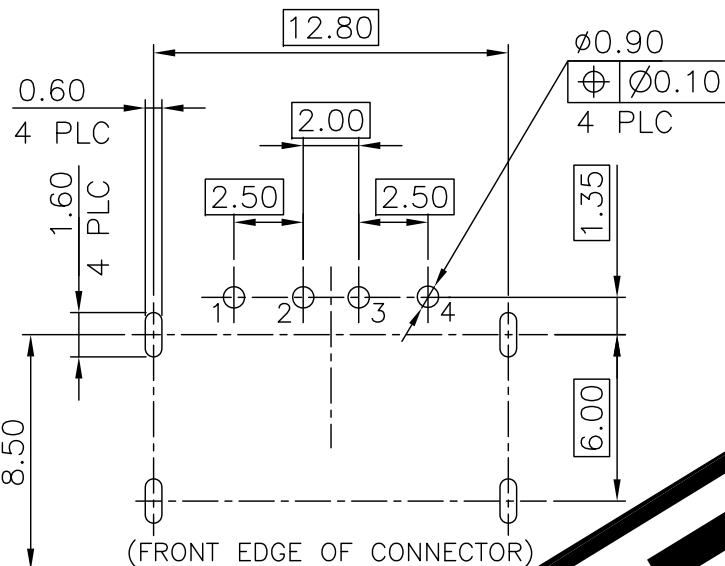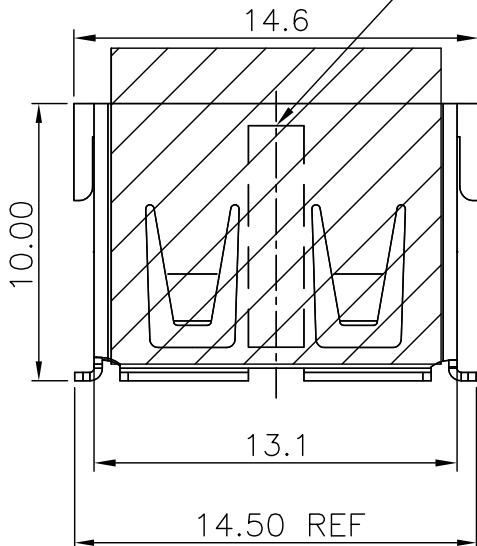

RECOMMEND P.C.B LAYOUT (THICKNESS=1.4mm)
(COMPONENT SIDE) TOLERANCE±0.05

RECOMMEND P.C.B LAYOUT (THICKNESS=1.4mm)
(COMPONENT SIDE) TOLERANCE±0.05

NOTE:

1. MATERIAL:

HOUSING: PA9T WITH 30%GF, UL94V-0, BLACK COLOR.

CONTACT: PHOSPHOR BRONZE.

SHELL: BRASS.

MYLAR: KAPTON, 0.06 THICKNESS

FINISH:



CONTACT: 0.762μm [30μ"] MIN. GOLD PLATING ON CONTACT AREA,
2.54μm [100μ"] MIN. MATTE-TIN PLATING ON SOLDER TAIL,
WITH ENTIRE CONTACT UNDERPLATED 1.27μm [50μ"] MIN. NICKEL
SHELL: 1.27μm [50μ"] MIN. NICKEL PLATING.

FINISH:

CONTACT: 0.254μm [10μ"] MIN. GOLD PLATING ON CONTACT AREA.
2.54μm [100μ"] MIN. MATTE-TIN PLATING ON SOLDER TAIL,
WITH ENTIRE CONTACT UNDERPLATED 1.27μm [50μ"] MIN. NICKEL
SHELL: 1.27μm [50μ"] MIN. NICKEL PLATING.
SPUTTERING/BLACK PLATING IN FRONT FLANGE.

4. REFLOW SOLDER CAPABLE TO 260°C PER TE TEST SPEC 109-201, CONDITION B.

CONNECTOR MOUNTING WITH ZERO INSERTION FORCE.

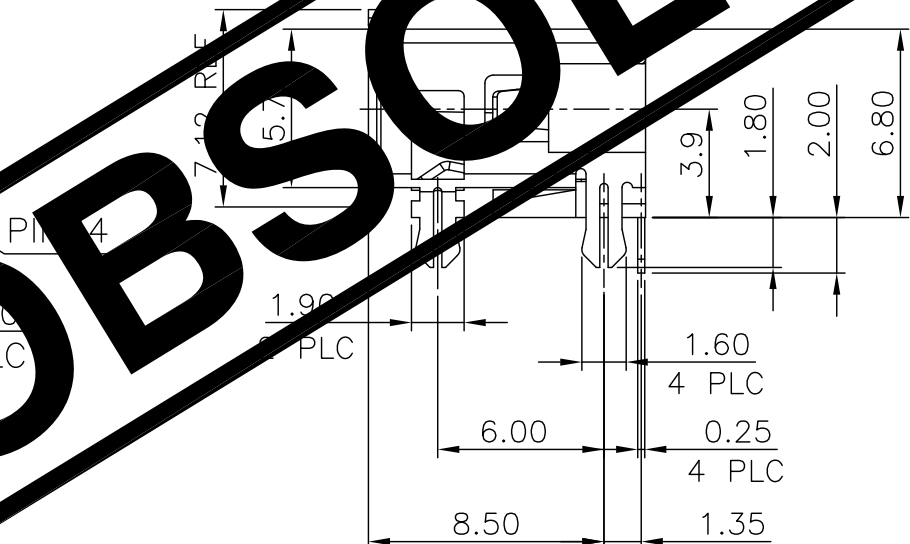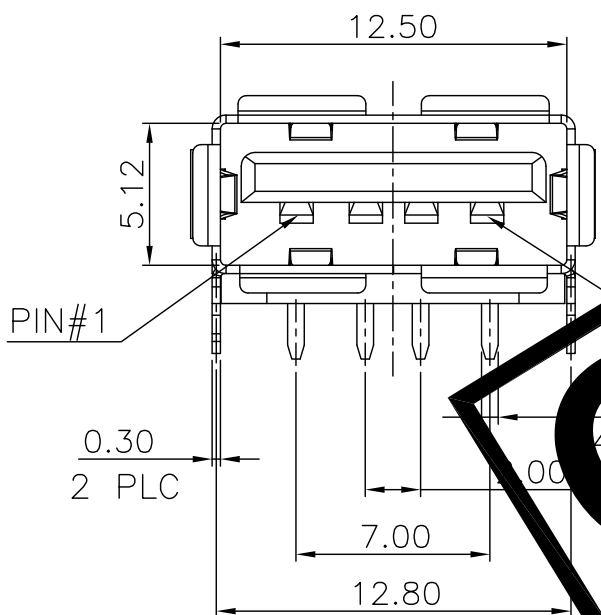

OBSOLETE		TAPE&REEL W/O MYLAR	5-1734081-3
		TAPE&REEL W/ MYLAR	5-1734081-2
		TAPE&REEL W/ MYLAR	5-1734081-1
	FINISH	PACKAGE	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN

CHK

APVD

PRODUCT SPEC

APPLICATION SPEC

WEIGHT 1.54 GRAMS

CUSTOMER DRAWING



TE Connectivity

NAME

USB CONNECTOR, RECEPTACLE
4 POSITION, SERIES A

SIZE

CAGE CODE

DRAWING NO

RESTRICTED TO

A300779C=1734081

SCALE

SHEET

6 of 19

REV E5

4

3

2

1

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

AUG ,2006.



COPYRIGHT 2009

BY TYCO ELECTRONICS CORPORATION.

ALL RIGHTS RESERVED.

LOC

DIST

REVISIONS

P

LTR


DESCRIPTION

DATE

DWN


APVD

SEE SHEET 1.



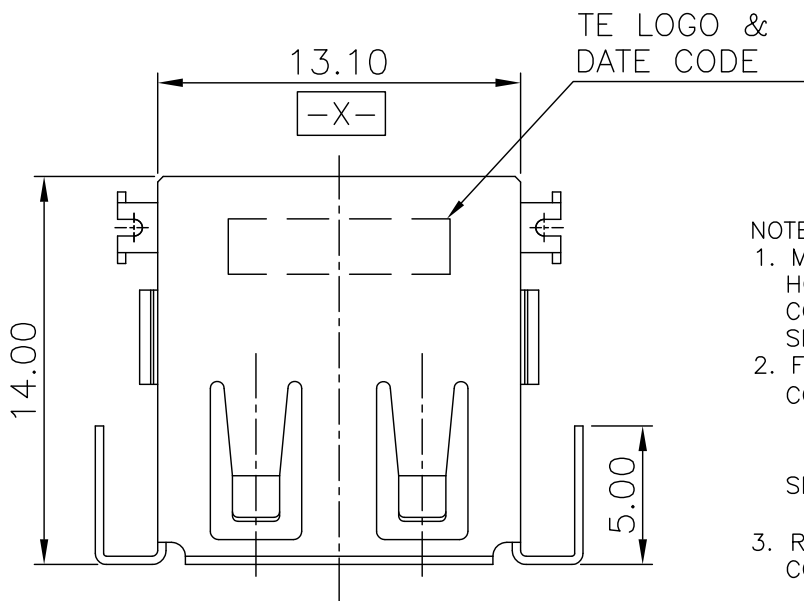


NOTE:

1. MATERIAL:
HOUSING: PA9T WITH 30%GF, UL94V-0, BLACK COLOR.
CONTACT: PHOSPHOR BRONZE.
SHELL: BRASS.
2. FINISH:
CONTACT: 0.762μm [30μ"] MIN. GOLD PLATING ON CONTACT AREA,
3.048μm [120μ"] MIN. BRIGHT TIN PLATING ON SOLDER TAILS
1.27μm [50μ"] MIN. NICKEL UNDERPLATING OVERALL.
SHELL: 0.762μm [30μ"] MIN. NICKEL PLATED OVER
0.762μm [30μ"] MIN. Cu UNDERPLATING OVERALL.
3. REFLOW SOLDER CAPABLE TO 260°C PER TE SPEC 109-2
CONDITION B.

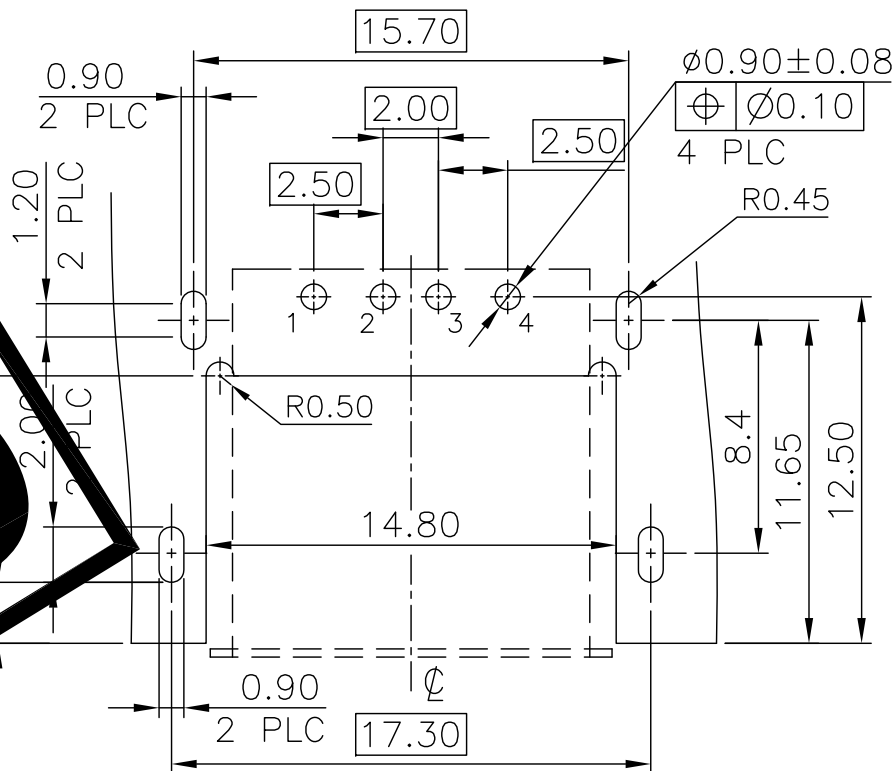

RECOMMEND P.C.B LAYOUT (THICKNESS=1.6mm)
(COMPONENT SIDE) TOLERANCE±0.05

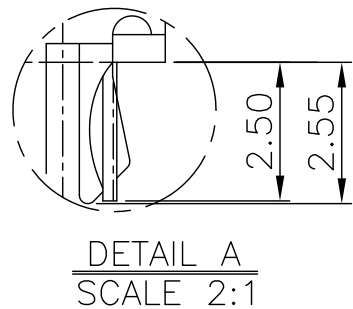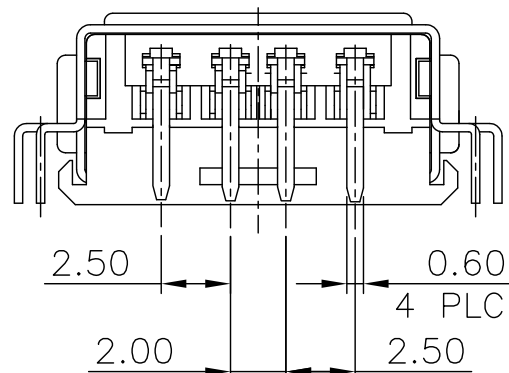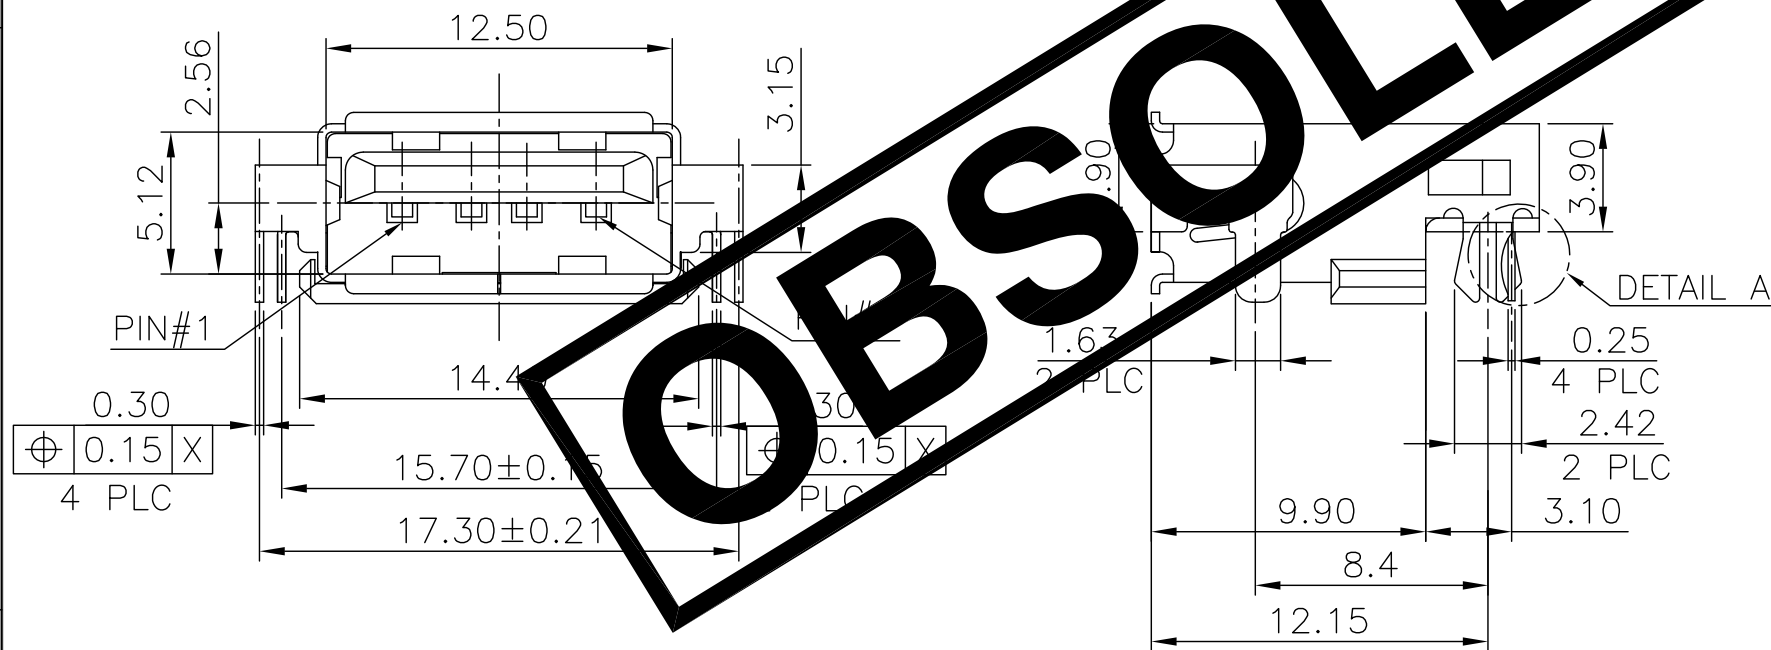

OBSOLETE	TAPE & REEL	6-1734081-2
	TUBE	6-1734081-1
	PACKAGE	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN

CHK

APVD

PRODUCT SPEC

APPLICATION SPEC

WEIGHT 1.47 GRAMS

CUSTOMER DRAWING



TE Connectivity

NAME

USB CONNECTOR, RECEPTACLE
4 POSITION, SERIES A

SIZE

CAGE CODE

DRAWING NO

RESTRICTED TO

A300779C-1734081


SCALE

SHEET

7 OF 19

REV E5

DIMENSIONS:
MM



MATERIAL




SEE NOTE

TOLERANCES UNLESS
OTHERWISE SPECIFIED:



0 PLC	± -
1 PLC	± 0.35
2 PLC	± 0.25
3 PLC	± 0.15
4 PLC	± -
ANGLES	± 3°

FINISH

SEE NOTE

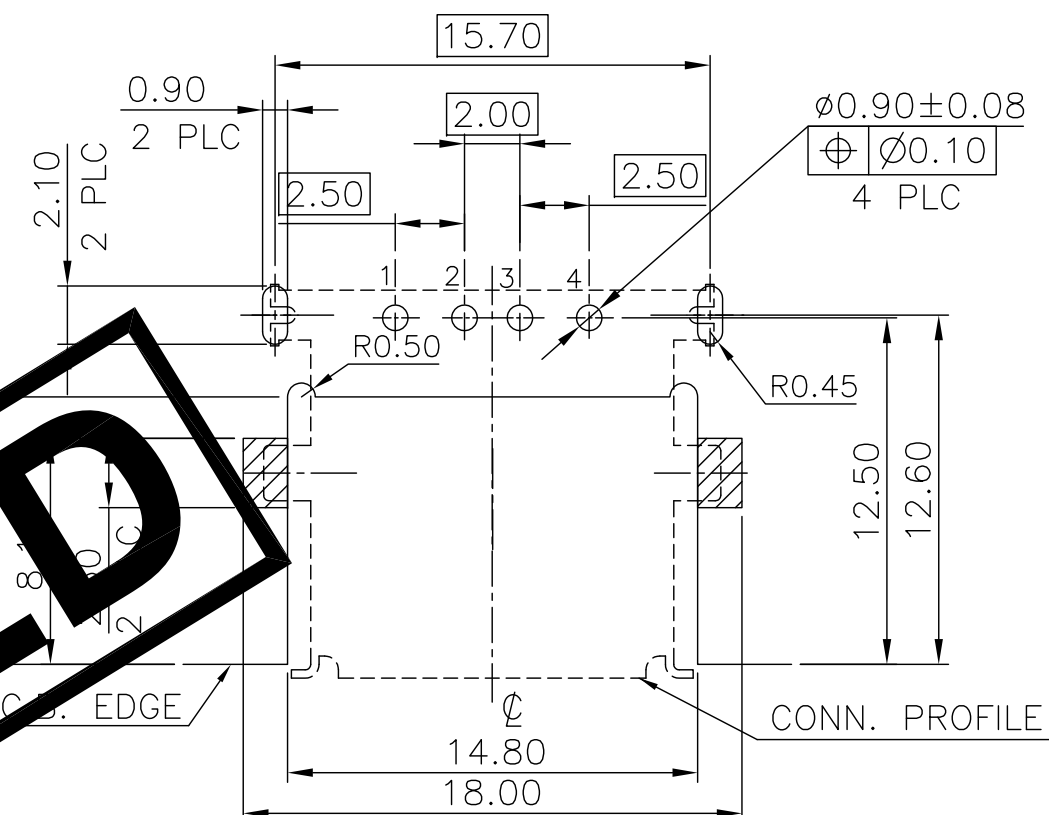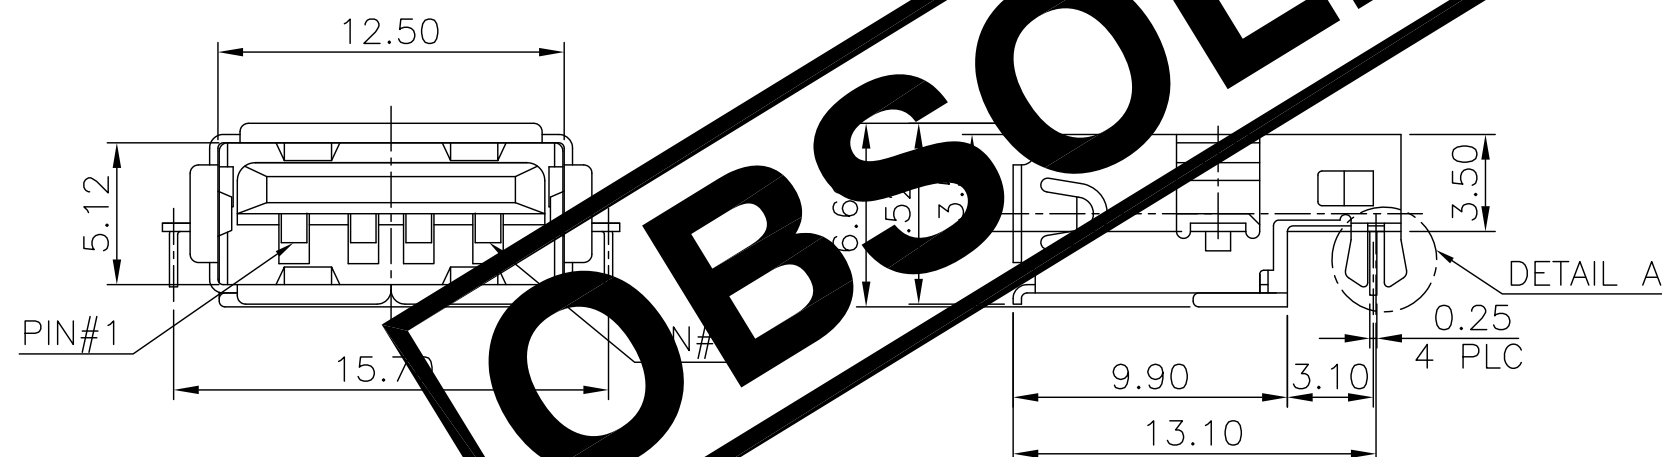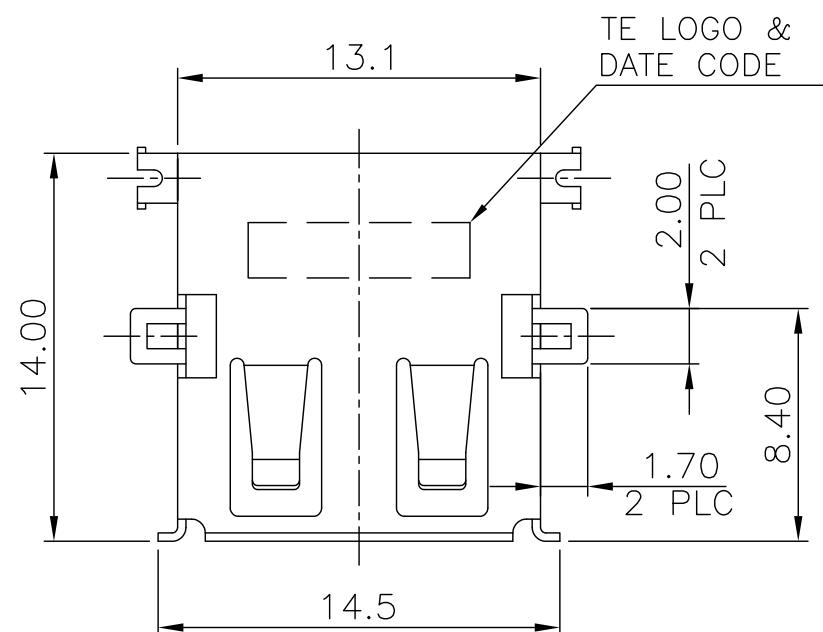


RECOMMEND P.C.B LAYOUT (THICKNESS=1.2mm)
(COMPONENT SIDE) TOLERANCE±0.05

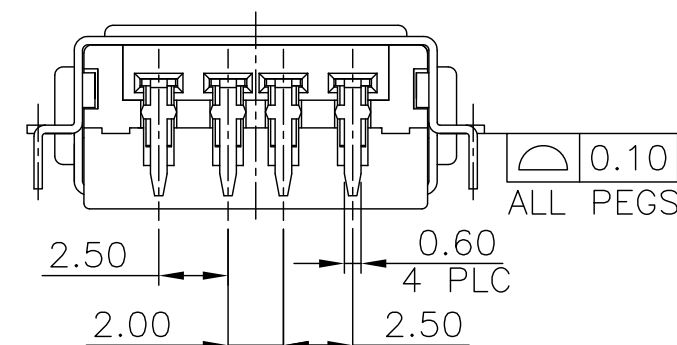

NOTE:

1. MATERIAL:
HOUSING: PA9T WITH 30%GF, UL 94V-0, BLACK COLOR.
CONTACT: PHOSPHOR BRONZE.
SHELL: BRASS.
2. FINISH:
CONTACT: $0.762\mu\text{m}$ [$30\mu''$] MIN. GOLD PLATING ON CONTACT AREA,
 $3.048\mu\text{m}$ [$120\mu''$] MIN. BRIGHT TIN PLATING ON SOLDER TAILS.
 $1.27\mu\text{m}$ [$50\mu''$] MIN. NICKEL UNDERPLATING OVERALL.
SHELL: $0.762\mu\text{m}$ [$30\mu''$] MIN. NICKEL PLATED OVER
 $0.762\mu\text{m}$ [$30\mu''$] MIN. Cu UNDERPLATING OVERALL.
3. REFLOW SOLDER CAPABLE TO 260°C PER JE SPEC 109-201,
CONDITION B.

TAPE & REEL	7-1734081-1
PACKAGE	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN		TE TE Connectivity											
DIMENSIONS: MM		TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± — 1 PLC ± 0.35 2 PLC ± 0.25 3 PLC ± 0.15 4 PLC ± — ANGLES ± 3°		NAME USB CONNECTOR, RECEPTACLE 4 POSITION, SERIES A											
								CHK							
		APVD						SIZE		CAGE CODE		DRAWING NO		RESTRICTED TO	
		PRODUCT SPEC													
		APPLICATION SPEC													
MATERIAL		FINISH		WEIGHT		A3		00779		C=1734081					
SEE NOTE		SEE NOTE		1.57 GRAMS											
CUSTOMER DRAWING				SCALE		SHEET		REV							
				—		9 of 19		F5							

4

3

2

1

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

AUG ,2006.

© COPYRIGHT 2009 BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC

DIST

REVISIONS

DW

P

LTR

DESCRIPTION

DATE




DWN

APVD

SEE SHEET 1.

NOTES:

1. MATERIAL:
REEL: PS.
EMBOSSED CARRIER: PS.
COVER TAPE: PBT.
2. DIMENSION :
TAPE REEL: $\phi 330\text{mm} \times 37.1\text{mm}$
SHIPPING CARTON: L=350mm,W=350mm, H=350mm
3. QUANTITY :
PRIMARY PACKING: 250PCS/REEL
SECONDARY PACKING: 9 REELS/CARTON(2,250PCS).
4. WEIGHT :
NET WEIGHT: 0.50 KG/REEL, 4.52 KG/CARTON.
GROSS WEIGHT: 1.00 KG/REEL, 9.50 KG/CARTON.
5. PEELING RESISTANCE: 20G TO 130G.
6. PEELING SPEED: 300MM/MIN.

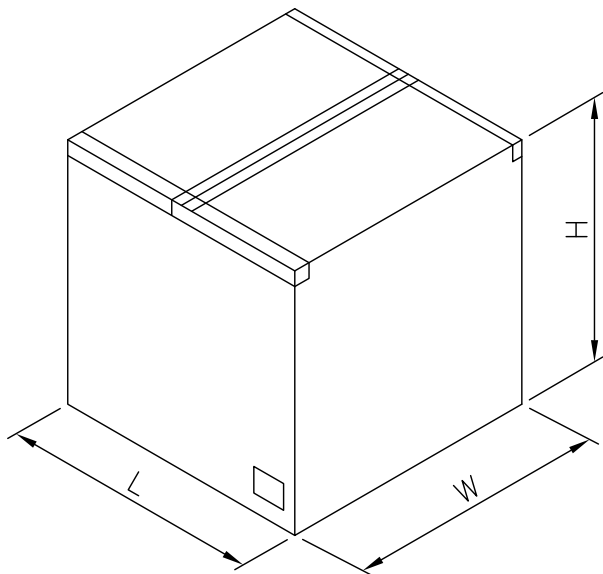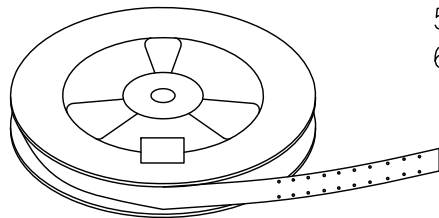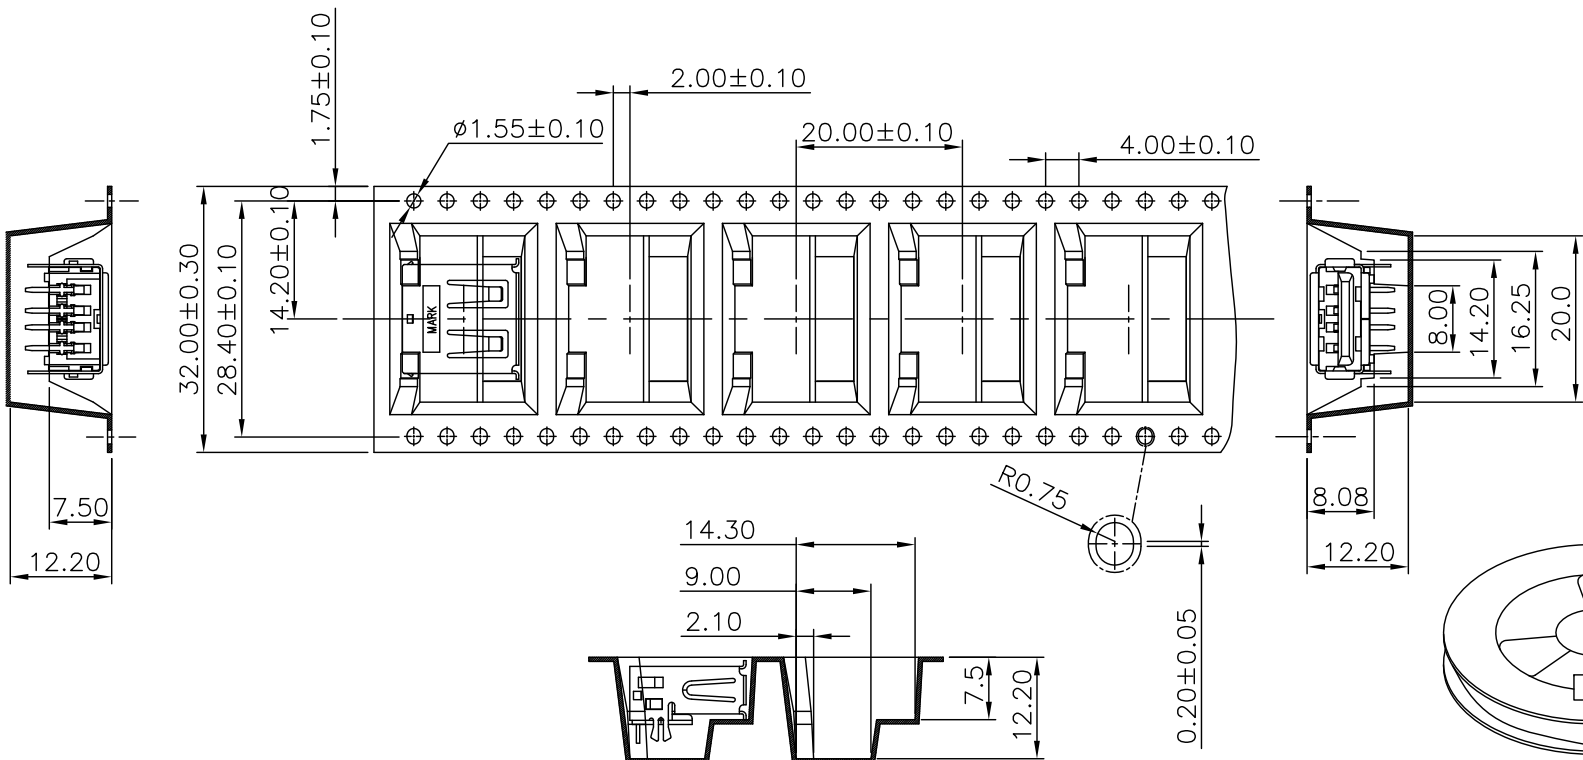


SHIPPING CARTON

9.50 Kg	4.52 Kg	250	9	2250	1-1734081-4	OBSOLETE
					1-1734081-3	
					1-1734081-2	
GROSS WEIGHT	NET WEIGHT	PCS/REEL	REELS/CARTON	QUANTITY	PART NUMBER	

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
MM



MATERIAL

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC $\pm .$
1 PLC $\pm .$
2 PLC $\pm .$
3 PLC $\pm .$
4 PLC $\pm .$
ANGLES $\pm .$
FINISH

DWN

CHK

APVD

PRODUCT SPEC

APPLICATION SPEC

WEIGHT

CUSTOMER DRAWING



TE Connectivity

NAME

USB CONNECTOR, RECEPTACLE
4 POSITION, SERIES A

SIZE

CAGE CODE

DRAWING NO

RESTRICTED TO

A3

00779

C=1734081

SCALE

SHEET

10 of 19

REV E5

4

3

2

1

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

AUG ,2006.



COPYRIGHT 2009

BY TYCO ELECTRONICS CORPORATION.

ALL RIGHTS RESERVED.

LOC

DIST

REVISIONS

P

LTR

DESCRIPTION

DATE

DWN

APVD

SEE SHEET 1.

NOTES:

1. MATERIAL:

REEL: PS.

EMBOSSED CARRIER: PS.

COVER TAPE: PBT.

2. DIMENSION :

TAPE REEL: $\phi 330\text{mm} \times 37.1\text{mm}$

SHIPPING CARTON: L=350mm,W=350mm, H=350mm

3. QUANTITY :

PRIMARY PACKING: 300PCS/REEL

SECONDARY PACKING: 8 REELS/CARTON(2,400PCS).




4. WEIGHT :

NET WEIGHT: 0.44KG/REEL, 4.00 KG/CARTON.



GROSS WEIGHT: 1.81 KG/REEL, 9.05 KG/CARTON.

5. PEELING RESISTANCE: 20G TO 130G.

PEELING SPEED: 300MM/MIN.




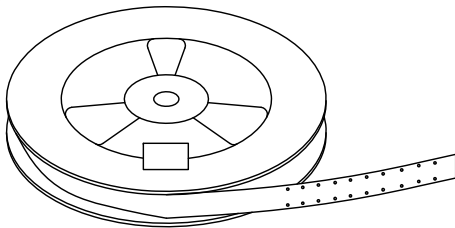
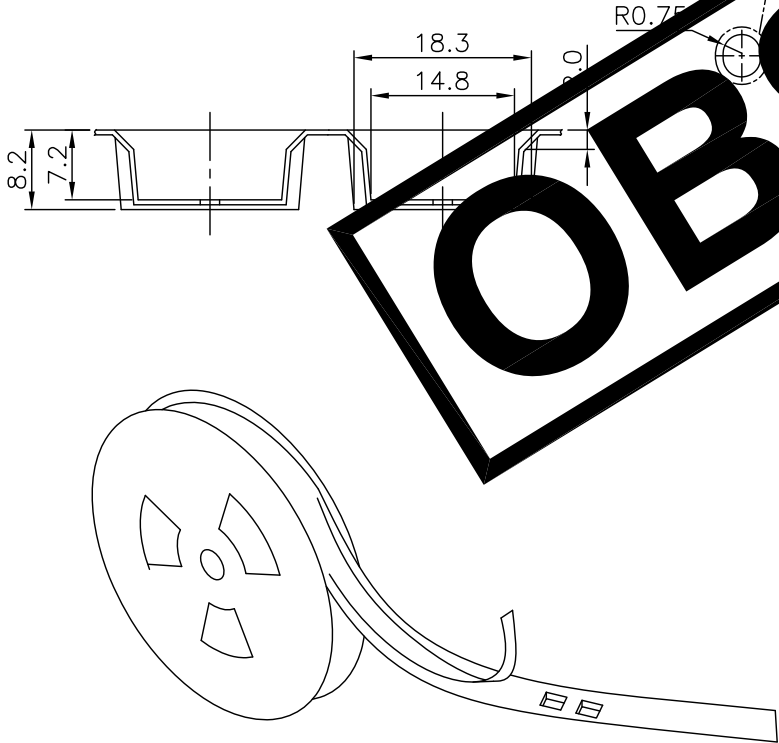
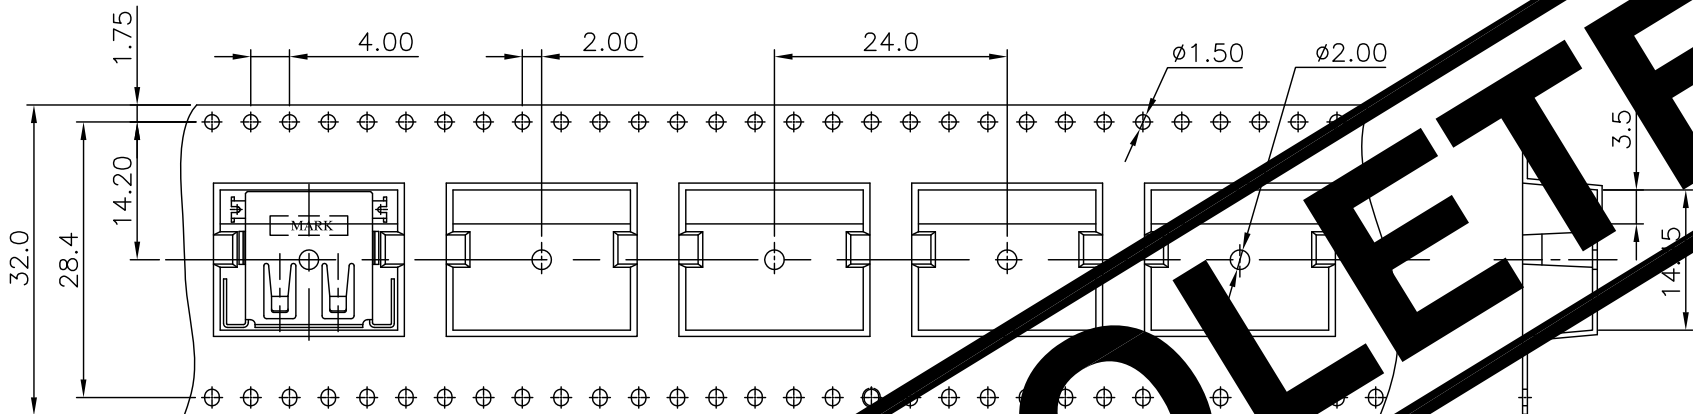


SHIPPING
CARTON

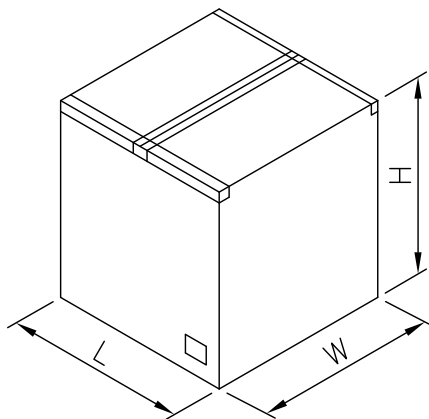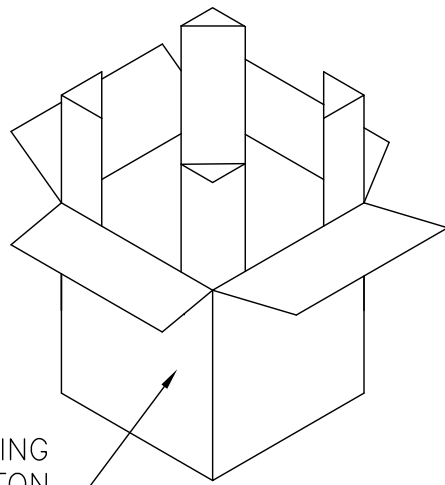



9.05 Kg	4.00 Kg	300	8	2400	6-1734081-2
GROSS WEIGHT	NET WEIGHT	PCS/REEL	REELS /CARTON	QUANTITY	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	 TE Connectivity		
DIMENSIONS: MM		CHK			
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD	NAME USB CONNECTOR, RECEPTACLE 4 POSITION, SERIES A		
0 PLC ± -		PRODUCT SPEC			
1 PLC ± -		APPLICATION SPEC	SIZE A3		
2 PLC ± -		WEIGHT			
3 PLC ± -		CUSTOMER DRAWING	CAGE CODE 00779		
4 PLC ± -		SCALE			
ANGLES ± -		SHEET	DRAWING NO C=1734081		
FINISH		11 of 19			
MATERIAL		REV	E5		

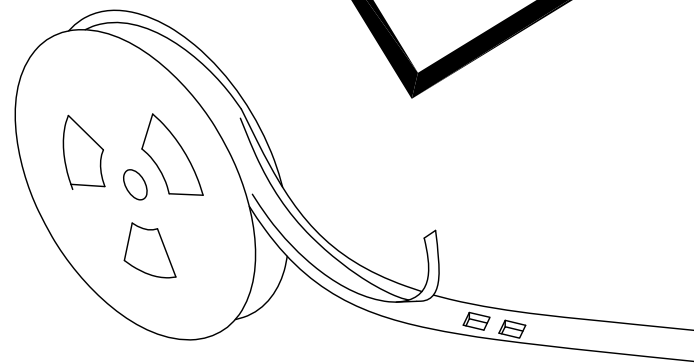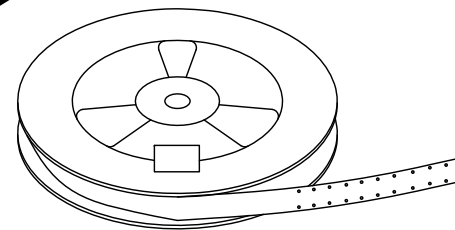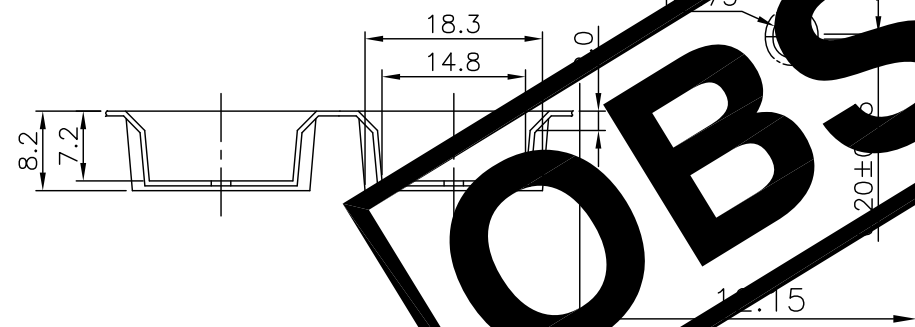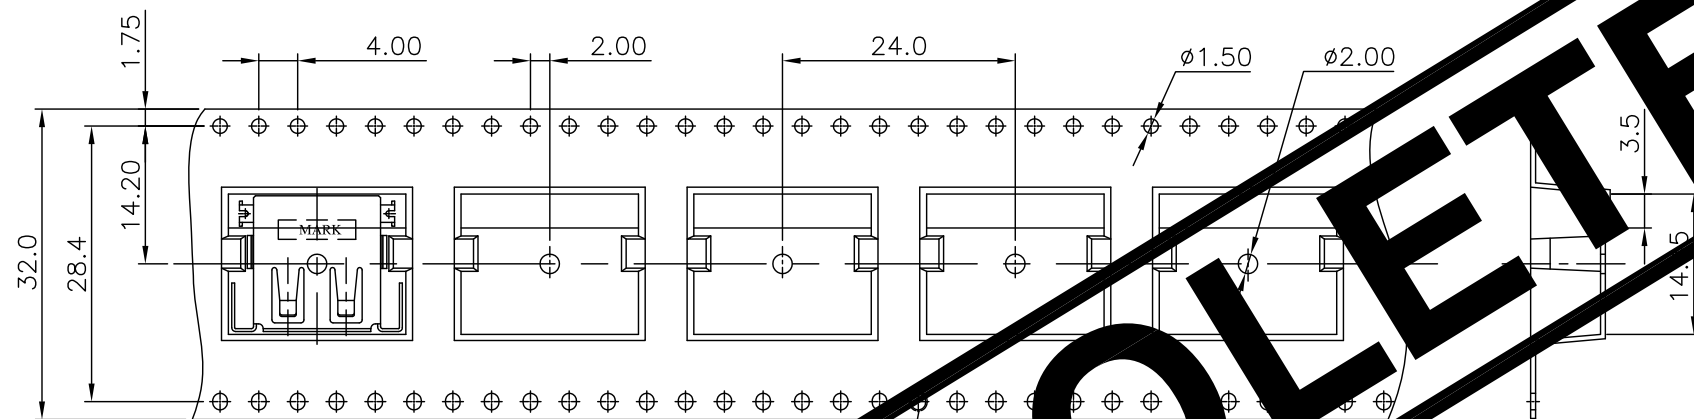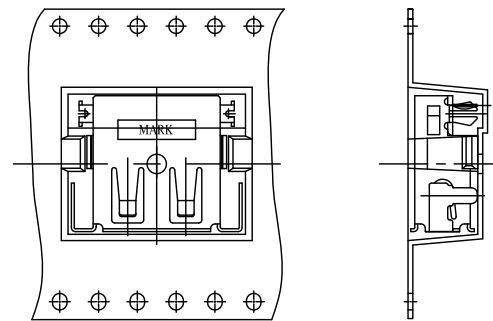


NOTES:

1. MATERIAL:
REEL: PS.
EMBOSSED CARRIER: PS.
COVER TAPE: PBT.
2. DIMENSION :
TAPE REEL: $\varnothing 330\text{mm} \times 37.1\text{mm}$
SHIPPING CARTON: L=350mm, W=350mm, H=350mm
3. QUANTITY :
PRIMARY PACKING: 300PCS/REEL
SECONDARY PACKING: 8 REELS/CARTON(2,400PCS).
4. WEIGHT :
NET WEIGHT: 0.44KG/REEL, 4.00 KG/CARTON.
GROSS WEIGHT: 1.81 KG/REEL, 9.05 KG/CARTON.
PEELING RESISTANCE: 20G TO 130G.
5. PEELING SPEED: 300MM/MIN.

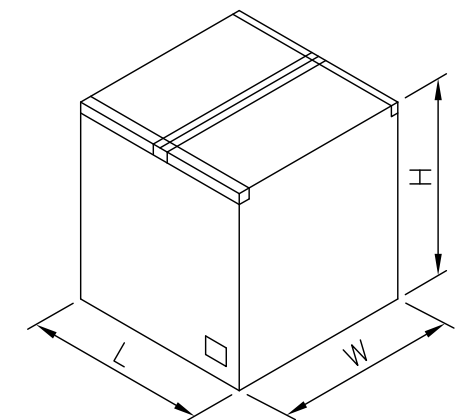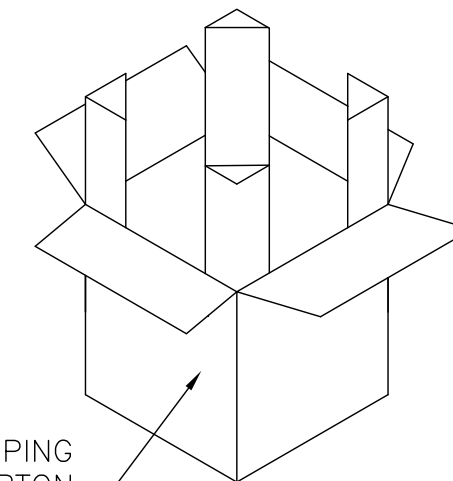

9.05 Kg	4.00 Kg	300	8	2400	6-1734081-3
GROSS WEIGHT	NET WEIGHT	PCS/REEL	REELS /CARTON	QUANTITY	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN		 TE Connectivity					
DIMENSIONS: MM		CHK		NAME USB CONNECTOR, RECEPTACLE 4 POSITION, SERIES A					
		APVD							
		PRODUCT SPEC							
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APPLICATION SPEC		SIZECAGE CODEDRAWING NORESTRICTED TO A300779C=1734081					
0 PLC ± - 1 PLC ± - 2 PLC ± - 3 PLC ± - 4 PLC ± - ANGLES ± -		WEIGHT							
MATERIAL		FINISH		CUSTOMER DRAWING					
				SCALE		SHEET 12 OF 19		REV F5	

4

3

2

1

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

AUG ,2006.



COPYRIGHT 2009

BY TYCO ELECTRONICS CORPORATION.

ALL RIGHTS RESERVED.

LOC

DIST

REVISIONS

P

LTR

DESCRIPTION

DATE

DWN

APVD

SEE SHEET 1.

NOTES:

1. MATERIAL:

REEL: PS.

EMBOSSED CARRIER: PS.

COVER TAPE: PBT.

2. DIMENSION :

TAPE REEL: $\varnothing 330\text{mm} \times 29.5\text{mm}$

SHIPPING CARTON: L=350mm,W=350mm, H=400mm

3. QUANTITY :

PRIMARY PACKING: 300PCS/REEL

SECONDARY PACKING: 12 REELS/CARTON(3600PCS).





4. WEIGHT :

NET WEIGHT: 0.46 KG/REEL, 5.55 KG/CARTON.

GROSS WEIGHT: 0.89 KG/REEL, 10.65 KG/CARTON.

5. PEEING RESISTANCE: 20G TO 130G.

6. PEELING SPEED: 300MM/MIN.

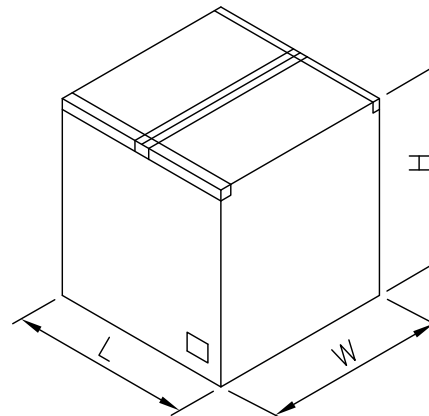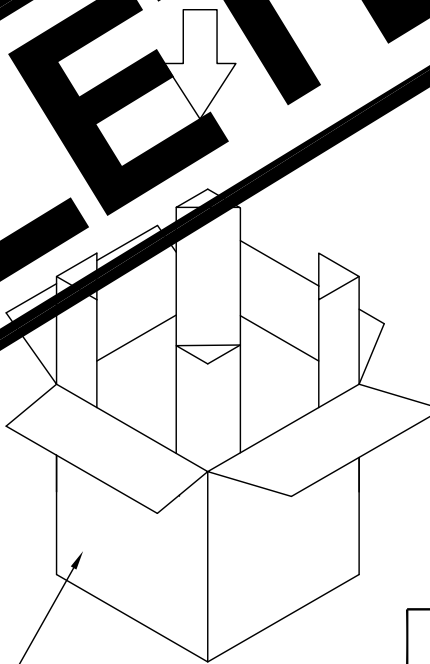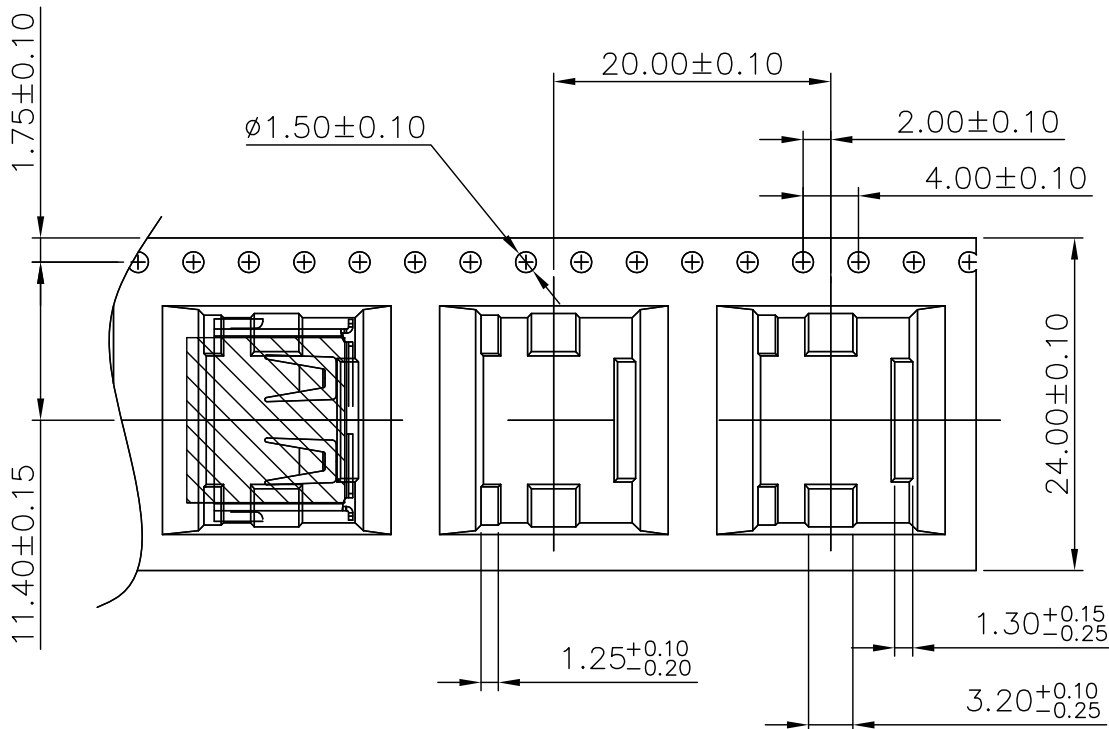


SHIPPING
CARTON

OBSOLETE	300	12	3600	10.65	5.55	5-1734081-3
						5-1734081-2
						5-1734081-1
	PCS/ REEL	REELS/ BOX	QUANTITY (PCS)	G/W (Kg)	N/W (Kg)	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
MM



MATERIAL

TOLERANCES UNLESS
OTHERWISE SPECIFIED:

0 PLC $\pm -$
1 PLC $\pm -$
2 PLC $\pm -$
3 PLC $\pm -$
4 PLC $\pm -$
ANGLES $\pm -$
FINISH

DWN

CHK

APVD

PRODUCT SPEC

APPLICATION SPEC

WEIGHT

CUSTOMER DRAWING



TE Connectivity

NAME

USB CONNECTOR, RECEPTACLE
4 POSITION, SERIES A

SIZE

CAGE CODE

DRAWING NO

RESTRICTED TO

A300779C=1734081

SCALE

SHEET

13 of 19

REV E5

4

3

2

1

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

AUG ,2006.



COPYRIGHT 2009

BY TYCO ELECTRONICS CORPORATION.

ALL RIGHTS RESERVED.

LOC

DIST

REVISIONS

DW

P

LTR

DESCRIPTION

DATE

DWN

APVD

SEE SHEET 1.

NOTES:

1. MATERIAL:

REEL: PS.

EMBOSSED CARRIER: PS.

COVER TAPE: PBT.

2. DIMENSION :

TAPE REEL: $\phi 330\text{mm} \times 37.1\text{mm}$

SHIPPING CARTON: L=350mm,W=350mm, H=350mm

3. QUANTITY :

PRIMARY PACKING: 350PCS/REEL

SECONDARY PACKING: 9 REELS/CARTON.(3150 PCS)




4. WEIGHT :

NET WEIGHT: 4.85 kg .



GROSS WEIGHT: 9.85 kg .

5. REELING RESISTANCE: 20G TO 130G.

6. REELING SPEED: 300MM/MIN.

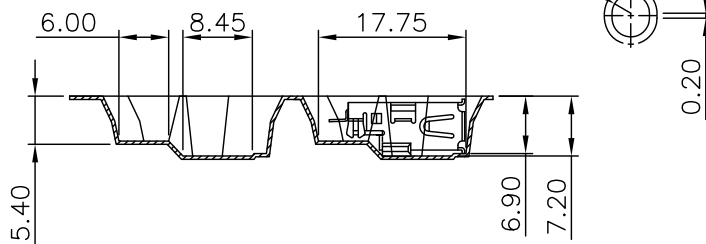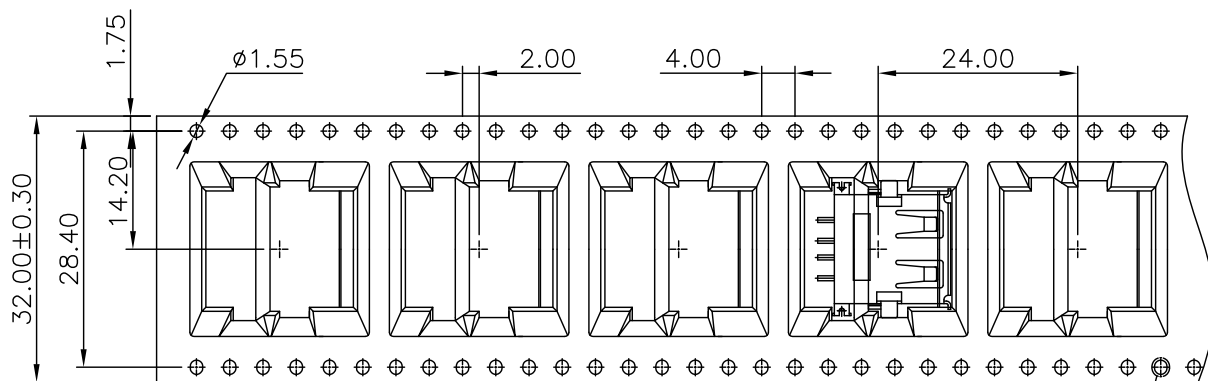

R0.75

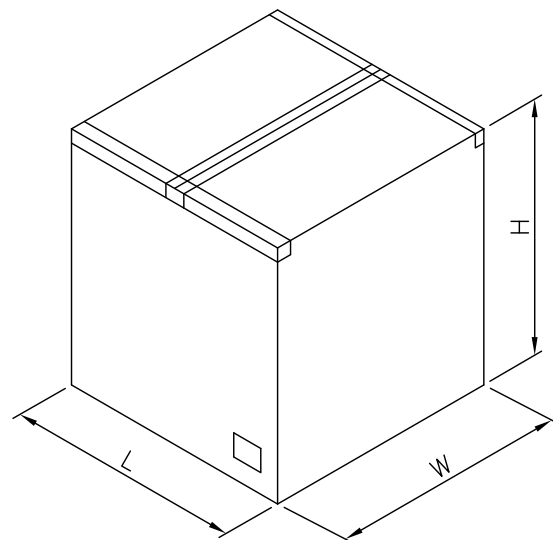


SHIPPING CARTON
9 TAPE-REEL/ CARTON

9.85 Kg	4.85 Kg	350	9	3150	3-1734081-1
GROSS WEIGHT	NET WEIGHT	PCS/REEL	REELS /CARTON	QUANTITY	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
MM



MATERIAL

TOLERANCES UNLESS
OTHERWISE SPECIFIED:

0 PLC ± -
1 PLC ± -
2 PLC ± -
3 PLC ± -
4 PLC ± -
ANGLES ± -
FINISH

DWN

CHK

APVD

PRODUCT SPEC

APPLICATION SPEC

WEIGHT

CUSTOMER DRAWING



TE Connectivity

NAME

USB CONNECTOR, RECEPTACLE
4 POSITION, SERIES A

SIZE

CAGE CODE

DRAWING NO

RESTRICTED TO

A300779C=1734081

SCALE

SHEET

14 of 19

REV E5

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

AUG ,2006.



COPYRIGHT 2009

BY TYCO ELECTRONICS CORPORATION.

ALL RIGHTS RESERVED.

LOC

DIST

REVISIONS

DW

P

LTR

DESCRIPTION

DATE

DWN

APVD

SEE SHEET 1.

NOTES:

1. DIMENSION :

TRAY : L=295mm, W=252mm, H=14mm

SHIPPING CARTON: L=315mm, W=270mm, H=200mm

POLYSTYRENE : L=290mm, W=250mm, H=10mm

2. QUANTITY :


PRIMARY PACKING: 100 PCS/TRAY

SECONDARY PACKING: 10 TRAYS/CARTON
(1,000PCS)


3. WEIGHT :

NET WEIGHT: 2.03KG/CARTON.

GROSS WEIGHT: 3.10KG/CARTON.

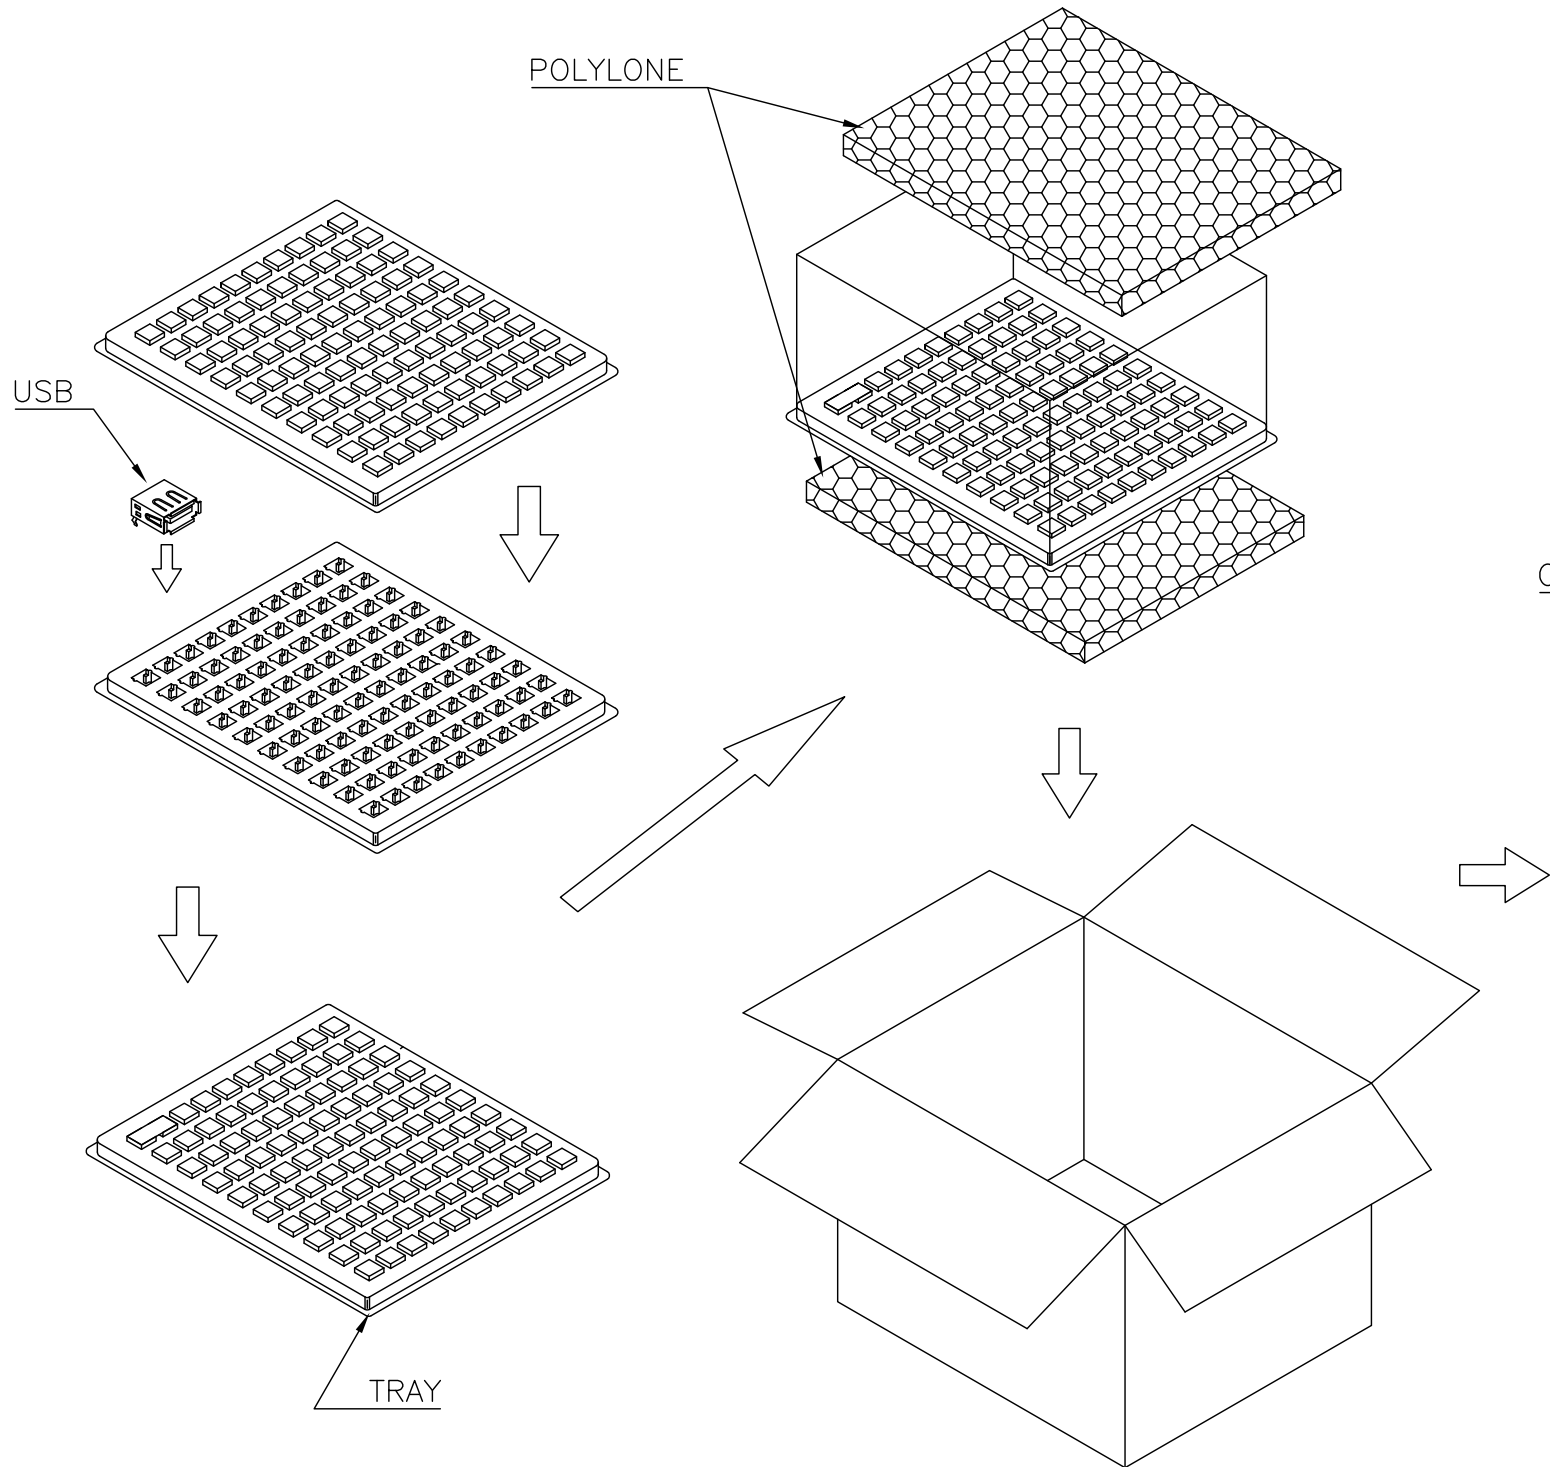


CARTON

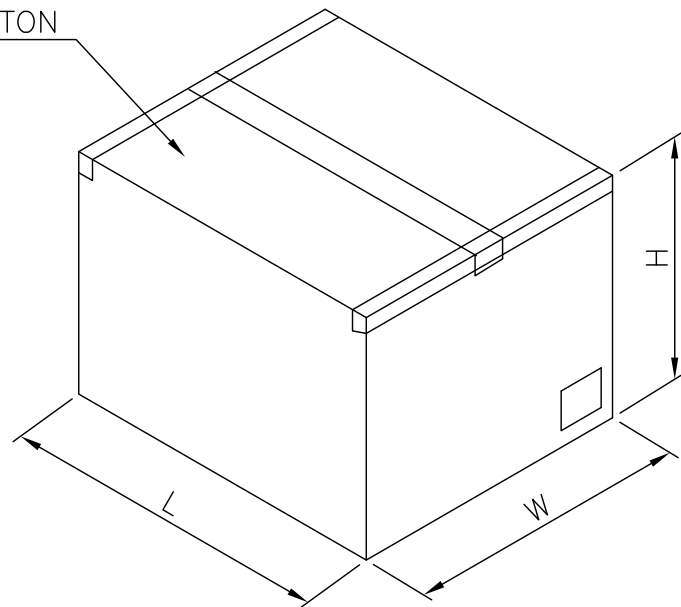

3.10 Kg	2.03 Kg	100	10	1000	4-1734081-2	OBSOLETE
					4-1734081-1	OBSOLETE
					1-1734081-1	
					1734081-2	OBSOLETE
					1734081-1	
GROSS WEIGHT	NET WEIGHT	PCS/TRAY	TRAY /CARTON	QUANTITY	PART NUMBER	

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
MM



MATERIAL

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC ± -
1 PLC ± -
2 PLC ± -
3 PLC ± -
4 PLC ± -
ANGLES ± -

FINISH

DWN

CHK

APVD

PRODUCT SPEC

APPLICATION SPEC

WEIGHT

CUSTOMER DRAWING



TE Connectivity

NAME

USB CONNECTOR, RECEPTACLE
4 POSITION, SERIES A

SIZE

CAGE CODE

DRAWING NO

RESTRICTED TO

A3

00779

C=1734081

SCALE

SHEET

16 of 19

REV E5

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

AUG ,2006.

© COPYRIGHT 2009 BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC

DIST

REVISIONS

DW

P

LTR

DESCRIPTION

DATE

DWN

APVD

SEE SHEET 1.

NOTES:

- 1. MATERIAL:
TRAY: PE.
POLYLONE:POLYLONE
SHIPPING CARTON: CORRUGATED FIBER.
- 2. DIMENSION :
TUBE : L=370mm, W=18.7mm, H=10.1mm
SHIPPING CARTON : L=390mm, W=165mm, H=90mm
- 3. QUANTITY :
25 PCS/TUBE
40 TUBES/INNER BOX(1,000PCS)
- 4. WEIGHT :
NET WEIGHT : 1.54 KG
GROSS WEIGHT : 2.45 KG

POLYONE

PLUG

TUBE


USB

PLUG

CARTON

OBSOLETE

OBSOLETE	2.45 Kg	1.54 Kg	25	40	1000	2-1734081-2
	GROSS WEIGHT	NET WEIGHT	PCS/TUBE	TUBES /CARTON	QUANTITY	2-1734081-1

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	 TE Connectivity							
DIMENSIONS: MM		CHK					NAME USB CONNECTOR, RECEPTACLE 4 POSITION, SERIES A			
		APVD								
		PRODUCT SPEC								
MATERIAL		APPLICATION SPEC	SIZE							
		WEIGHT	CAGE CODE							
FINISH		CUSTOMER DRAWING	DRAWING NO							
			RESTRICTED TO							
			SCALE							
			SHEET 17 of 19							
			REV E5							

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

AUG ,2006.



COPYRIGHT 2009

BY TYCO ELECTRONICS CORPORATION.

ALL RIGHTS RESERVED.

LOC

DIST

REVISIONS

DW

P

LTR

DESCRIPTION

DATE



DWN

APVD

SEE SHEET 1.

NOTE:

- 1. MATERIAL:
TRAY: PE.
POLYLONE:POLYLONE
SHIPPING CARTON: CORRUGATED FIBER.
- 2. DIMENSION :
TUBE : L=370mm, W=21.8mm, H=8.6mm
SHIPPING CARTON : L=390mm, W=165mm, H=90mm
- 3. QUANTITY :
25 PCS/TUBE
49 TUBES/INNER BOX(1,225PCS)
- 4. WEIGHT :
NET WEIGHT : 1.80 KG
GROSS WEIGHT : 3.70 KG

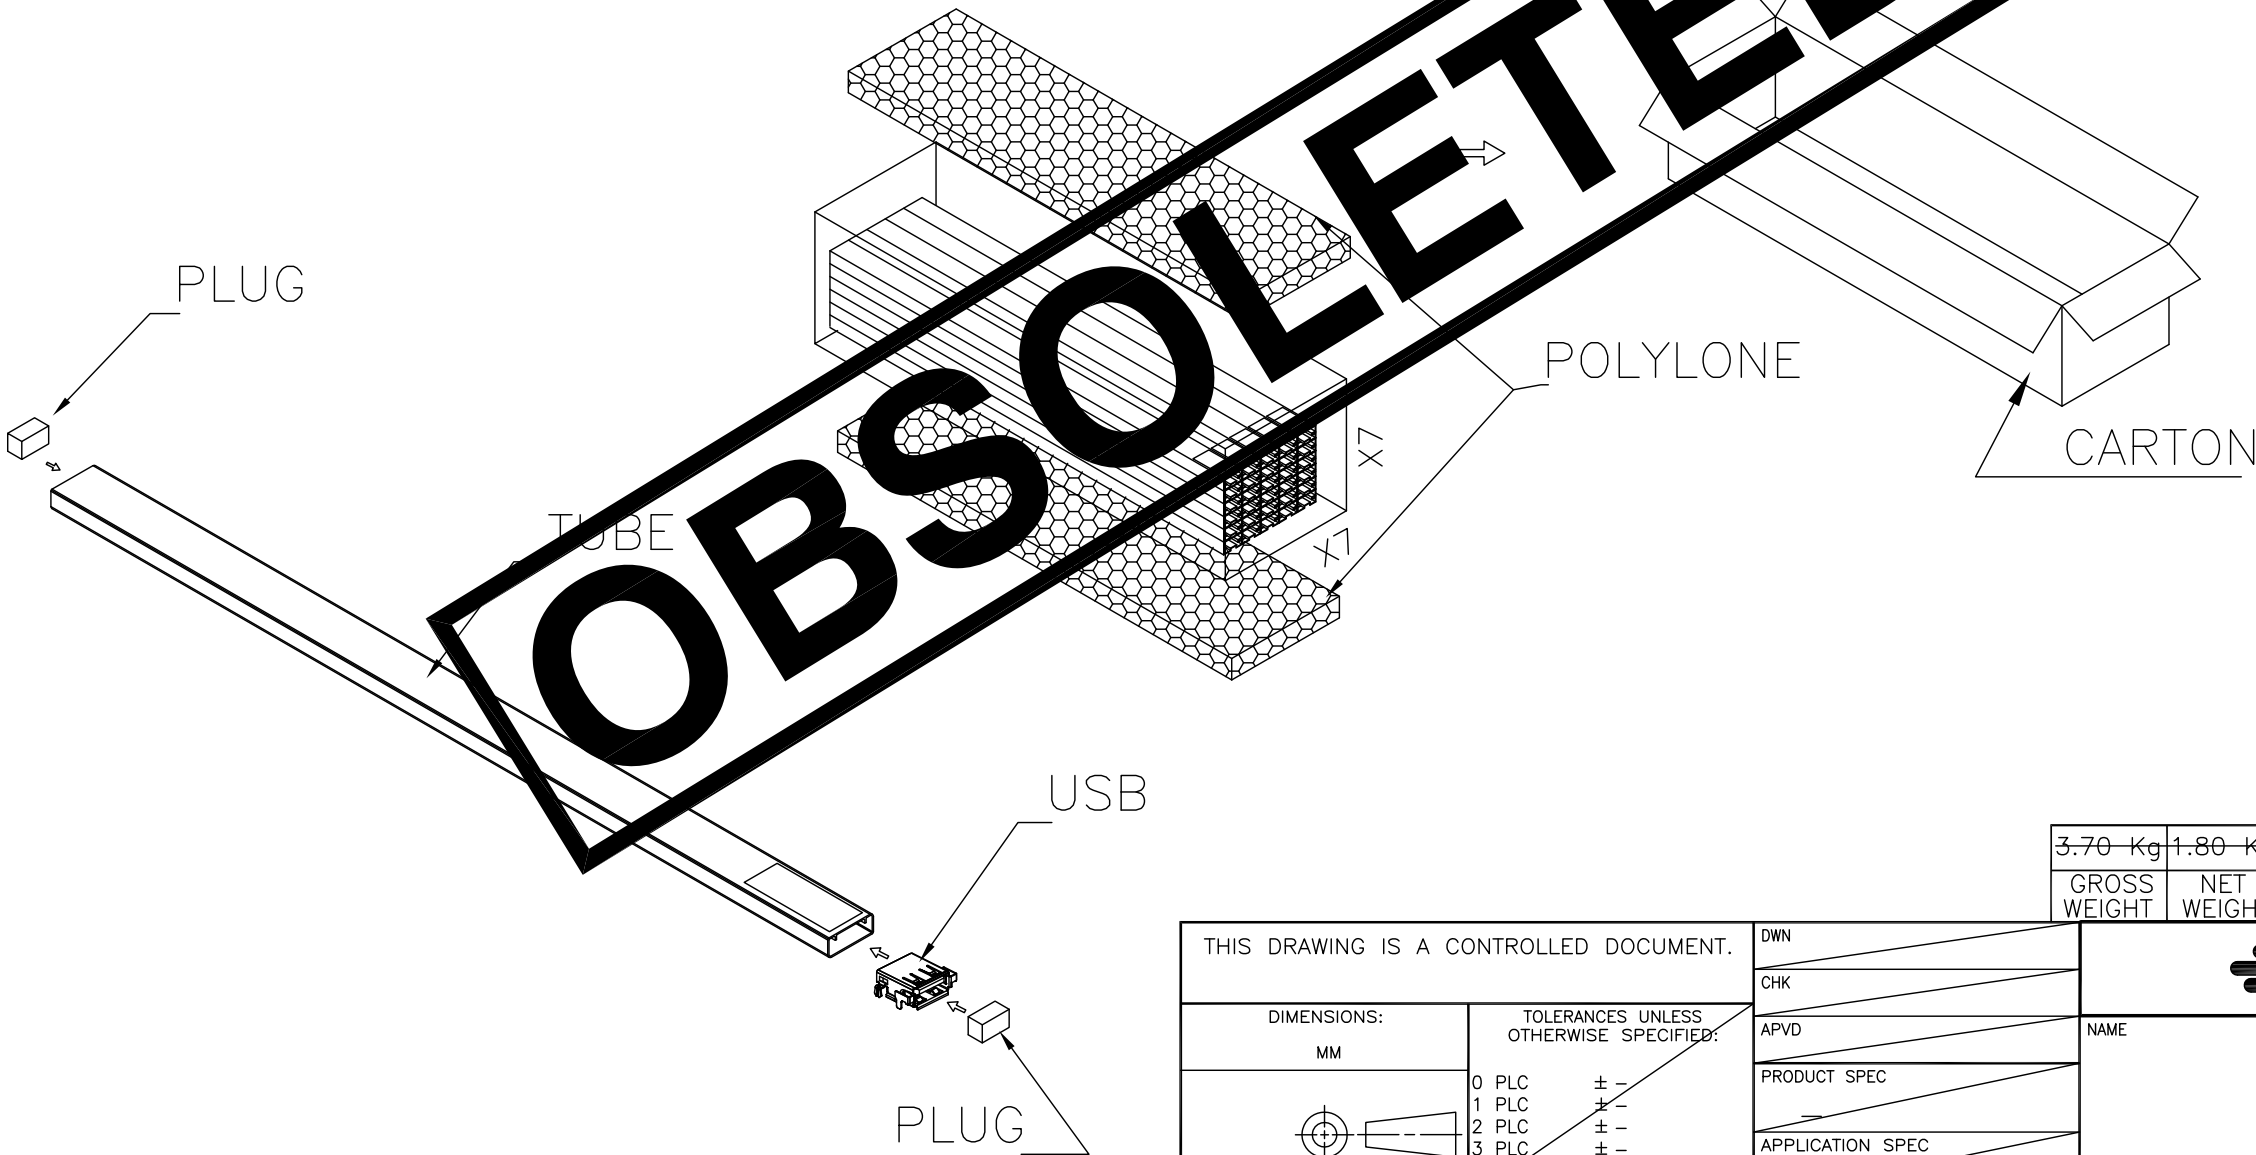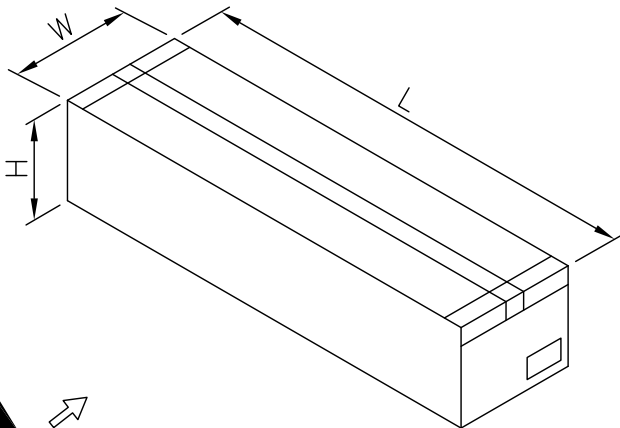

3.70 Kg	1.80 Kg	25	49	1225	6-1734081-1
GROSS WEIGHT	NET WEIGHT	PCS/TUBE	TUBES /CARTON	QUANTITY	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	TE Connectivity			
		CHK				
		APVD				
		PRODUCT SPEC				
DIMENSIONS: MM		APPLICATION SPEC	NAME USB CONNECTOR, RECEPTACLE 4 POSITION, SERIES A			
		WEIGHT				
MATERIAL		CUSTOMER DRAWING	SIZE A3	CAGE CODE 00779	DRAWING NO C=1734081	RESTRICTED TO
			SCALE	SHEET	18 of 19	REV E5



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.