

4

3

2

1

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

AUG ,2006.



COPYRIGHT 2009

BY TYCO ELECTRONICS CORPORATION.

ALL RIGHTS RESERVED.

LOC

DIST

REVISIONS

P

LTR

DESCRIPTION

DATE

DWN

APVD


E5

REVISED (ECR-13-016508)





23JAN14

BW

SC

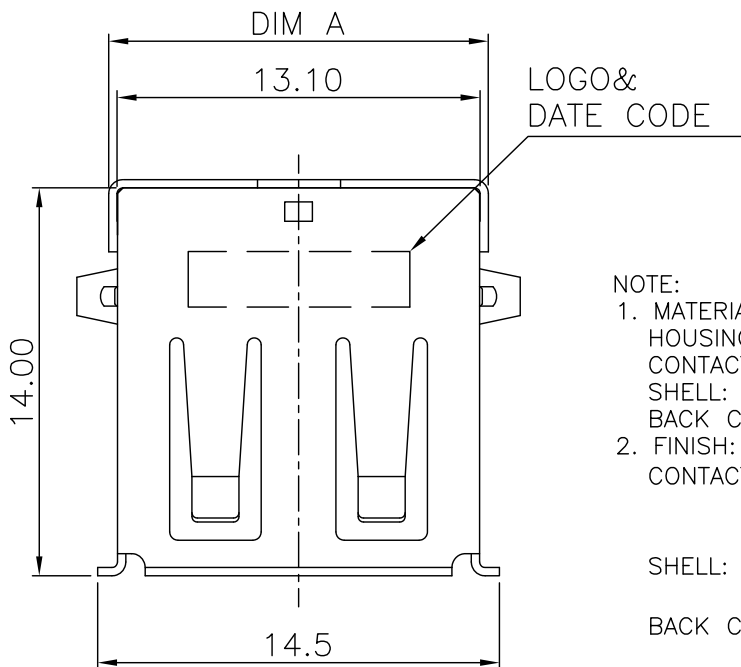

- NOTE:
- MATERIAL:
HOUSING: PA9T WITH 30%GF, UL94V-0, BLACK COLOR.
CONTACT: PHOSPHOR BRONZE.
SHELL: BRASS.
BACK COVER: BRASS.
 - FINISH:
CONTACT: 0.762μm [30μ"] MIN. GOLD PLATING ON CONTACT AREA.
3.048μm [120μ"] MIN. BRIGHT TIN PLATING ON SOLDER TAILS.
1.27μm [50μ"] MIN. NICKEL UNDERPLATING OVERALL.
SHELL: 0.762μm [30μ"] MIN. NICKEL PLATED OVER
0.762μm [30μ"] MIN. Cu UNDERPLATING OVERALL.
BACK COVER: 0.762μm [30μ"] MIN. NICKEL PLATED OVER
0.762μm [30μ"] MIN. Cu UNDERPLATING OVERALL.
 - REFLOW SOLDER CAPABLE TO 260°C PER TE SPEC 109-201, CONDITION B.

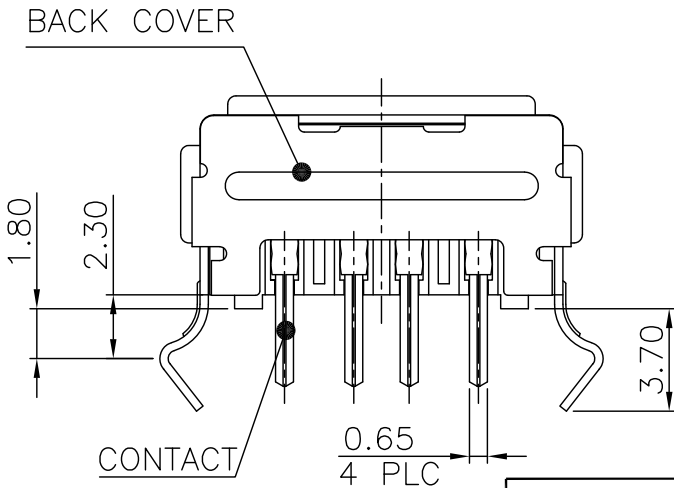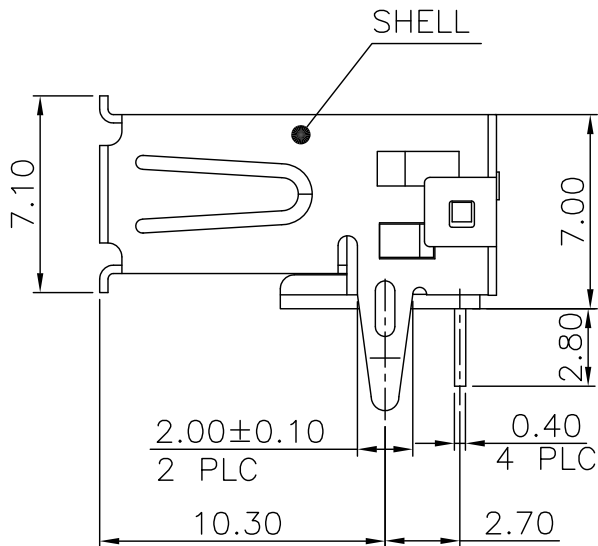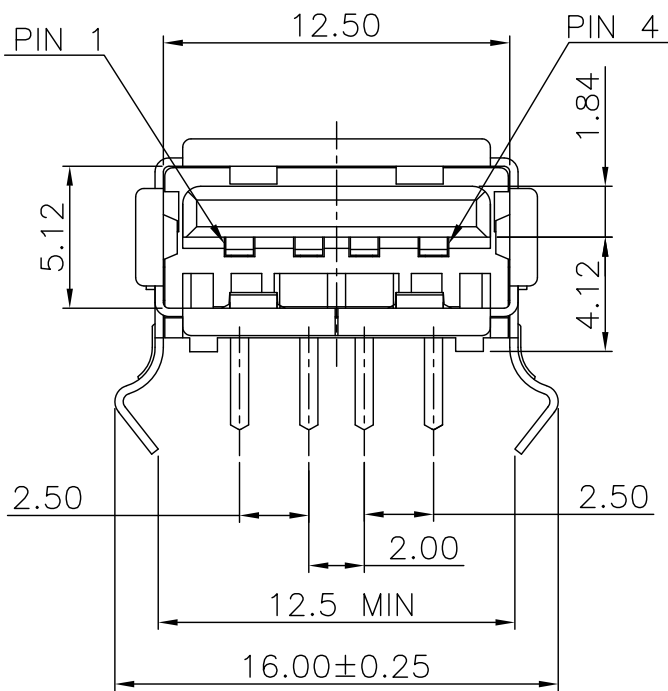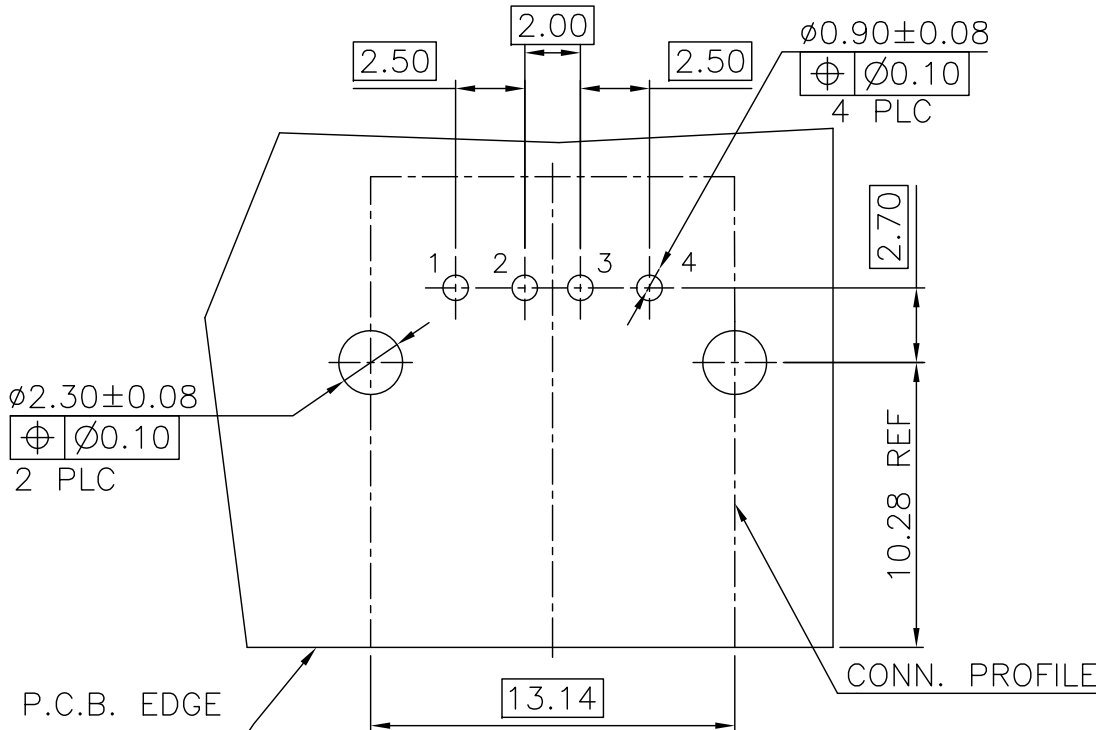

RECOMMEND P.C.B LAYOUT (THICKNESS=1.6mm)
(COMPONENT SIDE) TOLERANCE±0.05

OBSOLETE	NA	W/O	TRAY	1734081-2
	13.7	W/	TRAY	1734081-1
DIM.A	BACK COVER	PACKAGE	PART NUMBER	

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN O. HU 21SEP2004	TE Connectivity	
		CHK S. HSU 21SEP2004		
		APVD W.J. KE 21SEP2004	NAME	
		PRODUCT SPEC		
		108-57505	USB CONNECTOR, RECEPTACLE 4 POSITION, SERIES A	
		APPLICATION SPEC		
		501-57579	SIZE A3	
		WEIGHT 2.01 GRAMS		
		CUSTOMER DRAWING	CAGE CODE 00779	
			DRAWING NO 1734081	
			RESTRICTED TO —	
			SCALE —	
			SHEET 1 OF 19	
			REV E5	

4

3

2

1

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

AUG ,2006.



COPYRIGHT 2009

BY TYCO ELECTRONICS CORPORATION.

ALL RIGHTS RESERVED.

LOC

DIST

REVISIONS

P

LTR




DESCRIPTION

DATE

DWN




APVD

SEE SHEET 1.

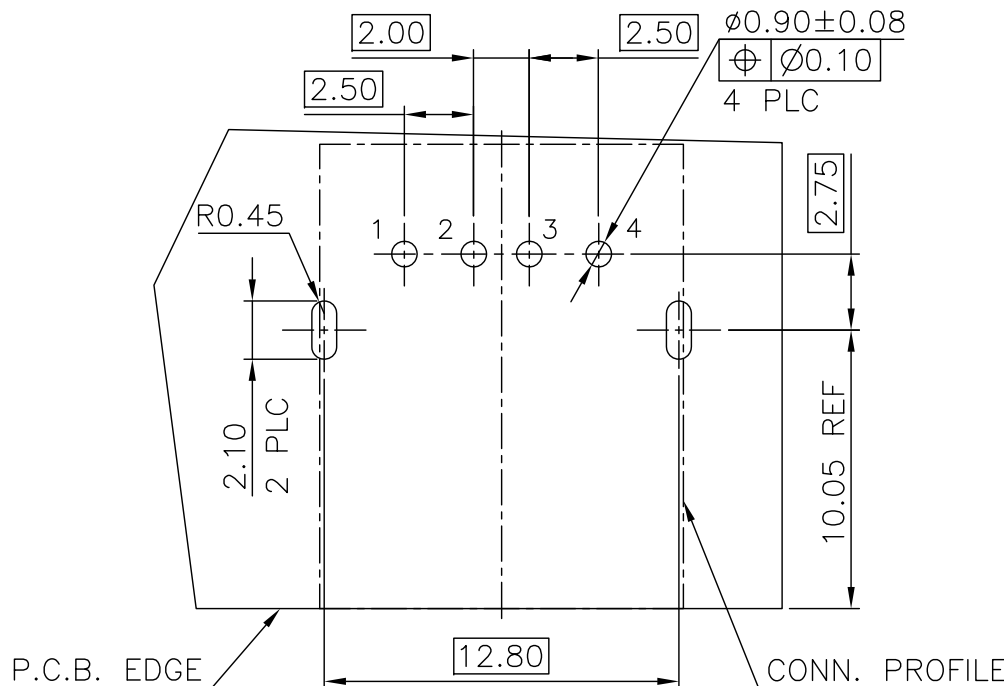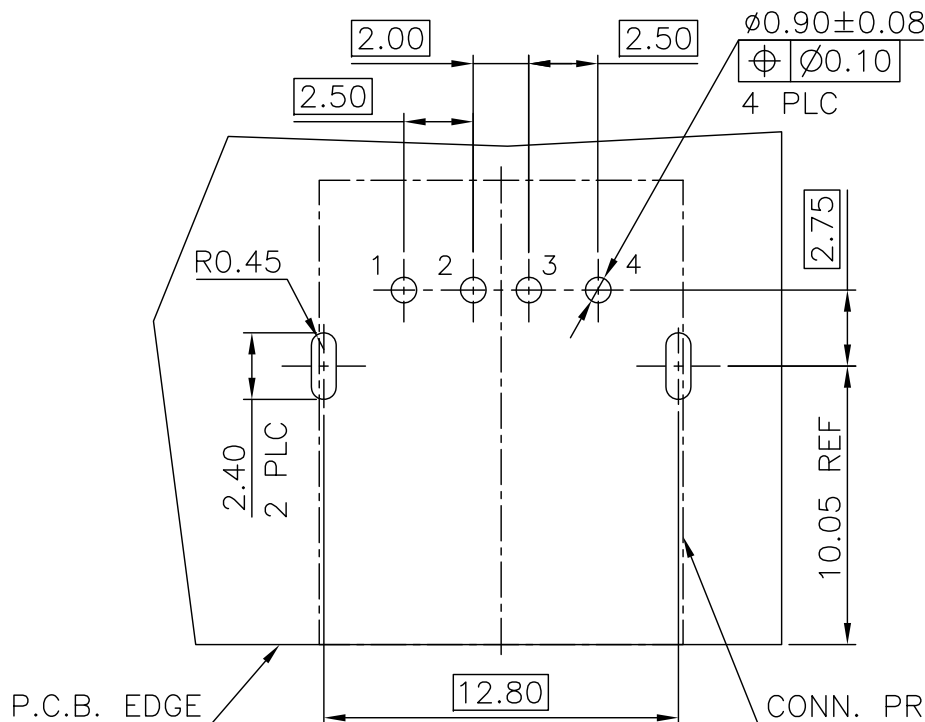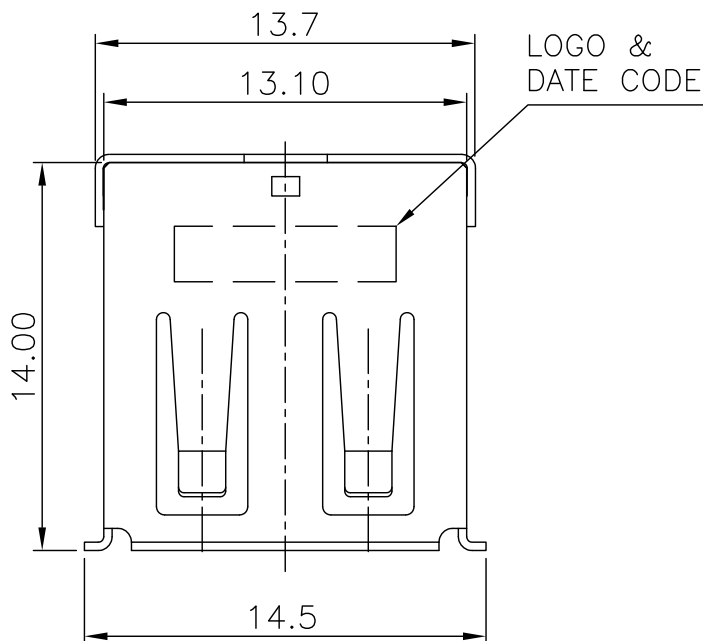

RECOMMEND P.C.B LAYOUT (THICKNESS=1.6mm)
(COMPONENT SIDE) TOLERANCE±0.05 FOR DIM.A=2.4

RECOMMEND P.C.B LAYOUT (THICKNESS=1.4~1.6mm)
(COMPONENT SIDE) TOLERANCE±0.05 FOR DIM.A=2.0

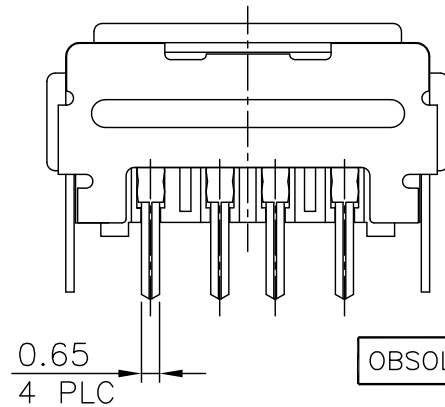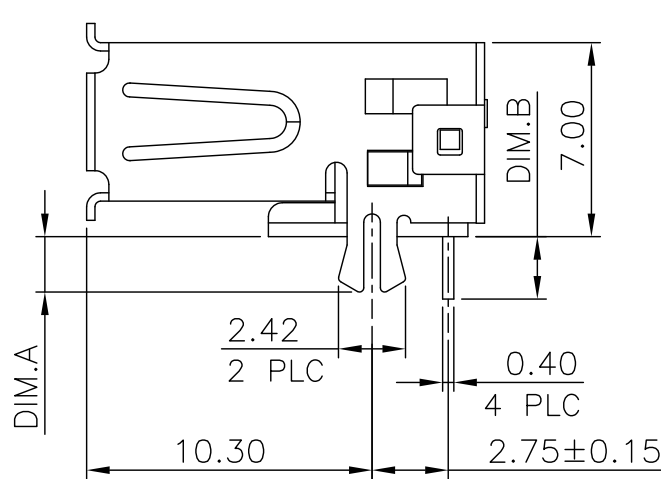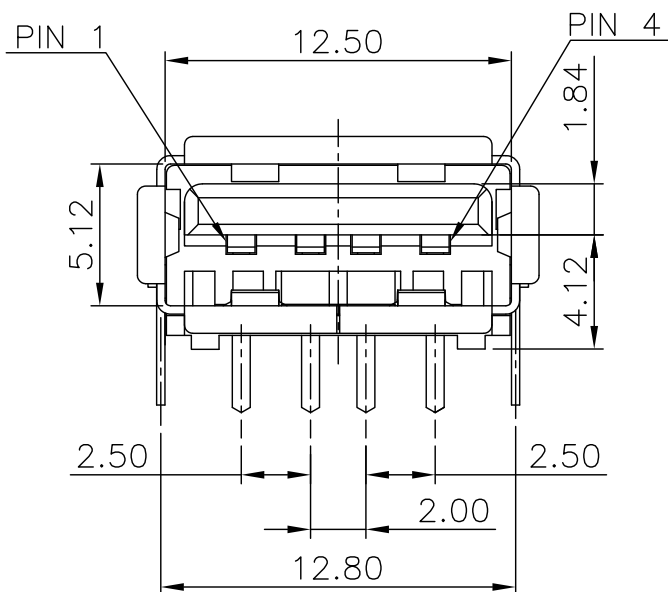

OBSOLETE	PA-46	MOON GRAY	2.0	2.25	T&R	1-1734081-4
			2.4	2.25	T&R	1-1734081-3
OBSOLETE	PA-9T	BLACK	2.0	1.5	T&R	1-1734081-5
				2.25	T&R	1-1734081-2
					TRAY	1-1734081-1
	HSG. MATERIAL	HSG. COLOR	DIM A	DIM B	PACKAGE	PART NUMBER

NOTE:

1. MATERIAL:

HOUSING: THERMOPLASTIC (SEE TABLE) WITH 30%GF, UL94V-0, BLACK COLOR.
CONTACT: PHOSPHOR BRONZE.
SHELL: BRASS.
BACK COVER: BRASS.

2. FINISH:

CONTACT: 0.762μm [30μ"] MIN. GOLD PLATING ON CONTACT AREA,
3.048μm [120μ"] MIN. BRIGHT TIN PLATING ON SOLDER TAILS.
1.27μm [50μ"] MIN. NICKEL UNDERPLATING OVERALL.
SHELL: 0.762μm [30μ"] MIN. NICKEL PLATED OVER
0.762μm [30μ"] MIN. Cu UNDERPLATING OVERALL.
BACK COVER: 0.762μm [30μ"] MIN. NICKEL PLATED OVER
0.762μm [30μ"] MIN. Cu UNDERPLATING OVERALL.

REFLOW SOLDER CAPABLE TO 245°C PER TE SPEC 109-201, CONDITION A.
REFLOW SOLDER CAPABLE TO 260°C PER TE SPEC 109-201, CONDITION B.

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN

CHK

APVD

PRODUCT SPEC

APPLICATION SPEC

WEIGHT 2.01 GRAMS

CUSTOMER DRAWING



TE Connectivity

NAME

USB CONNECTOR, RECEPTACLE
4 POSITION, SERIES A

SIZE

CAGE CODE

DRAWING NO

RESTRICTED TO

A300779C=1734081

SCALE

SHEET

2 of 19

REV E5

4

3

2

1

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

AUG ,2006.

©

COPYRIGHT 2009

BY TYCO ELECTRONICS CORPORATION.

ALL RIGHTS RESERVED.

LOC

DIST

REVISIONS

DW

P

LTR



DESCRIPTION

DATE





DWN

APVD

SEE SHEET 1.

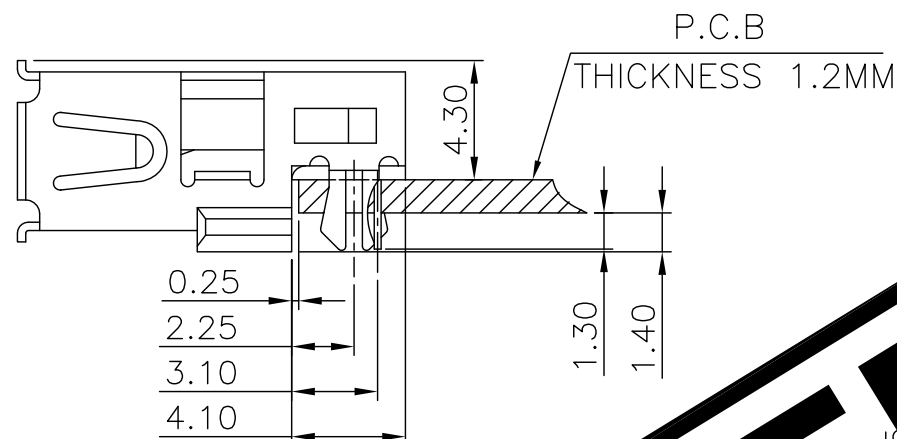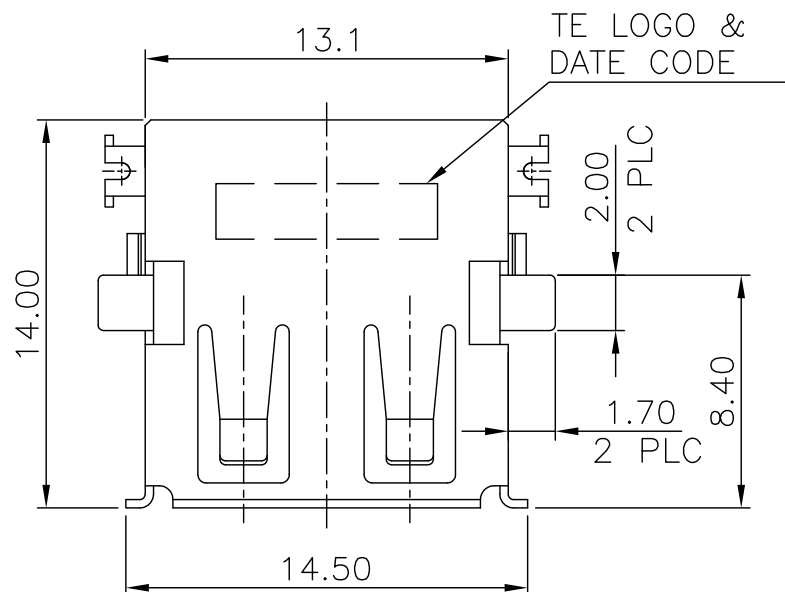

RECOMMENDED MOUNT DIMENSIONS

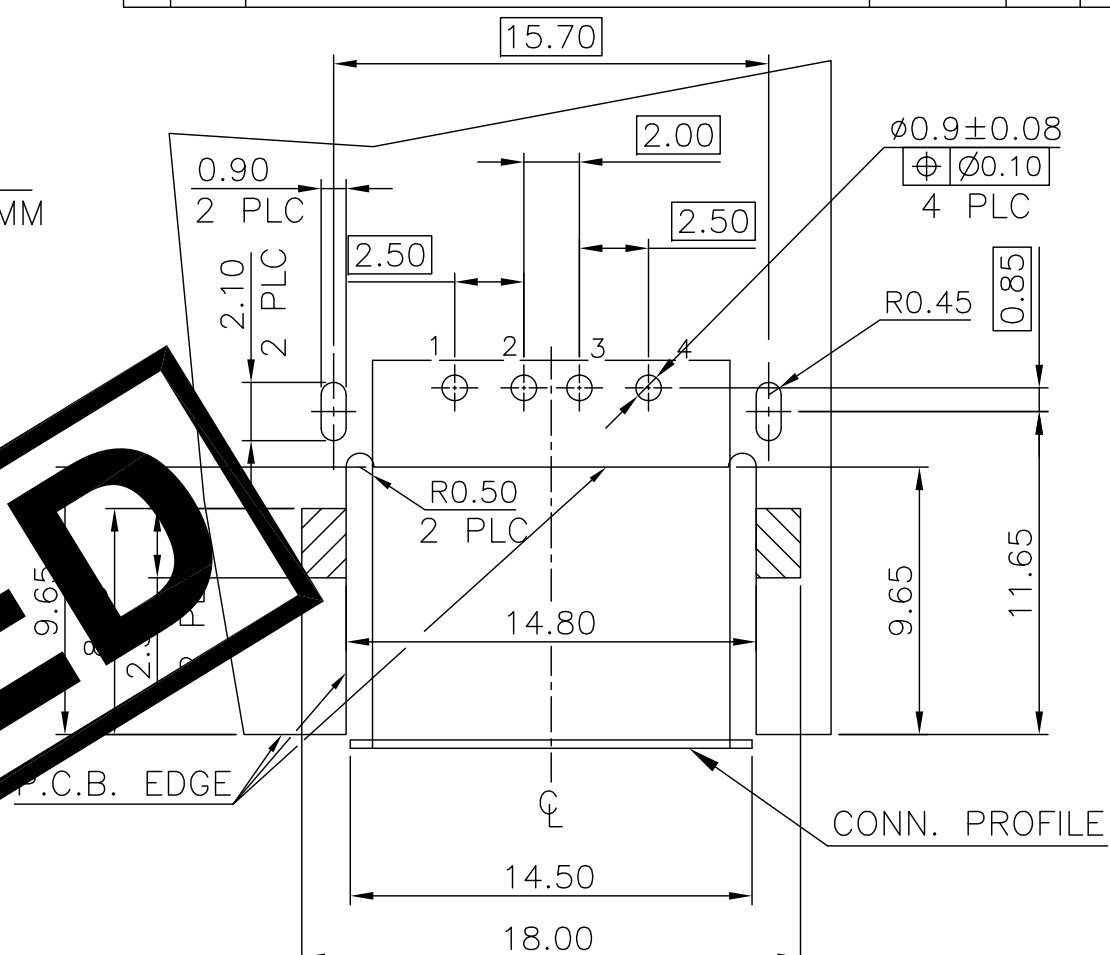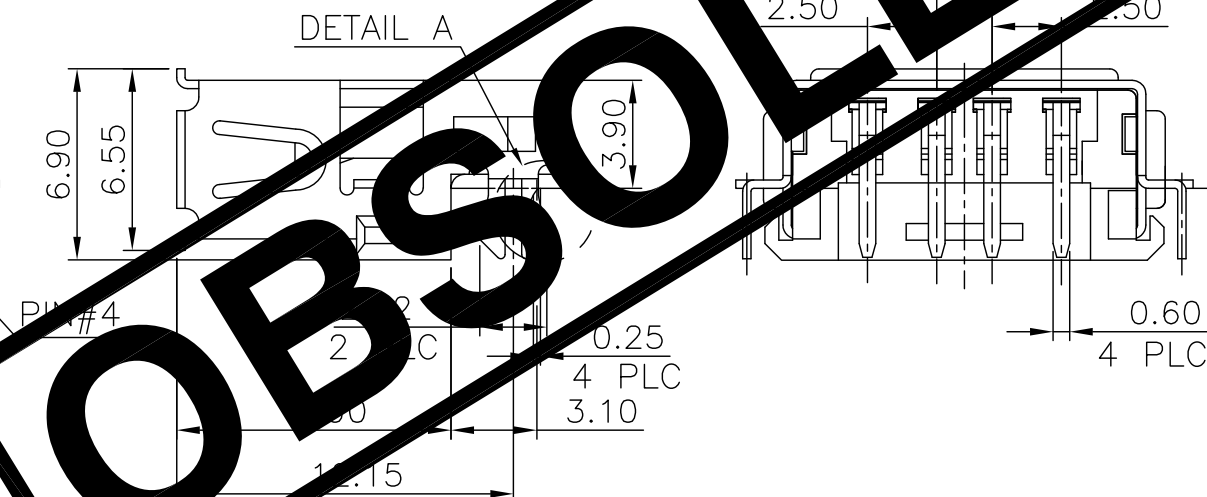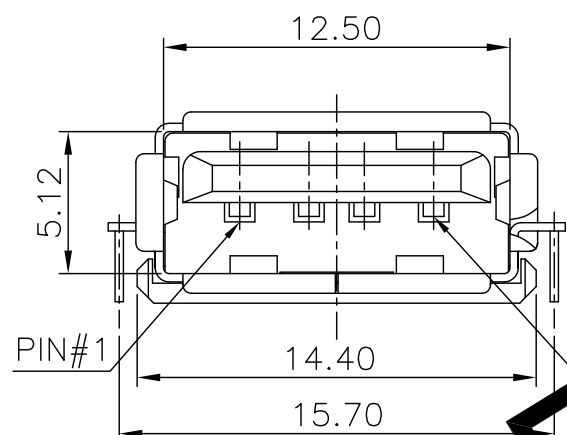RECOMMEND P.C.B LAYOUT (THICKNESS=1.2mm)
(COMPONENT SIDE) TOLERANCE±0.050.10
ALL PEGSDETAIL A
SCALE 2:1

NOTE:

1. MATERIAL:

HOUSING: PA9T WITH 30%GF, UL94V-0, BLACK COLOR.

CONTACT: PHOSPHOR BRONZE.

SHELL: BRASS.

2. FINISH:

CONTACT: 0.762μm [30μ"] MIN. GOLD PLATING ON CONTACT AREA,

3.048μm [120μ"] MIN. BRIGHT TIN PLATING ON SOLDER TAILS.

1.27μm [50μ"] MIN. NICKEL UNDERPLATING OVERALL.

SHELL: Δ0.762μm [30μ"] MIN. TIN PLATED OVER

0.762μm [30μ"] MIN. Cu UNDERPLATING OVERALL.

Δ0.762μm [30μ"] MIN. NICKEL PLATED OVER

0.762μm [30μ"] MIN. Cu UNDERPLATING OVERALL.

3. REFLOW SOLDER CAPABLE TO 260°C PER TE SPEC 109-201, CONDITION B.

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN

CHK

APVD

PRODUCT SPEC


APPLICATION SPEC

WEIGHT 1.57 GRAMS

CUSTOMER DRAWING

DIMENSIONS:

MM



MATERIAL

SEE NOTE

TOLERANCES UNLESS
OTHERWISE SPECIFIED:0 PLC ± -
1 PLC ± 0.35
2 PLC ± 0.25
3 PLC ± 0.15
4 PLC ± -
ANGLES ± 3°

FINISH

SEE NOTE

NAME

TE

TE Connectivity

USB CONNECTOR, RECEPTACLE
4 POSITION, SERIES A

SIZE

CAGE CODE

DRAWING NO

RESTRICTED TO

A300779C=1734081

SCALE

SHEET

3 of 19

REV E5

4

3

2

1

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

AUG ,2006.



COPYRIGHT 2009

BY TYCO ELECTRONICS CORPORATION.

ALL RIGHTS RESERVED.

LOC

DIST

REVISIONS

DW

P

LTR



DESCRIPTION

DATE





DWN

APVD

SEE SHEET 1.

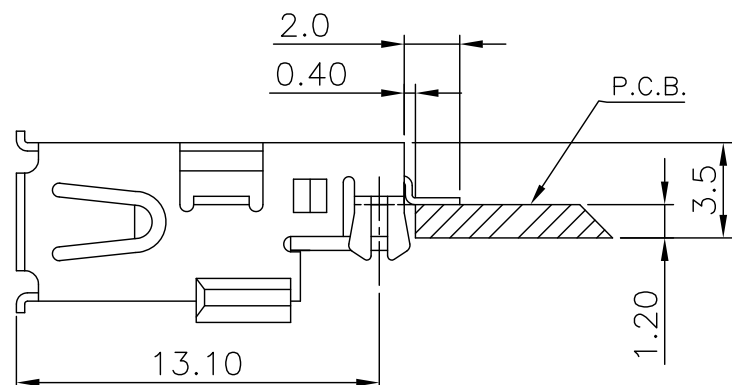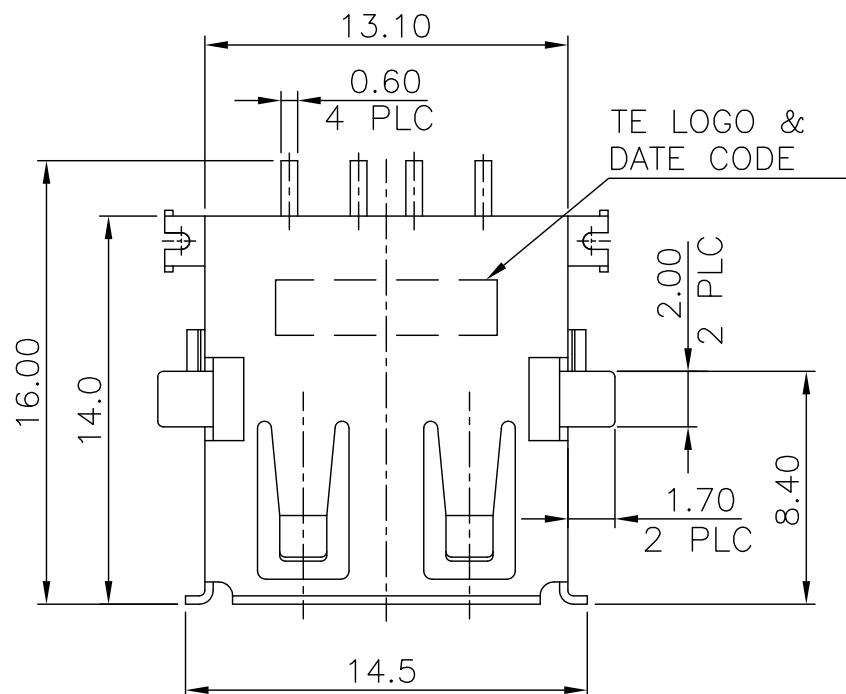

RECOMMENDED MOUNT DIMENSION

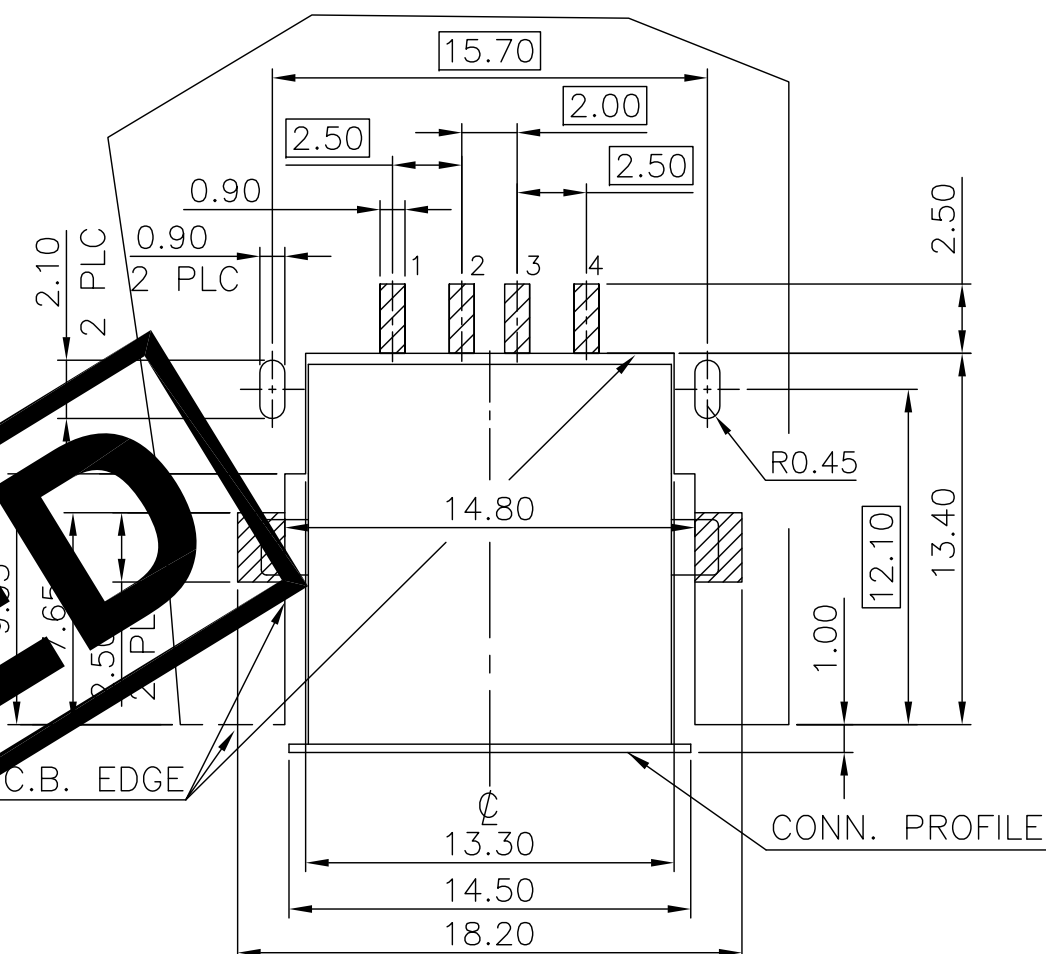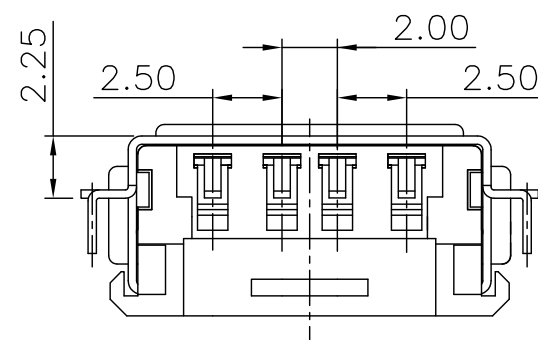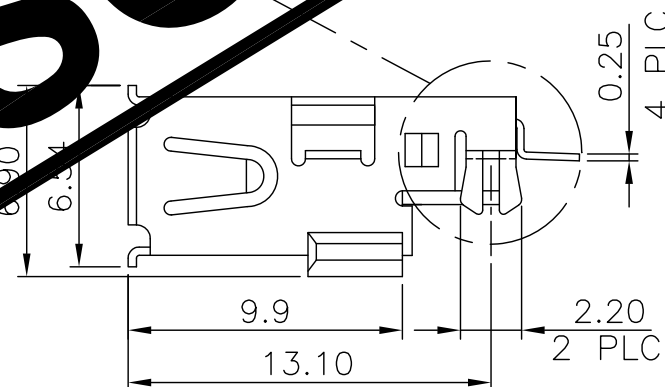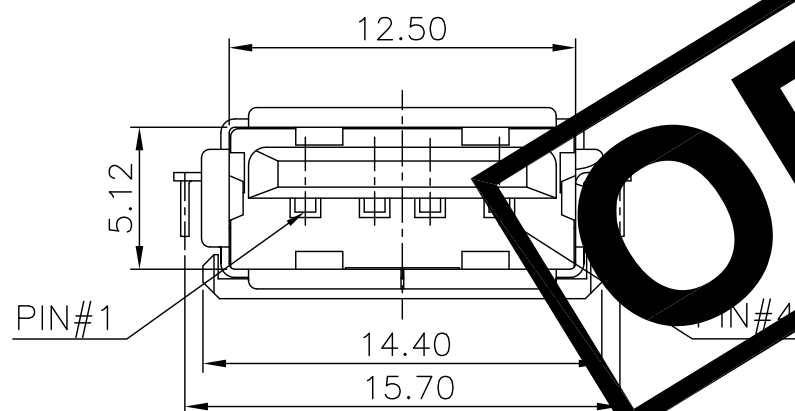RECOMMEND P.C.B LAYOUT (THICKNESS=1.2mm)
(COMPONENT SIDE) TOLERANCE±0.05

NOTE:

- MATERIAL:
HOUSING: PA9T WITH 30%GF, UL94V-0, BLACK COLOR.
CONTACT: PHOSPHOR BRONZE.
SHELL: BRASS.
- FINISH:
CONTACT: 0.762μm [30μ"] MIN. GOLD PLATING ON CONTACT AREA,
3.048μm [120μ"] MIN. BRIGHT TIN PLATING ON SOLDERTAILS.
1.27μm [50μ"] MIN. NICKEL UNDERPLATING OVERALL.
SHELL: 0.762μm [30μ"] MIN. NICKEL PLATED OVER
0.762μm [30μ"] MIN. Cu UNDERPLATING OVERALL.
- REFLOW SOLDER CAPABLE TO 260°C PER TE SPEC 109-201, CONDITION B.

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN

CHK

APVD

PRODUCT SPEC


APPLICATION SPEC

WEIGHT 1.54 GRAMS

CUSTOMER DRAWING

DIMENSIONS:

MM



MATERIAL

SEE NOTE

TOLERANCES UNLESS
OTHERWISE SPECIFIED:

0 PLC	± -
1 PLC	± 0.35
2 PLC	± 0.25
3 PLC	± 0.15
4 PLC	± -
ANGLES	± 3°

FINISH

SEE NOTE

NAME

SIZE

CAGE CODE

DRAWING NO

RESTRICTED TO



TE Connectivity

USB CONNECTOR, RECEPTACLE
4 POSITION, SERIES A

A300779

C=1734081

SCALE

SHEET

4 OF 19

REV E5

4

3

2

1

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

AUG ,2006.



COPYRIGHT 2009

BY TYCO ELECTRONICS CORPORATION.

ALL RIGHTS RESERVED.

LOC

DIST

REVISIONS

P

LTR


DESCRIPTION

DATE


DWN

APVD




SEE SHEET 1.

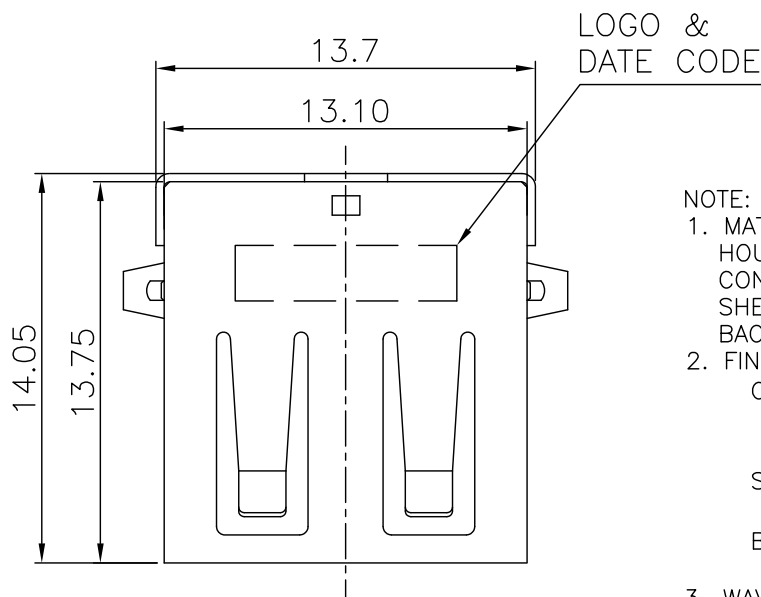

- NOTE:
- MATERIAL:
HOUSING: PBT WITH 30%GF, UL94V-0, COLOR: SEE TABLE.
CONTACT: PHOSPHOR BRONZE.
SHELL: BRASS.
BACK COVER: BRASS.
 - FINISH:
CONTACT: 0.762μm [30μ"] MIN. GOLD PLATING ON CONTACT AREA.
3.048μm [120μ"] MIN. BRIGHT TIN PLATING ON SOLDER TAILS.
1.27μm [50μ"] MIN. NICKEL UNDERPLATING OVER SOLDER TAIL.
SHELL: 0.762μm [30μ"] MIN. NICKEL PLATED OVER
0.762μm [30μ"] MIN. Cu UNDERPLATING OVER SOLDER TAIL.
BACK COVER: 0.762μm [30μ"] MIN. NICKEL PLATED OVER
0.762μm [30μ"] MIN. Cu UNDERPLATING OVER SOLDER TAIL.
 - WAVE SOLDER CAPABLE TO 245°C PER TE SPEC 10-00002, CONDITION A.

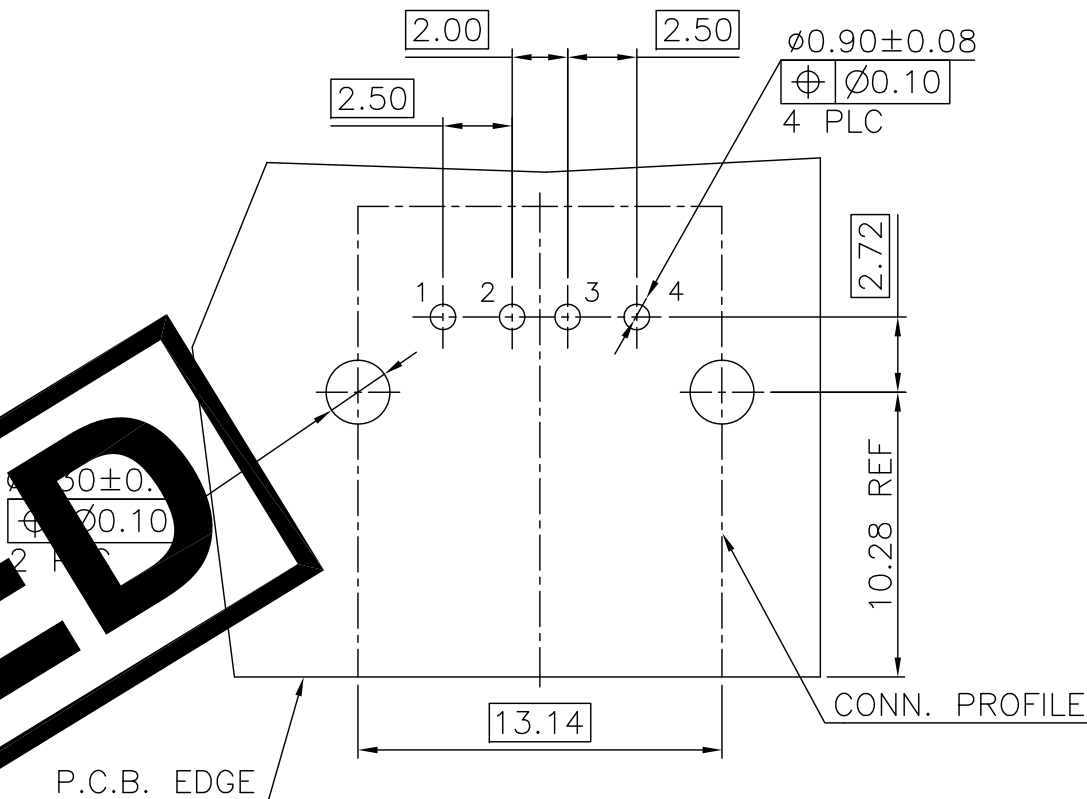

RECOMMEND P.C.B LAYOUT (THICKNESS=1.6mm)
(COMPONENT SIDE) TOLERANCE±0.05

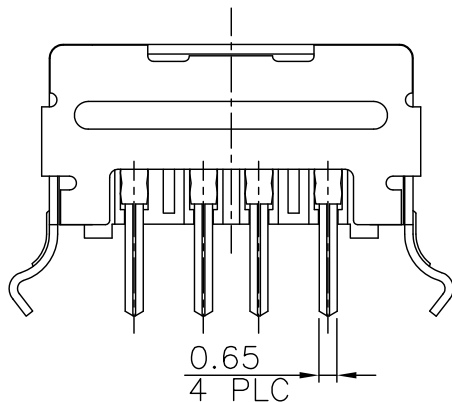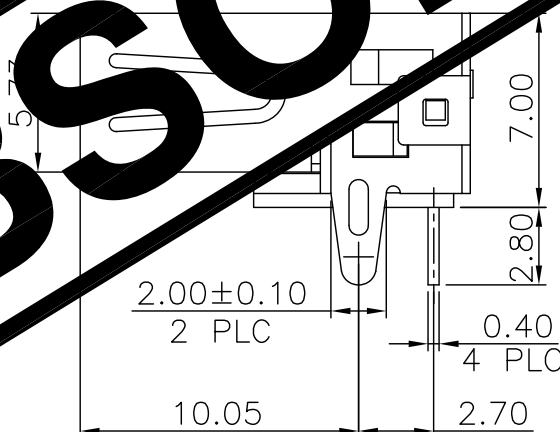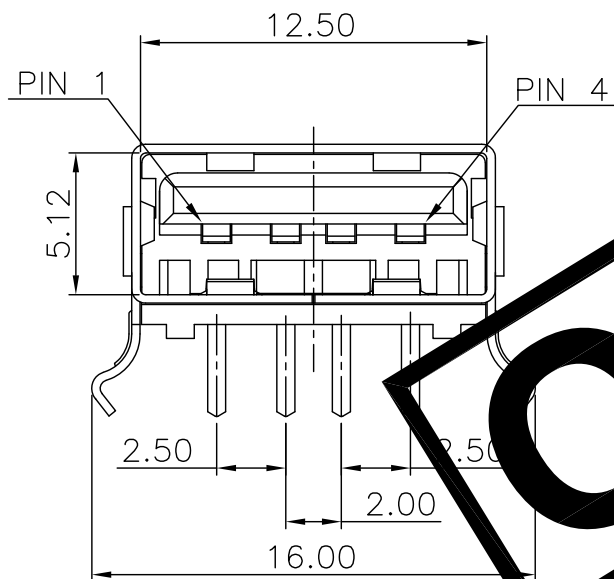

OBSOLETE	TRAY	MOON GRAY	4-1734081-2
		NONMETALLIC PEARL	4-1734081-1
	PACKAGE	HSG. COLOR	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN

CHK

APVD

PRODUCT SPEC

APPLICATION SPEC

WEIGHT 2.03 GRAMS

CUSTOMER DRAWING



TE Connectivity

NAME

USB CONNECTOR, RECEPTACLE
4 POSITION, SERIES A

SIZE

CAGE CODE

DRAWING NO

RESTRICTED TO

A300779C-1734081


SCALE

SHEET

5 of 19

REV E5

DIMENSIONS:
MM



MATERIAL

SEE NOTE

TOLERANCES UNLESS
OTHERWISE SPECIFIED:

0 PLC ± -
1 PLC ± 0.35
2 PLC ± 0.25
3 PLC ± 0.15
4 PLC ± -
ANGLES ± 3°

FINISH

SEE NOTE

4

3

2

1

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

AUG ,2006.



COPYRIGHT 2009

BY TYCO ELECTRONICS CORPORATION.

ALL RIGHTS RESERVED.

LOC

DIST

REVISIONS

P

LTR

DESCRIPTION




DATE

DWN

APVD

SEE SHEET 1.

TE LOGO &
DATE CODE

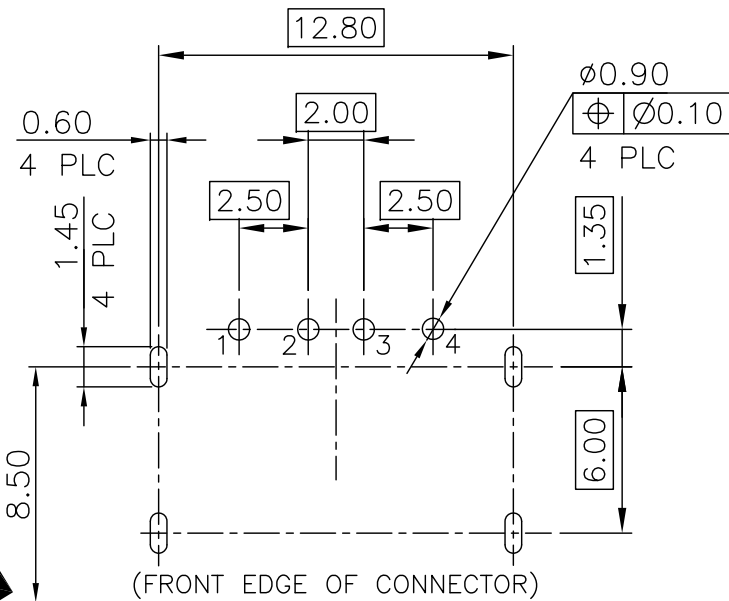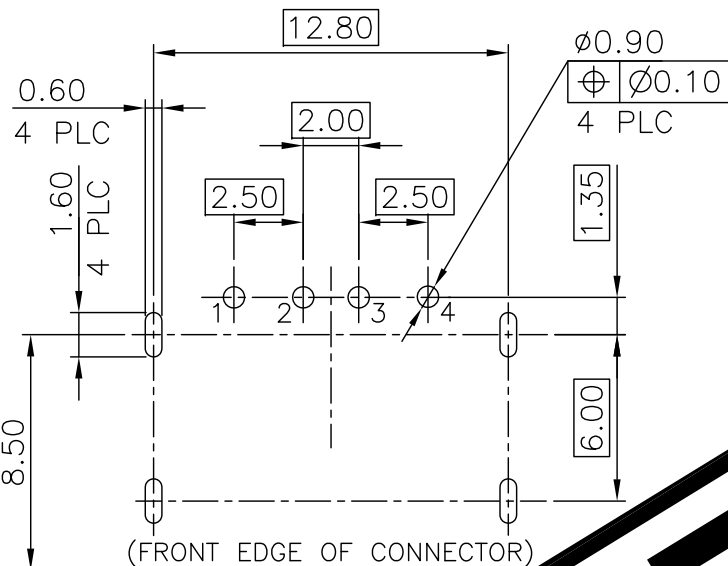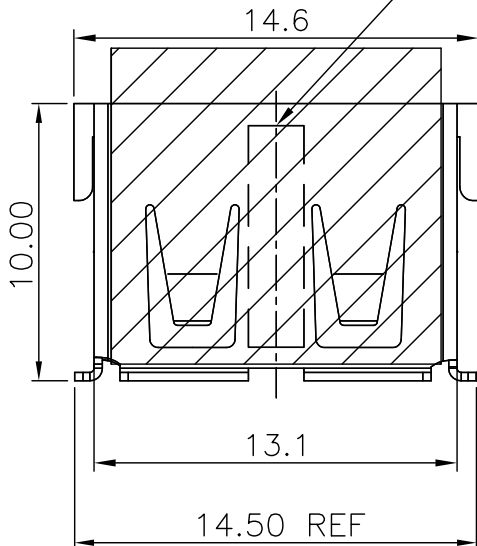

RECOMMEND P.C.B LAYOUT (THICKNESS=1.4mm)
(COMPONENT SIDE) TOLERANCE±0.05

RECOMMEND P.C.B LAYOUT (THICKNESS=1.4mm)
(COMPONENT SIDE) TOLERANCE±0.05

NOTE:

1. MATERIAL:

HOUSING: PA9T WITH 30%GF, UL94V-0, BLACK COLOR.

CONTACT: PHOSPHOR BRONZE.

SHELL: BRASS.

MYLAR: KAPTON, 0.06 THICKNESS

△ FINISH:



CONTACT: 0.762μm [30μ"] MIN. GOLD PLATING ON CONTACT AREA,
2.54μm [100μ"] MIN. MATTE-TIN PLATING ON SOLDER TAIL,
WITH ENTIRE CONTACT UNDERPLATED 1.27μm [50μ"] MIN. NICKEL
SHELL: 1.27μm [50μ"] MIN. NICKEL PLATING.

△ FINISH:

CONTACT: 0.254μm [10μ"] MIN. GOLD PLATING ON CONTACT AREA.
2.54μm [100μ"] MIN. MATTE-TIN PLATING ON SOLDER TAIL,
WITH ENTIRE CONTACT UNDERPLATED 1.27μm [50μ"] MIN. NICKEL
SHELL: 1.27μm [50μ"] MIN. NICKEL PLATING.
SPUTTERING/BLACK PLATING IN FRONT FLANGE.

4. REFLOW SOLDER CAPABLE TO 260°C PER TE TEST SPEC 109-201, CONDITION B.

△ CONNECTOR MOUNTING WITH ZERO INSERTION FORCE.

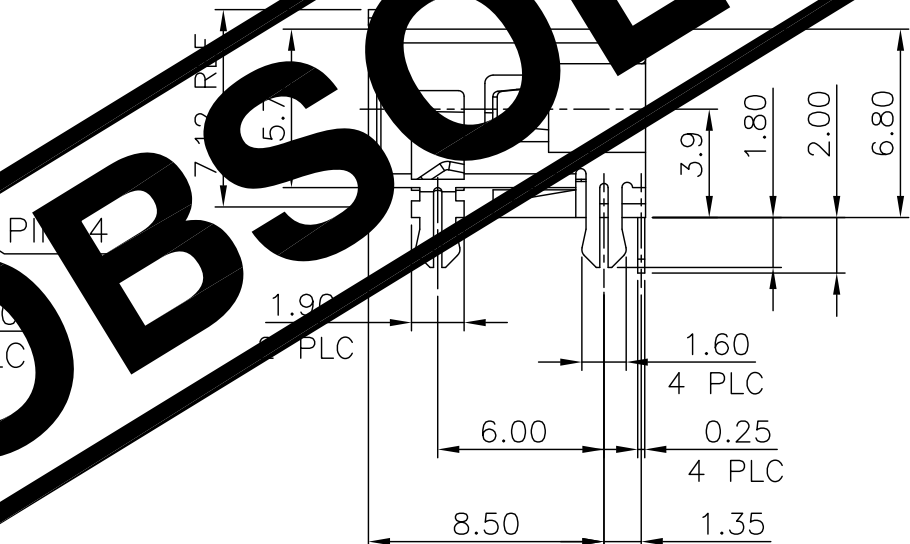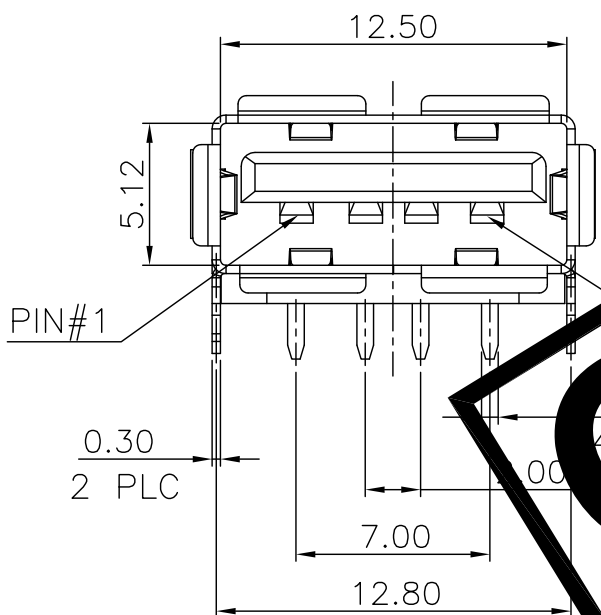

OBSOLETE	△	TAPE&REEL W/O MYLAR	5-1734081-3
	△	TAPE&REEL W/ MYLAR	5-1734081-2
	△	TAPE&REEL W/ MYLAR	5-1734081-1
	FINISH	PACKAGE	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN

CHK

APVD

PRODUCT SPEC

APPLICATION SPEC

WEIGHT 1.54 GRAMS

CUSTOMER DRAWING



TE Connectivity

NAME

USB CONNECTOR, RECEPTACLE
4 POSITION, SERIES A

SIZE

CAGE CODE

DRAWING NO

RESTRICTED TO

A300779C=1734081


SCALE

SHEET

6 of 19

REV E5

DIMENSIONS:
MM



MATERIAL


SEE NOTE

TOLERANCES UNLESS
OTHERWISE SPECIFIED:

0 PLC ± -
1 PLC ± 0.35
2 PLC ± 0.25
3 PLC ± 0.15
4 PLC ± -
ANGLES ± 3°


FINISH

SEE NOTE



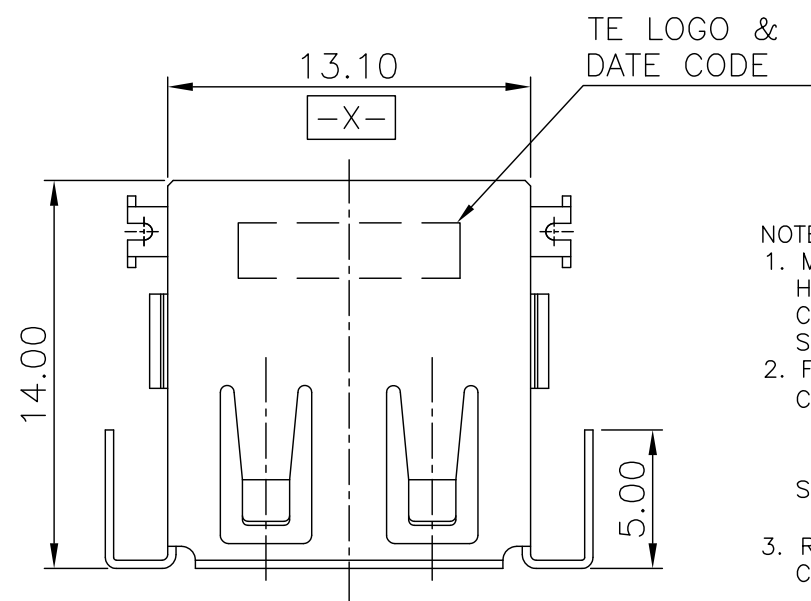


NOTE:


- NOTE:
1. MATERIAL:
HOUSING: PA9T WITH 30%GF, UL94V-0, BLACK COLOR.
CONTACT: PHOSPHOR BRONZE.
SHELL: BRASS.
 2. FINISH:
CONTACT: $0.762\mu\text{m}$ [30μ] MIN. GOLD PLATING ON CONTACT AREA,
 $3.048\mu\text{m}$ [120μ] MIN. BRIGHT TIN PLATING ON SOLDER PAILS
 $1.27\mu\text{m}$ [50μ] MIN. NICKEL UNDERPLATING OVERALL.
SHELL: $0.762\mu\text{m}$ [30μ] MIN. NICKEL PLATED OVER
 $0.762\mu\text{m}$ [30μ] MIN. Cu UNDERPLATING OVERALL.
 3. REFLOW SOLDER CAPABLE TO 260°C PER TE SPEC 109-2
CONDITION B.

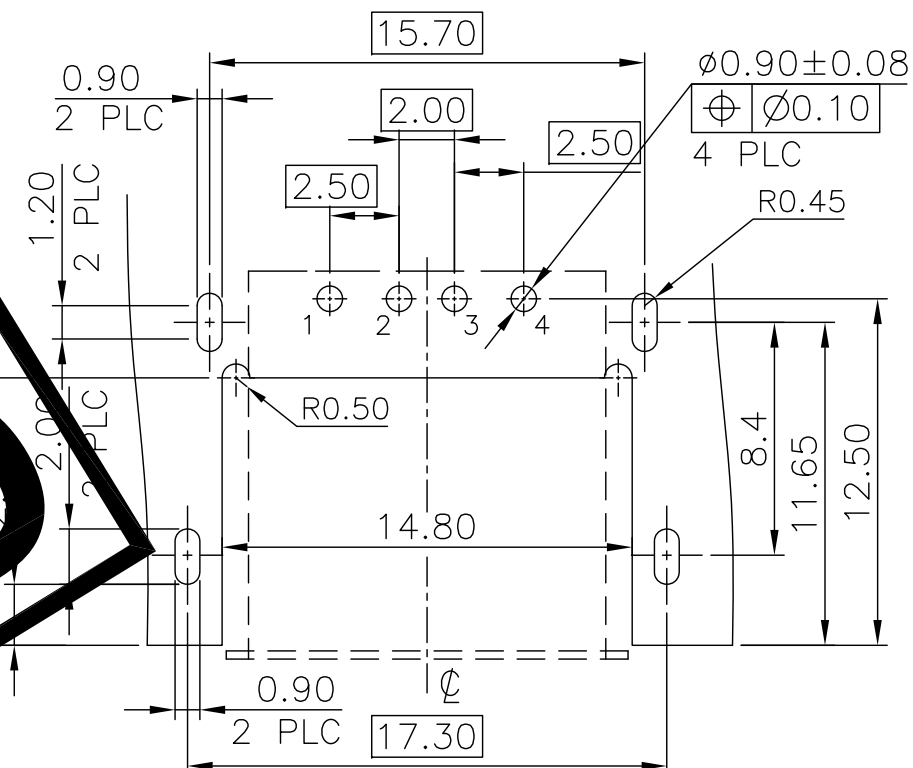


RECOMMEND P.C.B LAYOUT (THICKNESS=1.6mm)
(COMPONENT SIDE) TOLERANCE±0.05

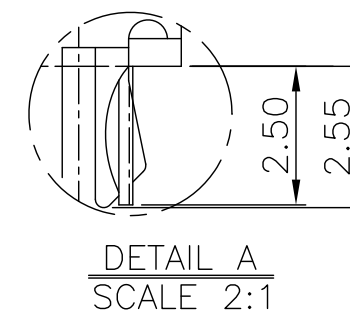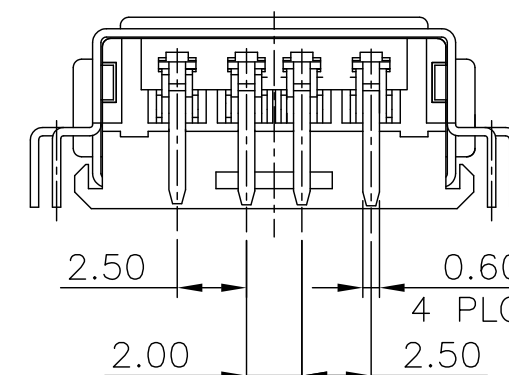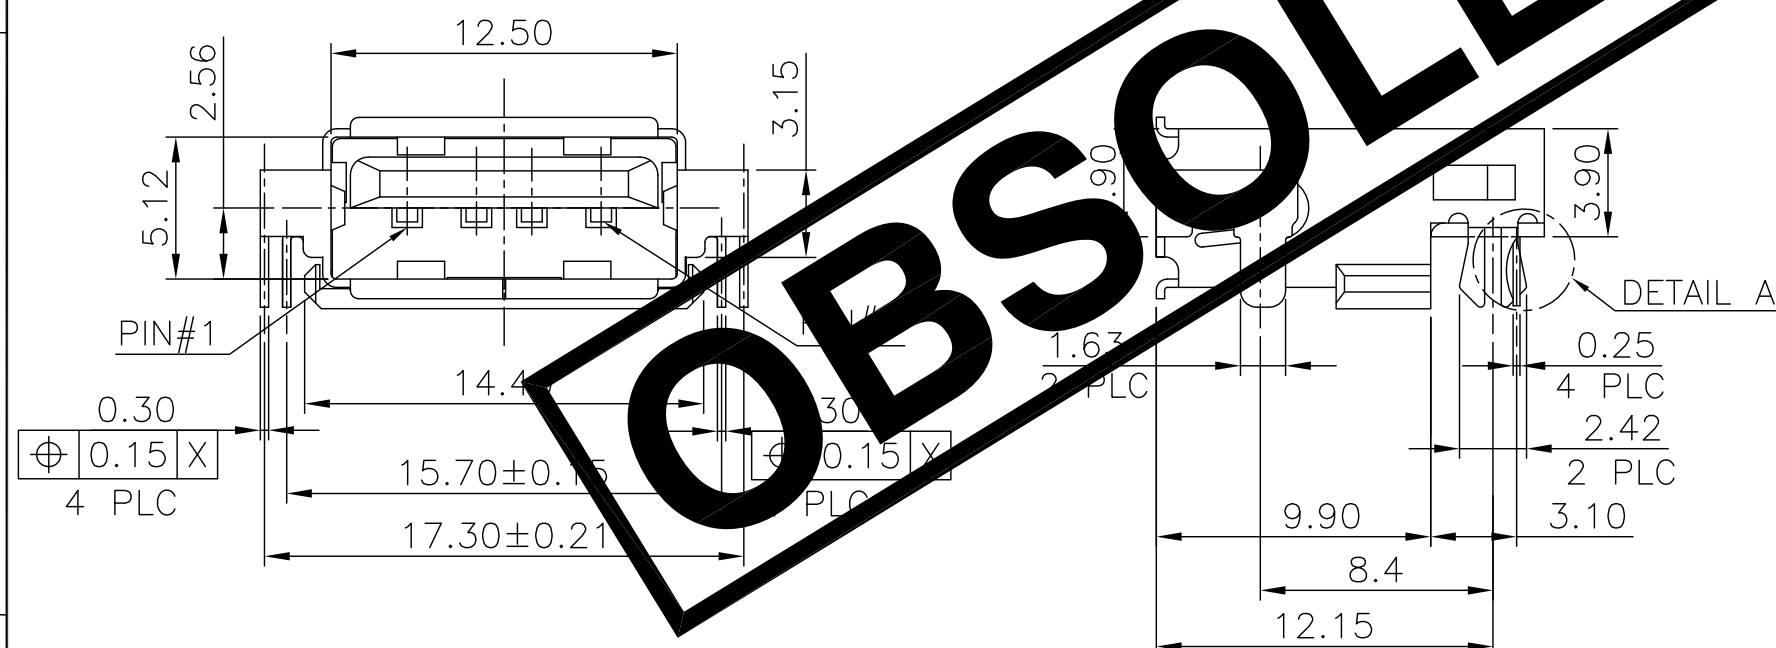


OBSOLETE	TAPE & REEL	6-1734081-2
	TUBE	6-1734081-1
	PACKAGE	PART NUMBER




THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN		 TE Connectivity	
		CHK			
DIMENSIONS:		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME USB CONNECTOR, RECEPTACLE 4 POSITION, SERIES A	
MM					
		0 PLC ± - 1 PLC ± 0.35 2 PLC ± 0.25 3 PLC ± 0.15 4 PLC ± - ANGLES ± 3°			
MATERIAL		FINISH			
SEE NOTE		SEE NOTE		SIZE CAGE CODE DRAWING NO RESTRICTED TO A3 00779 C=1734081 —	
CUSTOMER DRAWING				SCALE SHEET REV — 7 of 19 F5	

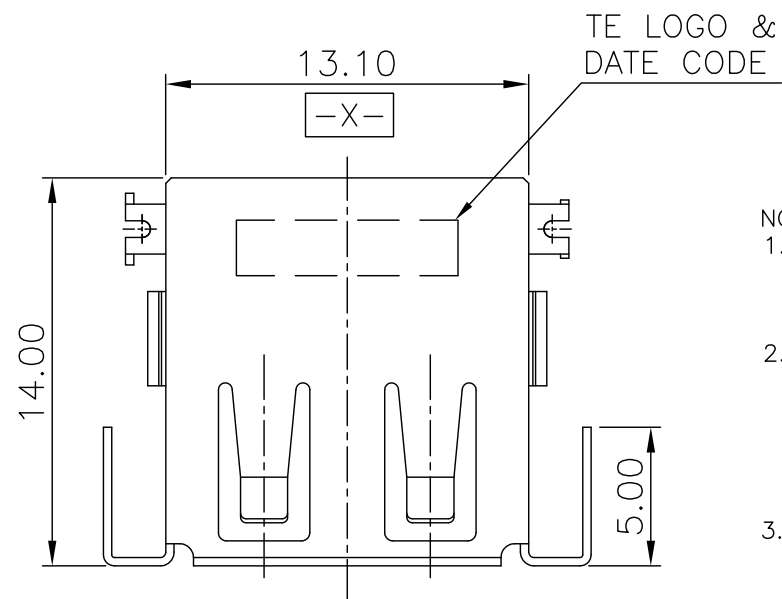

- NOTE:
1. MATERIAL:
HOUSING: PA9T WITH 30%GF, UL94V-0, BLACK COLOR.
CONTACT: PHOSPHOR BRONZE.
SHELL: BRASS.
 2. FINISH:
CONTACT: $0.762\mu\text{m}$ [$30\mu''$] MIN. GOLD PLATING ON CONTACT AREA,
 $3.048\mu\text{m}$ [$120\mu''$] MIN. BRIGHT TIN PLATING ON SOLDER PINS.
 $1.27\mu\text{m}$ [$50\mu''$] MIN. NICKEL UNDERPLATING OVERALL.
SHELL: $0.762\mu\text{m}$ [$30\mu''$] MIN. NICKEL PLATED OVER
 $0.762\mu\text{m}$ [$30\mu''$] MIN. Cu UNDERPLATING OVERALL.
 3. REFLOW SOLDER CAPABLE TO 260°C PER TE SPEC 109-2
CONDITION B.

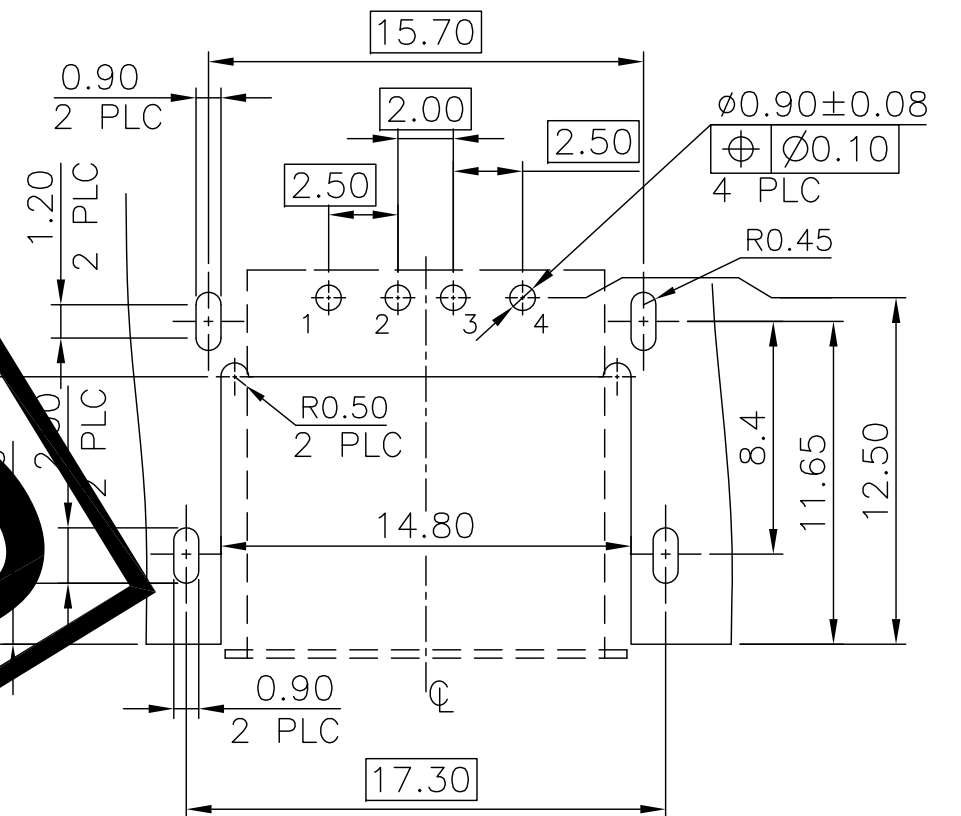





RECOMMEND P.C.B LAYOUT(THICKNESS=0.8mm)
(COMPONENT SIDE) TOLERANCE±0.05

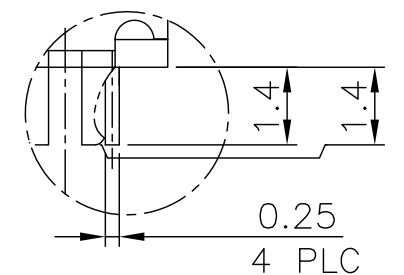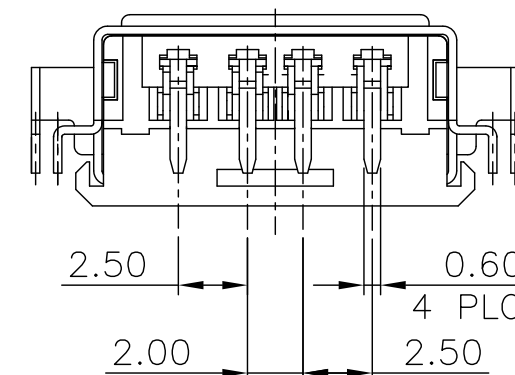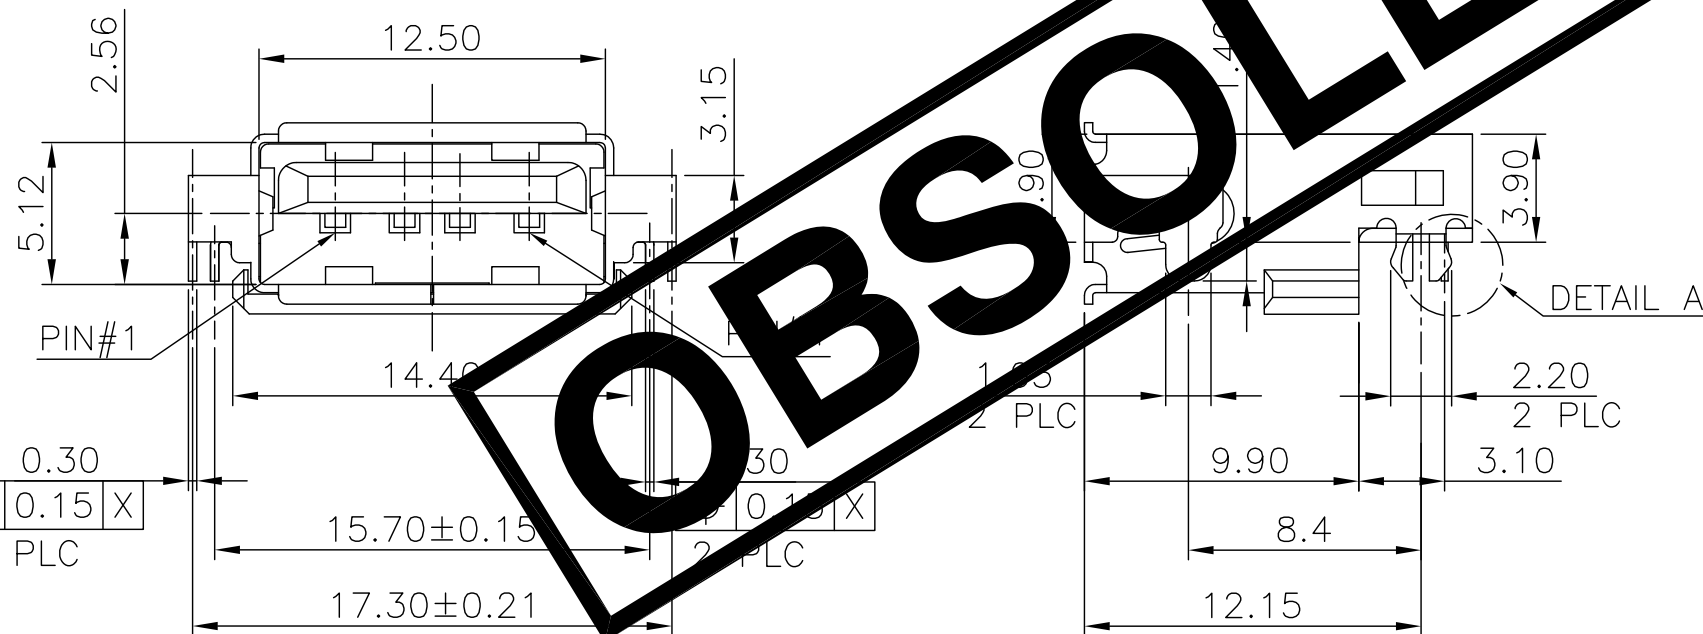



DETAIL A
SCALE 2:1

TAPE & REEL	6-1734081-3
PACKAGE	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN		 TE Connectivity	
		CHK			
DIMENSIONS: MM		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME	
		0 PLC ± - 1 PLC ± 0.35 2 PLC ± 0.25 3 PLC ± 0.15 4 PLC ± - ANGLES ± 3°		PRODUCT SPEC	
				APPLICATION SPEC	
MATERIAL SEE NOTE		FINISH SEE NOTE		SIZE	RESTRICTED TO
		WEIGHT 1.47 GRAMS		CAGE CODE A300779	DRAWING NO C=1734081
CUSTOMER DRAWING				SCALE —	SHEET 8 OF 19 REV F5

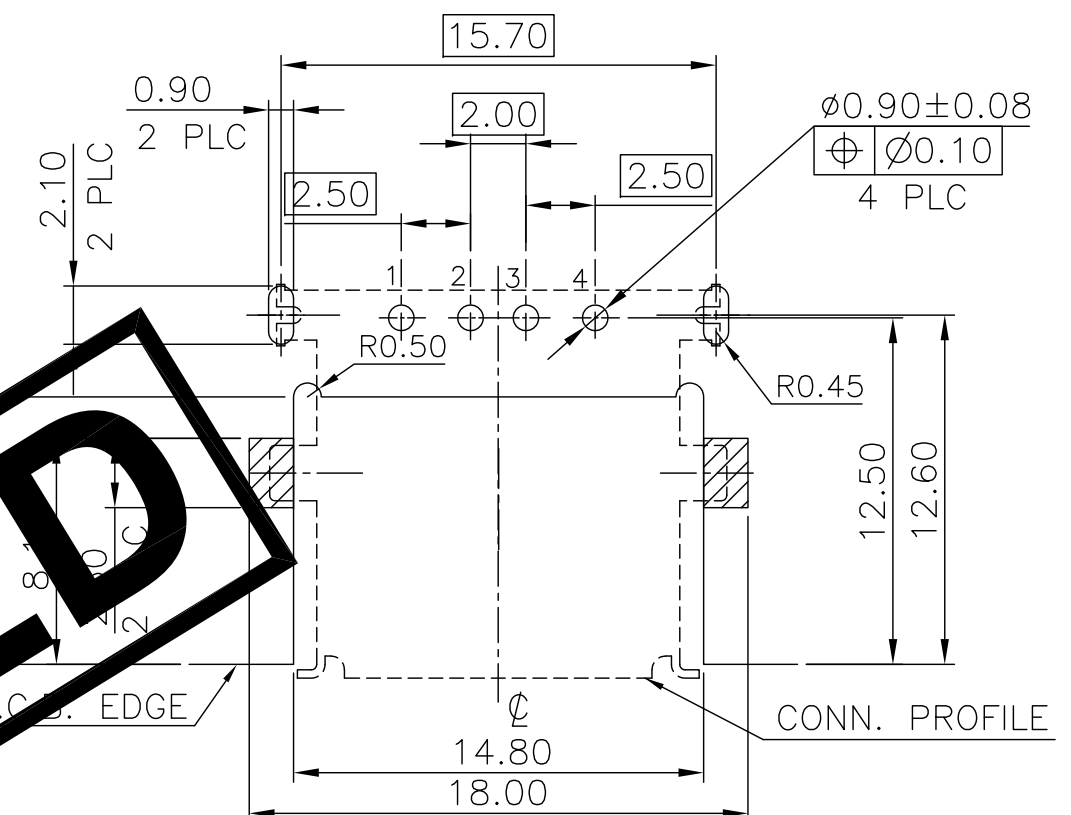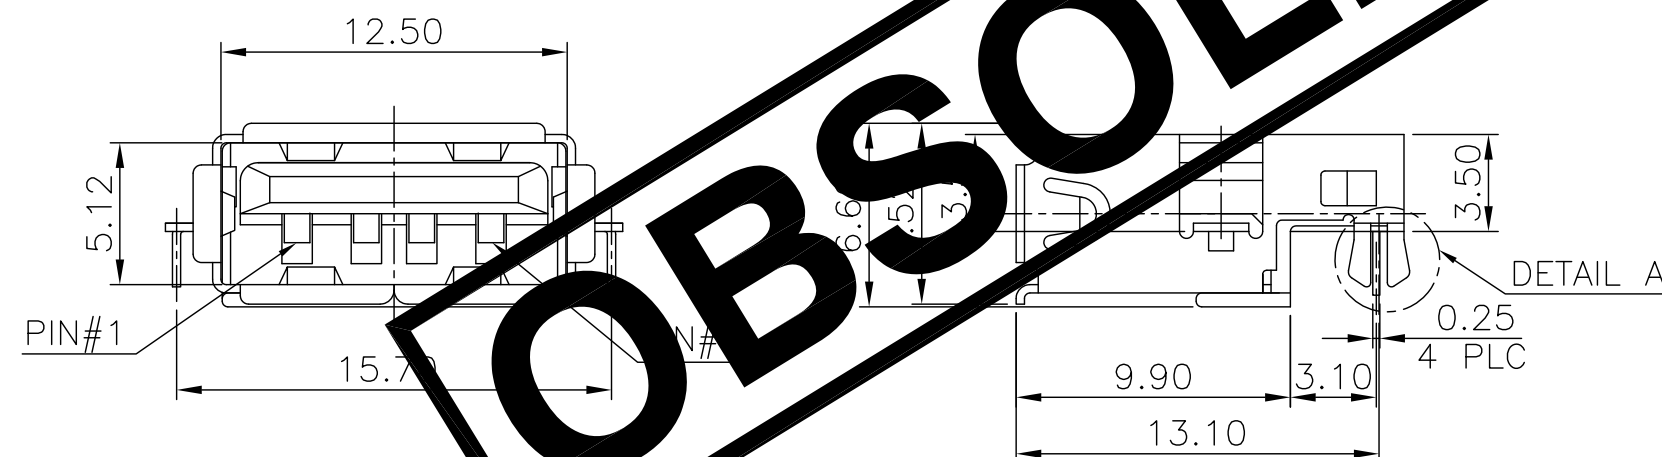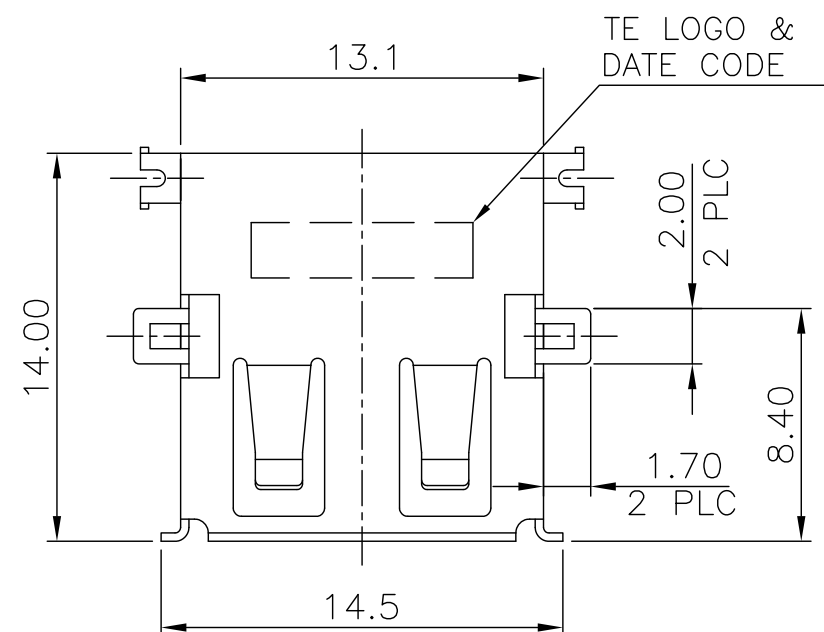


RECOMMEND P.C.B LAYOUT (THICKNESS=1.2mm)
(COMPONENT SIDE) TOLERANCE±0.05

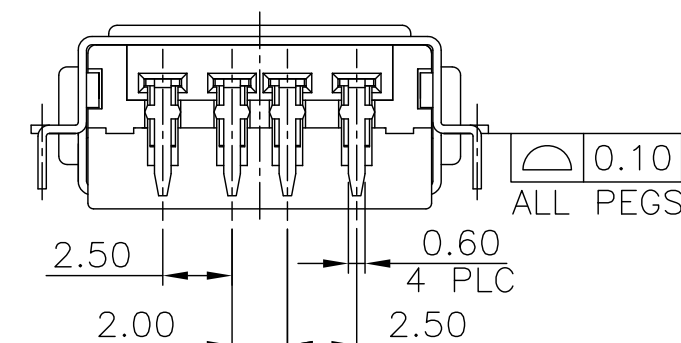

NOTE:

1. MATERIAL:
HOUSING: PA9T WITH 30%GF, UL 94V-0, BLACK COLOR.
CONTACT: PHOSPHOR BRONZE.
SHELL: BRASS.
2. FINISH:
CONTACT: $0.762\mu\text{m}$ [$30\mu''$] MIN. GOLD PLATING ON CONTACT AREA,
 $3.048\mu\text{m}$ [$120\mu''$] MIN. BRIGHT TIN PLATING ON SOLDER TAILS.
 $1.27\mu\text{m}$ [$50\mu''$] MIN. NICKEL UNDERPLATING OVERALL.
SHELL: $0.762\mu\text{m}$ [$30\mu''$] MIN. NICKEL PLATED OVER
 $0.762\mu\text{m}$ [$30\mu''$] MIN. Cu UNDERPLATING OVERALL.
3. REFLOW SOLDER CAPABLE TO 260°C PER TE SPEC 109-201,
CONDITION B.

TAPE & REEL	7-1734081-1
PACKAGE	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		 TE Connectivity	
DIMENSIONS: MM 		TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± - 1 PLC ± 0.35 2 PLC ± 0.25 3 PLC ± 0.15 4 PLC ± - ANGLES ± 3°	
MATERIAL		FINISH SEE NOTE	
SEE NOTE		WEIGHT 1.57 GRAMS	
CUSTOMER DRAWING		NAME USB CONNECTOR, RECEPTACLE 4 POSITION, SERIES A	
SIZE A3		CAGE CODE 00779	DRAWING NO C=1734081
RESTRICTED TO -		SCALE -	
SHEET 9 OF 19		REV F5	

4

3

2

1

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

AUG ,2006.



COPYRIGHT 2009

BY TYCO ELECTRONICS CORPORATION.

ALL RIGHTS RESERVED.

LOC

DIST

REVISIONS

P

LTR

DESCRIPTION

DATE

DWN

APVD

SEE SHEET 1.

NOTES:

1. MATERIAL:

REEL: PS.

EMBOSSED CARRIER: PS.

COVER TAPE: PBT.

2. DIMENSION :

TAPE REEL: $\phi 330\text{mm} \times 37.1\text{mm}$

SHIPPING CARTON: L=350mm,W=350mm, H=350mm

3. QUANTITY :

PRIMARY PACKING: 250PCS/REEL

SECONDARY PACKING: 9 REELS/CARTON(2,250PCS).





4. WEIGHT :

NET WEIGHT: 0.50 KG/REEL, 4.52 KG/CARTON.



GROSS WEIGHT: 1.00 KG/REEL, 9.50 KG/CARTON.

5. PEELING RESISTANCE: 20G TO 130G.

6. PEELING SPEED: 300MM/MIN.

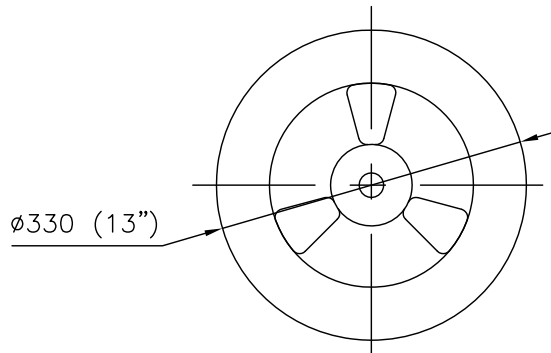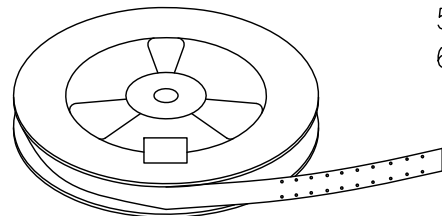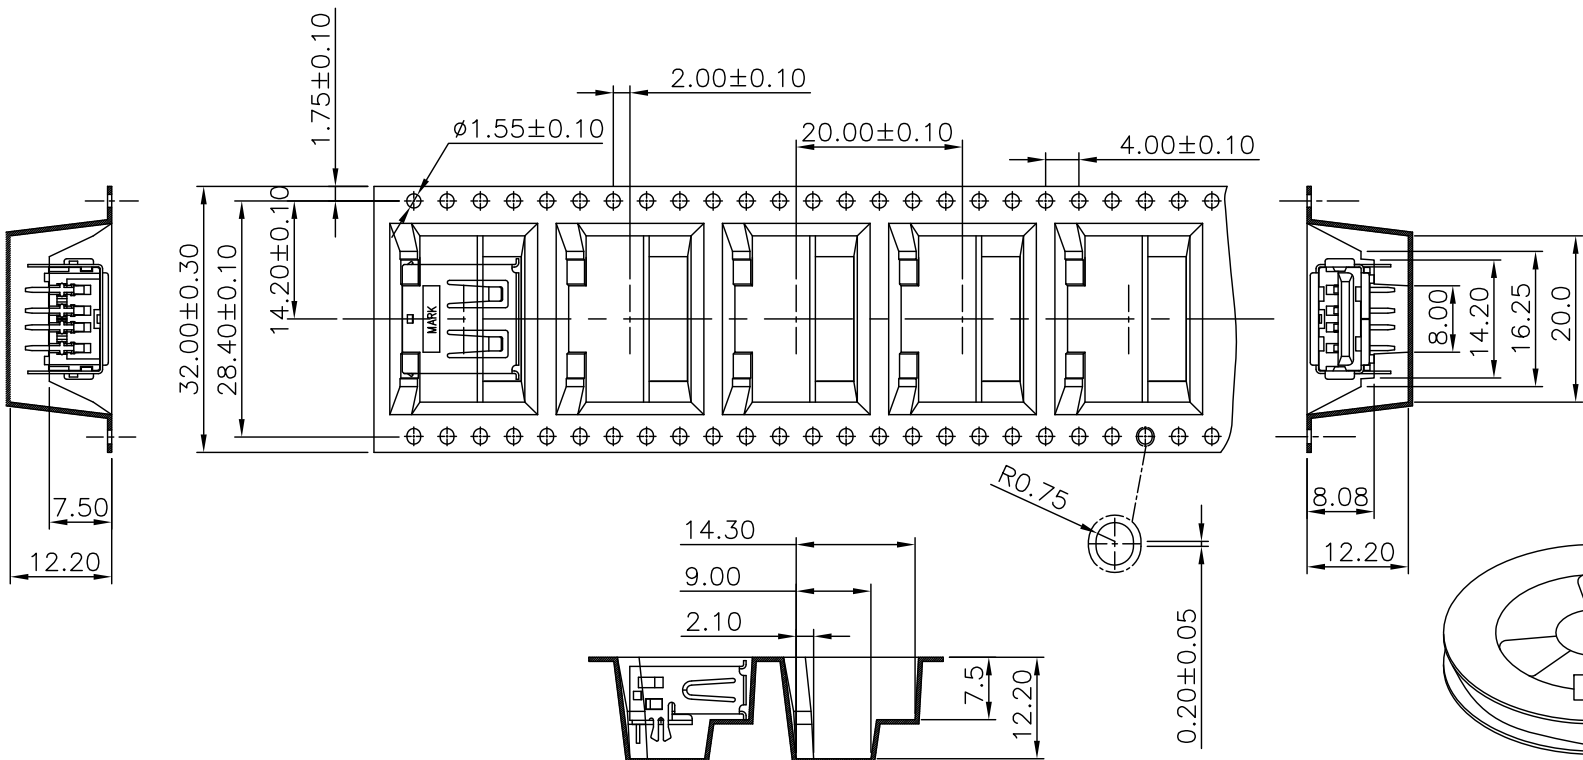


SHIPPING CARTON

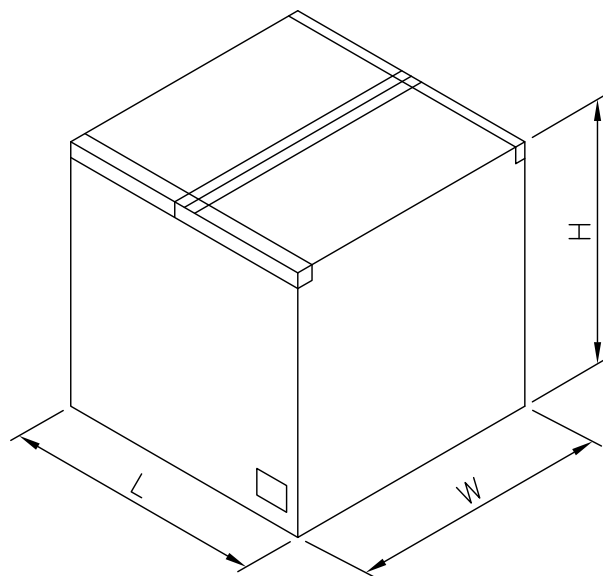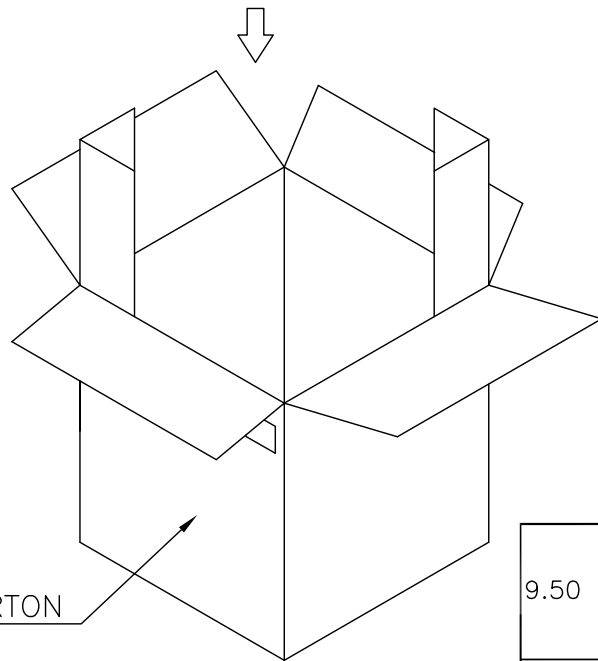

9.50 Kg	4.52 Kg	250	9	2250	1-1734081-4	OBSOLETE
					1-1734081-3	
					1-1734081-2	
GROSS WEIGHT	NET WEIGHT	PCS/REEL	REELS/CARTON	QUANTITY	PART NUMBER	

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
MM



MATERIAL

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC ± -
1 PLC ± -
2 PLC ± -
3 PLC ± -
4 PLC ± -
ANGLES ± -
FINISH

DWN

CHK

APVD

PRODUCT SPEC

APPLICATION SPEC

WEIGHT

CUSTOMER DRAWING



TE Connectivity

NAME

USB CONNECTOR, RECEPTACLE
4 POSITION, SERIES A

SIZE

CAGE CODE

DRAWING NO

RESTRICTED TO

A300779C-1734081

SCALE

SHEET

10 of 19

REV E5

4

3

2

1

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

AUG ,2006.



COPYRIGHT 2009

BY TYCO ELECTRONICS CORPORATION.

ALL RIGHTS RESERVED.

LOC

DIST

REVISIONS

P

LTR

DESCRIPTION

DATE

DWN

APVD

SEE SHEET 1.

NOTES:

1. MATERIAL:

REEL: PS.

EMBOSSED CARRIER: PS.

COVER TAPE: PBT.

2. DIMENSION :

TAPE REEL: $\phi 330\text{mm} \times 37.1\text{mm}$

SHIPPING CARTON: L=350mm,W=350mm, H=350mm

3. QUANTITY :

PRIMARY PACKING: 300PCS/REEL

SECONDARY PACKING: 8 REELS/CARTON(2,400PCS).



4. WEIGHT :

NET WEIGHT: 0.44KG/REEL, 4.00 KG/CARTON.

GROSS WEIGHT: 1.81 KG/REEL, 9.05 KG/CARTON.

5. PEELING RESISTANCE: 20G TO 130G.

PEELING SPEED: 300MM/MIN.

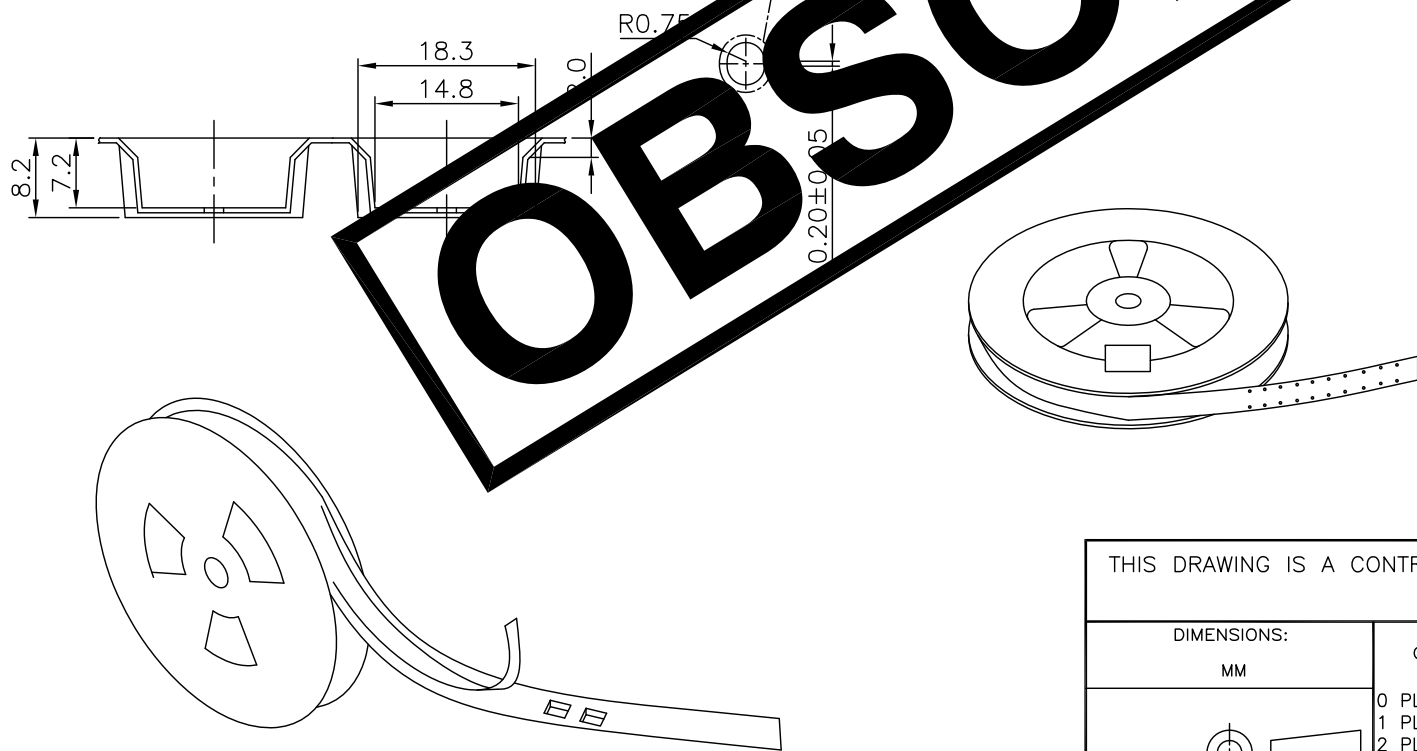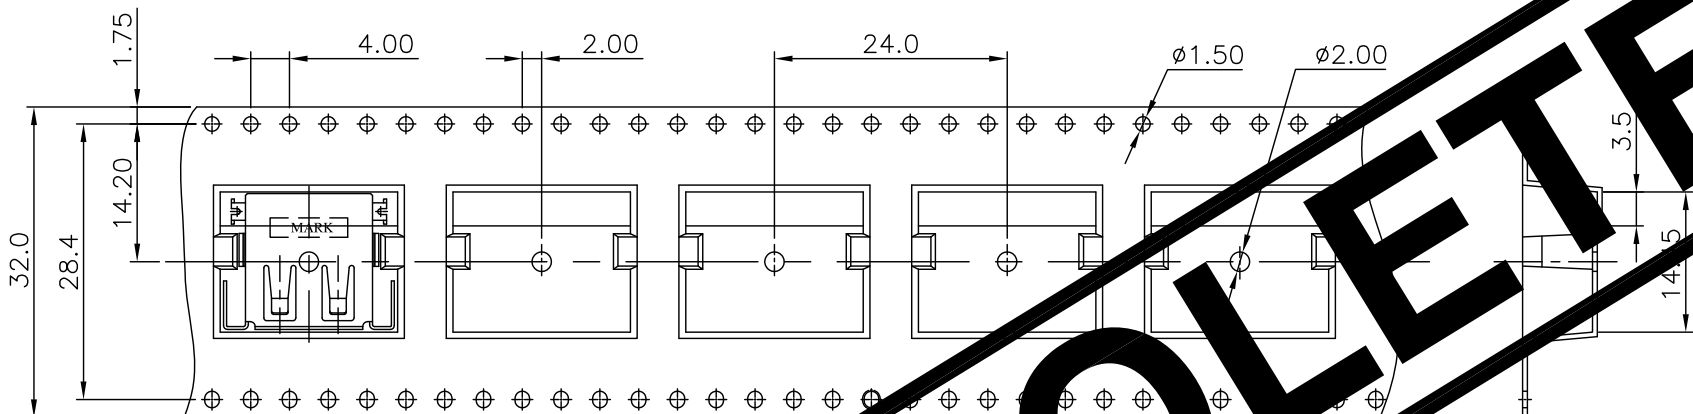

SHIPPING
CARTON

9.05 Kg	4.00 Kg	300	8	2400	6-1734081-2
GROSS WEIGHT	NET WEIGHT	PCS/REEL	REELS /CARTON	QUANTITY	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	 TE Connectivity		
DIMENSIONS: MM		CHK			
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD	NAME USB CONNECTOR, RECEPTACLE 4 POSITION, SERIES A		
0 PLC ± -		PRODUCT SPEC			
1 PLC ± -		APPLICATION SPEC	SIZE A3		
2 PLC ± -		WEIGHT			
3 PLC ± -		CUSTOMER DRAWING	CAGE CODE 00779		
4 PLC ± -		SCALE			
ANGLES ± -		SHEET	DRAWING NO C=1734081		
FINISH		11 of 19			
MATERIAL		REV	E5		

4

3

2

1

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

AUG ,2006.



COPYRIGHT 2009

BY TYCO ELECTRONICS CORPORATION.

ALL RIGHTS RESERVED.

LOC

DIST

REVISIONS

P

LTR

DESCRIPTION

DATE

DWN

APVD

SEE SHEET 1.

NOTES:

1. MATERIAL:

REEL: PS.

EMBOSSED CARRIER: PS.

COVER TAPE: PBT.

2. DIMENSION :

TAPE REEL: $\phi 330\text{mm} \times 37.1\text{mm}$

SHIPPING CARTON: L=350mm,W=350mm, H=350mm

3. QUANTITY :

PRIMARY PACKING: 300PCS/REEL

SECONDARY PACKING: 8 REELS/CARTON(2,400PCS).


4. WEIGHT :

NET WEIGHT: 0.44KG/REEL, 4.00 KG/CARTON.

GROSS WEIGHT: 1.81 KG/REEL, 9.05 KG/CARTON.

PEELING RESISTANCE: 20G TO 130G.

6. PEELING SPEED: 300MM/MIN.

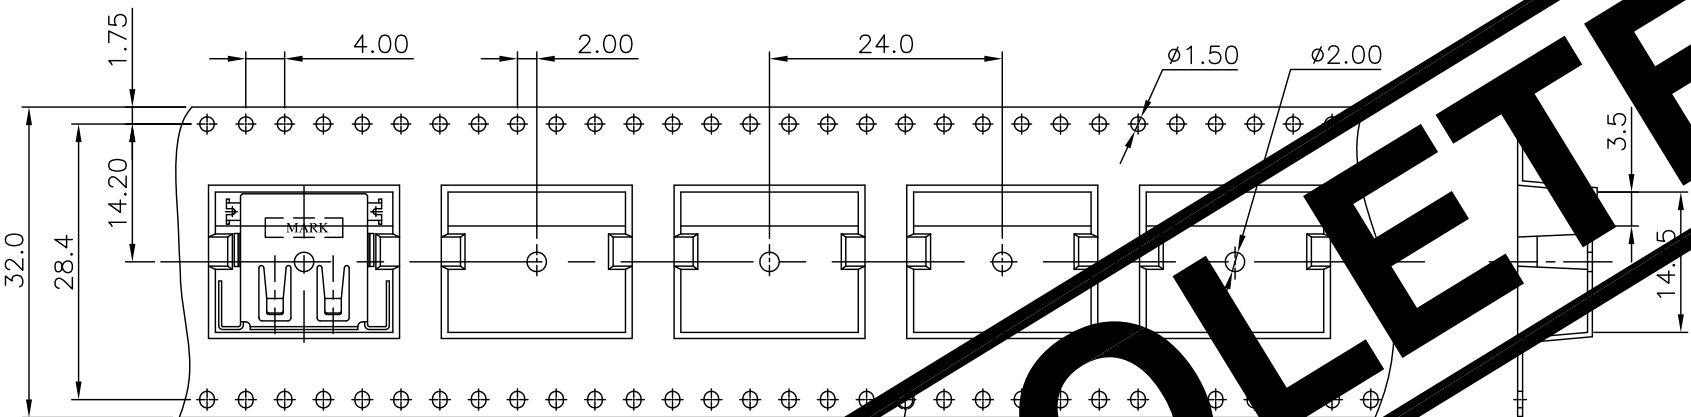


SHIPPING
CARTON

9.05 Kg	4.00 Kg	300	8	2400	6-1734081-3
GROSS WEIGHT	NET WEIGHT	PCS/REEL	REELS/CARTON	QUANTITY	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
MM



TOLERANCES UNLESS
OTHERWISE SPECIFIED:

0 PLC $\pm .$
1 PLC $\pm .$
2 PLC $\pm .$
3 PLC $\pm .$
4 PLC $\pm .$
ANGLES $\pm .$
FINISH

MATERIAL

DWN

CHK

APVD

PRODUCT SPEC

APPLICATION SPEC

WEIGHT

CUSTOMER DRAWING



TE Connectivity

NAME

USB CONNECTOR, RECEPTACLE
4 POSITION, SERIES A

SIZE

CAGE CODE

DRAWING NO

RESTRICTED TO

A3

00779

C=1734081

SCALE

SHEET

12 of 19

REV E5

4

3

2

1

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

AUG ,2006.



COPYRIGHT 2009

BY TYCO ELECTRONICS CORPORATION.

ALL RIGHTS RESERVED.

LOC

DIST

REVISIONS

P

LTR

DESCRIPTION

DATE

DWN

APVD

SEE SHEET 1.

NOTES:

1. MATERIAL:

REEL: PS.

EMBOSSED CARRIER: PS.

COVER TAPE: PBT.

2. DIMENSION :

TAPE REEL: $\varnothing 330\text{mm} \times 29.5\text{mm}$

SHIPPING CARTON: L=350mm,W=350mm, H=400mm

3. QUANTITY :

PRIMARY PACKING: 300PCS/REEL

SECONDARY PACKING: 12 REELS/CARTON(3600PCS).


4. WEIGHT :

NET WEIGHT: 0.46 KG/REEL, 5.55 KG/CARTON.


GROSS WEIGHT: 0.89 KG/REEL, 10.65 KG/CARTON.

5. PEELING RESISTANCE: 20G TO 130G.

6. PEELING SPEED: 300MM/MIN.

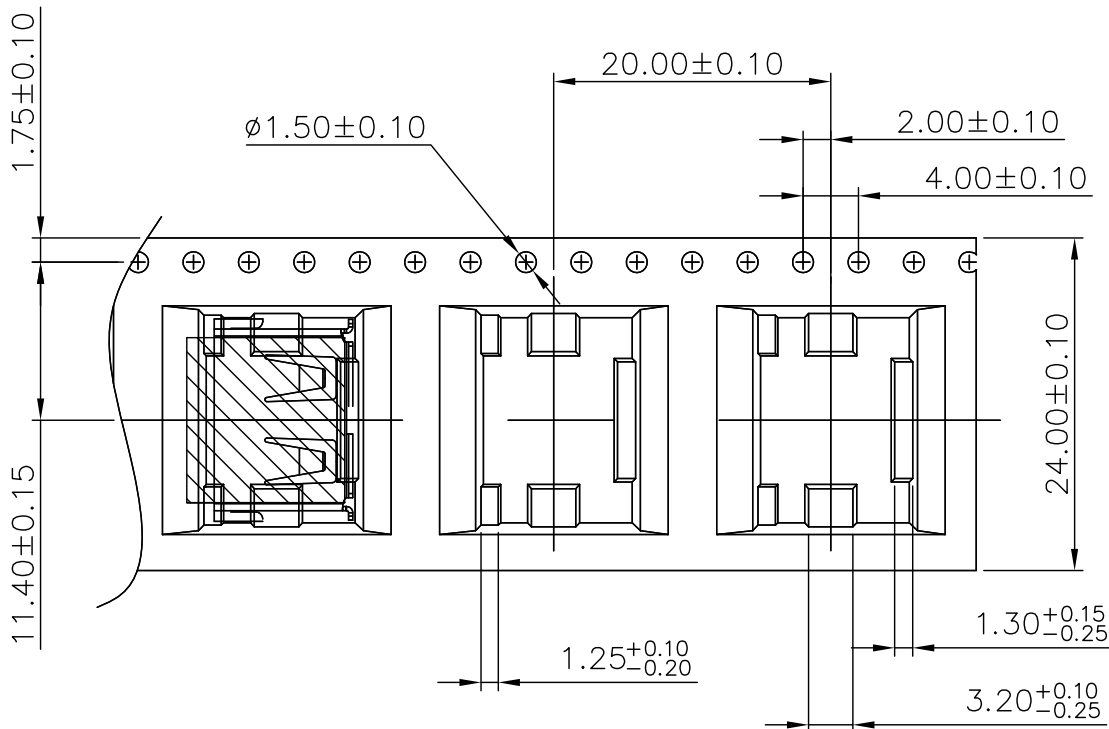


SHIPPING
CARTON

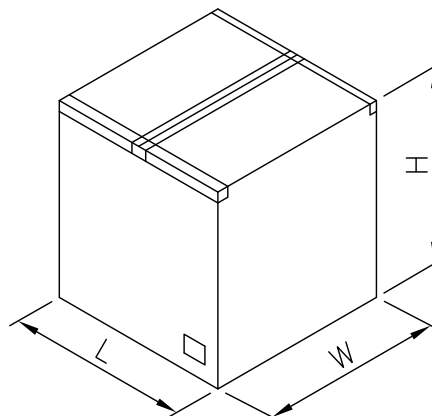

OBSOLETE	300	12	3600	10.65	5.55	5-1734081-3
						5-1734081-2
						5-1734081-1
	PCS/ REEL	REELS/ BOX	QUANTITY (PCS)	G/W (Kg)	N/W (Kg)	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
MM



MATERIAL

TOLERANCES UNLESS
OTHERWISE SPECIFIED:

0 PLC $\pm -$
1 PLC $\pm -$
2 PLC $\pm -$
3 PLC $\pm -$
4 PLC $\pm -$
ANGLES $\pm -$
FINISH

DWN

CHK

APVD

PRODUCT SPEC

APPLICATION SPEC

WEIGHT

CUSTOMER DRAWING



TE Connectivity

NAME

USB CONNECTOR, RECEPTACLE
4 POSITION, SERIES A

SIZE

CAGE CODE

DRAWING NO

RESTRICTED TO

A300779C-1734081

SCALE

SHEET

13 of 19

REV E5

4

3

2

1

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

AUG ,2006.



COPYRIGHT 2009

BY TYCO ELECTRONICS CORPORATION.

ALL RIGHTS RESERVED.

LOC

DIST

REVISIONS

DW

P

LTR

DESCRIPTION

DATE

DWN

APVD

SEE SHEET 1.

NOTES:

1. MATERIAL:

REEL: PS.

EMBOSSED CARRIER: PS.

COVER TAPE: PBT.

2. DIMENSION :

TAPE REEL: $\phi 330\text{mm} \times 37.1\text{mm}$

SHIPPING CARTON: L=350mm,W=350mm, H=350mm

3. QUANTITY :

PRIMARY PACKING: 350PCS/REEL

SECONDARY PACKING: 9 REELS/CARTON.(3150 PCS)







4. WEIGHT :

NET WEIGHT: 4.85 kg .


GROSS WEIGHT: 9.85 kg .

5. REELING RESISTANCE: 20G TO 130G.

6. REELING SPEED: 300MM/MIN.

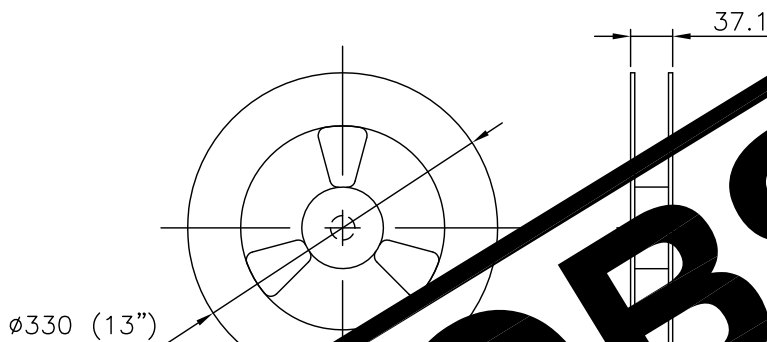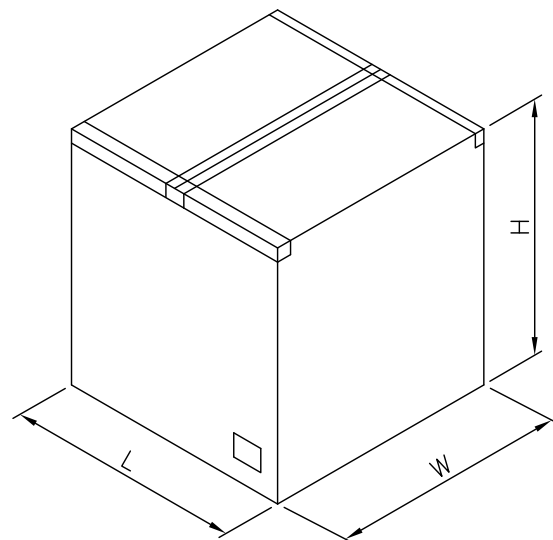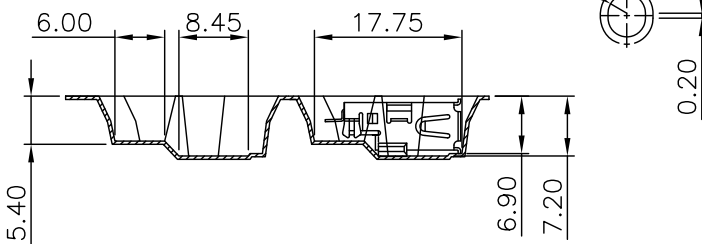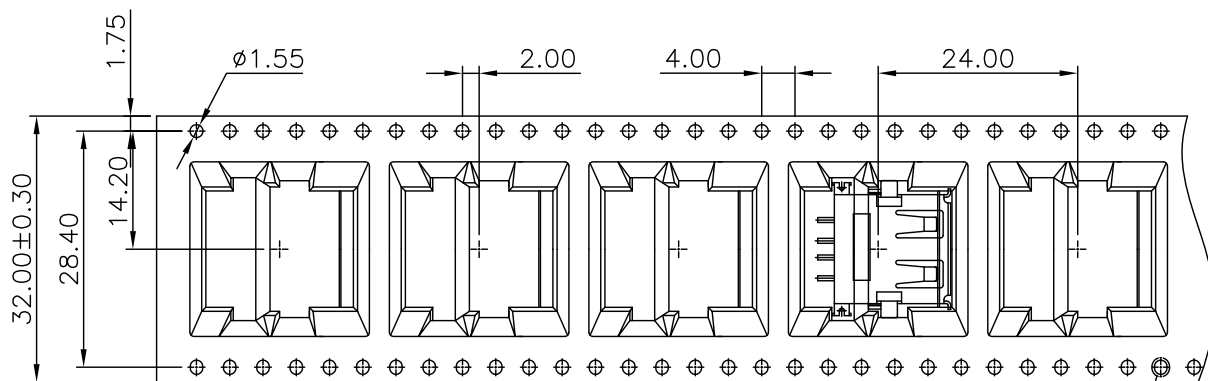


SHIPPING CARTON
9 TAPE-REEL/ CARTON

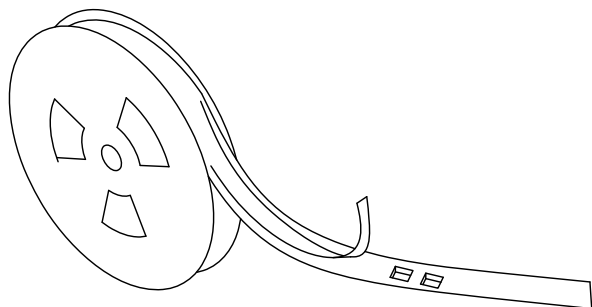

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
MM



TOLERANCES UNLESS
OTHERWISE SPECIFIED:

0 PLC ± -
1 PLC ± -
2 PLC ± -
3 PLC ± -
4 PLC ± -
ANGLES ± -
FINISH

MATERIAL

DWN

CHK

APVD

PRODUCT SPEC

APPLICATION SPEC

WEIGHT

CUSTOMER DRAWING



TE Connectivity

NAME

USB CONNECTOR, RECEPTACLE
4 POSITION, SERIES A

SIZE

CAGE CODE

DRAWING NO

RESTRICTED TO

A3

00779

C=1734081

SCALE

SHEET

14 of 19

REV E5

4

3

2

1

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

AUG ,2006.



COPYRIGHT 2009

BY TYCO ELECTRONICS CORPORATION.

ALL RIGHTS RESERVED.

LOC

DIST

REVISIONS

DW

P

LTR

DESCRIPTION

DATE







DWN

APVD

SEE SHEET 1.


NOTES:

- MATERIAL:
REEL: PS.
EMBOSSED CARRIER: PS.
COVER TAPE: PBT.
- DIMENSION :
TAPE REEL: $\phi 330\text{mm} \times 37.1\text{mm}$
SHIPPING CARTON: L=350mm,W=350mm, H=350mm
- QUANTITY :
PRIMARY PACKING: 350PCS/REEL
SECONDARY PACKING: 9 REELS/CARTON(3,150PCS).
- WEIGHT :
NET WEIGHT: 0.55 KG/REEL, 4.85 KG/CARTON.
GROSS WEIGHT: 1.09 KG/REEL, 9.85 KG/CARTON.
- PEELING RESISTANCE: 20G TO 130G.
PEELING SPEED: 100MM/MIN.

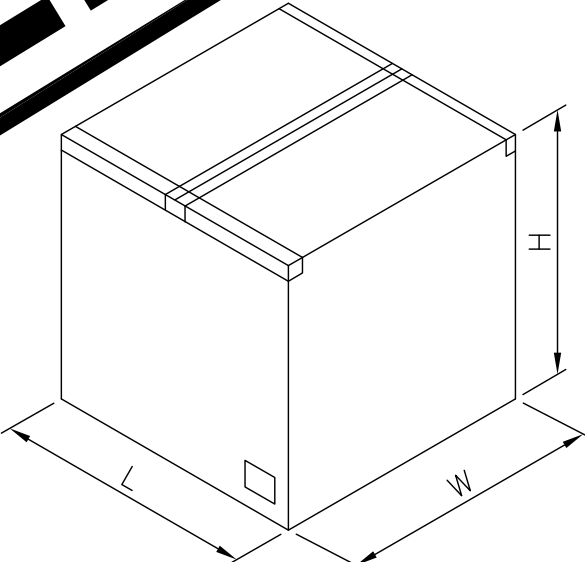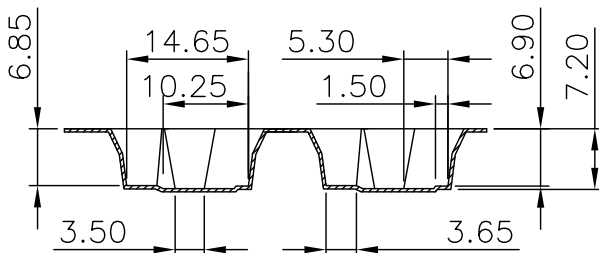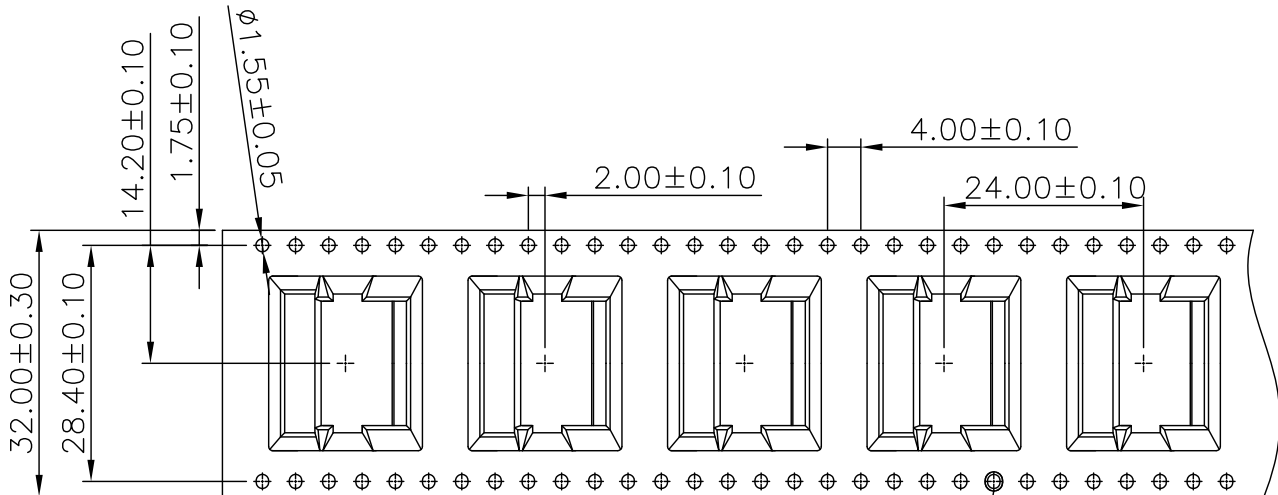

SHIPPING CARTON

OBSOLETE	9.85 Kg	4.85 Kg	350	9	3150	7-1734081-1
	GROSS WEIGHT	NET WEIGHT	PCS/REEL	REELS /CARTON	QUANTITY	2-1734081-3
PART NUMBER						

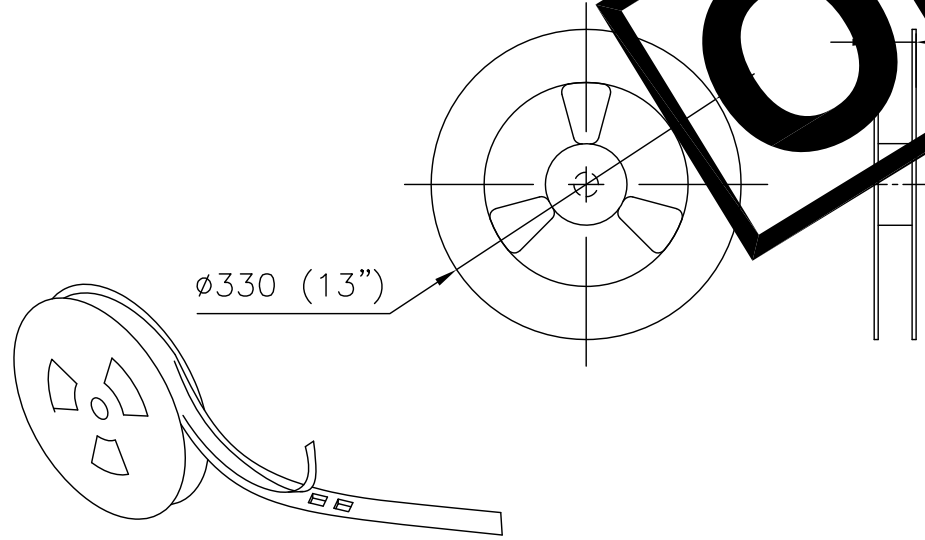

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	TE Connectivity			
DIMENSIONS: MM		CHK				
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD				
0 PLC ± -		PRODUCT SPEC				
1 PLC ± -		APPLICATION SPEC	NAME			
2 PLC ± -		WEIGHT				
3 PLC ± -		CUSTOMER DRAWING	SIZE CAGE CODE DRAWING NO RESTRICTED TO			
4 PLC ± -		SCALE				
ANGLES ± -		SHEET 15 of 19	REV E5			
FINISH						

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

AUG ,2006.

© COPYRIGHT 2009 BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC

DIST

REVISIONS

DW

P

LTR

DESCRIPTION

DATE

DWN

APVD

SEE SHEET 1.

NOTES:

1. DIMENSION :

TRAY : L=295mm, W=252mm, H=14mm

SHIPPING CARTON: L=315mm, W=270mm, H=200mm

POLYSTYRENE : L=290mm, W=250mm, H=10mm

2. QUANTITY :


PRIMARY PACKING: 100 PCS/TRAY

SECONDARY PACKING: 10 TRAYS/CARTON
(1,000PCS)


3. WEIGHT :

NET WEIGHT: 2.03KG/CARTON.

GROSS WEIGHT: 3.10KG/CARTON.

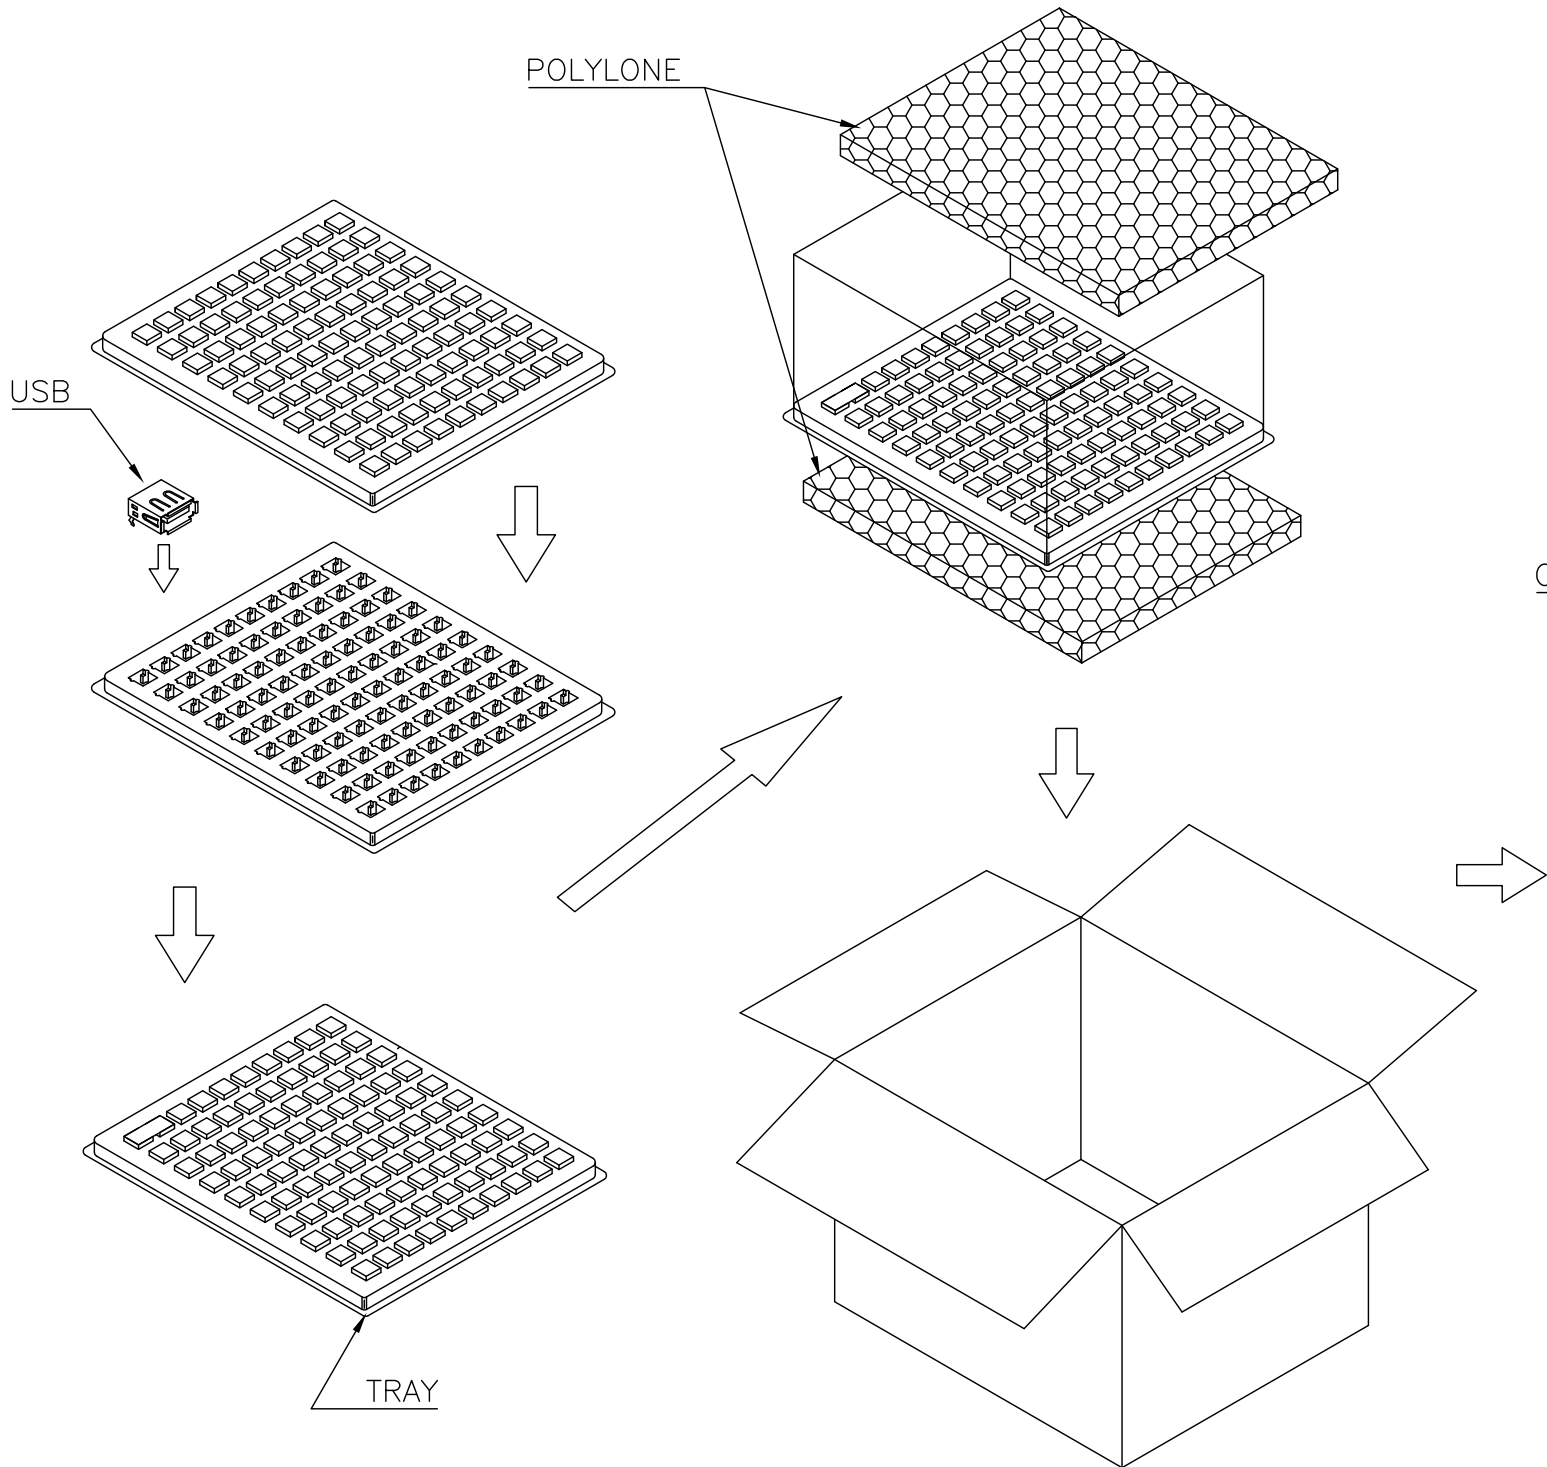


CARTON

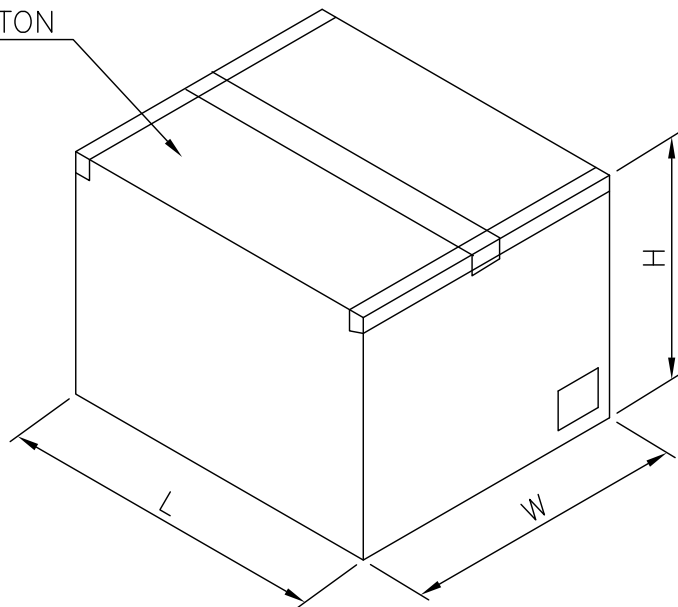

3.10 Kg	2.03 Kg	100	10	1000	4-1734081-2	OBSOLETE
					4-1734081-1	OBSOLETE
					1-1734081-1	
					1734081-2	OBSOLETE
					1734081-1	
GROSS WEIGHT	NET WEIGHT	PCS/TRAY	TRAY /CARTON	QUANTITY	PART NUMBER	

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
MM



MATERIAL

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC ± -
1 PLC ± -
2 PLC ± -
3 PLC ± -
4 PLC ± -
ANGLES ± -

FINISH

DWN

CHK

APVD

PRODUCT SPEC

APPLICATION SPEC

WEIGHT

CUSTOMER DRAWING



TE Connectivity

NAME

USB CONNECTOR, RECEPTACLE
4 POSITION, SERIES A

SIZE

CAGE CODE

DRAWING NO

RESTRICTED TO

A3

00779

C=1734081

SCALE

SHEET

16 of 19

REV E5

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

AUG ,2006.



COPYRIGHT 2009

BY TYCO ELECTRONICS CORPORATION.

ALL RIGHTS RESERVED.

LOC

DIST

REVISIONS

P

LTR

DESCRIPTION

DATE

DWN

APVD

SEE SHEET 1.

NOTES:

1. MATERIAL:

TRAY: PE.

POLYLONE:POLYLONE

SHIPPING CARTON: CORRUGATED FIBER.

2. DIMENSION :

TUBE : L=370mm, W=18.7mm, H=10.1mm

SHIPPING CARTON : L=390mm, W=165mm, H=90mm

3. QUANTITY :

25 PCS/TUBE

40 TUBES/INNER BOX(1,000PCS)

4. WEIGHT :

NET WEIGHT : 1.54 KG

GROSS WEIGHT : 2.45 KG

POLYONE

PLUG

TUBE

USB

PLUG

CARTON

OBSOLETE

OBSOLETE	2.45 Kg	1.54 Kg	25	40	1000	2-1734081-2
						2-1734081-1
GROSS WEIGHT	NET WEIGHT	PCS/TUBE	TUBES /CARTON	QUANTITY	PART NUMBER	

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN

CHK

APVD


PRODUCT SPEC

APPLICATION SPEC

WEIGHT

CUSTOMER DRAWING

DIMENSIONS:
MM



MATERIAL

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC ± -
1 PLC ± -
2 PLC ± -
3 PLC ± -
4 PLC ± -
ANGLES ± -

FINISH



TE Connectivity

NAME

USB CONNECTOR, RECEPTACLE
4 POSITION, SERIES A

SIZE

CAGE CODE

DRAWING NO

RESTRICTED TO

A3

00779

C=1734081

SCALE

SHEET

17 of 19

REV E5

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

AUG ,2006.



COPYRIGHT 2009

BY TYCO ELECTRONICS CORPORATION.

ALL RIGHTS RESERVED.

LOC

DIST

REVISIONS

DW

P

LTR

DESCRIPTION

DATE



DWN

APVD

SEE SHEET 1.


NOTE:

- 1. MATERIAL:
TRAY: PE.
POLYLONE:POLYLONE
SHIPPING CARTON: CORRUGATED FIBER.
- 2. DIMENSION :
TUBE : L=370mm, W=21.8mm, H=8.6mm
SHIPPING CARTON : L=390mm, W=165mm, H=90mm
- 3. QUANTITY :
25 PCS/TUBE
49 TUBES/INNER BOX(1,225PCS)
- 4. WEIGHT :
NET WEIGHT : 1.80 KG
GROSS WEIGHT : 3.70 KG

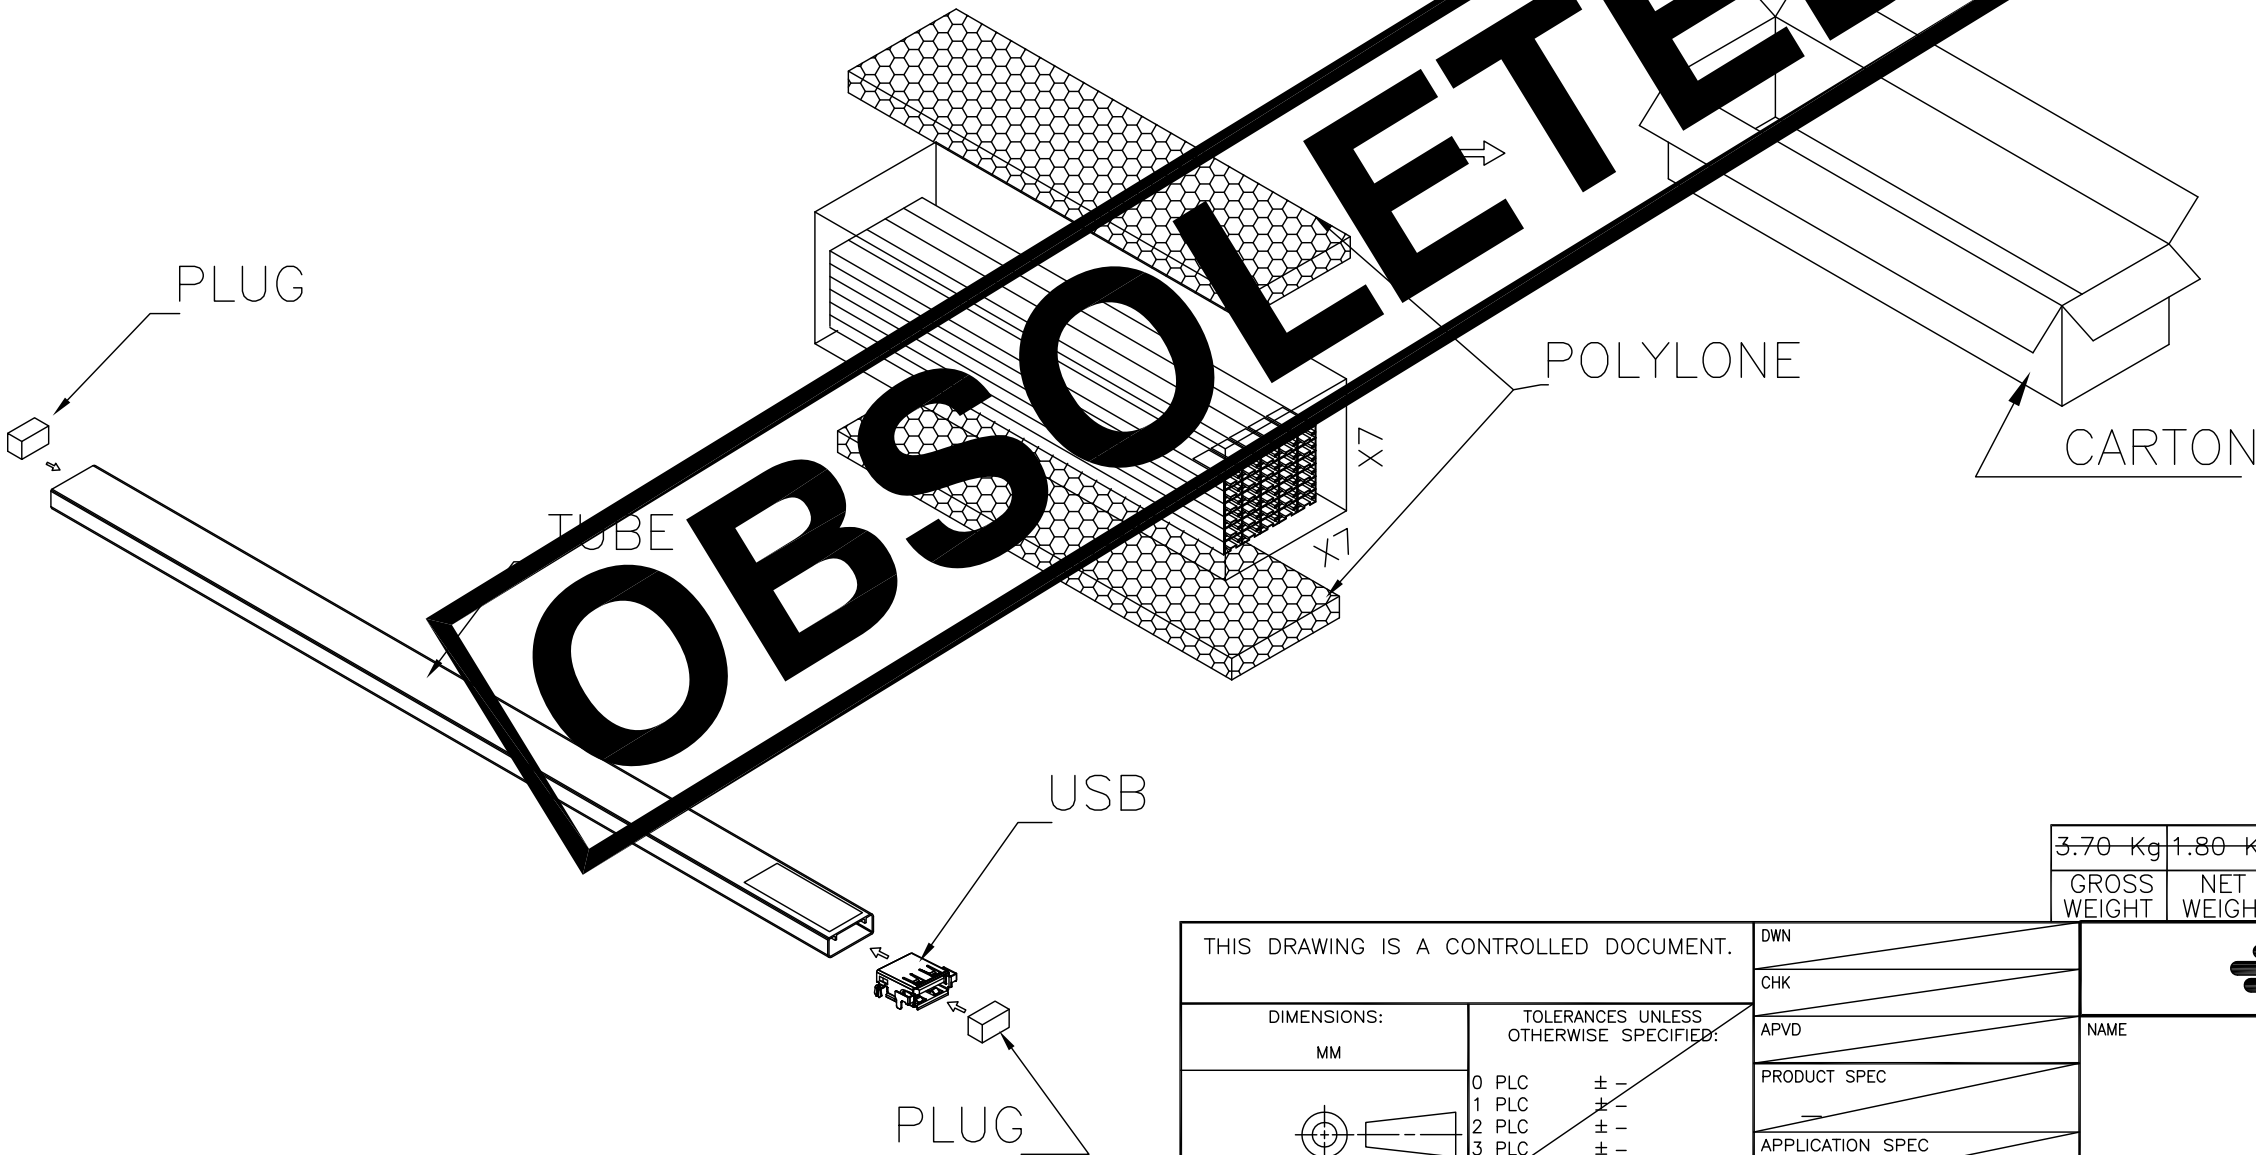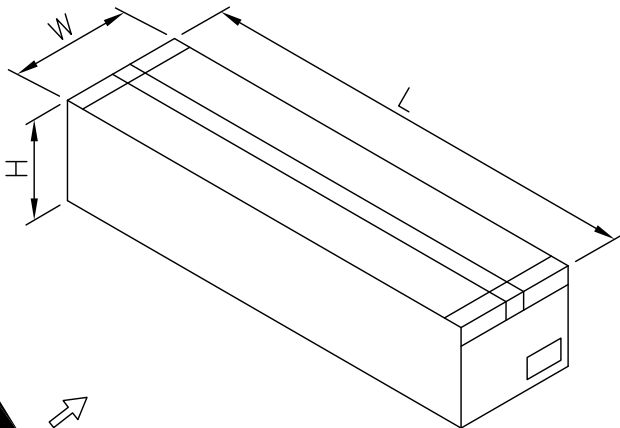


3.70 Kg	1.80 Kg	25	49	1225	6-1734081-1
GROSS WEIGHT	NET WEIGHT	PCS/TUBE	TUBES /CARTON	QUANTITY	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	TE Connectivity			
		CHK				
		APVD				
		PRODUCT SPEC				
DIMENSIONS: MM		APPLICATION SPEC	NAME USB CONNECTOR, RECEPTACLE 4 POSITION, SERIES A			
		WEIGHT				
MATERIAL		CUSTOMER DRAWING	SIZE A3	CAGE CODE 00779	DRAWING NO C=1734081	RESTRICTED TO
TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± - 1 PLC ± - 2 PLC ± - 3 PLC ± - 4 PLC ± - ANGLES ± - FINISH			SCALE —		SHEET 18 of 19	REV E5

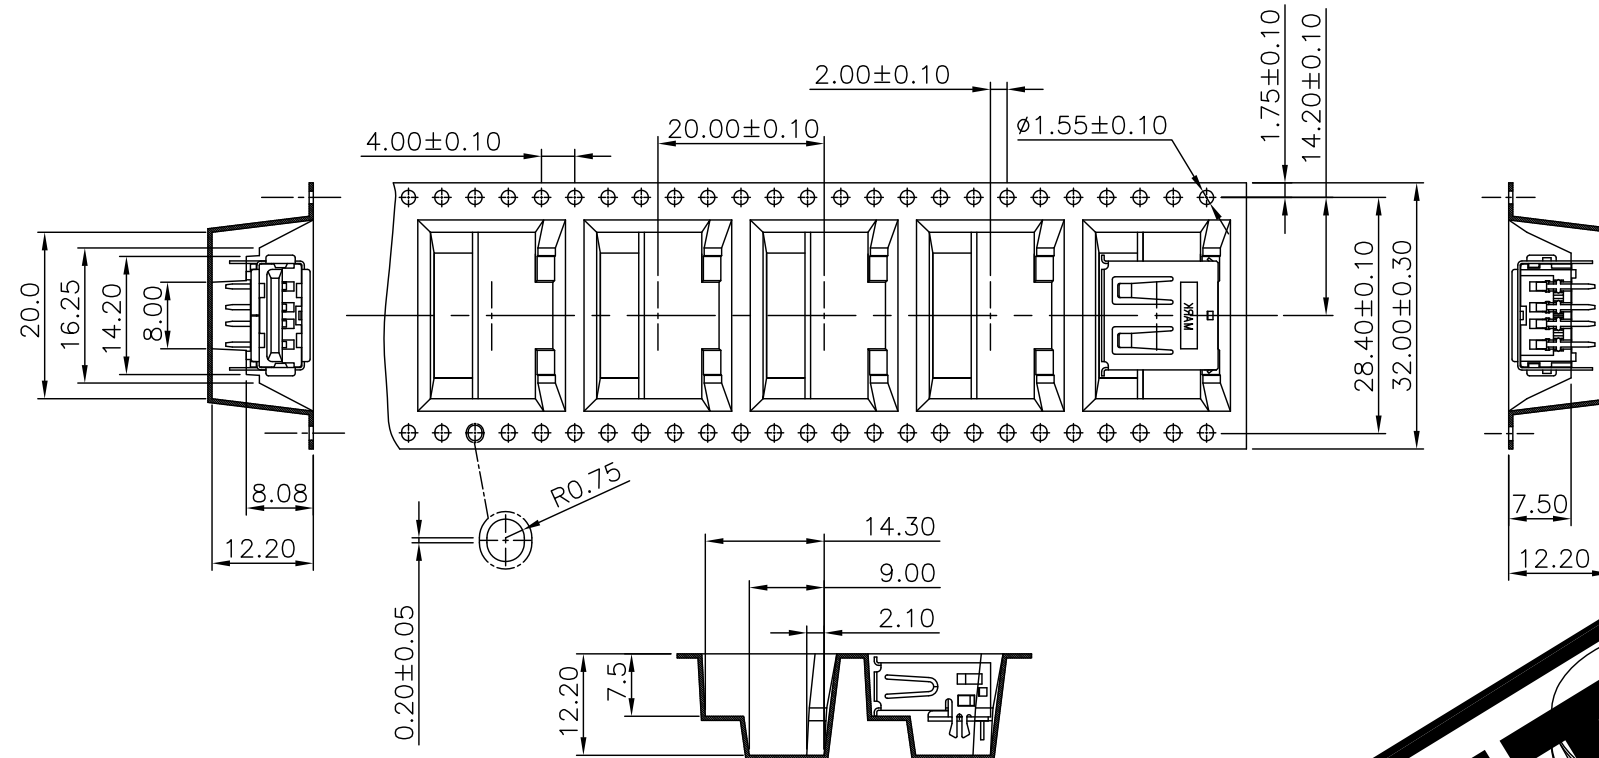

NOTES:


1. MATERIAL:
REEL: PS.
EMBOSSED CARRIER: PS.
COVER TAPE: PBT.
2. DIMENSION:
SHIPPING CARTON: L=350mm,W=350mm, H=350mm
3. PEELING RESISTANCE: 20G TO 130G.
PEELING SPEED: 300MM/MIN.




PULL OUT DIRECTION




LABEL

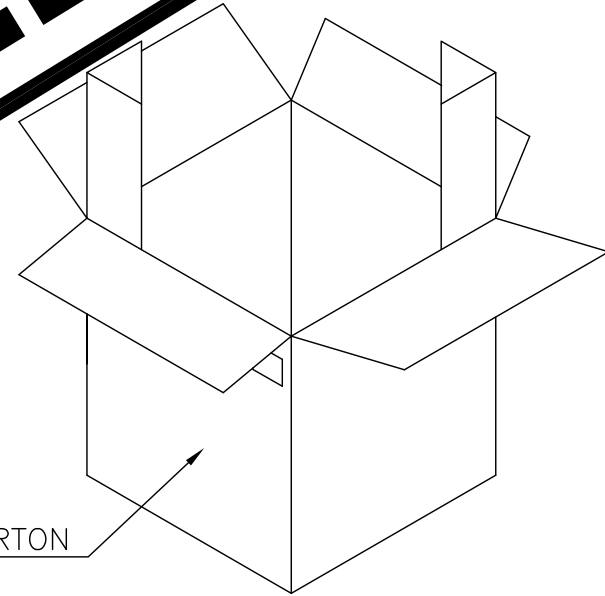

SHIPPING CARTON

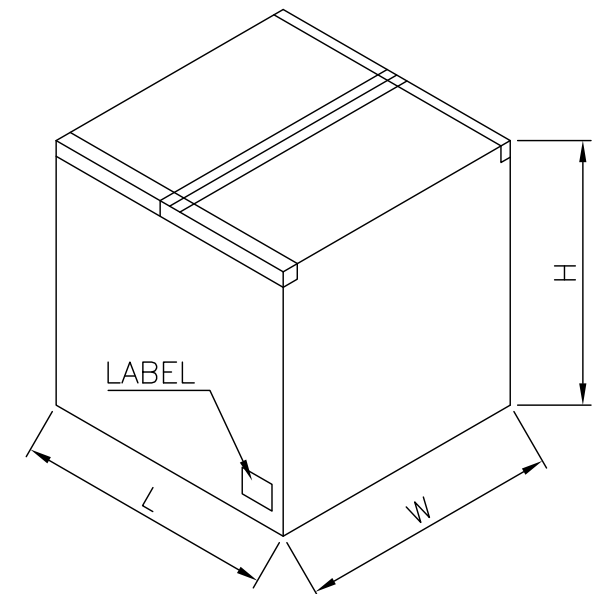

9.50 Kg	4.52 Kg	250	9	2250	1-1734081-5
GROSS WEIGHT	NET WEIGHT	PCS/REEL	REELS /CARTON	QUANTITY	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	 TE Connectivity			
DIMENSIONS: MM		CHK	NAME			
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD	USB CONNECTOR, RECEPTACLE 4 POSITION, SERIES A			
		PRODUCT SPEC				
0 PLC ± - 1 PLC ± - 2 PLC ± - 3 PLC ± - 4 PLC ± - ANGLES ± -		APPLICATION SPEC				
MATERIAL		WEIGHT	SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
			A3	00779	C=1734081	
CUSTOMER DRAWING			SCALE	SHEET		REV
				19 OF 19		F5




Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.