

12.5 mm Modular Panel Potentiometers High Dielectric Strength



FEATURES

- High dielectric strength potentiometer up to 5000 V_{rms}
- 12.5 mm square single turn panel control
- Plastic shaft and bushing
- Two shaft lengths and 29 terminal styles
- P11P: Cermet element
- P11D: Conductive plastic element
- Multiple assemblies - up to seven modules
- Test according to CECC 41 000
- Shaft and panel sealed version
- Up to twenty-one indent positions
- Rotary switch options
- Custom designs on request
- Compliant to RoHS directive 2002/95/EC




RoHS
COMPLIANT

| | | | |
|-----------|---------|---------|--------|
| VERSATILE | MODULAR | COMPACT | ROBUST |
|-----------|---------|---------|--------|

CONFIGURATION EXAMPLE - Dimensions in mm (Inches)/Tolerance ± 0.5 mm (± 0.02")

Single module, single shaft, solder lugs, imperial bushing and shaft

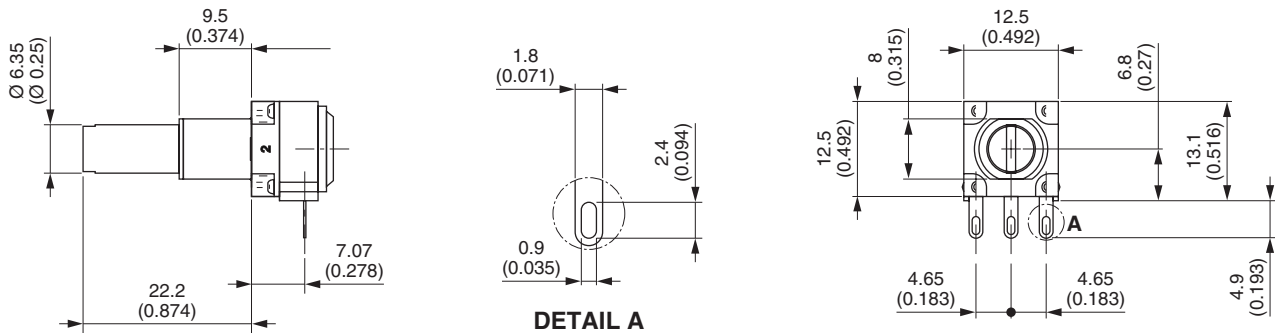

Single module, single shaft, vertical mounting, PC pins with support plate, imperial bushing and shaft



Single module, single shaft, solder lugs, imperial bushing and shaft





12.5 mm Modular Panel Potentiometers High Dielectric Strength

P11P, P11D

Vishay Sfernice

GENERAL SPECIFICATIONS

| ELECTRICAL (INITIAL) | | | P11D | P11P |
|-----------------------------------|----------------------------|--|------------------------------|-----------------------------|
| Resistive Element | | | Conductive plastic | Cermet |
| Electrical Travel | | | 270° ± 10° | 270° ± 10° |
| Resistance Range ⁽¹⁾ | Linear Law | | 1 kΩ to 1 MΩ | 20 Ω to 10 MΩ |
| | Non Linear Law | | 470 Ω to 500 kΩ | 100 Ω to 2.2 MΩ |
| Tolerance | Standard | | ± 20 % | ± 20 % |
| | On Request | | - | ± 5 % or ± 10 % |
| Power Rating at 70 °C | Linear Law | | 0.5 W at + 70 °C | 1 W at + 70 °C |
| | Non Linear Law | | 0.25 W at + 70 °C | 0.5 W at + 70 °C |
| | Multiple Assemblies | | 0.25 W at + 70 °C per module | 0.5 W at + 70 °C per module |
| Temperature Coefficient (Typical) | | | ± 500 ppm | ± 150 ppm |
| Limiting Element Voltage | | | 350 V | 350 V |
| End Resistance (Typical) | | | 2 Ω | 2 Ω |
| Contact Resistance Variation | Linear Law | | 1 % | 2 % or 3 Ω |
| Independent Linearity (Typical) | Linear Law | | ± 5 % | ± 5 % |
| Insulation Resistance | | | 10 ⁶ MΩ min. | 10 ⁶ MΩ min. |
| Dielectric Strength | Leads to Support Plate | | 3000 V _{RMS} min. | 3000 V _{RMS} min. |
| | Leads to Shaft and Bushing | | 5000 V _{RMS} min. | 5000 V _{RMS} min. |
| Mechanical Rotation Life | | | 50 000 cycles | 50 000 cycles |

Note

⁽¹⁾ Consult Vishay Sfernice for other ohmic values

| MECHANICAL (INITIAL) | | |
|----------------------------|-------------------------------------|--|
| Mechanical Travel | | 300° ± 5° |
| Operating Torque (Typical) | Single and dual assemblies | 0.2 Ncm to 1 Ncm max. (0.3 oz.-inch to 1.4 oz.-inch max.) |
| | Three to Seven Modules (Per Module) | 0.2 Ncm to 0.3 Ncm max. (0.3 oz.-inch to 0.45 oz.-inch max.) |
| End Stop Torque | | 80 Ncm max. (6.8 lb.-inch max.) |
| Tightening Torque | | 150 Ncm max. (13 lb.-inch max.) |
| Weight | Single Assemblies | 3.5 g |
| | Two to Seven Modules (Per Module) | 1.5 g to 2 g (0.25 oz. to 0.32 oz.) |

| ENVIRONMENTAL | | | P11D | P11P |
|-----------------------------|--|--|---------------------|---------------------|
| Operating Temperature Range | | | - 40 °C to + 100 °C | - 40 °C to + 100 °C |
| Climatic Category | | | 40/100/21 | 40/100/56 |
| Sealing | | | IP64 | IP64 |
| Storage Temperature | | | - 40 °C to + 100 °C | - 40 °C to + 100 °C |

| MARKING |
|---|
| <ul style="list-style-type: none"> • Potentiometer Module VISHAY logo, nominal ohmic value (Ω, kΩ, MΩ), two stars identify P11D version, tolerance in % - variation law, manufacturing date (four digits), "3" for the lead 3 |
| <ul style="list-style-type: none"> • Switch Module Version, manufacturing date (four digits), "c" for common lead |
| <ul style="list-style-type: none"> • Indent Module Version, manufacturing date (four digits) |

| PACKAGING |
|---|
| <ul style="list-style-type: none"> • Box |





| PERFORMANCES | | | | |
|-------------------|---|--|--------------------|--------------------|
| TESTS | CONDITIONS | TYPICAL VALUE AND DRIFTS | | |
| | | | P11D | P11P |
| Load Life | 1000 h at + 70 °C (90°/30') | $\Delta R_T/R_T$ (%) contact resistance variation | ± 10 % ± 5 % | ± 2 % ± 4 % |
| Temperature Cycle | - 40 °C to + 100 °C, 5 cycles | $\Delta R_T/R_T$ (%) | ± 0.5 % | ± 0.2 % |
| Moisture | + 40 °C, 93 % relative humidity P11D: 21 days, P11P: 56 days | $\Delta R_T/R_T$ (%) insulation resistance | ± 5 % > 10 MΩ | ± 2 % > 1000 MΩ |
| Rotational Life | P11P/P11D: 50 000 cycles | $\Delta R_T/R_T$ (%) contact resistance variation | ± 6 % ± 4 % | ± 5 % ± 5 % |
| Climatic Sequence | Dry heat at + 100 °C/damp heat cold - 40 °C/damp heat 5 cycles | $\Delta R_T/R_T$ (%) | - | ± 1 % |
| Shock | 50 g, 11 ms 3 shocks - 3 directions | $\Delta R_T/R_T$ (%) resistance setting change | ± 0.2 % ± 0.5 % | ± 0.2 % ± 0.5 % |
| Vibration | 10 Hz to 55 Hz 0.75 mm or 10 g, 6 h | $\Delta R_T/R_T$ (%) voltage setting change | ± 0.2 % ± 0.5 % | ± 0.2 % ± 0.5 % |

| ORDERING INFORMATION (Part Number 18 digits) | | | | | | | | | | | | | |
|--|--|---------------------------------|---------|--------|-------|-------------|-------|--|--|--|--|--|--|
| <div style="display: flex; justify-content: space-around; font-weight: bold; font-size: 1.2em;"> P11P2F0GGSY00103MA </div> | | | | | | | | | | | | | |
| MODEL | STYLE | NUMBER OF MODULES | BUSHING | OPTION | SHAFT | SHAFT STYLE | LEADS | RESISTANCE CODE/ TOLERANCE/ TAPER OR SPECIAL | | | | | |
| P11 | P = CERMET ELEMENT D = CONDUCTIVE PLASTIC (AUDIO) | 1 2 3 4 5 6 7 | | | | | | | | | | | |

| STANDARD RESISTANCE ELEMENT DATA | | | | | | | | | | | |
|----------------------------------|---------------------|----------------------|-------------------------|---------------------|----------------------|-------------------------|------------------------------------|----------------------|-------------------------|------------------------------|-------|
| STANDARD RESISTANCE VALUES | P11P CERMET | | | | | | P11A CONDUCTIVE PLASTIC LINEAR LAW | | | TYPICAL TCR - 40 °C/+ 100 °C | |
| | LINEAR LAW | | | NON LINEAR LAW | | | MAX. POWER AT 70 °C | MAX. WORKING VOLTAGE | MAX. CUR. THROUGH WIPER | P11P | P11D |
| | MAX. POWER AT 70 °C | MAX. WORKING VOLTAGE | MAX. CUR. THROUGH WIPER | MAX. POWER AT 70 °C | MAX. WORKING VOLTAGE | MAX. CUR. THROUGH WIPER | | | | | |
| Ω | W | V | mA | W | V | mA | W | V | mA | ppm/°C | |
| 22 | 1 | 4.69 | 213 | | | | | | | | |
| 47 | ↓ | 6.85 | 146 | | | | | | | | |
| 50 | | 7.07 | 141 | | | | | | | | |
| 100 | | 10 | 100 | | | | | | | | |
| 200 | | 14.8 | 67.4 | 0.5 | | | | | | | |
| 470 | | 21.6 | 46.1 | ↓ | 15.3 | 32.7 | | | | | |
| 500 | | 22.4 | 44.7 | | 15.8 | 31.6 | | | | | |
| 1K | | 31.6 | 31.6 | | 22.4 | 22.4 | 0.5 | 22.4 | 22.4 | ± 150 | ± 500 |
| 2.2K | | 46.9 | 21.3 | | 33.2 | 15.1 | ↓ | 33.2 | 15.1 | | |
| 4.7K | | 63.5 | 14.5 | | 48.5 | 10.3 | | 48.5 | 10.3 | | |
| 5K | | 70.7 | 14.1 | | 50.0 | 10.0 | | 50.0 | 10.0 | | |
| 10K | | 100 | 10 | | 79.7 | 7.07 | | 79.7 | 7.07 | | |
| 22K | | 148 | 6.7 | | 105 | 4.77 | | 105 | 4.77 | | |
| 47K | | 217 | 4.6 | ↓ | 153 | 3.26 | ↓ | 153 | 3.26 | | |
| 50K | | 224 | 4.47 | | 158 | 3.16 | | 158 | 3.16 | | |
| 100K | 1 | 316 | 3.16 | 0.5 | 224 | 2.24 | 0.5 | 224 | 2.24 | | |
| 220K | 0.56 | 350 | 1.59 | 0.26 | 332 | 1.51 | 0.5 | 332 | 1.51 | | |
| 470K | 0.26 | 350 | 0.75 | 0.12 | 350 | 0.74 | 0.26 | 350 | 0.74 | | |
| 500K | 0.25 | 350 | 0.70 | 0.25 | 350 | 0.70 | 0.25 | 350 | 0.70 | | |
| 1M | 0.12 | 350 | 0.35 | | 350 | 0.35 | | | | | |
| 2.2M | 0.05 | 350 | 0.16 | | | | | | | | |
| 4.7M | 0.02 | 350 | 0.07 | | | | | | | | |

| ORDERING INFORMATION (Part Number 18 digits) | | | | | | | | | | | | | | | | | | | | | | | | | |
|--|-------|-------------------|--|---|---|--------|-------|-------------|-------|--|------|---|---|---|---|---|---|--|--|--|--|--|--|--|--|
| P | 1 | 1 | P | 2 | F | 0 | G | G | S | Y | 0 | 0 | 1 | 0 | 3 | M | A | | | | | | | | |
| MODEL | STYLE | NUMBER OF MODULES | BUSHING | | | OPTION | SHAFT | SHAFT STYLE | LEADS | RESISTANCE CODE/TOLERANCE/TAPER OR SPECIAL | | | | | | | | | | | | | | | |
| P11 | | | <table border="1"> <tr> <td></td> <td>Ø</td> <td>L</td> </tr> <tr> <td>F</td> <td>3/8"</td> <td>3/8"</td> </tr> </table> | | | | Ø | L | F | 3/8" | 3/8" | | | | | | | | | | | | | | |
| | Ø | L | | | | | | | | | | | | | | | | | | | | | | | |
| F | 3/8" | 3/8" | | | | | | | | | | | | | | | | | | | | | | | |

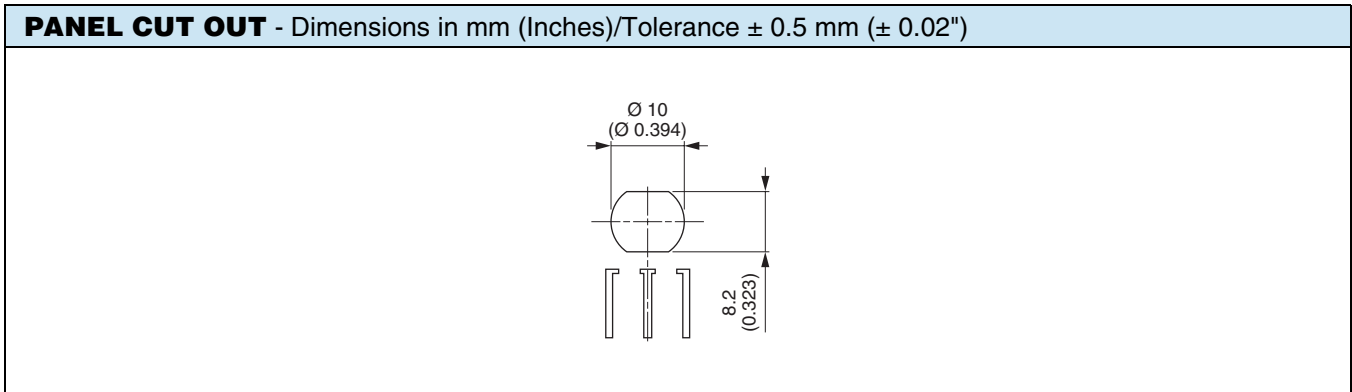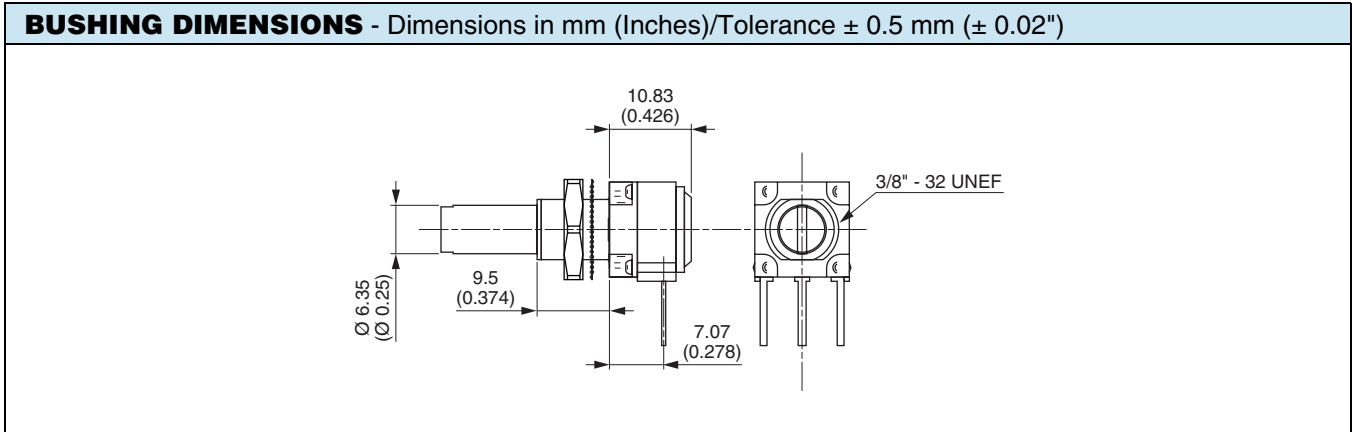

Notes

- Hardware supplied in separate bags

ORDERING INFORMATION (Part Number 18 digits)

| | | | | | | | | | | | | | | | | | | | | | |
|-------|-------|-------------------|---------|---|---|---|---|-------|-------------|-------|--|---|---|---|---|---|---|--|--|--|--|
| P | 1 | 1 | P | 2 | F | 0 | G | G | S | Y | 0 | 0 | 1 | 0 | 3 | M | A | | | | |
| MODEL | STYLE | NUMBER OF MODULES | BUSHING | OPTION | | | | SHAFT | SHAFT STYLE | LEADS | RESISTANCE CODE/TOLERANCE/TAPER OR SPECIAL | | | | | | | | | | |
| | | | | <p><u>Location Pegs:</u> A = $\varnothing = 2$ L = 6.2 B = $\varnothing = 2$ L = 7.75 C = $\varnothing = 3.5$ L = 13.5 0 = Without peg</p> <p><u>Sealed Version:</u> P = Panel and shaft sealed</p> | | | | | | | | | | | | | | | | | |

LOCATING PEGS (Anti-Rotation Lug)

The locating peg is provided by a plate mounted on the bushing and positioned by the module sides. Four set positions are available, clock face orientation: 12, 3, 6, 9.

Bushings have a double flat. When panel mounting holes have been punched accordingly, an anti-rotation lug is not necessary.

| CODE | $\varnothing d$ (mm) | L (mm) | EFFECTIVE HIGH PEG |
|------|----------------------|--------|--------------------|
| A | 2 | 6.2 | 0.7 |
| B | 2 | 7.75 | 0.7 |
| C | 3.5 | 13.5 | 1.1 |

PANEL AND SHAFT SEALED

O ring plate can not be used with locating pegs

Note

- Locating pegs and panel o ring are supplied in separate bags with nuts and washers

| ORDERING INFORMATION (Part Number 18 digits) | | | | | | | | | | | | | | | | | |
|--|-------|-------------------|---------|--------|-------|----------|--------|-------------|-------|--|---|---|---|---|---|---|---|
| P | 1 | 1 | P | 2 | F | 0 | G | G | S | Y | 0 | 0 | 1 | 0 | 3 | M | A |
| MODEL | STYLE | NUMBER OF MODULES | BUSHING | OPTION | SHAFT | | | SHAFT STYLE | LEADS | RESISTANCE CODE/TOLERANCE/TAPER OR SPECIAL | | | | | | | |
| | | | | | CODE | L (inch) | L (mm) | S = Slotted | | | | | | | | | |
| | | | | | GG | 5/8 | 15.8 | | | | | | | | | | |
| | | | | | GJ | 7/8 | 22.2 | | | | | | | | | | |

SHAFTS - Dimensions in mm (Inches)/Tolerance ± 0.5 mm (± 0.02 ")

The shaft length are always measured from the mounting face.
Shafts are designed by a 3 letter code (3 digits). Shafts are slotted and aligned to $\pm 10^\circ$ of the wiper position.

ORDERING INFORMATION (Part Number 18 digits)


| | | | | | | | | | | | | | | | | | |
|-------|-------|-------------------|---------|--------|-------|-------------|-----------------|-----|-----|-----|-----|---|--|---|---|---|---|
| P | 1 | 1 | P | 2 | F | 0 | G | G | S | Y | 0 | 0 | 1 | 0 | 3 | M | A |
| MODEL | STYLE | NUMBER OF MODULES | BUSHING | OPTION | SHAFT | SHAFT STYLE | LEADS | | | | | | RESISTANCE CODE/TOLERANCE/TAPER OR SPECIAL | | | | |
| | | | | | | | Available leads | | | | | | | | | | |
| | | | | | | | A00 | W00 | X00 | Y00 | Z00 | | | | | | |
| | | | | | | | A10 | W10 | X03 | Y03 | Z03 | | | | | | |
| | | | | | | | A13 | W20 | X04 | Y04 | Z04 | | | | | | |
| | | | | | | | A14 | | X10 | | Z10 | | | | | | |
| | | | | | | | A20 | | X13 | | Z13 | | | | | | |
| | | | | | | | A23 | | X14 | | Z14 | | | | | | |
| | | | | | | | A24 | | X20 | | Z20 | | | | | | |
| | | | | | | | | | X23 | | Z23 | | | | | | |
| | | | | | | | | | X24 | | Z24 | | | | | | |

| FIRST DIGIT | |
|-------------|--|
| Y | Soldering lugs |
| X | PCB pins |
| Z | PCB pins with front support plate |
| A | PCB pins with front and back support plates |
| W | PCB pins - vertical mounting with 2 extra pins - 1 module only |

| SECOND DIGIT | |
|--------------|---|
| 0 | Y = 4.65 mm (0.183") A, X, Z, W = 5.08 mm (0.200") pin spacing pins section 0.9 x 0.3 mm ² (0.035" x 0.012") |
| 1 | 2.54 mm (0.100") pin spacing pin section 0.6 x 0.3 mm ² (0.024" x 0.012") |
| 2 | 5.08 mm (0.200") pin spacing pins section 0.6 x 0.3 mm ² (0.024" x 0.012") |

| THIRD DIGIT | |
|-------------|---|
| 0 | 5.08 mm (0.200") space between modules |
| 3 | 7.62 mm (0.300") space between modules |
| 4 | 10.16 mm (0.400") space between modules |

DIMENSIONS in mm (Inches)/Tolerance ± 0.5 (0.02)

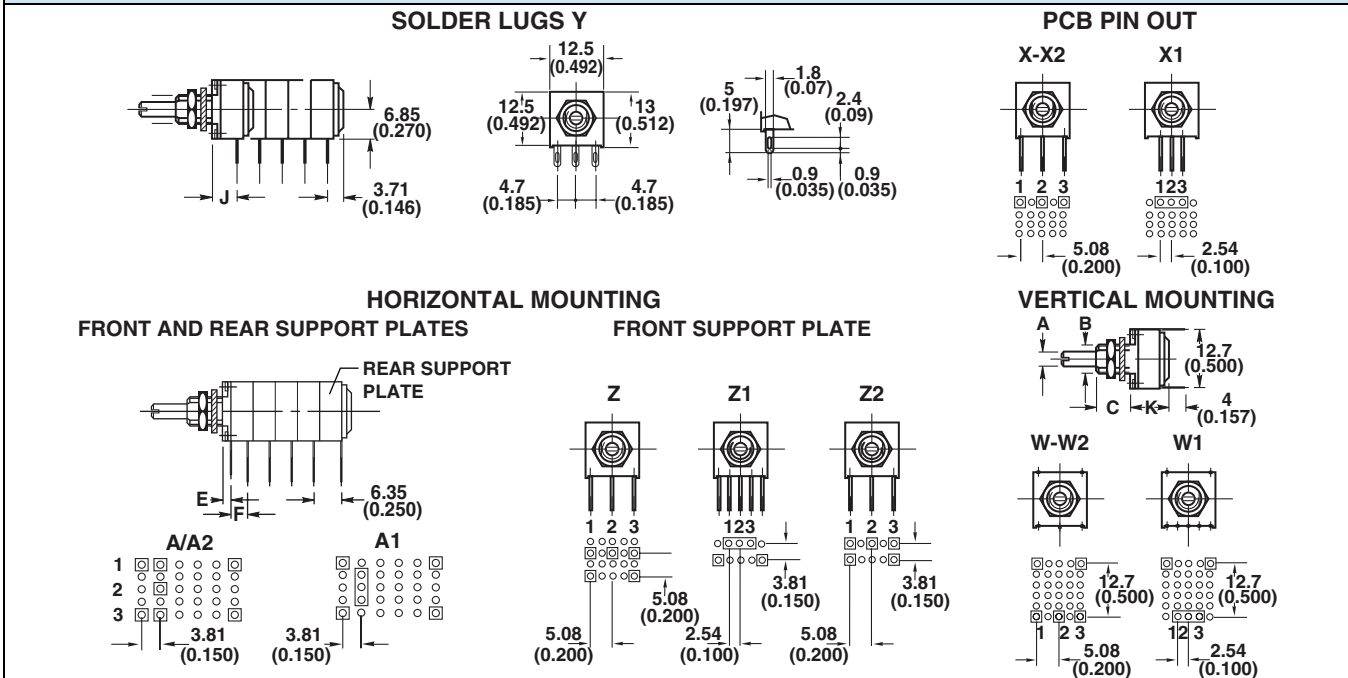



THE POSITION OF EACH MODULE IS FREE

| | LEADS | | | |
|---|--------------|-------------|---------------------------------|--------------------------|
| | X../Y.. | A../Z1./Z2. | Z0. (except with rotary switch) | Z0. (with rotary switch) |
| E | - | 3.6 (0.14) | 3.81 (0.15) | 2.15 (0.085) |
| F | - | 3.81 (0.15) | 5.08 (0.20) | 5.08 (0.20) |
| J | 7.06 (0.278) | - | - | - |

| ORDERING INFORMATION (Part Number 18 digits) | | | | | | | | | | | | | | | | | |
|--|-------|-------------------|---------|--------------|-------|-------------|-------|--|---|---|---|---|---|---|---|---|---|
| P | 1 | 1 | P | 2 | F | 0 | G | G | S | Y | 0 | 0 | 1 | 0 | 3 | M | A |
| MODEL | STYLE | NUMBER OF MODULES | BUSHING | LOCATING PEG | SHAFT | SHAFT STYLE | LEADS | RESISTANCE CODE/ TOLERANCE/ TAPER OR SPECIAL | | | | | | | | | |
| | | | | | | | | Resistance Code: 200 = 20 Ω to 106 = 10 MΩ Tolerance Code: M = 20 %, K = 10 %, J = 5 % Taper: A, L, W, F, S, R or special code given by Vishay | | | | | | | | | |

| RESISTANCE CODE |
|--------------------------------------|
| See Conversion Table for ohmic value |

| TOLERANCE |
|---|
| Standard: M = ± 20 % |
| On request: K = ± 10 %, J = ± 5 % (cermet only) |

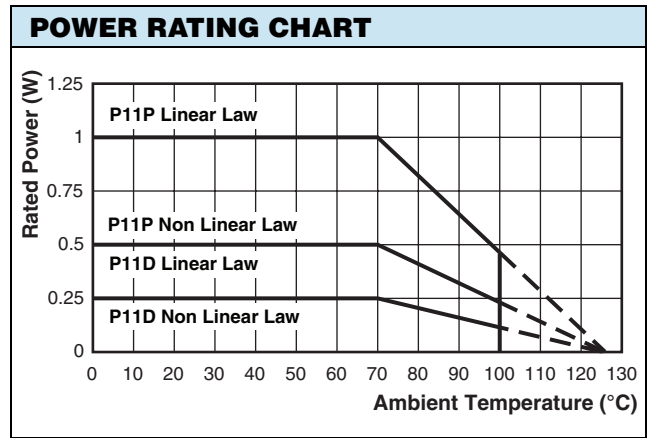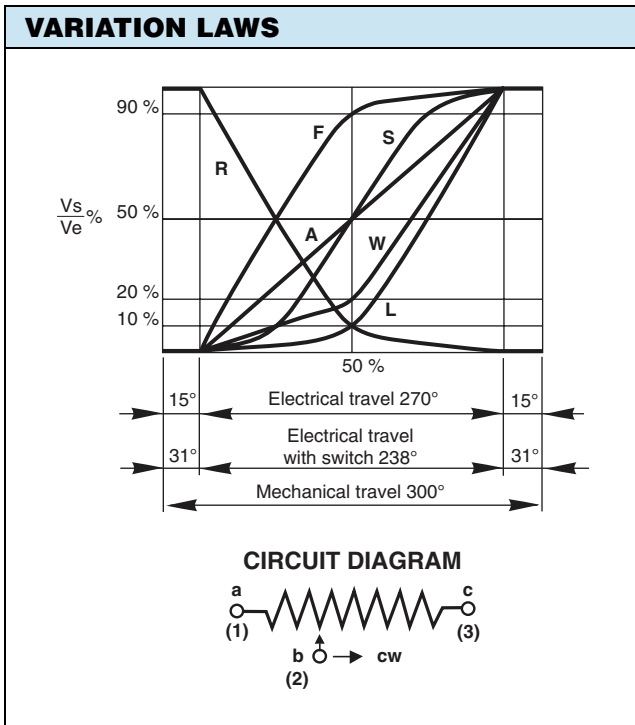

| SPECIAL CODES GIVEN BY VISHAY |
|---|
| OPTION AVAILABLE |
| <ul style="list-style-type: none"> • Custom design on request • Specific linearity • Specific interlinearity • Specific variation law • Multiple assemblies with various modules |

P11 OPTION: ROTARY SWITCH MODULES



- Rotary switches
- Current up to 2 A
- Actuation CW or CCW position

MODULES: RS ON/OFF SWITCH RSI CHANGEOVER SWITCH

The position of each module is free. RS and RSI rotary switches are housed in a standard P11 module size 12.7 mm x 12.7 mm x 5.08 mm (0.5" x 0.5" x 0.2"). They have the same terminal styles as the assembled electrical modules.

An assembly can comprise 1 or more switch modules.

Switch actuation is described as seen from the shaft end.

D: means actuation in maximum CCW position

F: means actuation in maximum CW position

The switch actuation travel is 25° with a total mechanical travel of 300° ± 5° and electrical travel of electrical module is 238° ± 10°.

Leads finish: Gold plated.

RDS SINGLE POLE SWITCH, NORMALLY OPEN

In full CCW position, the contact between 1 and 3 is open. It is made at the beginning of the travel in CW direction.

RSF SINGLE POLE SWITCH, NORMALLY OPEN

In full CW position, the contact between 1 and 3 is open. It is made at the beginning of the travel in CCW direction.

RSID SINGLE POLE CHANGEOVER

In full CCW position, the contact is made between 3 and 2 and open between 3 and 1. Switch actuation (CW direction) reverses these positions.


RSIF SINGLE POLE CHANGEOVER

In full CW position, the contact is made between 1 and 2 and open between 1 and 3. Switch actuation (CCW direction) reverses these positions.

SWITCH SPECIFICATIONS

| | | |
|--|----------------------|--------------------------------|
| Switching Power Maximum | | 62.5 VA v 15 VA = |
| Switching Current Maximum | | 0.25 A 250 V v 0.5 A 30 V = |
| Maximum Current Through Element | | 2 A |
| Contact Resistance | | 30 mΩ |
| Dielectric Strength | Terminal to Terminal | 1000 V _{RMS} |
| | Terminal to Bushing | 5000 V _{RMS} |
| Maximum Voltage Operation | | 250 V v 30 V = |
| Insulation Resistance Between Contacts | | 10 ⁶ MΩ |
| Life at P _{max} . | | 10 000 actuations |
| Minimal Travel | | 25° |
| Operating Temperature | | - 40 °C to + 85 °C |

ELECTRICAL DIAGRAM

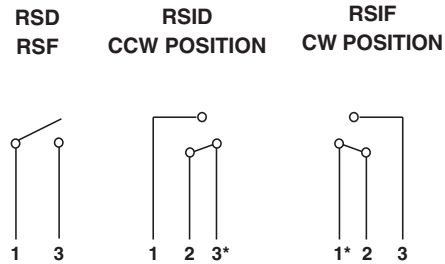

Note
• Common

ORDERING INFORMATION (First order only)


RSID

| | |
|-------------|---|
| RSD | SPST: Single pole, open switch in CCW position - 2 pins |
| RSF | SPST: Single pole, open switch in CW position - 2 pins |
| RSID | SPDT: Single pole, changeover switch in CCW position - 3 pins |
| RSIF | SPDT: Single pole, changeover switch in CW position - 3 pins |

P11 OPTION: DETENT MODULES

The valley detents mechanism is housed in a standard P11 module. Up to 21 detents position available.
Count detents as follows: 1 for CCW position, 1 for full CW position, plus the other positions forming equal resistance increments (linear taper) - not equal angles.

Available now: CVID - CVIF - CVIM
CV3 - CV11 - CV21

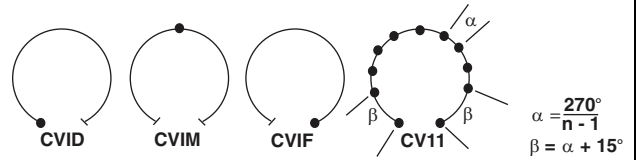

Rotational life: 10 000 cycles

ORDERING INFORMATION (First order only for special code creation)

CV1M

- CV1M** 1 detent at half travel
- CV1M J84** CV1M with accuracy of center point $\pm 2\%$ (all laws except S)
- CV1D** 1 detent at CCW position
- CV1F** 1 detent at CW position
- CV3** 3 detents
- CV11** 11 detents
- CV21** 21 detents

P11 OPTION: NEUTRAL MODULES "EN"

Neutral or screen module is housed in a standard P11 module.
It is used as a screen between two electrical modules.

The leads can be connected to ground.

ORDERING INFORMATION (First order only for special code creation)



EN

- EN** Neutral module

P11 OPTION: CENTER CURRENT TAP "J"

The extra terminal is a solder lug connected at 50 % of electrical travel and situated in the potentiometer module opposite the terminals.

Center tap presents a short circuit of 11° of travel.

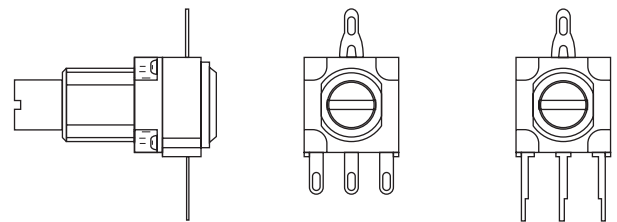


ORDERING INFORMATION (First order only)

J

- J** Center tap

P11 OPTION: SPECIAL LINEARITY - CONFORMITY

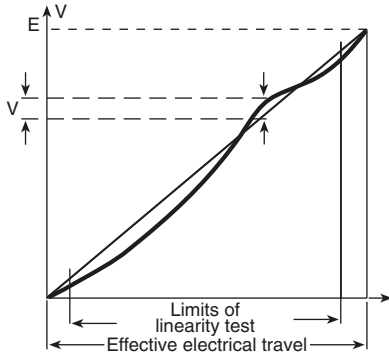

The independent linearity (conformity for the non linear laws) is the maximum gap ΔV between the actual variation curve and the theoretical variation curve the nearest to it. The linearity and the conformity are expressed in percentage of the total applied voltage E

$$\text{linearity conformity} = \frac{\pm \Delta V_{\text{max}}}{E}$$

They are measured over 90 % of actual electrical travel (centered).

On request linearity can be guaranteed in linear law.


ORDERING INFORMATION (First order only)

J123

J123 Independent linearity $\pm 3\%$ (linear law)
J145 Independent linearity $\pm 2\%$ (linear law)

For other request, contact us.

P11 OPTION: SPECIAL INTERLINEARITY - INTERCONFORMITY

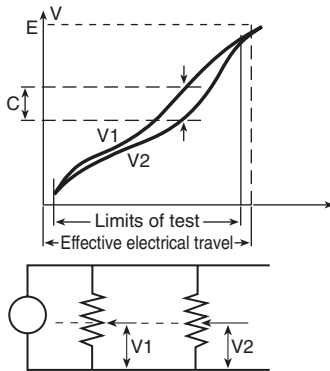

It is the maximum deviation between the actual voltage outputs of 2 or more pot modules in the same assembly. It is expressed as a percentage of the total applied voltage, or in dB attenuation.

Interlinearity is measured between 2 pot modules, over 10 to 90 % of the attenuation.

The interlinearity or interconformity is expressed as a percentage of the total applied voltage:

$$I \% = \frac{|C|}{E}$$

Or in decibels by comparison between outputs V1 and V2

$$I \text{ dB} = 20 \log \frac{V_1}{V_2}$$

ORDERING INFORMATION (First order only)

J44


J44 Interlinearity $\pm 2\%$ (linear law)

For other request, contact us.



EXAMPLES OF FIRST ORDER INFORMATION

FIRST EXAMPLE: Triple module (switch is counted as a module)

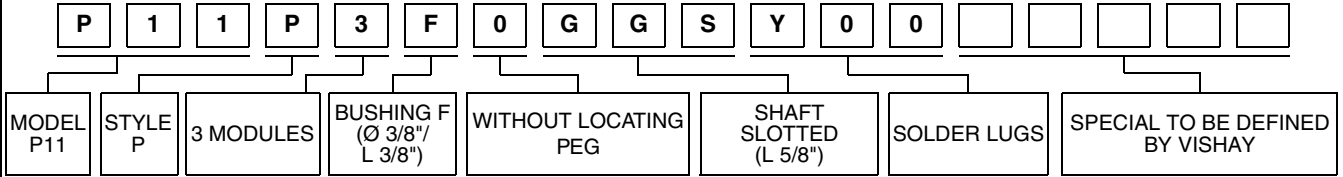

ORDERING INFORMATION:

| | | |
|-------------------|---------------------------------------|------|
| PART NUMBER | P11P3F0GGSY00..... | |
| SHAFT AND BUSHING | See drawing of special shaft attached | |
| MODULE NO. 1 | RSID | |
| MODULE NO. 2 | 103 M A | J123 |
| MODULE NO. 3 | 503 M A | J |

PART NUMBER DESCRIPTION (used on some Vishay document or label, for information only)

| | | | | | | | | | | | | |
|-------|---------|---------|--------|-------|----------------|-------|-------|------|-------|---------|---------|--------------------|
| P11P | 3 | F | 0 | GG | S | Y00 | 10K | 20 % | A | | | e3 |
| MODEL | MODULES | BUSHING | OPTION | SHAFT | SHAFT STYLE | LEADS | VALUE | TOL. | TAPER | SPECIAL | SPECIAL | LEAD (Pb)- FREE |



Disclaimer

All product specifications and data are subject to change without notice.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

Vishay disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay for any damages arising or resulting from such use or sale. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.