

FEATURES

12 precision gamma reference outputs
Mask-programmable gamma resistors:
 0.2% resolution and 0.1% accuracy
Mask programmable voltage regulator: 0.4% accuracy
Upper 6 buffers swing to V_{DD}
Lower 6 buffers swing to GND
Single-supply operation: 7.5 V to 16 V
Gamma current drive: 15 mA per channel
 V_{COM} peak output current: 250 mA
Outputs stable under load conditions
48-lead, Pb-free LFCSP package

APPLICATIONS

LCD TV panels
LCD monitor panels

PRODUCT OVERVIEW

The ADD8707 is a 12-channel integrated gamma reference with V_{COM} for use in LCD TV and monitor panels. The output buffers feature high current drive and low offset voltage to provide an accurate and stable gamma curve. The top six channels swing to V_{DD} and the lower six channels swing to GND.

Integrating the gamma setup resistors drastically reduces the external component count while increasing the gamma curve accuracy. To accommodate multiple column drivers and panel architectures, the ADD8707 is mask-programmable to a 0.2% resolution using the on-chip 500 resistor string. An on-board voltage regulator provides a fixed input for the resistor string, isolating the gamma curve from supply ripple.

The ADD8707 is specified over the temperature range of -40°C to $+105^{\circ}\text{C}$ and comes in a 48-lead, Pb-free, lead frame chip-scale package.

FUNCTIONAL BLOCK DIAGRAM

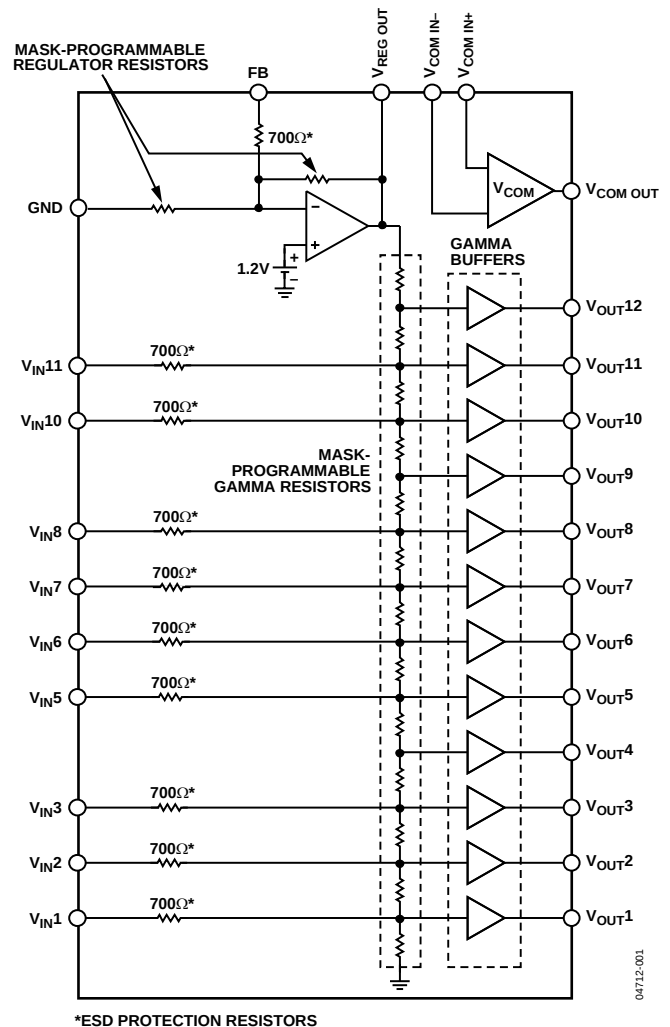


Figure 1. 48-Lead LFCSP

Rev. A

Information furnished by Analog Devices is believed to be accurate and reliable. However, no responsibility is assumed by Analog Devices for its use, nor for any infringements of patents or other rights of third parties that may result from its use. Specifications subject to change without notice. No license is granted by implication or otherwise under any patent or patent rights of Analog Devices. Trademarks and registered trademarks are the property of their respective owners.

TABLE OF CONTENTS

Electrical Characteristics	3
Absolute Maximum Ratings.....	5
Pin Configuration and Function Description	6
Typical Performance Characteristics	8
Application Notes	12
Tap Point Selection.....	12
Voltage Regulator	13
Maximum Power Dissipation	13
Land Pattern.....	13
Operating Temperature Range	14
Typical Applications Circuit.....	16
Development Circuit.....	17
Tap Point and Regulator Voltage Request Form.....	19
Regulator Section— $V_{REG OUT}$	19
Tap Point Section.....	19
Outline Dimensions	20
Ordering Guide.....	20

REVISION HISTORY

10/04—Data Sheet Changed from Rev. 0 to Rev. A

Changes to Product Overview Section	1
Changes to Figure 1	1
Changes to Electrical Characteristics Section	3
Changes to Absolute Maximum Ratings Section	5
Changes to Pin Configuration and Function Description.....	6
Changes to Typical Performance Characteristics Section.....	8
Changes to Applications Notes Section	12
Changes to Figure 28, Typical Applications Circuit.....	16
Added Development Circuit Section	17
Added Tap Point and Regulator Voltage Request Form.....	19
Changes to Ordering Guide	20

7/04—Revision 0: Initial Version

ELECTRICAL CHARACTERISTICS

$V_{DD} = 16\text{ V}$, $T_A @ +25^\circ\text{C}$, unless otherwise noted.

Table 1.

Parameter	Symbol	Condition	Min	Typ	Max	Unit
GAMMA CURVE CHARACTERISTICS						
Accuracy	R _{ACC} ¹	500 segments		0.1	0.4	%
Programming Resolution	R _{RES}			0.2		%
Total Resistor String Value	R _{TOTAL}			15		kΩ
BUFFER CHARACTERISTICS						
OUTPUTS						
Output Voltage Range (Ch12 to Ch7)	V _{OUT}	I _L = 100 μA	1.4		V _{DD}	V
Output Voltage Range (Ch6 to Ch1)	V _{OUT}	I _L = 100 μA	0		V _{DD} – 1.4	V
Output vs. Load (Ch12, Ch11, Ch2, Ch1)	ΔV _{OUT} ²	I _L = 20 mA		15		mV
Output vs. Load (Ch10 to Ch3)	ΔV _{OUT} ²	I _L = 5 mA		5		mV
INPUTS						
Offset Voltage	V _{OS}	–40°C ≤ T _A ≤ +105°C		5	15	mV
Offset Voltage Drift	ΔV _{OS} /ΔT			20		μV/°C
Input Bias Current	I _B			0.5	1.5	μA
Input Voltage Range (Ch12 to Ch7)	V _{IN}			1.4		V _{DD}
Input Voltage Range (Ch6 to Ch1)	V _{IN}		0		V _{DD} – 1.4	V
V _{COM} CHARACTERISTICS						
Offset Voltage	V _{OS}	I _L = 30 mA	1.4	5	15	mV
Input Range	V _{IN}				V _{DD} – 1.4	V
Peak Output Current	I _{PK}			250	mA	
Continuous Output Current	I _{OUT}			50	mA	
Output vs. Load	ΔV _{COM} ²			10	mV	
BUFFER AND V _{COM} DYNAMIC PERFORMANCE						
Slew Rate	SR	R _L = 10 kΩ, CL = 200 pF	4	6		V/μs
Bandwidth	BW	–3dB, R _L = 10 kΩ, CL = 200 pF		4.5		MHz
Settling Time to 0.1%	t _S	1V step, R _L = 10 kΩ, CL = 200 pF		1.1		μs
Phase Margin	φ _o	R _L = 10 kΩ, CL = 200 pF		55		Degrees
Power Supply Rejection Ratio	PSRR	V _{DD} = 7 V to 17 V, –40°C ≤ T _A ≤ +105°C	68	90		dB
VOLTAGE REGULATOR						
Programmable Range	V _{REG OUT}	No Load. V _{REG OUT} = 14.4V	5		V _{DD} – 0.6	V
Initial Regulator Accuracy	V _{ACC}			0.4	1.5	%
Dropout Voltage	V _{DO}		I _L = 100 μA	100	150	mV
		I _L = 5 mA		310	350	mV
Line Regulation	REG _{LINE}	V _{IN} = 8.5 V to 16.5 V, V _{OUT} = 8V		0.01	0.20	%/V
Load Regulation	REG _{LOAD}	I _O = 100 μA to 5 mA		0.02	0.10	%/mA
Maximum Load Current	I _O	–40°C ≤ T _A ≤ +105°C	5			mA
Feedback Reference Voltage	V _{REF}			1.2		V
Feedback Input Bias Current	I _{B FB}	–40°C ≤ T _A ≤ +105°C	–150	10	150	nA

ADD8707

Parameter	Symbol	Condition	Min	Typ	Max	Unit
SYSTEM ACCURACY				10		
Total Error ^{3, 4}	V _{TOTAL ERROR}	–40°C ≤ T _A ≤ +105°C		0.5	3	%
POWER SUPPLY						
Supply Voltage	V _{DD}		7.5		16	V
Supply Current	I _{SY}	No load, –40°C ≤ T _A ≤ +105°C		8.3	15	mA

¹ Gamma curve accuracy includes resistor matching and buffer errors, but excludes the regulator error.

² ΔV_{COM} is the shift from the desired output voltage under the specified current load.

³ Total error is defined as the difference between the designed and actual output voltage divided by the actual regulator output voltage or full-scale voltage.

⁴ Total error includes regulator error, resistor string error, bias current effects, and buffer offset voltage.

ABSOLUTE MAXIMUM RATINGS

Table 2.

Parameter	Rating
Supply Voltage (V_{DD})	18 V
Input Voltage	–0.5 V to V_{DD}
Storage Temperature Range	–65°C to +150°C
Operating Temperature Range ¹	–40°C to +105°C
Lead Temperature Range (Soldering 10 sec)	300°C
Junction Temperature	150°C
ESD Tolerance (HBM)	±3000 V
ESD Tolerance (MM)	±100 V

Stresses above those listed under Absolute Maximum Ratings may cause permanent damage to the device. This is a stress rating only; functional operation of the device at these or any other conditions above those indicated in the operational section of this specification is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

Table 3. Thermal Resistance

Package Type	θ_{JA} ²	θ_{JA} ³	Unit
48-Lead LFCSP (CP)	28.3	47.7	°C/W

¹ See the Applications Information section.

² θ_{JA} for exposed pad soldered to JEDEC 4-layer board.

³ θ_{JA} for exposed pad not soldered down.

ESD CAUTION

ESD (electrostatic discharge) sensitive device. Electrostatic charges as high as 4000 V readily accumulate on the human body and test equipment and can discharge without detection. Although this product features proprietary ESD protection circuitry, permanent damage may occur on devices subjected to high energy electrostatic discharges. Therefore, proper ESD precautions are recommended to avoid performance degradation or loss of functionality.



PIN CONFIGURATION AND FUNCTION DESCRIPTION

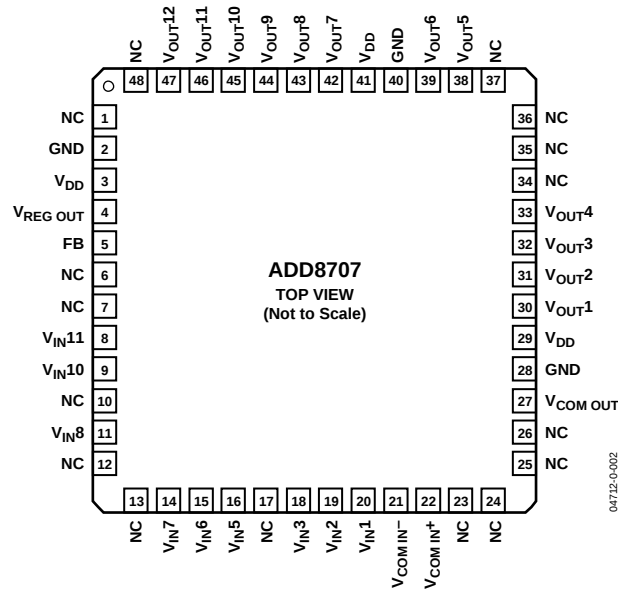


Figure 2. 48-Lead LFCSP

Table 4. Pin Function Descriptions

Pin No.	Name	Description
1	NC	
2	GND	Ground. Normally 0 V.
3	V _{DD}	Supply voltage. Normally 16 V.
4	V _{REG OUT}	Regulator output voltage. Provides reference voltage to resistor string and is internally connected to the top of the resistor string.
5	FB	Regulator feedback pin. Compares a percentage of the regulator output to the internal 1.2V voltage reference. Internal resistors are used to program the desired regulator output voltage.
6	NC	
7	NC	
8	V _{IN11}	Buffer inputs. Normally floating. ¹
9	V _{IN10}	
10	NC	
11	V _{IN8}	Buffer inputs. Normally floating. ¹
12	NC	
13	NC	
14	V _{IN7}	Buffer inputs. Normally floating. ¹
15	V _{IN6}	
16	V _{IN5}	
17	NC	
18	V _{IN3}	Buffer inputs. Normally floating. ¹
19	V _{IN2}	
20	V _{IN1}	
21	V _{COM IN-}	V _{COM} amplifier inverting input.
22	V _{COM IN+}	V _{COM} amplifier non-inverting input.
23	NC	
24	NC	

¹ External resistors can be added to modify the internal resistor string to change the gamma voltage. An external resistor calculator is available upon request.

Pin No.	Name	Description
25	NC	
26	NC	
27	V _{COM OUT}	V _{COM} amplifier output.
28	GND	Ground. Normally 0 V.
29	V _{DD}	Supply voltage. Normally 16 V.
30	V _{OUT1}	Buffer outputs. These buffers can swing to ground.
31	V _{OUT2}	
32	V _{OUT3}	
33	V _{OUT4}	
34	NC	
35	NC	
36	NC	
37	NC	
38	V _{OUT5}	Buffer outputs. These buffers can swing to ground.
39	V _{OUT6}	
40	GND	Ground. Normally 0 V.
41	V _{DD}	Supply voltage. Normally 16 V.
42	V _{OUT7}	Buffer outputs. These buffers can swing to V _{DD} .
43	V _{OUT8}	
44	V _{OUT9}	
45	V _{OUT10}	
46	V _{OUT11}	
47	V _{OUT12}	
48	NC	

TYPICAL PERFORMANCE CHARACTERISTICS

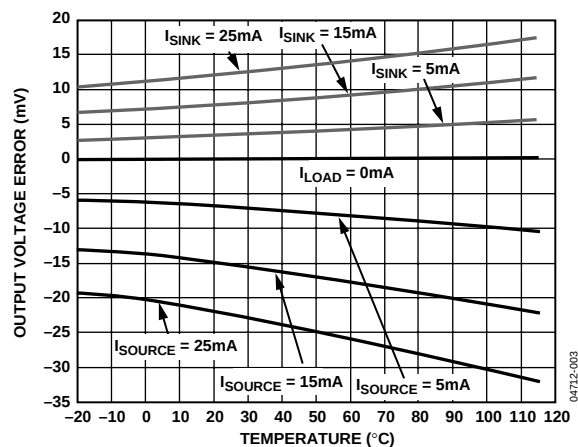


Figure 3. Output Voltage Error vs. Temperature

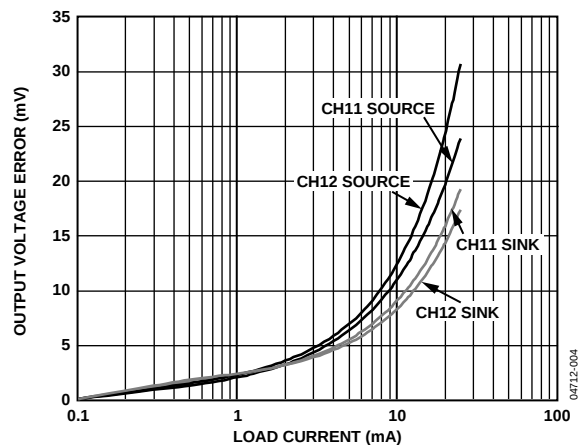


Figure 4. Output Voltage Error vs. Load Current (Channels 11 and 12)

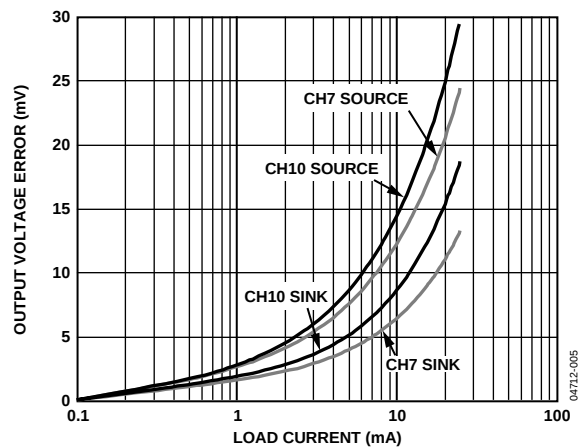


Figure 5. Output Voltage Error vs. Load Current (Channels 7 and 10)

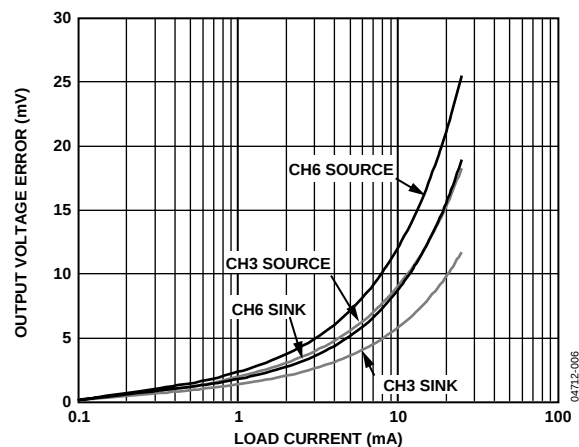


Figure 6. Output Voltage Error vs. Load Current (Channels 3 and 6)

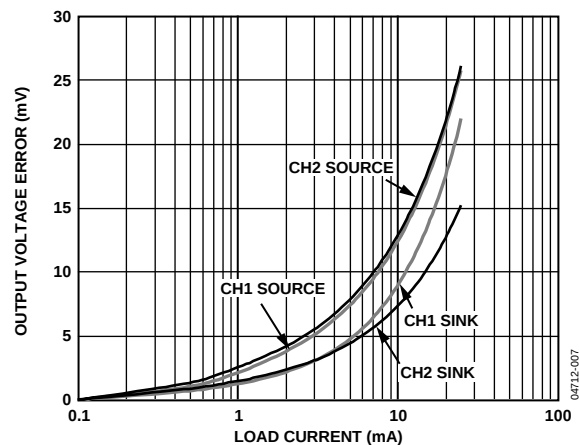


Figure 7. Output Voltage Error vs. Load Current (Channels 1 and 2)

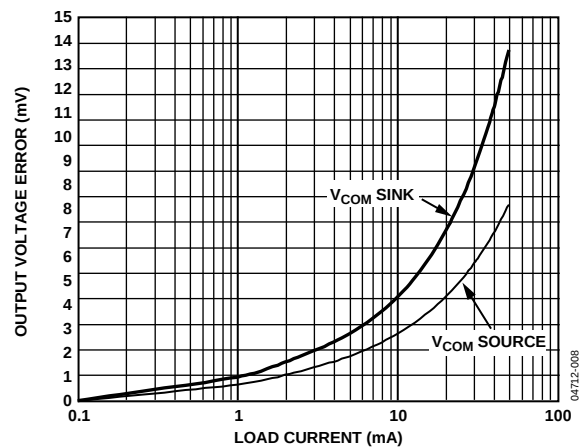


Figure 8. Output Voltage Error vs. Load Current (V_{COM})

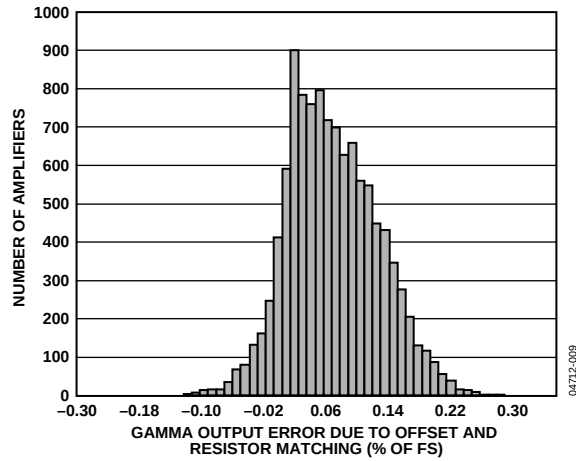


Figure 9. Gamma Output Voltage Error

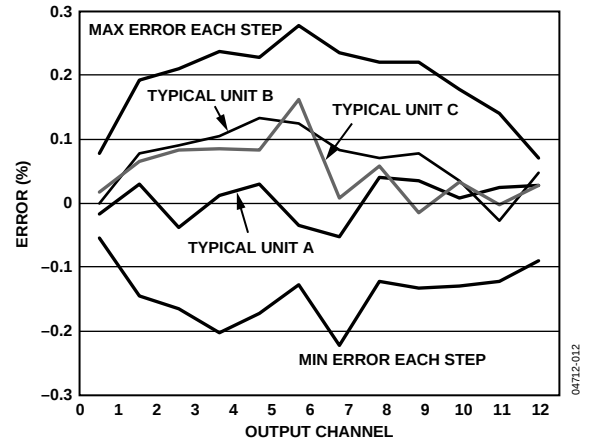


Figure 12. Gamma Output Error per Channel (920 Parts)

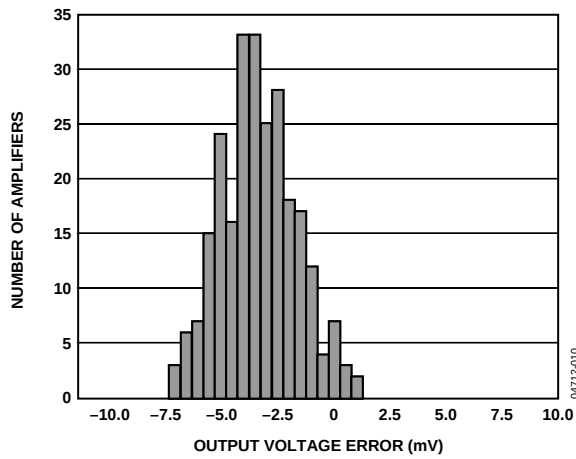


Figure 10. V_{COM} Offset Voltage

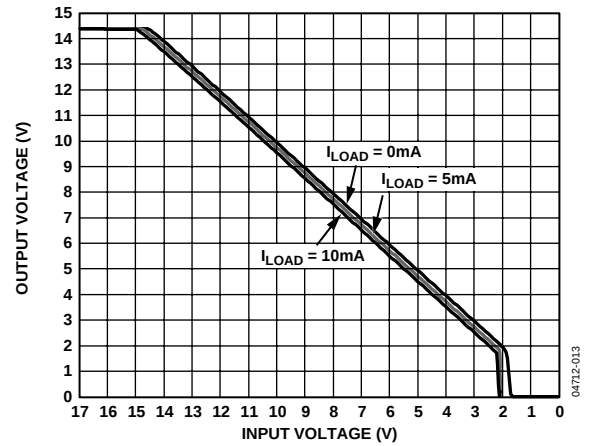


Figure 13. Dropout Characteristics

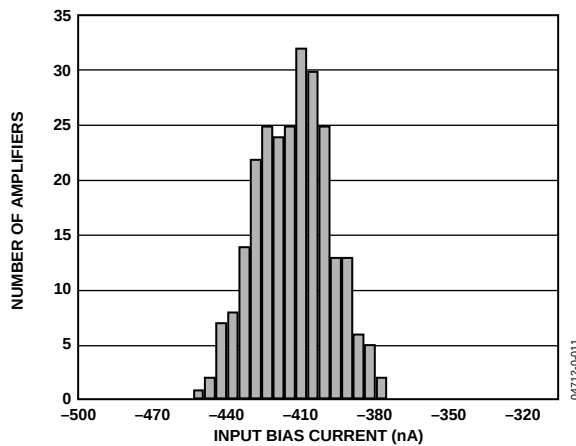


Figure 11. V_{COM} Input Bias Current Distribution

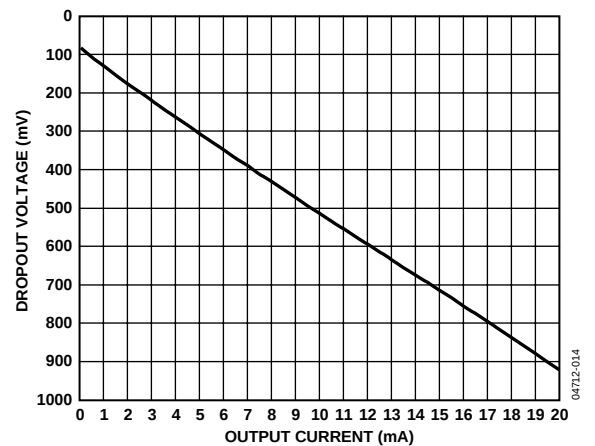


Figure 14. Dropout Voltage vs. Output Current

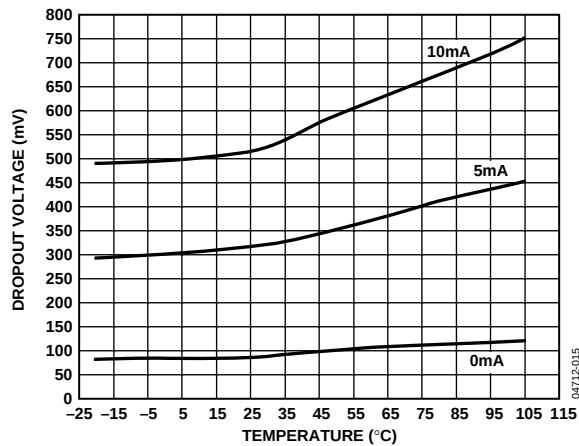


Figure 15. Dropout Voltage vs. Temperature

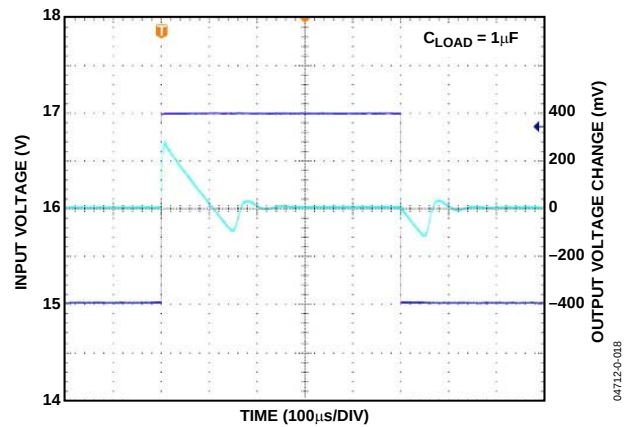


Figure 18. Regulator Line Transient Response

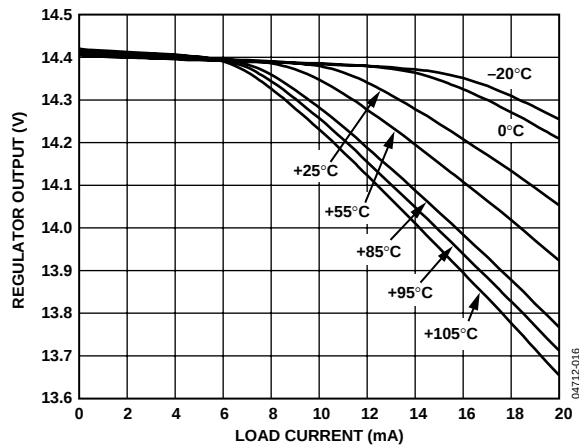


Figure 16. Regulator Output vs. I_{LOAD} over Temperature

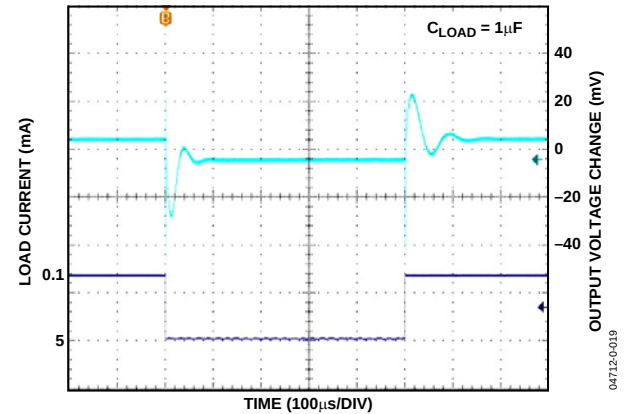


Figure 19. Regulator Load Transient Response

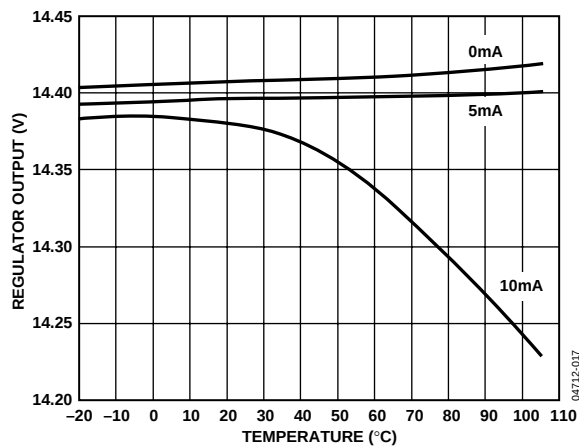


Figure 17. Regulator Output vs. Temperature

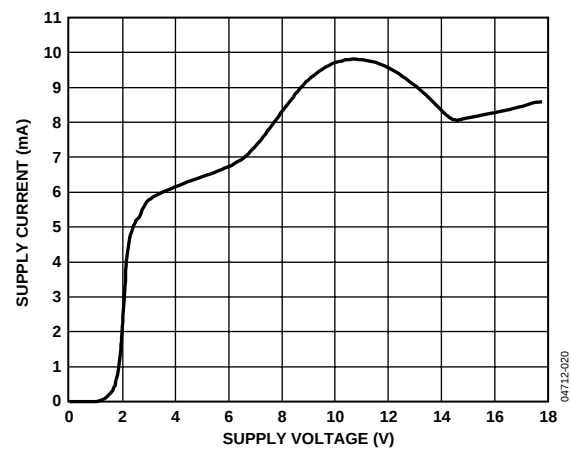


Figure 20. Supply Current vs. Supply Voltage

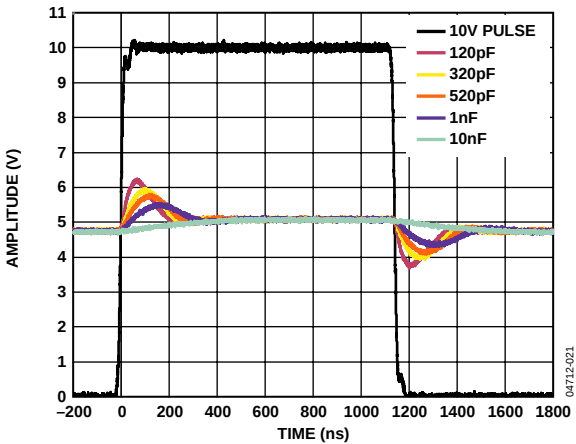


Figure 21. Gamma Buffers Transient Load Response vs. Capacitive Loading

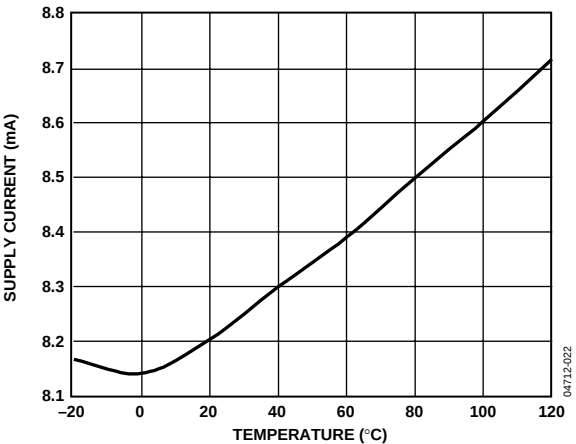


Figure 22. Supply Current vs. Temperature

APPLICATION NOTES

The ADD8707 is a mask-programmable gamma reference generator that allows source drivers to be optimized for the different combinations of liquid crystals, glass sizes, etc. in large LCD panels. It generates 12 gamma reference outputs that can be mask-programmed in 0.2% increments using the 500 matched internal resistors (Figure 23), so that every point on the curve can be targeted within 0.1% of the desired value.

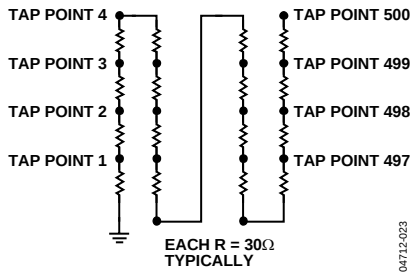


Figure 23. 500 Mask-Programmable Resistor String

In a typical panel application, the selected source drivers have an internal gamma curve that is not ideal for the specific panel (Figure 24). The ADD8707 allows the gamma curve in the source drivers to be adjusted appropriately, and also insures that all the source drivers have the same gamma curve.

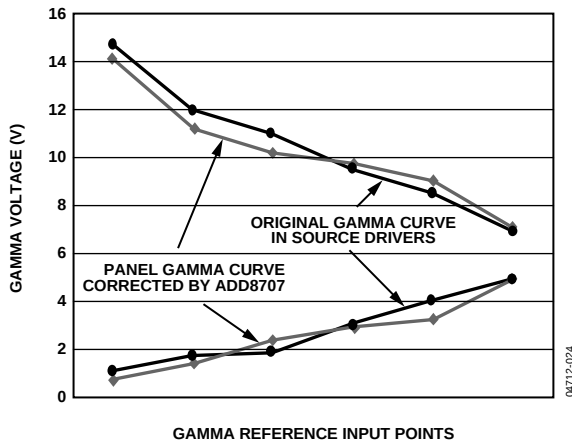


Figure 24. Original and Corrected Gamma Curves

The matching and tracking accuracy of the internal resistors is typically 0.1% with worst-case deviation from the desired curve within 0.4% of the ideal gamma curve, over temperature.

The ADD8707 also includes a low dropout linear regulator to provide a stable reference level for the gamma curve for optimum panel performance.

TAP POINT SELECTION

The ADD8707 uses a single resistor string consisting of 500 individual elements. The tap points are mask programmable and completely independent of each other. Refer to the Tap Point and Regulator Voltage Request Form in this data sheet.




Figure 25. Gamma Buffers Tap Point Circuit.

Tap point voltages can be derived from the following equation:

$$V_{OUT\ X} = \frac{TP_X}{500} \times V_{REG\ OUT}$$

where TP_X is the desired tap point for the X^{th} channel.

Table 5. Typical Mask Implementation

$V_{DD} = 16\text{ V}$, $V_{REG\ OUT} = 14.4\text{ V}$, $0 \leq X \leq 500$

	Tap Point (X)	Voltage	Units
V_{OUT12}	500	14.400	V
V_{OUT11}	419	12.067	V
V_{OUT10}	365	10.512	V
V_{OUT9}	349	10.051	V
V_{OUT8}	343	9.878	V
V_{OUT7}	297	8.554	V
V_{OUT6}	213	6.134	V
V_{OUT5}	173	4.982	V
V_{OUT4}	163	4.694	V
V_{OUT3}	146	4.205	V
V_{OUT2}	95	2.736	V
V_{OUT1}	7	0.202	V

VOLTAGE REGULATOR

The on-board voltage regulator provides a regulated voltage to the resistor chain to provide stable gamma voltages.

The output of the regulator is set by the two mask programmable internal resistors R1 and R2, and a reference voltage. In the ADD8707, the typical values of these parts are shown in Figure 26. To request a different regulator voltage, please refer to the Tap Point and Regulator Voltage Request Form in this data sheet.




Figure 26. Voltage Regulator

The internal resistors have a typical accuracy of 0.1%. External resistors can be used to adjust the regulator voltage, though it is not recommended. Contact a sales office for further details.

MAXIMUM POWER DISSIPATION

The maximum safe power dissipation in the ADD8707 package is limited by the associated rise in junction temperature (TJ) on the die. At approximately 150°C, the glass transition temperature, the properties of the plastic change. Even temporarily exceeding this temperature limit may change the stresses that the package exerts on the die, permanently shifting the parametric performance of the ADD8707. Exceeding a junction temperature of 175°C for an extended period can result in changes in the silicon devices, potentially causing failure.

LAND PATTERN

The LFCSP package comes with a thermal pad. Soldering down this thermal pad dramatically improves the heat dissipation of the package. It is necessary to attach vias that connect the soldered thermal pad to another layer on the board. This provides an avenue to dissipate the heat away from the part. Without vias, the heat is isolated directly under the part.

Subdivide the solder paste, or stencil layer, for the thermal pad. This reduces solder balling and splatter. It is not critical how the subdivisions are arranged, as long as the total coverage of the solder paste for the thermal pad is greater than 50%. The land pattern is critical to heat dissipation. A suggested land pattern is shown in Figure 27.

The thermal pad is attached to the substrate. In the ADD8707, the substrate is connected to VDD. To be electrically safe, the thermal pad should be soldered to an area on the board that is electrically isolated or connected to VDD. Attaching the thermal pad to ground adversely affects the performance of the part.

OPERATING TEMPERATURE RANGE

The junction temperature is as follows:

$$T_J = T_{AMB} + \theta_{JA} \times P_{DIS}$$

where:

T_{AMB} = ambient temperature specified on the data sheet.

θ_{JA} = junction-to-ambient thermal resistance, in °C/watt.

P_{DIS} = power dissipated in the device, in watts.

For the ADD8707, P_{DIS} can be calculated by

$$P_{DIS} = V_{DD} \times I_{DQ} + \Sigma(I_{OUTX(+)} \times (V_{DD} - V_{OUTX})) + \Sigma(-I_{OUTX(-)} \times V_{OUTX}) + (V_{DD} - V_{REGOUT}) \times I_{LOAD}$$

where:

$V_{DD} \times I_{DQ}$ = nominal system power requirements.

$I_{OUTX(+)} \times (V_{DD} - V_{OUTX})$ = positive-current amplifier load power dissipation (current comes from V_{DD}).

$-I_{OUTX(-)} \times V_{OUTX}$ = negative-current amplifier load power dissipation (current goes to GND).

$(V_{DD} - V_{REGOUT}) \times I_{LOAD}$ = regulator load power dissipation.

In this example, $T_{AMB} = 95^\circ\text{C}$. To calculate P_{DIS} , assume the values in Table 6.

Table 6.

	V _{OUTX} (V)	I _{OUTX} (mA)	P (W)
V _{OUT12}	14.400	8.3	0.0133
V _{OUT11}	12.067	7.9	0.0311
V _{OUT10}	10.512	-4.5	0.0473
V _{OUT9}	10.051	-4.2	0.0422
V _{OUT8}	9.878	5.6	0.0343
V _{OUT7}	8.554	-3.3	0.0282
V _{OUT6}	6.134	-6.9	0.0423
V _{OUT5}	4.982	5.7	0.0628
V _{OUT4}	4.694	3.5	0.0396
V _{OUT3}	4.205	9.6	0.113
V _{OUT2}	2.736	9.5	0.126
V _{OUT1}	0.202	-7.2	0.00145
$\Sigma(I_{OUTX(+)} \times (V_{DD} - V_{OUTX})) + \Sigma(-I_{OUTX(-)} \times V_{OUTX})$			0.582

$$V_{DD} \times I_{DQ} = 16 \text{ V} \times 15 \text{ mA} = 0.240 \text{ W.}$$

$$(V_{DD} - V_{REGOUT}) \times I_{LOAD} = (16 \text{ V} - 14.4 \text{ V}) \times 5 \text{ mA} = 0.008 \text{ W.}$$

$$P_{DIS} = 0.240 \text{ W} + 0.582 \text{ W} + 0.008 \text{ W} = 0.830 \text{ W.}$$

Example 1

Exposed pad soldered down with via $\theta_{JA} = 28.3^\circ\text{C/W}$:

$$T_J = 95^\circ\text{C} + (28.3^\circ\text{C/W}) \times (0.830 \text{ W}) = 118.5^\circ\text{C}$$

The maximum junction temperature that is guaranteed before the part breaks down is 150°C . The maximum process limit is 125°C . Because T_J is $< 150^\circ\text{C}$ and $< 125^\circ\text{C}$, this example demonstrates a condition where the part should perform within process limits.

Example 2

Exposed pad not soldered down $\theta_{JA} = 47.7^\circ\text{C/W}$:

$$T_J = 95^\circ\text{C} + (47.7^\circ\text{C/W}) \times (0.830 \text{ W}) = 134.6^\circ\text{C}$$

In this example, T_J is $< 150^\circ\text{C}$ but $> 125^\circ\text{C}$. Although the part should not exhibit any damage here, the process limits have been exceeded. The part may no longer operate as intended.


These examples show that soldering down the exposed pad is important for proper heat dissipation. Under the same power-up and loading conditions, the unsoldered part has a higher temperature than the soldered part. Therefore, it is strongly advised that the exposed pad be soldered down.



Figure 27. 48-Lead LFCSP (CP-48) Land Pattern—Dimensions shown in millimeters

Notes:

1. Gray area represents the board metallization.
2. White area represents the solder mask and vias.
3. Hatched area is for the heat sink solder paste.
4. The thermal pad is electrically active. The solder mask opening should be 0.150 mm larger than the pad size, resulting in 0.075 mm of clearance between the copper pad and solder mask.

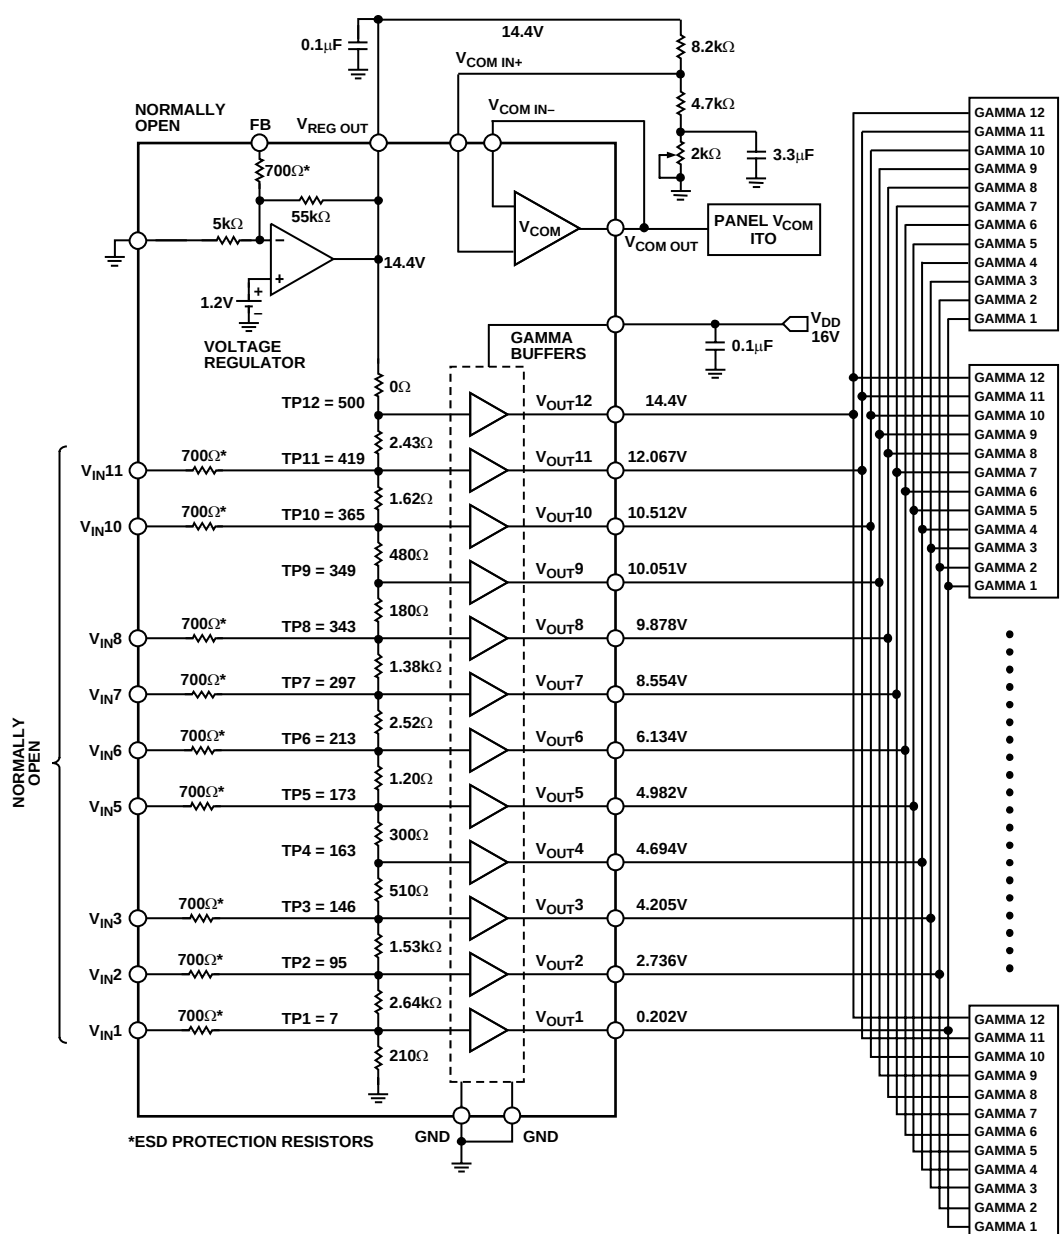

DEVELOPMENT CIRCUIT

For development purposes, the ADD8707 is available in a generic form without the tap points (see Figure 29). The typical applications circuit for this part is shown in Figure 30. To order this version, refer to the Ordering Guide. The model listed is the development version.

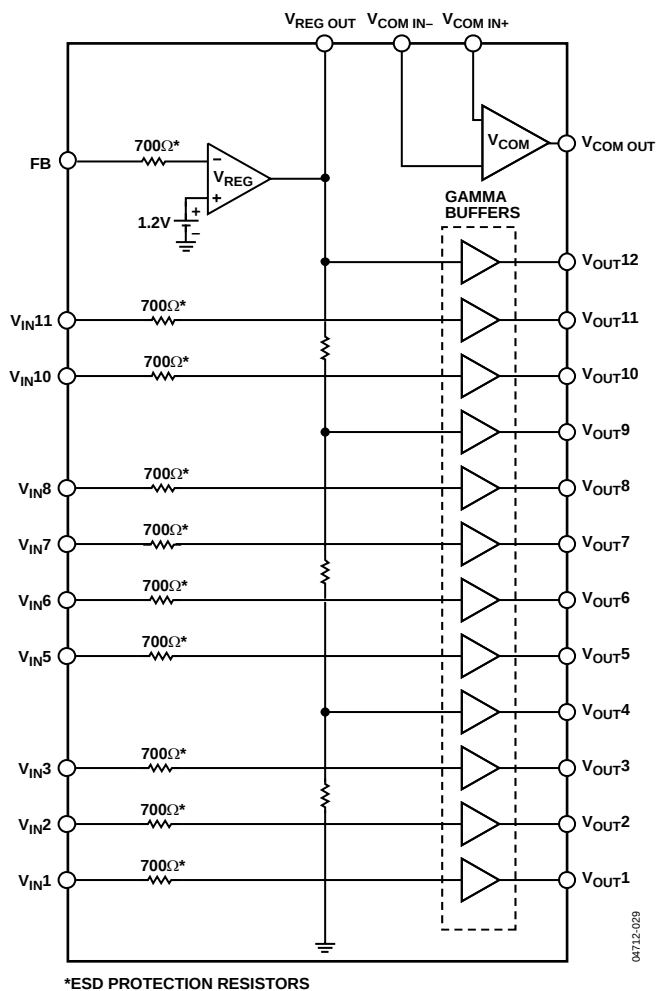


Figure 29. Block Diagram for ADD8707 Development Version (with No Tap Points)

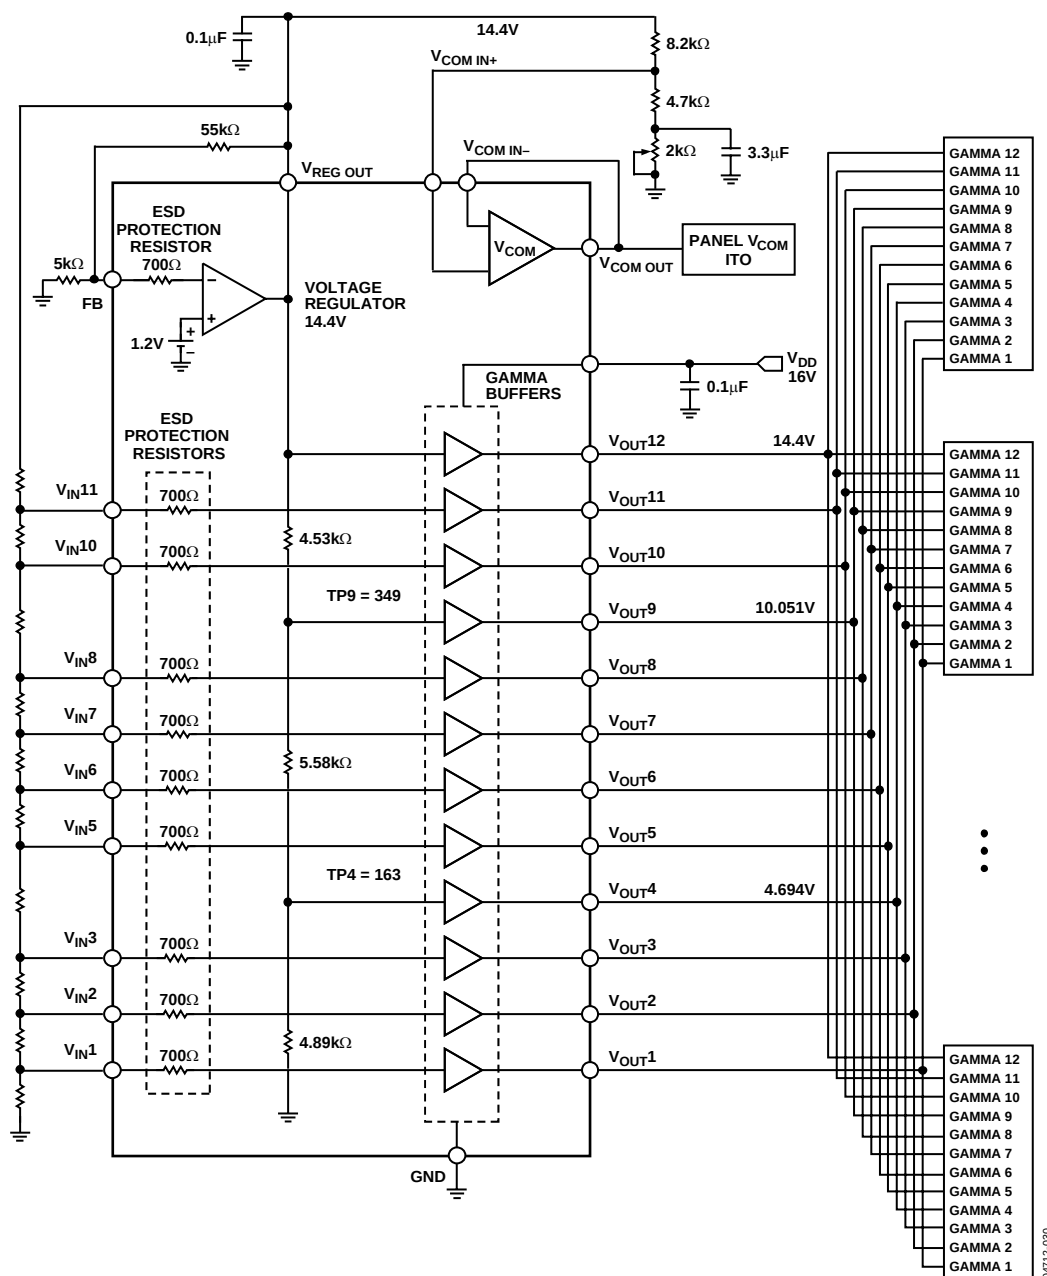


Figure 30. Typical Applications Circuit for ADD8707 Development Version (with No Tap Points)

TAP POINT AND REGULATOR VOLTAGE REQUEST FORM

REGULATOR SECTION— $V_{REG\ OUT}$

To ensure correct regulator operation V_{DD} must exceed V_{REG} by 600 mV minimum—that is, a $V_{REG} = 14.4\text{ V}$ requires a minimum $V_{DD} = 15.0\text{ V}$.

Parameter	Value (6.9 V – 15.4 V)
$V_{REG\ OUT}$	

TAP POINT SECTION

Gamma output voltages are calculated using the following formula:

$$V_{OUT} = \frac{TP \times V_{REG\ OUT}}{500}$$

A Microsoft® Excel spreadsheet is available which automatically calculates the best tap point based on $V_{REG\ OUT}$ and the desired output voltages for each gamma output.

Output	Tap Point
V_{OUT18}	
V_{OUT17}	
V_{OUT16}	
V_{OUT15}	
V_{OUT14}	
V_{OUT13}	
V_{OUT12}	
V_{OUT11}	
V_{OUT10}	
V_{OUT9}	
V_{OUT8}	
V_{OUT7}	
V_{OUT6}	
V_{OUT5}	
V_{OUT4}	
V_{OUT3}	
V_{OUT2}	
V_{OUT1}	

CUSTOMER INFORMATION

Name: _____

Company: _____

Address: _____

Date: _____

Please return this form to your local sales office.

OUTLINE DIMENSIONS

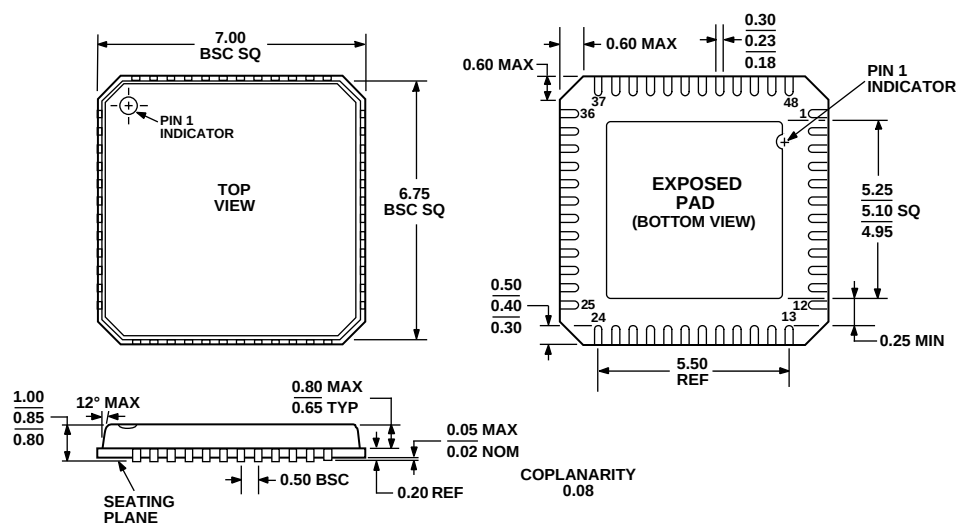


Figure 31. 48-Lead Lead Frame Chip Scale Package [LFCSP]
7 mm × 7 mm Body
(CP-48)
Dimensions shown in millimeters

ORDERING GUIDE

Model ¹	Temperature Package	Package Description	Package Outline
ADD8707WCPZ-REEL ^{2,3}	−40°C to +105°C	48-Lead Lead Frame Chip Scale Package	CP-48

¹ Available in reels only.

² Z = Pb-free part.

³ Development version.



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.