



Low-Cost, Micropower, Low-Dropout, High-Output-Current, SOT23 Voltage References

General Description

The MAX6100–MAX6107 are low-cost, low-dropout (LDO), micropower voltage references. These three-terminal references are available with output voltage options of 1.25V, 1.8V, 2.048V, 2.5V, 3V, 4.096V, 4.5V, and 5V. They feature a proprietary curvature-correction circuit and laser-trimmed, thin-film resistors that result in a low temperature coefficient of 75ppm/°C (max) and an initial accuracy of $\pm 0.4\%$ (max). These devices are specified over the extended temperature range (-40°C to $+85^{\circ}\text{C}$).


These series-mode voltage references draw only 90 μA of supply current and can source 5mA and sink 2mA of load current. Unlike conventional shunt-mode (two-terminal) references that waste supply current and require an external resistor, these devices offer a supply current that is virtually independent of the supply voltage (with only a 4 $\mu\text{A/V}$ variation with supply voltage) and do not require an external resistor. Additionally, these internally compensated devices do not require an external compensation capacitor and are stable with load capacitance. Eliminating the external compensation capacitor saves valuable board area in space-critical applications. Low-dropout voltage and supply independent, ultra-low supply current make these devices ideal for battery-operated, high-performance, low-voltage systems.

The MAX6100–MAX6107 are available in tiny 3-pin SOT23 packages.

Applications

Portable Battery-Powered Systems
Notebook Computers
PDAs, GPSs, DMMs
Cellular Phones
Hard-Disk Drives

Typical Operating Circuit

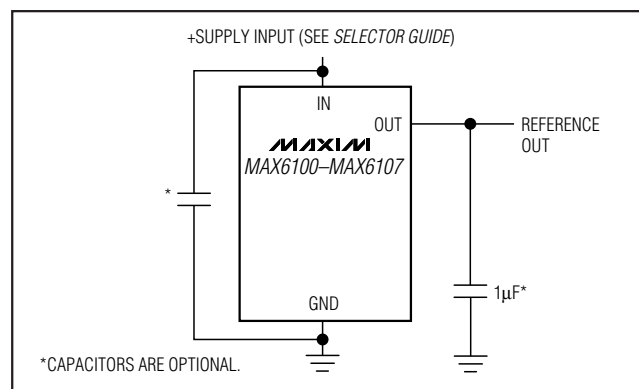

Features

- ♦ Ultra-Small 3-Pin SOT23 Package
- ♦ Low Cost
- ♦ No Output Capacitor Required
- ♦ Stable with Capacitive Loads
- ♦ Load Regulation (2mA Sink): 8mV/mA (max)
Load Regulation (5mA Source): 0.9mV/mA (max)
- ♦ $\pm 0.4\%$ (max) Initial Accuracy
- ♦ Low 75ppm/°C Temperature Coefficient
- ♦ 125 μA (max) Quiescent Supply Current
- ♦ 50mV Dropout at 1mA Load Current

Ordering Information

PART	TEMP RANGE	PIN-PACKAGE	TOP MARK
MAX6100EUR-T	-40°C to $+85^{\circ}\text{C}$	3 SOT23-3	FZID
MAX6101EUR-T	-40°C to $+85^{\circ}\text{C}$	3 SOT23-3	FZGT
MAX6102EUR-T	-40°C to $+85^{\circ}\text{C}$	3 SOT23-3	FZGU
MAX6103EUR-T	-40°C to $+85^{\circ}\text{C}$	3 SOT23-3	FZGV
MAX6104EUR-T	-40°C to $+85^{\circ}\text{C}$	3 SOT23-3	FZGW
MAX6105EUR-T	-40°C to $+85^{\circ}\text{C}$	3 SOT23-3	FZGX
MAX6106EUR-T	-40°C to $+85^{\circ}\text{C}$	3 SOT23-3	FZJR
MAX6107EUR-T	-40°C to $+85^{\circ}\text{C}$	3 SOT23-3	FZMV

Note: There is a minimum order increment of 2500 pieces for SOT23 packages.

Selector Guide

PART	OUTPUT VOLTAGE (V)	INPUT VOLTAGE RANGE (V)
MAX6100	1.800	2.5 to 12.6
MAX6101	1.250	2.5 to 12.6
MAX6102	2.500	($V_{\text{OUT}} + 200\text{mV}$) to 12.6
MAX6103	3.000	($V_{\text{OUT}} + 200\text{mV}$) to 12.6
MAX6104	4.096	($V_{\text{OUT}} + 200\text{mV}$) to 12.6
MAX6105	5.000	($V_{\text{OUT}} + 200\text{mV}$) to 12.6
MAX6106	2.048	2.5 to 12.6
MAX6107	4.5	($V_{\text{OUT}} + 200\text{mV}$) to 12.6

Pin Configuration appears at end of data sheet.



Maxim Integrated Products 1

For pricing, delivery, and ordering information, please contact Maxim/Dallas Direct! at 1-888-629-4642, or visit Maxim's website at www.maxim-ic.com.

MAX6100–MAX6107

Low-Cost, Micropower, Low-Dropout, High-Output-Current, SOT23 Voltage References

ABSOLUTE MAXIMUM RATINGS

(Voltages Referenced to GND)

IN	-0.3V to +13.5V
OUT	-0.3V to ($V_{IN} + 0.3V$)
Output Short-Circuit to GND or IN ($V_{IN} < 6V$)	Continuous
Output Short-Circuit to GND or IN ($V_{IN} \geq 6V$)	60s

Continuous Power Dissipation ($T_A = +70^\circ\text{C}$)

3-Pin SOT23 (derate 4.0mW/ $^\circ\text{C}$ above $+70^\circ\text{C}$)	320mW
Operating Temperature Range	-40°C to $+85^\circ\text{C}$
Storage Temperature Range	-65°C to $+150^\circ\text{C}$
Lead Temperature (soldering, 10s)	$+300^\circ\text{C}$

Stresses beyond those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated in the operational sections of the specifications is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

ELECTRICAL CHARACTERISTICS—MAX6101, $V_{OUT} = 1.25V$

($V_{IN} = 5V$, $I_{OUT} = 0$, $T_A = T_{MIN}$ to T_{MAX} , unless otherwise noted. Typical values are at $T_A = +25^\circ\text{C}$.) (Note 1)

PARAMETER	SYMBOL	CONDITIONS	MIN	TYP	MAX	UNITS
Output Voltage	V_{OUT}	$T_A = +25^\circ\text{C}$	1.245	1.250	1.255	V
Output Voltage Temperature Coefficient (Notes 2, 3)	TCV_{OUT}	0°C to $+70^\circ\text{C}$			65	ppm/ $^\circ\text{C}$
		-40°C to $+85^\circ\text{C}$			75	
Line Regulation	$\Delta V_{OUT} / \Delta V_{IN}$	$2.5V \leq V_{IN} \leq 12.6V$			90	$\mu\text{V/V}$
Load Regulation	$\Delta V_{OUT} / \Delta I_{OUT}$	Sourcing: $0 \leq I_{OUT} \leq 5\text{mA}$			0.9	mV/mA
		Sinking: $-2\text{mA} \leq I_{OUT} \leq 0$			3.0	
OUT Short-Circuit Current	I_{SC}	Short to GND		110		mA
		Short to IN		12		
Long-Term Stability	$\Delta V_{OUT} / \text{time}$	1000hr at $+25^\circ\text{C}$		50		ppm/1000hr
Output Voltage Hysteresis (Note 4)	$\Delta V_{OUT} / \text{cycle}$			130		ppm
DYNAMIC CHARACTERISTICS						
Noise Voltage	e_{OUT}	$f = 0.1\text{Hz}$ to 10Hz		13		$\mu\text{VP-P}$
		$f = 10\text{Hz}$ to 10kHz		15		μVRMS
Ripple Rejection	$\Delta V_{OUT} / \Delta V_{IN}$	$V_{IN} = 5V \pm 100\text{mV}$, $f = 120\text{Hz}$		86		dB
Turn-On Settling Time	t_R	To $V_{OUT} = 0.1\%$ of final value, $C_{OUT} = 50\text{pF}$		50		μs
INPUT CHARACTERISTICS						
Supply Voltage Range	V_{IN}	Guaranteed by line-regulation test	2.5		12.6	V
Quiescent Supply Current	I_{IN}			90	125	μA
Change in Supply Current	I_{IN}/V_{IN}	$2.5V \leq V_{IN} \leq 12.6V$		4	8	$\mu\text{A/V}$

Low-Cost, Micropower, Low-Dropout, High-Output-Current, SOT23 Voltage References

MAX6100-MAX6107

ELECTRICAL CHARACTERISTICS—MAX6100, $V_{OUT} = 1.8V$

($V_{IN} = 5V$, $T_A = T_{MIN}$ to T_{MAX} , unless otherwise noted. Typical values are at $T_A = +25^\circ C$) (Note 1)

PARAMETER	SYMBOL	CONDITIONS	MIN	TYP	MAX	UNITS
Output Voltage	V_{OUT}	$T_A = +25^\circ C$	1.793	1.800	1.807	V
Output Voltage Temperature Coefficient (Notes 2, 3)	TCV_{OUT}	$0^\circ C$ to $+70^\circ C$			65	ppm/ $^\circ C$
		$-40^\circ C$ to $+85^\circ C$			75	
Line Regulation	$\Delta V_{OUT} / \Delta V_{IN}$	$2.5V \leq V_{IN} \leq 12.6V$			200	$\mu V/V$
Load Regulation	$\Delta V_{OUT} / \Delta I_{OUT}$	Sourcing: $0 \leq I_{OUT} \leq 5mA$			0.9	mV/mA
		Sinking: $-2mA \leq I_{OUT} \leq 0$			4.0	
OUT Short-Circuit Current	I_{SC}	Short to GND		110		mA
		Short to IN		12		
Long-Term Stability	$\Delta V_{OUT} / \text{time}$	1000hr at $+25^\circ C$		50		ppm/1000hr
Output Voltage Hysteresis (Note 4)	$\Delta V_{OUT} / \text{cycle}$			130		ppm
DYNAMIC CHARACTERISTICS						
Noise Voltage	e_{OUT}	$f = 0.1Hz$ to $10Hz$		22		μV_{P-P}
		$f = 10Hz$ to $10kHz$		25		μV_{RMS}
Ripple Rejection	$\Delta V_{OUT} / \Delta V_{IN}$	$V_{IN} = 5V$, $\pm 100mV$, $f = 120Hz$		86		dB
Turn-On Settling Time	t_R	To $V_{OUT} = 0.1\%$ of final value, $C_{OUT} = 50pF$		100		μs
INPUT CHARACTERISTICS						
Supply Voltage Range	V_{IN}	Guaranteed by line-regulation test	2.5		12.6	V
Quiescent Supply Current	I_{IN}			90	125	μA
Change in Supply Current	I_{IN}/V_{IN}	$2.5V \leq V_{IN} \leq 12.6V$		4	8	$\mu A/V$

Low-Cost, Micropower, Low-Dropout, High-Output-Current, SOT23 Voltage References

ELECTRICAL CHARACTERISTICS—MAX6106, $V_{OUT} = 2.048V$

($V_{IN} = 5V$, $I_{OUT} = 0$, $T_A = T_{MIN}$ to T_{MAX} , unless otherwise noted. Typical values are at $T_A = +25^\circ C$.) (Note 1)

PARAMETER	SYMBOL	CONDITIONS	MIN	TYP	MAX	UNITS
Output Voltage	V_{OUT}	$T_A = +25^\circ C$	2.040	2.048	2.056	V
Output Voltage Temperature Coefficient (Notes 2, 3)	TCV_{OUT}	$0^\circ C$ to $+70^\circ C$			65	ppm/ $^\circ C$
		$-40^\circ C$ to $+85^\circ C$			75	
Line Regulation	$\Delta V_{OUT} / \Delta V_{IN}$	$2.5V \leq V_{IN} \leq 12.6V$			200	$\mu V/V$
Load Regulation	$\Delta V_{OUT} / \Delta I_{OUT}$	Sourcing: $0 \leq I_{OUT} \leq 5mA$			0.9	mV/mA
		Sinking: $-2mA \leq I_{OUT} \leq 0$			4.0	
OUT Short-Circuit Current	I_{SC}	Short to GND		110		mA
		Short to IN		12		
Long-Term Stability	$\Delta V_{OUT} / \text{time}$	1000hr at $+25^\circ C$		50		ppm/1000hr
Output Voltage Hysteresis (Note 4)	$\Delta V_{OUT} / \text{cycle}$			130		ppm
DYNAMIC CHARACTERISTICS						
Noise Voltage	e_{OUT}	$f = 0.1Hz$ to $10Hz$		22		μV_{P-P}
		$f = 10Hz$ to $10kHz$		25		μV_{RMS}
Ripple Rejection	$\Delta V_{OUT} / \Delta V_{IN}$	$V_{IN} = 5V \pm 100mV$, $f = 120Hz$		86		dB
Turn-On Settling Time	t_R	To $V_{OUT} = 0.1\%$ of final value, $C_{OUT} = 50pF$		100		μs
INPUT CHARACTERISTICS						
Supply Voltage Range	V_{IN}	Guaranteed by line-regulation test	2.5		12.6	V
Quiescent Supply Current	I_{IN}			90	125	μA
Change in Supply Current	I_{IN} / V_{IN}	$2.5 \leq V_{IN} \leq 12.6V$		4	8	$\mu A/V$

Low-Cost, Micropower, Low-Dropout, High-Output-Current, SOT23 Voltage References

MAX6100-MAX6107

ELECTRICAL CHARACTERISTICS—MAX6102, $V_{OUT} = 2.50V$

($V_{IN} = 5V$, $I_{OUT} = 0$, $T_A = T_{MIN}$ to T_{MAX} , unless otherwise noted. Typical values are at $T_A = +25^\circ C$.) (Note 1)

PARAMETER	SYMBOL	CONDITIONS	MIN	TYP	MAX	UNITS
Output Voltage	V_{OUT}	$T_A = +25^\circ C$	2.490	2.50	2.510	V
Output Voltage Temperature Coefficient (Notes 2, 3)	TCV_{OUT}	$0^\circ C$ to $+70^\circ C$			65	ppm/ $^\circ C$
		$-40^\circ C$ to $+85^\circ C$			75	
Line Regulation	$\Delta V_{OUT} / \Delta V_{IN}$	$(V_{OUT} + 0.2V) \leq V_{IN} \leq 12.6V$			300	$\mu V/V$
Load Regulation	$\Delta V_{OUT} / \Delta I_{OUT}$	Sourcing: $0 \leq I_{OUT} \leq 5mA$			0.9	mV/mA
		Sinking: $-2mA \leq I_{OUT} \leq 0$			5.0	
Dropout Voltage (Note 5)	$V_{IN} - V_{OUT}$	$I_{OUT} = 1mA$		50	200	mV
OUT Short-Circuit Current	I_{SC}	Short to GND		110		mA
		Short to IN		12		
Long-Term Stability	$\Delta V_{OUT} / \text{time}$	1000hr at $+25^\circ C$		50		ppm/1000hr
Output Voltage Hysteresis (Note 4)	$\Delta V_{OUT} / \text{cycle}$			130		ppm
DYNAMIC CHARACTERISTICS						
Noise Voltage	e_{OUT}	$f = 0.1Hz$ to $10Hz$		27		μV_{P-P}
		$f = 10Hz$ to $10kHz$		30		μV_{RMS}
Ripple Rejection	$\Delta V_{OUT} / \Delta V_{IN}$	$V_{IN} = 5V \pm 100mV$, $f = 120Hz$		86		dB
Turn-On Settling Time	t_R	To $V_{OUT} = 0.1\%$ of final value, $C_{OUT} = 50pF$		115		μs
INPUT CHARACTERISTICS						
Supply Voltage Range	V_{IN}	Guaranteed by line-regulation test	$V_{OUT} + 0.2$		12.6	V
Quiescent Supply Current	I_{IN}			90	125	μA
Change in Supply Current	I_{IN}/V_{IN}	$(V_{OUT} + 0.2V) \leq V_{IN} \leq 12.6V$		4	8	$\mu A/V$

Low-Cost, Micropower, Low-Dropout, High-Output-Current, SOT23 Voltage References

ELECTRICAL CHARACTERISTICS—MAX6103, V_{OUT} = 3.0V

(V_{IN} = 5V, I_{OUT} = 0, T_A = T_{MIN} to T_{MAX}, unless otherwise noted. Typical values are at T_A = +25°C.) (Note 1)

PARAMETER	SYMBOL	CONDITIONS	MIN	TYP	MAX	UNITS
Output Voltage	V _{OUT}	T _A = +25°C	2.988	3.000	3.012	V
Output Voltage Temperature Coefficient (Notes 2, 3)	TCV _{OUT}	0°C to +70°C			65	ppm/°C
		-40°C to +85°C			75	
Line Regulation	$\Delta V_{OUT} / \Delta V_{IN}$	(V _{OUT} + 0.2V) ≤ V _{IN} ≤ 12.6V			400	μV/V
Load Regulation	$\Delta V_{OUT} / \Delta I_{OUT}$	Sourcing: 0 ≤ I _{OUT} ≤ 5mA			0.9	mV/mA
		Sinking: -2mA ≤ I _{OUT} ≤ 0			6.0	
Dropout Voltage (Note 5)	V _{IN} - V _{OUT}	I _{OUT} = 1mA		50	200	mV
OUT Short-Circuit Current	I _{SC}	Short to GND		110		mA
		Short to IN		12		
Long-Term Stability	$\Delta V_{OUT} / \text{time}$	1000hr at +25°C		50		ppm/1000hr
Output Voltage Hysteresis (Note 4)	$\Delta V_{OUT} / \text{cycle}$			130		ppm
DYNAMIC CHARACTERISTICS						
Noise Voltage	e _{OUT}	f = 0.1Hz to 10Hz		35		μV _{P-P}
		f = 10Hz to 10kHz		40		μV _{RMS}
Ripple Rejection	$\Delta V_{OUT} / \Delta V_{IN}$	V _{IN} = 5V ± 100mV, f = 120Hz		76		dB
Turn-On Settling Time	t _R	To V _{OUT} = 0.1% of final value, C _{OUT} = 50pF		115		μs
INPUT CHARACTERISTICS						
Supply Voltage Range	V _{IN}	Guaranteed by line-regulation test	V _{OUT} + 0.2		12.6	V
Quiescent Supply Current	I _{IN}			90	125	μA
Change in Supply Current	I _{IN} /V _{IN}	(V _{OUT} + 0.2V) ≤ V _{IN} ≤ 12.6V		4	8	μA/V

Low-Cost, Micropower, Low-Dropout, High-Output-Current, SOT23 Voltage References

MAX6100-MAX6107

ELECTRICAL CHARACTERISTICS—MAX6104, $V_{OUT} = 4.096V$

($V_{IN} = 5V$, $I_{OUT} = 0$, $T_A = T_{MIN}$ to T_{MAX} , unless otherwise noted. Typical values are at $T_A = +25^\circ C$.) (Note 1)

PARAMETER	SYMBOL	CONDITIONS	MIN	TYP	MAX	UNITS
Output Voltage	V_{OUT}	$T_A = +25^\circ C$	4.080	4.096	4.112	V
Output Voltage Temperature Coefficient (Notes 2, 3)	TCV_{OUT}	$0^\circ C$ to $+70^\circ C$			65	ppm/ $^\circ C$
		$-40^\circ C$ to $+85^\circ C$			75	
Line Regulation	$\Delta V_{OUT} / \Delta V_{IN}$	$(V_{OUT} + 0.2V) \leq V_{IN} \leq 12.6V$			430	$\mu V/V$
Load Regulation	$\Delta V_{OUT} / \Delta I_{OUT}$	Sourcing: $0 \leq I_{OUT} \leq 5mA$			0.9	mV/mA
		Sinking: $-2mA \leq I_{OUT} \leq 0$			8.0	
Dropout Voltage (Note 5)	$V_{IN} - V_{OUT}$	$I_{OUT} = 1mA$		50	200	mV
OUT Short-Circuit Current	I_{SC}	Short to GND		110		mA
		Short to IN		12		
Long-Term Stability	$\Delta V_{OUT} / \text{time}$	1000hr at $+25^\circ C$		50		ppm/1000hr
Output Voltage Hysteresis (Note 4)	$\Delta V_{OUT} / \text{cycle}$			130		ppm
DYNAMIC CHARACTERISTICS						
Noise Voltage	e_{OUT}	$f = 0.1Hz$ to $10Hz$		50		μV_{P-P}
		$f = 10Hz$ to $10kHz$		50		μV_{RMS}
Ripple Rejection	$\Delta V_{OUT} / \Delta V_{IN}$	$V_{IN} = 5V \pm 100mV$, $f = 120Hz$		72		dB
Turn-On Settling Time	t_R	To $V_{OUT} = 0.1\%$ of final value, $C_{OUT} = 50pF$		190		μs
INPUT CHARACTERISTICS						
Supply Voltage Range	V_{IN}	Guaranteed by line-regulation test	$V_{OUT} + 0.2$		12.6	V
Quiescent Supply Current	I_{IN}			90	125	μA
Change in Supply Current	I_{IN}/V_{IN}	$(V_{OUT} + 0.2V) \leq V_{IN} \leq 12.6V$		4	8	$\mu A/V$

Low-Cost, Micropower, Low-Dropout, High-Output-Current, SOT23 Voltage References

ELECTRICAL CHARACTERISTICS—MAX6107, $V_{OUT} = 4.5V$

($V_{IN} = 5V$, $I_{OUT} = 0$, $T_A = T_{MIN}$ to T_{MAX} , unless otherwise noted. Typical values are at $T_A = +25^\circ C$.) (Note 1)

PARAMETER	SYMBOL	CONDITIONS	MIN	TYP	MAX	UNITS
Output Voltage	V_{OUT}	$T_A = +25^\circ C$	4.482	4.500	4.518	V
Output Voltage Temperature Coefficient (Notes 2, 3)	TCV_{OUT}	$0^\circ C$ to $+70^\circ C$			65	ppm/ $^\circ C$
		$-40^\circ C$ to $+85^\circ C$			75	
Line Regulation	$\Delta V_{OUT}/\Delta V_{IN}$	$(V_{OUT} + 0.2V) \leq V_{IN} \leq 12.6V$			550	$\mu V/V$
Load Regulation	$\Delta V_{OUT}/\Delta I_{OUT}$	Sourcing: $0 \leq I_{OUT} \leq 5mA$			0.9	mV/mA
		Sinking: $-2mA \leq I_{OUT} \leq 0$			8.0	
Dropout Voltage (Note 5)	$V_{IN} - V_{OUT}$	$I_{OUT} = 1mA$		50	200	mV
OUT Short-Circuit Current	I_{SC}	Short to GND		110		mA
		Short to IN		12		
Long-Term Stability	$\Delta V_{OUT}/\text{time}$	1000hr at $+25^\circ C$		50		ppm/1000hr
Output Voltage Hysteresis (Note 4)	$\Delta V_{OUT}/\text{cycle}$			130		ppm
DYNAMIC CHARACTERISTICS						
Noise Voltage	e_{OUT}	$f = 0.1Hz$ to $10Hz$		55		μV_{P-P}
		$f = 10Hz$ to $10kHz$		55		μV_{RMS}
Ripple Rejection	$\Delta V_{OUT}/\Delta V_{IN}$	$V_{IN} = 5V \pm 100mV$, $f = 120Hz$		70		dB
Turn-On Settling Time	t_R	To $V_{OUT} = 0.1\%$ of final value, $C_{OUT} = 50pF$		230		μs
INPUT CHARACTERISTICS						
Supply Voltage Range	V_{IN}	Guaranteed by line-regulation test	$V_{OUT} + 0.2$		12.6	V
Quiescent Supply Current	I_{IN}		90	125		μA
Change in Supply Current	I_{IN}/V_{IN}	$(V_{OUT} + 0.2V) \leq V_{IN} \leq 12.6V$	4	8		$\mu A/V$

Low-Cost, Micropower, Low-Dropout, High-Output-Current, SOT23 Voltage References

MAX6100-MAX6107

ELECTRICAL CHARACTERISTICS—MAX6105, $V_{OUT} = 5.000V$

($V_{IN} = 5.5V$, $I_{OUT} = 0$, $T_A = T_{MIN}$ to T_{MAX} , unless otherwise noted. Typical values are at $T_A = +25^{\circ}C$.) (Note 1)

PARAMETER	SYMBOL	CONDITIONS	MIN	TYP	MAX	UNITS
Output Voltage	V_{OUT}	$T_A = +25^{\circ}C$	4.980	5.000	5.020	V
Output Voltage Temperature Coefficient (Notes 2, 3)	TCV_{OUT}	$0^{\circ}C$ to $+70^{\circ}C$			65	ppm/ $^{\circ}C$
		$-40^{\circ}C$ to $+85^{\circ}C$			75	
Line Regulation	$\Delta V_{OUT} / \Delta V_{IN}$	$(V_{OUT} + 0.2V) \leq V_{IN} \leq 12.6V$			550	$\mu V/V$
Load Regulation	$\Delta V_{OUT} / \Delta I_{OUT}$	Sourcing: $0 \leq I_{OUT} \leq 5mA$			0.9	mV/mA
		Sinking: $-2mA \leq I_{OUT} \leq 0$			10	
Dropout Voltage (Note 5)	$V_{IN} - V_{OUT}$	$I_{OUT} = 1mA$		50	200	mV
OUT Short-Circuit Current	I_{SC}	Short to GND		110		mA
		Short to IN		12		
Long-Term Stability	$\Delta V_{OUT} / \text{time}$	1000hr at $+25^{\circ}C$		50		ppm/1000hr
Output Voltage Hysteresis (Note 4)	$\Delta V_{OUT} / \text{cycle}$			130		ppm
DYNAMIC CHARACTERISTICS						
Noise Voltage	e_{OUT}	$f = 0.1Hz$ to $10Hz$		60		μV_{P-P}
		$f = 10Hz$ to $10kHz$		60		μV_{RMS}
Ripple Rejection	$\Delta V_{OUT} / \Delta V_{IN}$	$V_{IN} = 6V \pm 100mV$, $f = 120Hz$		65		dB
Turn-On Settling Time	t_R	To $V_{OUT} = 0.1\%$ of final value, $C_{OUT} = 50pF$		300		μs
INPUT CHARACTERISTICS						
Supply Voltage Range	V_{IN}	Guaranteed by line-regulation test	$V_{OUT} + 0.2$		12.6	V
Quiescent Supply Current	I_{IN}		90	125		μA
Change in Supply Current	I_{IN}/V_{IN}	$(V_{OUT} + 0.2V) \leq V_{IN} \leq 12.6V$	4	8		$\mu A/V$

Note 1: Devices are 100% production tested at $T_A = +25^{\circ}C$ and are guaranteed by design from $T_A = T_{MIN}$ to T_{MAX} by correlation to sample units characterized over temperature.

Note 2: Temperature coefficient is specified by the "box" method, i.e., the maximum ΔV_{OUT} is divided by the maximum Δt .

Note 3: Not production tested. Guaranteed by design.

Note 4: Thermal hysteresis is defined as the change in $+25^{\circ}C$ output voltage before and after temperature cycling of the device from $T_A = T_{MIN}$ to T_{MAX} .


Note 5: Dropout voltage is the minimum input voltage at which V_{OUT} changes $\leq 0.2\%$ from V_{OUT} at $V_{IN} = 5.0V$ ($V_{IN} = 5.5V$ for MAX6105).

Low-Cost, Micropower, Low-Dropout, High-Output-Current, SOT23 Voltage References


Typical Operating Characteristics

($T_A = +25^\circ\text{C}$, unless otherwise noted.)


MAX6102
OUTPUT VOLTAGE TEMPERATURE DRIFT

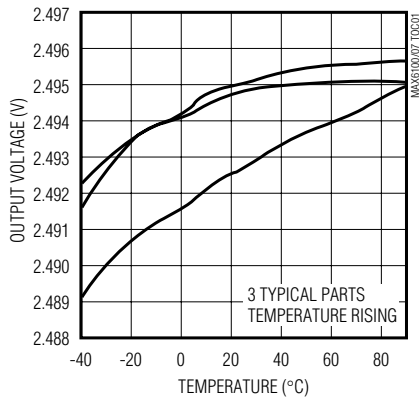


MAX6105
OUTPUT VOLTAGE TEMPERATURE DRIFT

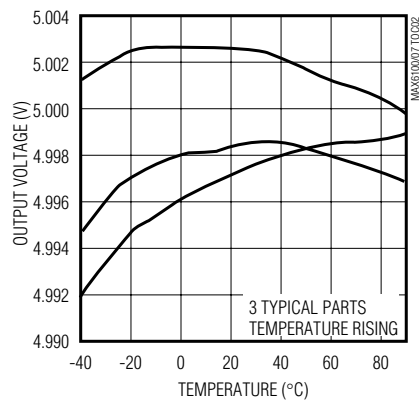


SUPPLY CURRENT vs. INPUT VOLTAGE

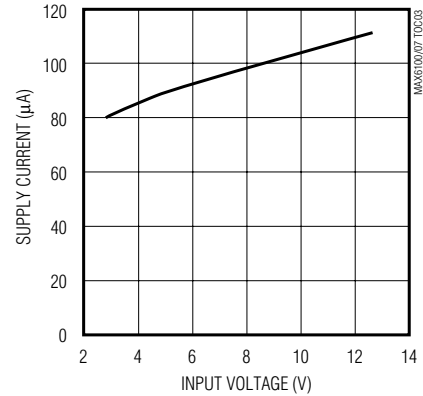


MAX6101
SUPPLY CURRENT vs. TEMPERATURE

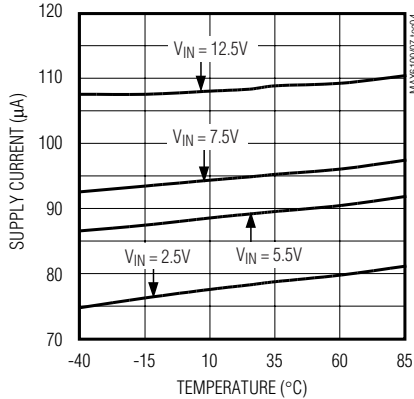


MAX6102
DROPOUT VOLTAGE vs. SOURCE CURRENT

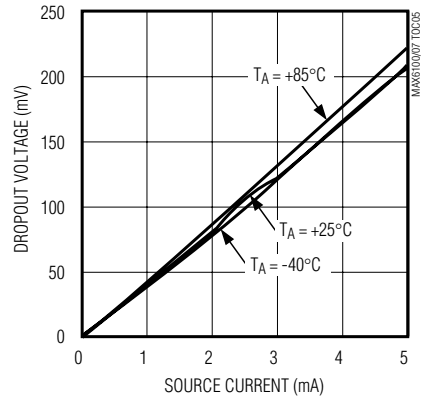


MAX6102
DROPOUT VOLTAGE vs. SINK CURRENT

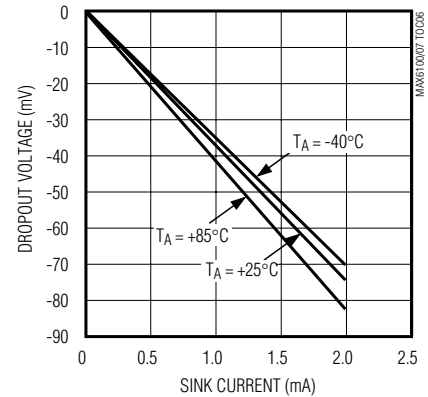


MAX6105
DROPOUT VOLTAGE vs. SOURCE CURRENT

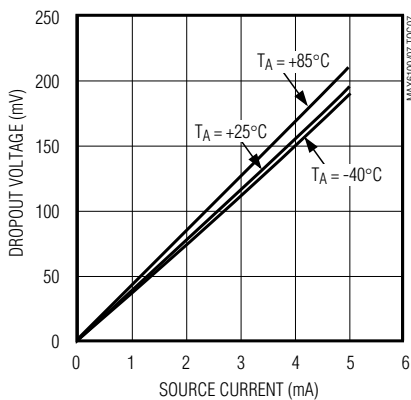

MAX6105
DROPOUT VOLTAGE vs. SINK CURRENT

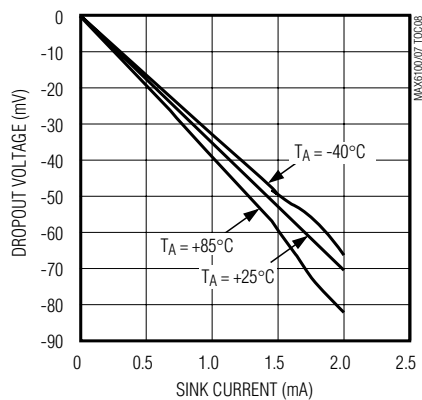

MAX6102
LOAD REGULATION









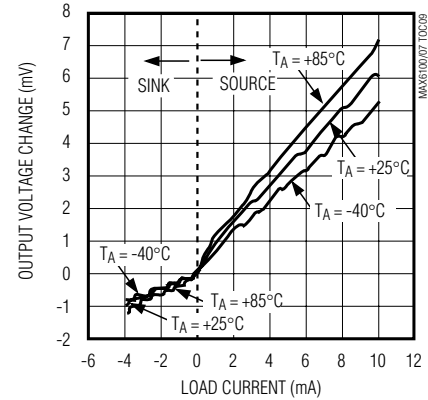


Low-Cost, Micropower, Low-Dropout, High-Output-Current, SOT23 Voltage References

Typical Operating Characteristics (continued)

($T_A = +25^\circ\text{C}$, unless otherwise noted.)







MAX6100-MAX6107

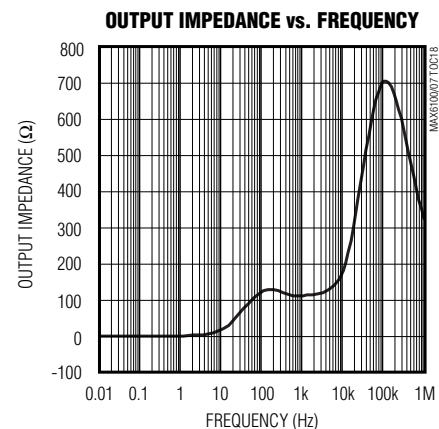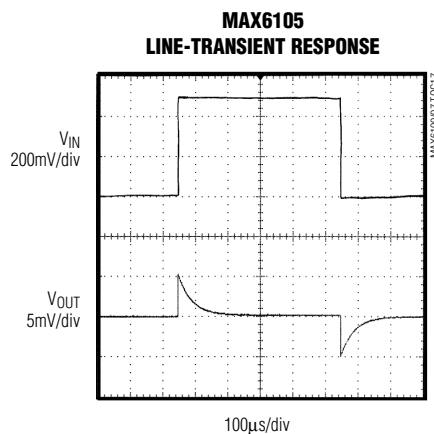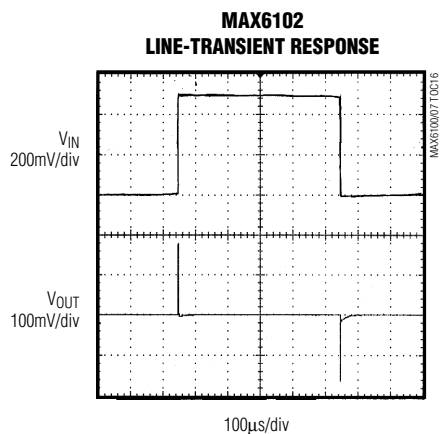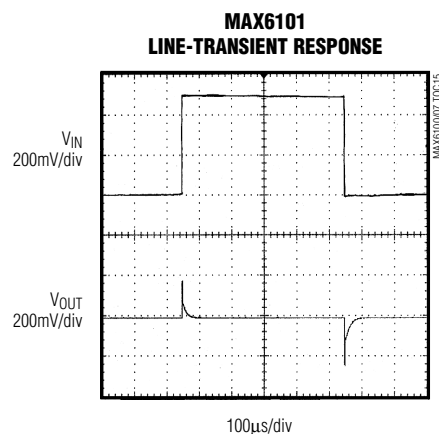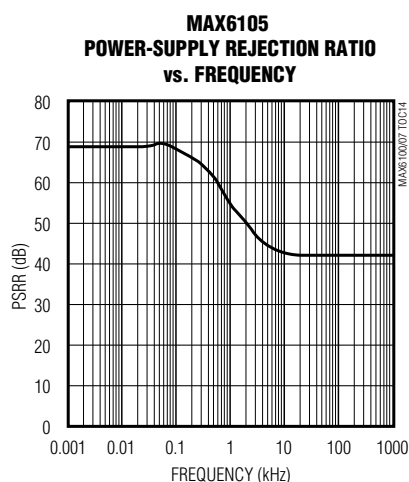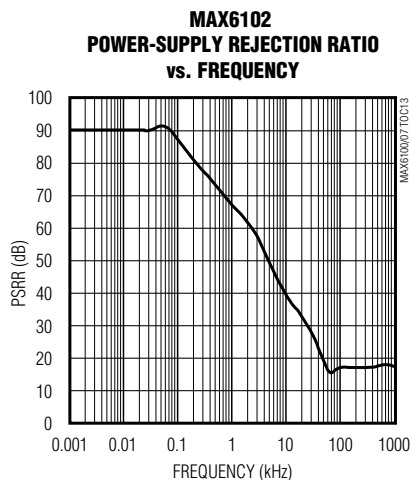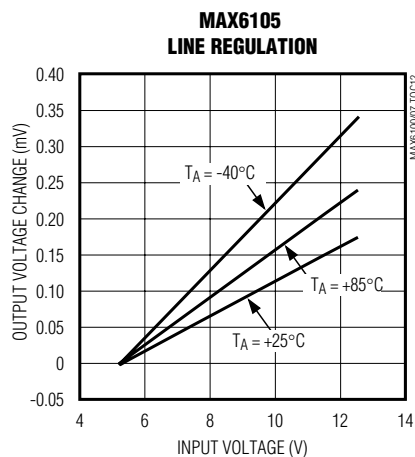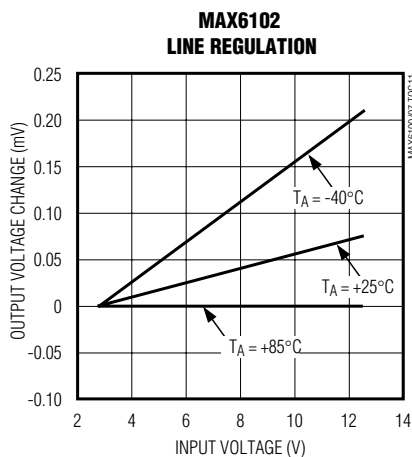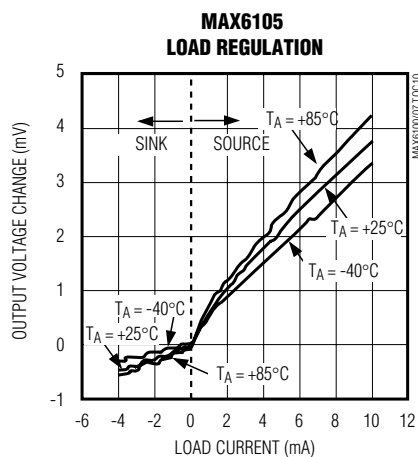

Low-Cost, Micropower, Low-Dropout, High-Output-Current, SOT23 Voltage References

Typical Operating Characteristics (continued)




($T_A = +25^\circ\text{C}$, unless otherwise noted.)

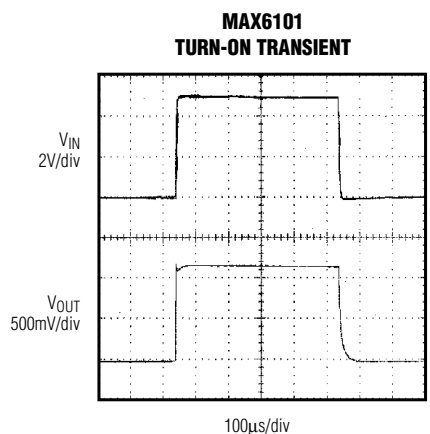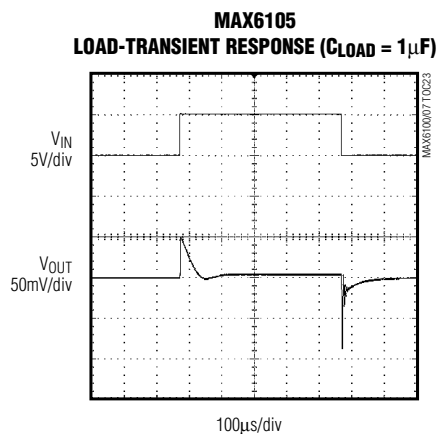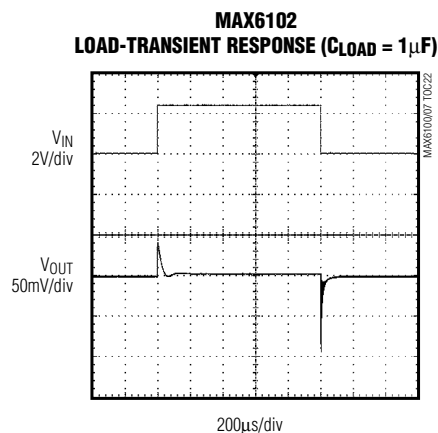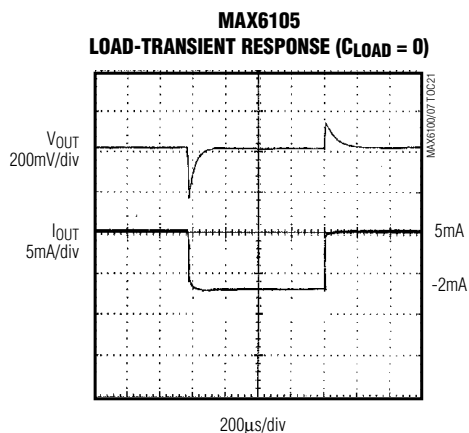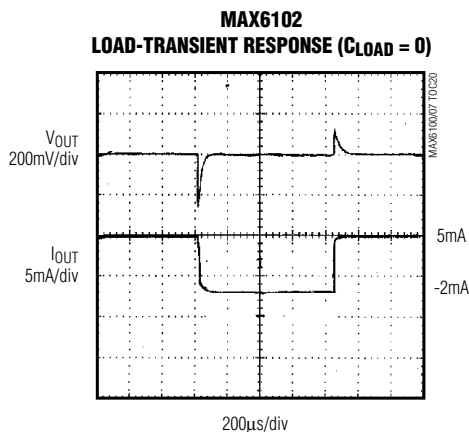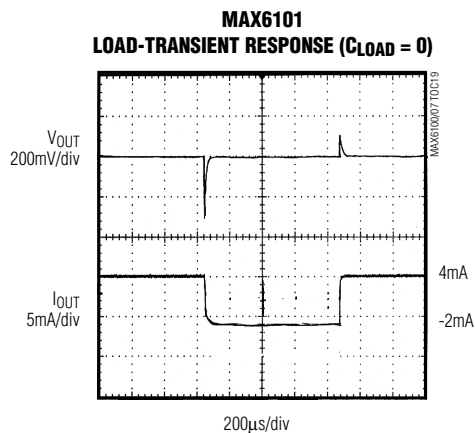

Low-Cost, Micropower, Low-Dropout, High-Output-Current, SOT23 Voltage References

Typical Operating Characteristics (continued)

($T_A = +25^\circ\text{C}$, unless otherwise noted.)

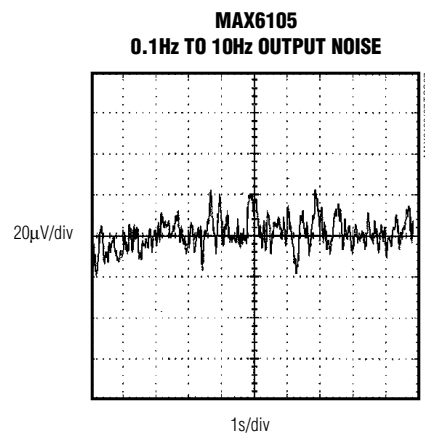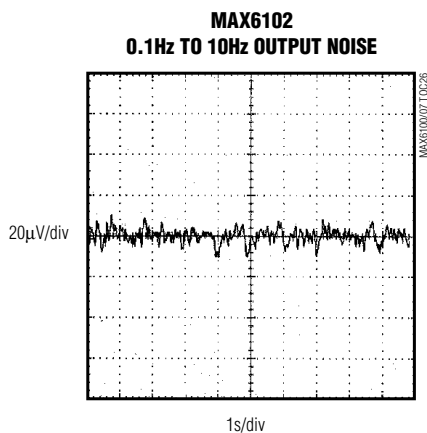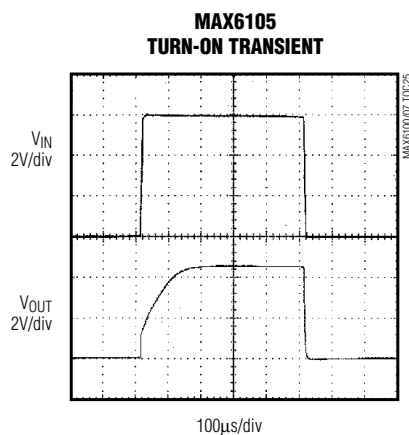

MAX6100-MAX6107

Pin Description

PIN	NAME	FUNCTION
1	IN	Input Voltage
2	OUT	Reference Output
3	GND	Ground

Applications Information

Input Bypassing

For the best line-transient performance, decouple the input with a 0.1μF ceramic capacitor as shown in the *Typical Operating Circuit*. Locate the capacitor as close to IN as possible. Where transient performance is less important, no capacitor is necessary.

Output/Load Capacitance

Devices in the MAX6100 family do not require an output capacitance for frequency stability. They are stable for any capacitive load when sourcing less than 200μA. When sourcing greater than 200μA, the output may become unstable with capacitive loads between 0.5nF and 50nF. In applications where the load or the supply can experience step changes, an output capacitor reduces the amount of overshoot (undershoot) and improves the circuit's transient response. Many applications do not require an external capacitor, and the MAX6100 family can offer a significant advantage in these applications when board space is critical.

Supply Current

The quiescent supply current of the series-mode MAX6100 family is typically 90μA and is virtually independent of the supply voltage, with only an 8μA/V (max) variation with supply voltage. Unlike series references, shunt-mode references operate with a series resistor connected to the power supply. The quiescent current of a shunt-mode reference is thus a function of the input voltage. Additionally, shunt-mode references have to be biased at the maximum-expected load current, even if the load current is not present at the time. In the MAX6100 family, the load current is drawn from the input voltage only when required, so supply current is not wasted and efficiency is maximized at all input voltages. This improved efficiency reduces power dissipation and extends battery life. When the supply voltage is below the minimum specified input voltage (as during turn-on), the devices can draw up to 400μA beyond the nominal supply current. The input voltage source must be capable of providing this current to ensure reliable turn-on.

Output Voltage Hysteresis


Output voltage hysteresis is the change of output voltage at $T_A = +25^\circ\text{C}$ before and after the device is cycled over its entire operating temperature range. Hysteresis is caused by differential package stress appearing across the bandgap core transistors. The typical temperature hysteresis value is 130ppm.

Low-Cost, Micropower, Low-Dropout, High-Output-Current, SOT23 Voltage References

Turn-On Time

These devices typically turn on and settle to within 0.1% of their final value in 50 μ s to 300 μ s. The turn-on time can increase up to 1.5ms with the device operating at the minimum dropout voltage and the maximum load.

Pin Configuration

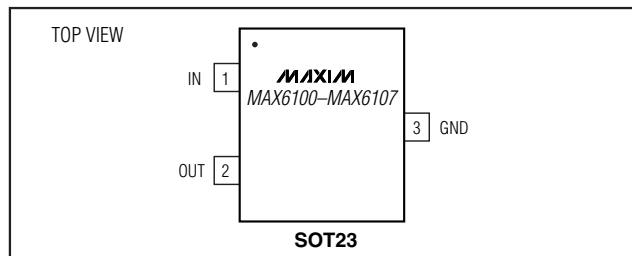

Chip Information


TRANSISTOR COUNT: 117

Package Information



(The package drawing(s) in this data sheet may not reflect the most current specifications. For the latest package outline information, go to www.maxim-ic.com/packages.)

NOTES:

1. D&E DO NOT INCLUDE MOLD FLASH.
2. MOLD FLASH OR PROTRUSIONS NOT TO EXCEED .15mm (.006")
3. CONTROLLING DIMENSION: MILLIMETER

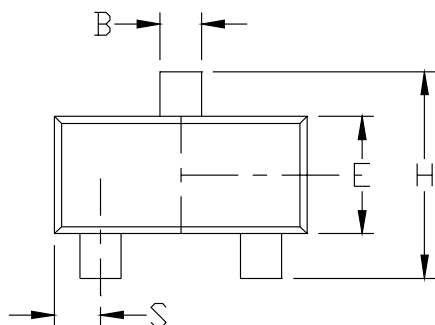

DIM	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	0.031	0.047	0.787	1.194
A1	0.001	0.005	0.025	0.127
B	0.014	0.022	0.356	0.559
C	0.0034	0.006	0.086	0.152
D	0.105	0.120	2.667	3.048
E	0.047	0.055	1.194	1.397
e	0.070	0.080	1.778	2.032
H	0.082	0.098	2.083	2.489
L	0.004	0.012	0.102	0.305
S	0.017	0.022	0.432	0.559
α	0°	8°	0°	8°

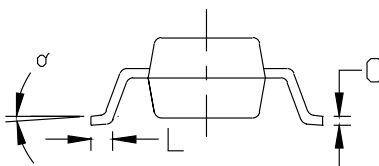

MAXIM			
PROPRIETARY INFORMATION			
TITLE:			
PACKAGE OUTLINE SOT-23, 3L			
APPROVAL	DOCUMENT CONTROL NO.	REV	1/1
	21-0051	C	

SOT23LEPS

Maxim cannot assume responsibility for use of any circuitry other than circuitry entirely embodied in a Maxim product. No circuit patent licenses are implied. Maxim reserves the right to change the circuitry and specifications without notice at any time.

14 **Maxim Integrated Products, 120 San Gabriel Drive, Sunnyvale, CA 94086 408-737-7600**



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.