

PNP POWER SILICON TRANSISTOR

Qualified per MIL-PRF-19500/545

DEVICES

2N5151	2N5153
2N5151L	2N5153L
2N5151U3	2N5153U3

LEVELS

JAN
JANTX
JANTXV
JANS

ABSOLUTE MAXIMUM RATINGS ($T_C = +25^\circ\text{C}$ unless otherwise noted)


Parameters / Test Conditions	Symbol	Value	Unit
Collector-Emitter Voltage	V_{CEO}	80	Vdc
Collector-Base Voltage	V_{CBO}	100	Vdc
Emitter-Base Voltage	V_{EBO}	5.5	Vdc
Collector Current	I_C	2.0	Adc
Total Power Dissipation 2N5151, 2N5153, L @ $T_A = +25^\circ\text{C}$ ⁽¹⁾ 2N5151, 2N5153, L @ $T_C = +25^\circ\text{C}$ ⁽²⁾ 2N5151U3, 2N5153U3 @ $T_A = +25^\circ\text{C}$ ⁽³⁾ 2N5151U3, 2N5153U3 @ $T_C = +25^\circ\text{C}$ ⁽⁴⁾	P_T	1.0 10 1.16 100	W
Operating & Storage Junction Temperature Range	T_J, T_{stg}	-65 to +200	$^\circ\text{C}$
Thermal Resistance, Junction-to Case	$R_{\theta JC}$	10 1.75 (U3)	$^\circ\text{C}/\text{W}$

Note:


- 1) Derate linearly 5.7mW/ $^\circ\text{C}$ for $T_A > +25^\circ$
- 2) Derate linearly 66.7mW/ $^\circ\text{C}$ for $T_A > +25^\circ$
- 3) Derate linearly 6.63mW/ $^\circ\text{C}$ for $T_A > +25^\circ$
- 4) Derate linearly 571mW/ $^\circ\text{C}$ for $T_A > +25^\circ$

ELECTRICAL CHARACTERISTICS ($T_A = +25^\circ\text{C}$, unless otherwise noted)


Parameters / Test Conditions	Symbol	Min.	Max.	Unit
OFF CHARACTERISTICS				
Collector-Emitter Breakdown Voltage $I_C = 100\text{mAdc}, I_B = 0$	$V_{(BR)CEO}$	80		Vdc
Emitter-Base Cutoff Current $V_{EB} = 4.0\text{Vdc}, I_C = 0$ $V_{EB} = 5.5\text{Vdc}, I_C = 0$	I_{EBO}		1.0 1.0	μAdc mAdc
Collector-Emitter Cutoff Current $V_{CE} = 60\text{Vdc}, V_{BE} = 0$ $V_{CE} = 100\text{Vdc}, V_{BE} = 0$	I_{CES}		1.0 1.0	μAdc mAdc
Collector-Base Cutoff Current $V_{CE} = 40\text{Vdc}, I_B = 0$	I_{CEO}		50	μAdc



TO-5
2N5151L, 2N5153L
(See Figure 1)



TO-39 (TO-205AD)
2N5151, 2N5153



U-3
2N5151U3, 2N5153U3

PNP POWER SILICON TRANSISTOR

Qualified per MIL-PRF-19500/545

ELECTRICAL CHARACTERISTICS

Parameters / Test Conditions	Symbol	Min.	Max.	Unit
ON CHARACTERISTICS				
Forward-Current Transfer Ratio $I_C = 50\text{mA dc}, V_{CE} = 5\text{V dc}$		20		
2N5151		50		
2N5153				
$I_C = 2.5\text{A dc}, V_{CE} = 5\text{V dc}$	h_{FE}	30	90	
2N5151		70	200	
2N5153				
$I_C = 5\text{A dc}, V_{CE} = 5\text{V dc}$		20		
2N5151		40		
2N5153				
Collector-Emitter Saturation Voltage $I_C = 2.5\text{A dc}, I_B = 250\text{mA dc}$ $I_C = 5.0\text{A dc}, I_B = 500\text{mA dc}$	$V_{CE(sat)}$		0.75 1.5	Vdc
Base-Emitter Voltage Non-Saturation $I_C = 2.5\text{A dc}, V_{CE} = 5\text{V dc}$	V_{BE}		1.45	Vdc
Base-Emitter Saturation Voltage $I_C = 2.5\text{A dc}, I_B = 250\text{mA dc}$ $I_C = 5.0\text{A dc}, I_B = 500\text{mA dc}$	$V_{BE(sat)}$		1.45 2.2	Vdc

DYNAMIC CHARACTERISTICS

Magnitude of Common Emitter Small-Signal Short-Circuit Forward Current Transfer Ratio $I_C = 500\text{mA dc}, V_{CE} = 5\text{V dc}, f = 10\text{MHz}$		6		
2N5151	$ h_{fe} $	7		
2N5153				
Common-Emitter Small-Signal Short-Circuit. Forward-Current Transfer Ratio $I_C = 100\text{mA dc}, V_{CE} = 5\text{V dc}, f = 1\text{kHz}$	h_{fe}	20		
2N5151		50		
2N5153				
Output Capacitance $V_{CB} = 10\text{V dc}, I_E = 0, f = 1.0\text{MHz}$	C_{obo}		250	pF

SWITCHING CHARACTERISTICS

Parameters / Test Conditions	Symbol	Min.	Max.	Unit
Turn-On Time $I_C = 5\text{A dc}, I_{B1} = 500\text{mA dc}$ $I_{B2} = -500\text{mA dc}$ $R_L = 6\Omega$ $V_{BE(OFF)} = 3.7\text{V dc}$	t_{on}		0.5	μs
Turn-Off Time $I_C = 5\text{A dc}, I_{B1} = 500\text{mA dc}$ $I_{B2} = -500\text{mA dc}$ $R_L = 6\Omega$ $V_{BE(OFF)} = 3.7\text{V dc}$	t_{off}		1.5	μs

6 Lake Street, Lawrence, MA 01841
 1-800-446-1158 / (978) 620-2600 / Fax: (978) 689-0803
 Website: <http://www.microsemi.com>

PNP POWER SILICON TRANSISTOR

Qualified per MIL-PRF-19500/545

SWITCHING CHARACTERISTICS (cont.)

Parameters / Test Conditions		Symbol	Min.	Max.	Unit
Storage Time	$I_C = 5\text{Adc}$, $I_{B1} = 500\text{mAdc}$	t_s		1.4	μs
	$I_{B2} = -500\text{mAdc}$				
Fall Time	$R_L = 6\Omega$ $V_{BE(OFF)} = 3.7\text{Vdc}$	t_f		0.5	μs

SAFE OPERATING AREA

DC Tests

$T_C = +25^\circ\text{C}$, 1 Cycle, $t_p = 1.0\text{s}$

Test 1

$V_{CE} = 5.0\text{Vdc}$, $I_C = 2.0\text{Adc}$


Test 2

$V_{CE} = 32\text{Vdc}$, $I_C = 310\text{mAdc}$

Test 3

$V_{CE} = 80\text{Vdc}$, $I_C = 14.5\text{mAdc}$

FIGURE 1 (TO-5, TO-39)
 PACKAGE DIMENSIONS

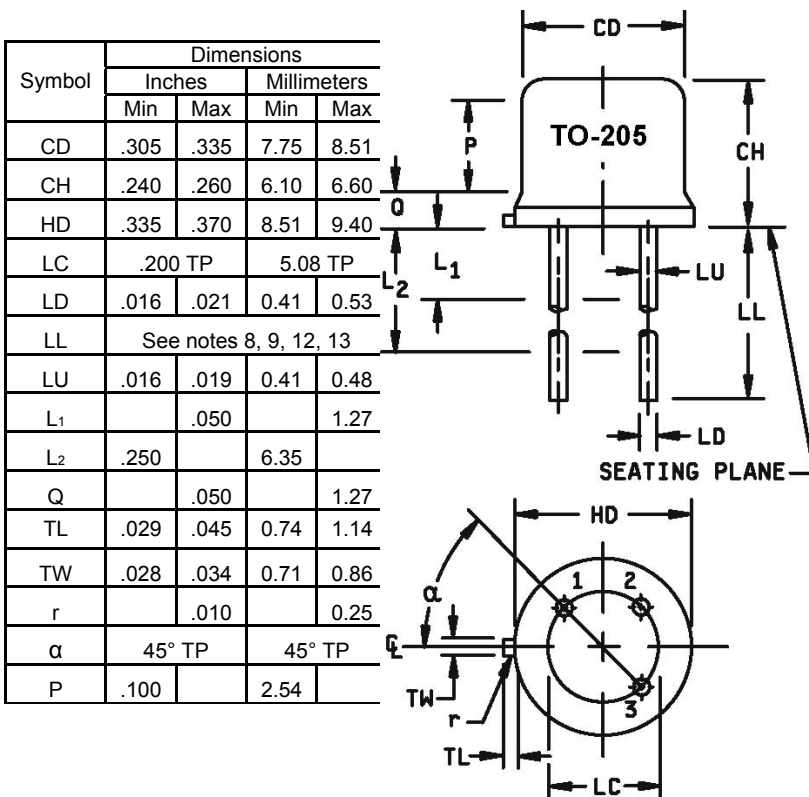

6 Lake Street, Lawrence, MA 01841
 1-800-446-1158 / (978) 620-2600 / Fax: (978) 689-0803
 Website: <http://www.microsemi.com>

PNP POWER SILICON TRANSISTOR


Qualified per MIL-PRF-19500/545

NOTES:

- 1 Dimensions are in inches.
- 2 Millimeters are given for general information only.
- 3 Beyond r (radius) maximum, TW shall be held for a minimum length of .011 inch (0.28 mm).
- 4 TL measured from maximum HD.
- 5 Outline in this zone is not controlled.
- 6 CD shall not vary more than .010 inch (0.25 mm) in zone P. This zone is controlled for automatic handling.
- 7 Leads at gauge plane .054 +.001 -.000 inch (1.37 +0.03 -0.00 mm) below seating plane shall be within .007 inch (0.18 mm) radius of true position (TP) at maximum material condition (MMC) relative to tab at MMC.
- 8 LU applied between L1 and L2. LD applies between L2 and LL minimum. Diameter is uncontrolled in L1 and beyond LL minimum.
- 9 All three leads.
- 10 The collector shall be electrically and mechanically connected to the case.
- 11 r (radius) applies to both inside corners of tab.
- 12 In accordance with ASME Y14.5M, diameters are equivalent to ϕx symbology.
- 13 For transistor types 2N5151 and 2N5153, LL is .5 inch (13 mm) minimum, and .75 inch (19 mm) maximum.
- 14 For transistor types 2N5151L and 2N5153L, LL is 1.5 inch (38 mm) minimum and 1.75 inch (44.4 mm) maximum.
- 15 Lead designation, depending on device type, shall be as follows: lead numbering; lead 1 = emitter, lead 2 = base, and lead 3 = collector.

**FIGURE 2 (U3)
PACKAGE DIMENSIONS**

Symbol	Dimensions			
	Inches		Millimeters	
	Min	Max	Min	Max
BL	.395	.405	10.04	10.28
BW	.291	.301	7.40	7.64
CH	.1085	.1205	2.76	3.06
LH	.010	.020	0.25	0.51
LL1	.220	.230	5.59	5.84
LL2	.115	.125	2.93	3.17
LS1	.150 BSC		3.81 BSC	
LS2	.075 BSC		1.91 BSC	
LW1	.281	.291	7.14	7.39
LW2	.090	.100	2.29	2.54
Q1	.030		0.762	
Q2	.030		0.762	

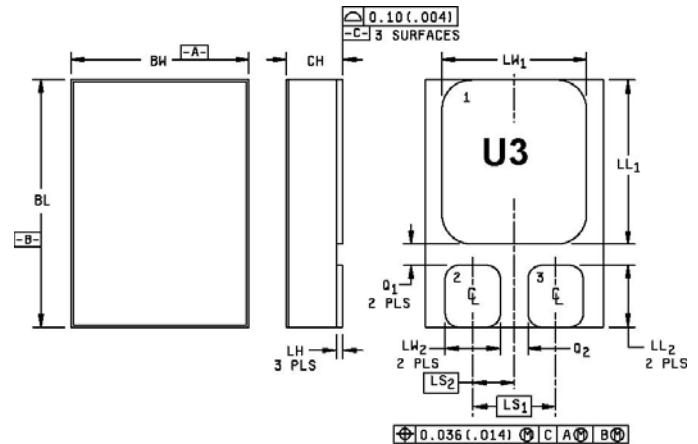

NOTES:

- 1 Dimensions are in inches.
- 2 Millimeters are given for general information only.
- 3 Terminal 1 - collector, terminal 2 - base, terminal 3 - emitter



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.