






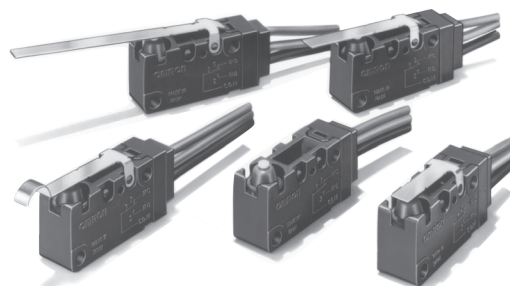


Sealed Snap Action Switch D2VW

Watertight Miniature Snap Action Switch

- High-quality watertight, high-precision miniature Snap Action switch. Switch Body meets IP67 requirements
- Use of epoxy resin assures high sealing capability and is ideal for dusty places or where water is sprayed
- V-series internal mechanism assures high precision and long life
- General-load (5 A at 250 VAC) models and micro-load models are available
- RoHS Compliant



Ordering Information

| Actuator | Terminal | Model | |
|---|------------------------------------|----------------|---------------|
| | | Model 0.1 A | Model 5 A |
| Pin plunger  | With solder and #187 tab terminals | D2VW-01-1HS | D2VW-5-1HS |
| | With lead wires | D2VW-01-1MS | D2VW-5-1MS |
| Short hinge lever  | With solder and #187 tab terminals | D2VW-01L1A-1HS | D2VW-5L1A-1HS |
| | With lead wires | D2VW-01L1A-1MS | D2VW-5L1A-1MS |
| Hinge lever  | With solder and #187 tab terminals | D2VW-01L1-1HS | D2VW-5L1-1HS |
| | With lead wires | D2VW-01L1-1MS | D2VW-5L1-1MS |
| Long hinge lever  | With solder and #187 tab terminals | D2VW-01L1B-1HS | D2VW-5L1B-1HS |
| | With lead wires | D2VW-01L1B-1MS | D2VW-5L1B-1MS |
| Simulated roller lever  | With solder and #187 tab terminals | D2VW-01L3-1HS | D2VW-5L3-1HS |
| | With lead wires | D2VW-01L3-1MS | D2VW-5L3-1MS |
| Short hinge roller lever  | With solder and #187 tab terminals | D2VW-01L2A-1HS | D2VW-5L2A-1HS |
| | With lead wires | D2VW-01L2A-1MS | D2VW-5L2A-1MS |
| Hinge roller lever  | With solder and #187 tab terminals | D2VW-01L2-1HS | D2VW-5L2-1HS |
| | With lead wires | D2VW-01L2-1MS | D2VW-5L2-1MS |

- Note:**
1. The standard lengths of the lead wires (UL1015 AWG20 for UL/CSA models, AV0.75f otherwise) of models incorporating them are 30 cm.
 2. Remove “-HS” from the end of solder/quick-connect models to obtain non-UL/CSA versions. (e.g.: D2VW-01-1HS → D2VW-01-1)
 3. Remove “S” from the end of lead wire models to obtain non-UL/CSA versions with AV0.75f wire. (e.g.: D2VW-5L3-1MS → D2VW-5L3-1M)

Model Number Legend

D2VW-□ □ - □ □
1 2 3 4

- | | | | |
|---|---|--|--|
| <p>1. Ratings</p> <p>5: 5 A at 250 VAC 01: 0.1 A at 30 VDC</p> | <p>2. Actuator</p> <p>None: Pin plunger L1A: Short hinge lever L1: Hinge lever L1B: Long hinge lever L3: Simulated roller lever L2A: Short hinge roller lever L2: Hinge roller lever</p> | <p>3. Contact Form</p> <p>1: SPDT 2: SPST-NC* 3: SPST-NO*</p> <p>*Lead wire versions only</p> | <p>4. Terminals</p> <p>None, HS: Solder terminals (HS for UL and CSA approval.) M, MS: Molded lead wires (MS for UL and CSA approval)</p> |
|---|---|--|--|

Specifications

■ Characteristics

| Model | D2VW-01 | D2VW-5 |
|---|---|--|
| Operating speed | 0.1 mm to 1 m/s (at pin plunger) | |
| Operating frequency | Mechanical: 300 operations/minute max. Electrical: 30 operations/minute max. | |
| Insulation resistance | 100 MΩ min. (at 500 VDC) | |
| Contact resistance | 50 mΩ max. (100 mΩ max. for molded lead wire models) | |
| Dielectric strength (See note 2) | 1,000 VAC, 50/60 Hz for 1 min. between terminals of the same polarity 1,500 VAC, 50/60 Hz for 1 min. between each current-carrying metal parts and ground, and between each terminal and non-current-carrying metal parts. | |
| Vibration resistance (See note 3) | Malfunction: 10 to 55 Hz, 1.5 mm double amplitude | |
| Shock resistance (See note 3) | Destruction: 1,000 m/s ² (approx. 100G) max. Malfunction: 300 m/s ² (approx. 30G) max. | |
| Degree of protection | IEC IP67 (excluding the terminals on terminal models). | |
| Degree of protection against electric shock | Class I | |
| Proof tracking index (PTI) | 175 | |
| Ambient operating temperature | -40° to 85°C (at 60% RH max.) with no icing | |
| Ambient operating humidity | 95% max. (for 5°C to 35°C) | |
| Life expectancy | Mechanical | 10,000,000 operations min. at 60 operations per minute |
| | Electrical | 1,000,000 operations min. at 30 ops. per minute. 100,000 operations min. at 30 ops. per minute |
| Weight | Approx. 7g (pin plunger models without wires) | |

Note: 1. Data shown are of initial value.

2. The dielectric strength shown is measured using a separator between the switch and metal mounting plate.

3. For the pin plunger models, the above values apply for use at the free position and total travel position. For the lever models, the values apply at the total travel position.

4. The operating temperature of the lead wire (AV0.75f) for non-UL/CSA molded lead wire models is between -40 to 85°C.

■ Ratings (reference values)

D2VW-5

| Rated Voltage | Non-inductive load | | | | Inductive load | | | |
|---------------|--------------------|----|-----------|----|----------------|----|------------|----|
| | Resistive load | | Lamp load | | Inductive load | | Motor load | |
| | NC | NO | NC | NO | NC | NO | NC | NO |
| 125 VAC | 5 A | | 0.5 A | | 4 A | | — | |
| 250 VAC | 5 A | | 0.5 A | | 4 A | | — | |
| 30 VDC | 5 A | | 3 A | | 4 A | | — | |
| 125 VDC | 0.4 A | | 0.1 A | | 0.4 A | | — | |

D2VW-01

| Rated Voltage | Non-inductive load | | | | Inductive load | | | |
|---------------|--------------------|----|-----------|----|----------------|----|------------|----|
| | Resistive load | | Lamp load | | Inductive load | | Motor load | |
| | NC | NO | NC | NO | NC | NO | NC | NO |
| 125 VAC | 0.1 A | | — | | — | | — | |
| 30 VDC | 0.1 A | | — | | — | | — | |

Note: 1. The resistive load ratings apply under the following test conditions:

Ambient Temperature = 20±2°C, Ambient Humidity = 65±5%, Operating frequency = 30 operations/min.

2. The above current ratings are the values of the steady-state current.

3. Inductive load has a power factor of 0.7 min. (AC) and a time constant of 7 ms max. (DC).

4. Lamp load has an inrush current of 10 times the steady-state current.

5. Rating for UL/CSA approval is as follows (See "Approved Standards" section):

D2VW-01 0.1A @ 125 VAC

0.1A @ 30 VDC

D2VW-5 3A @ 125 VAC, 250 VAC

Approved Standards

Consult your OMRON sales representative for specific models with standard approvals.

UL Recognized, CSA Certified

| Rated Voltage | D2VW-5 | D2VW-01 |
|---------------|--------|---------|
| 125 VAC | 3 A | 0.1 A |
| 250 VAC | 3 A | --- |
| 30 VDC | --- | 0.1 A |

EN 61058-1 (VDE Approval)

| Rated Voltage | D2VW-5 | D2VW-01 |
|---------------|--------|---------|
| 125 VAC | --- | 0.1 A |
| 250 VAC | 3 A | --- |

Testing conditions:

25E3 (25,000 operations), T85 (0°C to 85°C) for D2VW-5
 1E5 (100,000 operations), T85 (0°C to 85°C) for D2VW-01

Contact Specifications


| Item | D2VW-5 | D2VW-01 |
|------------------------------------|--------------------------------|---------------|
| Specification | Rivet | Crossbar |
| Material | Silver alloy | Gold alloy |
| Gap (standard value) | 0.5 mm | |
| Inrush current | NC: 15 A max. NO: 15 A max. | --- |
| Minimum applicable load (see note) | 160 mA at 5 VDC | 1 mA at 5 VDC |

Note: Minimum applicable loads are indicated by N standard reference values. This value represents the failure rate at a 60% (λ_{60}) reliability level (JIS C5003). The equation $\lambda_{60} = 0.5 \times 10^{-6} / \text{operations}$ indicates that a failure rate of 1/2,000,000 operations can be expected at a reliability level of 60%


Engineering Data

Structure


SPDT



SPST-NC




SPST-NO



Note: Colors in parentheses indicate lead wire colors.

Mounting

All switches may be panel mounted using M3 mounting screws with plane washers or spring washers to securely mount the switch. Tighten the screws to a torque of 0.39 to 0.59 N·m.




Dimensions


■ Terminals

- Note:** 1. Unless otherwise specified, all units are in millimeters and a tolerance of ± 0.4 mm applies to all dimensions
 2. The pin plunger model is shown here as a typical example for both the solder/quick connect terminals and the molded lead wire versions.

Solder/Quick Connect Terminals

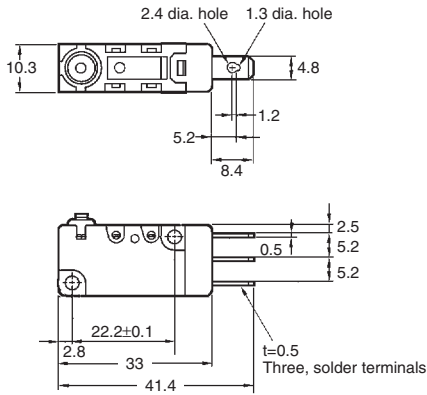

Molded Lead Wires

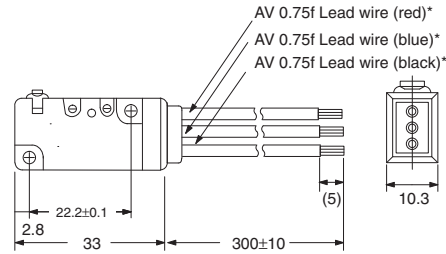



* UL/CSA approved models have AWG20 UL approved wiring.

■ Dimensions and Operating Characteristics

- Note:** 1. Unless otherwise specified, all units are in millimeters and a tolerance of ± 0.4 mm applies to all dimensions
 2. Omitted dimensions are the same as pin plunger type.
 3. The operating characteristics are for operation in the A direction (▼)

Pin Plunger Models



D2VW-01-1HS
 D2VW-5-1HS

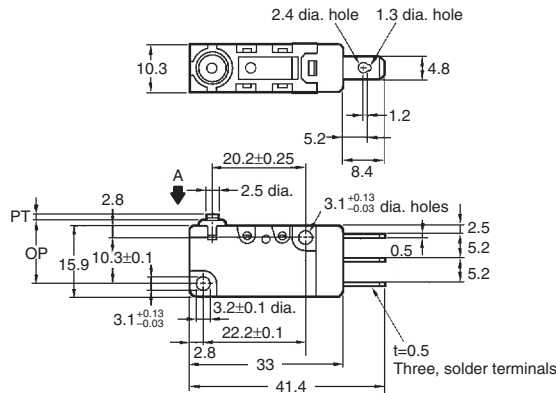

| | |
|---------|---------------|
| OF max | 200 gf |
| RF min. | 30 gf |
| PT max. | 1.2 mm |
| OT min. | 1.0 mm |
| MD max. | 0.4 mm |
| OP | 14.7 ± 0.4 mm |

Short Hinge Lever Models



D2VW-01L1A-1MS
 D2VW-5L1A-1MS

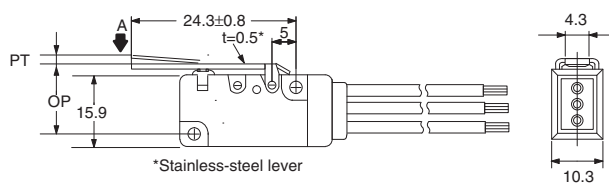

| | |
|---------|---------------|
| OF max | 200 gf |
| RF min. | 20 gf |
| PT max. | 1.6 mm |
| OT min. | 0.8 mm |
| MD max. | 0.5 mm |
| OP | 15.2 ± 0.5 mm |

Hinge Lever Models

D2VW-01L1-1MS
 D2VW-5L1-1MS

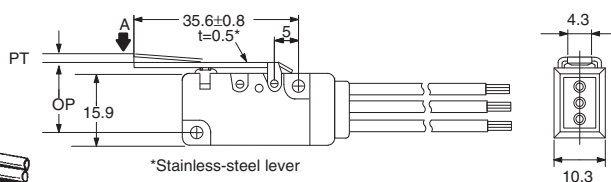


| | |
|---------|---------------|
| OF max | 120 gf |
| RF min. | 15 gf |
| PT max. | 4.0 mm |
| OT min. | 1.6 mm |
| MD max. | 0.8 mm |
| OP | 15.2 ± 1.2 mm |

- Note:** 1. Unless otherwise specified, all units are in millimeters and a tolerance of ± 0.4 mm applies to all dimensions
 2. Omitted dimensions are the same as pin plunger type.
 3. The operating characteristics are for operation in the A direction(↓)

Long Hinge Lever Models


D2VW-01L1B-1MS
 D2VW-5L1B-1MS

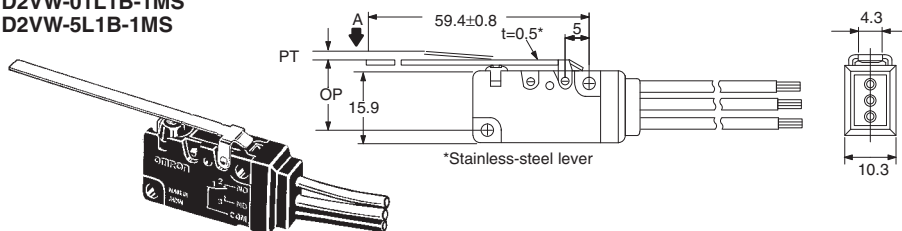

| | |
|---------|---------------|
| OF max | 60 gf |
| RF min. | 5 gf |
| PT max. | 9.0 mm |
| OT min. | 3.2 mm |
| MD max. | 2.0 mm |
| OP | 15.2 ± 2.6 mm |

Simulated Roller Lever Models


D2VW-01L3-1MS
 D2VW-5L3-1MS

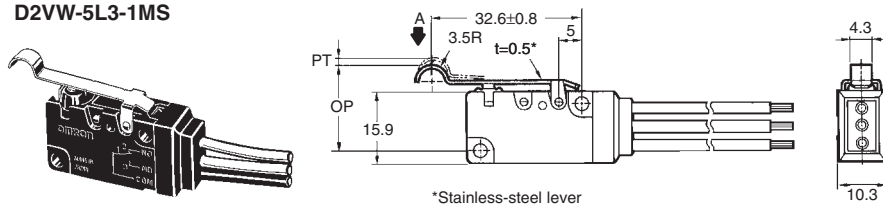

| | |
|---------|---------------|
| OF max | 120 gf |
| RF min. | 15 gf |
| PT max. | 4.0 mm |
| OT min. | 1.6 mm |
| MD max. | 0.8 mm |
| OP | 18.7 ± 1.2 mm |

Short Hinge Roller Lever Models


D2VW-01L2A-1MS
 D2VW-5L2A-1MS

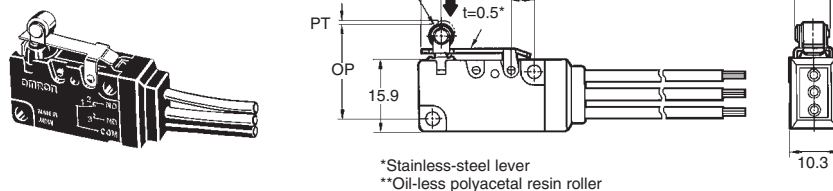

| | |
|---------|---------------|
| OF max | 230 gf |
| RF min. | 20 gf |
| PT max. | 1.6 mm |
| OT min. | 0.8 mm |
| MD max. | 0.5 mm |
| OP | 20.7 ± 0.6 mm |

Hinge Roller Lever Models

D2VW-01L2-1MS
 D2VW-5L2-1MS

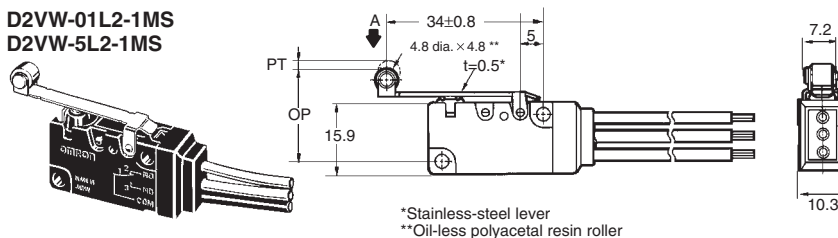

| | |
|---------|---------------|
| OF max | 120 gf |
| RF min. | 15 gf |
| PT max. | 4.0 mm |
| OT min. | 1.6 mm |
| MD max. | 0.8 mm |
| OP | 20.7 ± 1.2 mm |

Precautions

Be sure to read the precautions and information common to all Snap Action and Detection Switches, contained in the Technical User's Guide, "Snap Action Switches, Technical Information" for correct use.


Correct Use

Operations

Make sure that the switching object is perfectly separated from the actuator when the switch is not operated and the actuator is pressed appropriately by the switching object when the switch is operated.

The switch should be set so that its stroke will be within the rated OT when the switch is operated.

With the pin plunger models, set the switch so that the plunger can be actuated from directly above. Since the plunger is covered with a rubber cap, applying a force from lateral directions may cause damage to the plunger or reduction in the sealing capability.




Handling

Handle the switch carefully so as not to break the sealing rubber of the plunger.

Using Microloads

Using a model for ordinary loads to switch microloads may result in faulty operation. Instead, use the models that are designed for microloads and that operate in the following range;

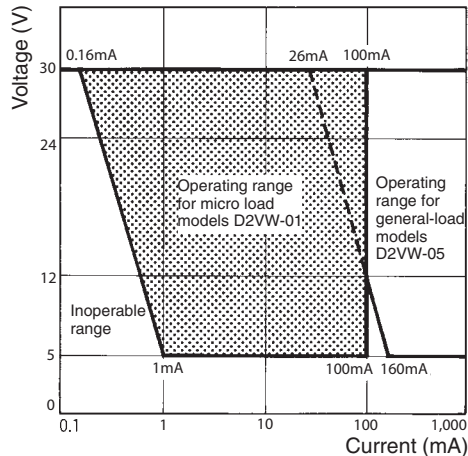


However, even when using microload models within the operating range shown above, if inrush current or inductive voltage spikes occur when the contact is opened or closed, then contact wear may increase and so decrease the service life. Therefore, insert a contact protection circuit where necessary.

Cautions

Degree of Protection

The D2VW was tested under water and passed the following watertightness test, which however, does not mean that the D2VW can be used in the water.

JIS C0929 (rules for testing the watertightness of electrical devices and materials), class 7 (watertightness test). Refer to the following illustration for the test method at OMRON.



Note: The object to be tested is left in the water for 30 minutes on condition that the distance between the surface of the water and the top of the object be 15 cm minimum and the distance between the surface of the water and the bottom of the object be 1 m minimum.

Protection Against Chemicals

Prevent the switch from coming into contact with oil and chemicals. Otherwise, damage to or deterioration of the switch materials may occur.

A large grid of 20 columns and 30 rows of small squares, used for taking notes or drawing. The grid is composed of thin, light gray lines forming a uniform pattern across the page.

All sales are subject to Omron Electronic Components LLC standard terms and conditions of sale, which can be found at http://www.components.omron.com/components/web/webfiles.nsf/sales_terms.html

ALL DIMENSIONS SHOWN ARE IN MILLIMETERS.
To convert millimeters into inches, multiply by 0.03937. To convert grams into ounces, multiply by 0.03527.



OMRON ELECTRONIC COMPONENTS LLC
55 E. Commerce Drive, Suite B
Schaumburg, IL 60173

847-882-2288

OMRON ON-LINE

Global - <http://www.omron.com>
USA - <http://www.components.omron.com>



Компания «ЭлектроПласт» предлагает заключение долгосрочных отношений при поставках импортных электронных компонентов на взаимовыгодных условиях!

Наши преимущества:

- Оперативные поставки широкого спектра электронных компонентов отечественного и импортного производства напрямую от производителей и с крупнейших мировых складов;
- Поставка более 17-ти миллионов наименований электронных компонентов;
- Поставка сложных, дефицитных, либо снятых с производства позиций;
- Оперативные сроки поставки под заказ (от 5 рабочих дней);
- Экспресс доставка в любую точку России;
- Техническая поддержка проекта, помощь в подборе аналогов, поставка прототипов;
- Система менеджмента качества сертифицирована по Международному стандарту ISO 9001;
- Лицензия ФСБ на осуществление работ с использованием сведений, составляющих государственную тайну;
- Поставка специализированных компонентов (Xilinx, Altera, Analog Devices, Intersil, Interpoint, Microsemi, Aeroflex, Peregrine, Syfer, Eurofarad, Texas Instrument, Miteq, Cobham, E2V, MA-COM, Hittite, Mini-Circuits, General Dynamics и др.);

Помимо этого, одним из направлений компании «ЭлектроПласт» является направление «Источники питания». Мы предлагаем Вам помощь Конструкторского отдела:

- Подбор оптимального решения, техническое обоснование при выборе компонента;
- Подбор аналогов;
- Консультации по применению компонента;
- Поставка образцов и прототипов;
- Техническая поддержка проекта;
- Защита от снятия компонента с производства.



Как с нами связаться

Телефон: 8 (812) 309 58 32 (многоканальный)

Факс: 8 (812) 320-02-42

Электронная почта: org@eplast1.ru

Адрес: 198099, г. Санкт-Петербург, ул. Калинина, дом 2, корпус 4, литера А.